

AXON: A ROS 2 RMW with Shared-Memory/QUIC Transport and QKD/ML-KEM Key Establishment

Sergio Sánchez de la Fuente •

Robotics Group
Universidad de León
ssand@unileon.es

Miguel Ángel González-Santamarta •

Robotics Group
Universidad de León
mgons@unileon.es

Francisco Javier Rodríguez-Lera •

Robotics Group
Universidad de León
fjrodl@unileon.es

Vicente Matellán Olivera •

Robotics Group
Universidad de León
vicente.matellan@unileon.es

Ángel Manuel Guerrero-Higueras •

Robotics Group
Universidad de León
am.guerrero@unileon.es

Abstract—Robot Operating System 2 (ROS 2) standardizes application code against a middleware interface (RMW) whose reference implementations are built on the Data Distribution Service (DDS). We present AXON, an alternative ROS 2 RMW implementation that separates transport policy by deployment scope. A Rust core and C++ adapter use POSIX shared-memory rings for same-host communication, QUIC for remote communication, and a daemon for discovery and graph synchronization. We then describe two fail-closed TLS 1.3 key-establishment configurations for remote traffic. The `classic` configuration offers only the hybrid X25519MLKEM768 group, preventing negotiation of a classical-only group. The `qkd` configuration imports a 256-bit key obtained through the ETSI GS QKD 014 API as a pairwise external PSK and offers no Diffie-Hellman group. Its default `messages10` strategy additionally protects remote application messages with AES-256-GCM, rotating KME material after ten outgoing messages and using a fresh nonce per envelope; `session` relies on QUIC protection alone. The external-PSK path requires a narrow extension to `rustls`, now bundled with AXON. We define the threat model, distinguish peer authentication in the two configurations, and delimit the implementation-level validation from ROS 2 conformance, comparative performance, and physical-QKD validation.

Index Terms—ROS 2, middleware, RMW, shared memory, QUIC, quantum key distribution, post-quantum cryptography, ML-KEM.

I. INTRODUCTION

ROS 2 decouples application code from the communication layer through the ROS middleware interface (RMW) [1], [2]. An RMW implements a fixed C surface (`rmw_*`) that `rcl`, `rclcpp`, `rclpy`, command-line tooling, RViz, and Gazebo call, so any conforming middleware can be selected at run time with `RMW_IMPLEMENTATION`. The default implementations are built on the Data Distribution Service (DDS) and its RTPS wire protocol [3], [4]. DDS provides mature, standardized interoperability across vendors, which is valuable when heterogeneous systems must interoperate on a shared network.

That same universality is also a constraint. A DDS domain treats every peer relationship as the same network problem, regardless of whether the two endpoints share a host, a wired LAN, a lossy WiFi link, or a NAT boundary. In practice a robotics system rarely looks uniform: a camera node and a

perception node on one workstation, a Gazebo simulation feeding a remote RViz over WiFi, and a container talking to a physical robot each stress the transport differently. The 2021 ROS Middleware Evaluation [5] and the emergence of non-DDS RMWs such as `rmw_zenoh` [6], [7] show that the community increasingly treats transport policy as a degree of freedom rather than a fixed cost.

AXON takes that position deliberately. It implements the ROS 2 RMW API with the QoS limitations stated in Section XI, but *does not preserve DDS wire interoperability*. AXON does not attempt to join an arbitrary DDS/RTPS domain; it optimizes the path between ROS processes that intentionally select it. This trade is explicit: users who need to interoperate with an existing DDS deployment should keep a DDS RMW; users who control both endpoints gain a transport tuned to how their system is actually deployed.

On top of that substrate, AXON treats confidentiality as a first-class, forward-looking concern. Robot fleets increasingly carry sensitive perception, mapping, and command data over shared or wireless links, and their operational lifetimes are long enough that “harvest-now, decrypt-later” adversaries and future quantum computers are part of the threat model [8], [9]. AXON therefore makes the establishment of the session key the object of design. Its default `classic` mode requires a CRYSTALS-Kyber (ML-KEM) hybrid key exchange [10], [11] and offers nothing else, so a classical fallback cannot be negotiated. Its `qkd` mode replaces the exchange entirely with key material delivered by an ETSI-standard Quantum Key Distribution management entity [12], [13], imported directly into the TLS 1.3 key schedule. The optional `session` strategy leaves payload protection to QUIC. The default `messages10` strategy deliberately adds a second, application-level AEAD envelope so KME-delivered data keys can be rotated independently of the QUIC connection.

Contributions. This paper makes the following contributions:

- 1) A two-layer ROS 2 RMW implementation (Rust core + C++ adapter) that routes same-host traffic over shared

memory and cross-host traffic over QUIC, with a daemon-based control plane for discovery and graph introspection (Sections III–VII).

- 2) A transport-security design in which QUIC protects remote ROS traffic and offers two mutually exclusive key-establishment modes: a mandatory hybrid ML-KEM exchange with no classical fallback, and quantum-distributed key material imported as a TLS 1.3 external pre-shared key. QKD deployments can additionally rotate application-layer KME keys every ten outgoing messages (Section VIII).
- 3) An implementation of the latter that required extending rustls, whose public API does not expose TLS 1.3 external PSKs — the component of this work that configuration alone cannot reproduce (Section VIII).
- 4) Fail-closed enforcement throughout: mismatched peers are rejected via a mode field carried in discovery, obsolete configuration variables from earlier designs are refused at startup, and no path falls back to a classical-only exchange or to plaintext (Section VIII).
- 5) A validation scope covering ROS-facing behavior, local and remote transport paths, and fail-closed security behavior, with explicit limits on conformance, performance, and physical-QKD claims (Section X).

II. BACKGROUND AND RELATED WORK

A. ROS 2, RMW, and DDS

ROS 2 messages are described in IDL and serialized in Common Data Representation (CDR). The RMW contract covers publishers, subscriptions, services, graph introspection, wait sets, and QoS [14]. DDS-based RMWs (Fast DDS [15], Cyclone DDS [16], Connex [17]) implement this contract over RTPS [4]. `rmw_zend` replaced RTPS with the Zenoh protocol [7] while keeping the RMW surface, demonstrating that the RMW abstraction admits non-DDS transports. AXON follows the same substitutability principle but optimizes for controlled, self-selected deployments and adds a native security path.

B. Transports

QUIC [18], [19] provides multiplexed, encrypted and connection-oriented streams over UDP, with modern loss recovery. That fits cross-host robot links better than raw UDP multicast does for bulk sensor data. AXON uses the `quinn` [20] QUIC implementation. Same-host traffic instead uses POSIX shared memory [21] with `eventfd` [22] notification and `epoll` [23] multiplexing, avoiding kernel copies for large frames.

C. Quantum and post-quantum key agreement

QKD distributes symmetric key material whose secrecy rests on physics rather than computational hardness [13], [24]; the ETSI GS QKD 014 specification standardizes a REST API through which applications request keys from a Key Management Entity (KME) [12]. QKD requires specialized hardware or a simulator such as QuKayDee [25]; finite key supply and KME request latency require an explicit consumption policy.

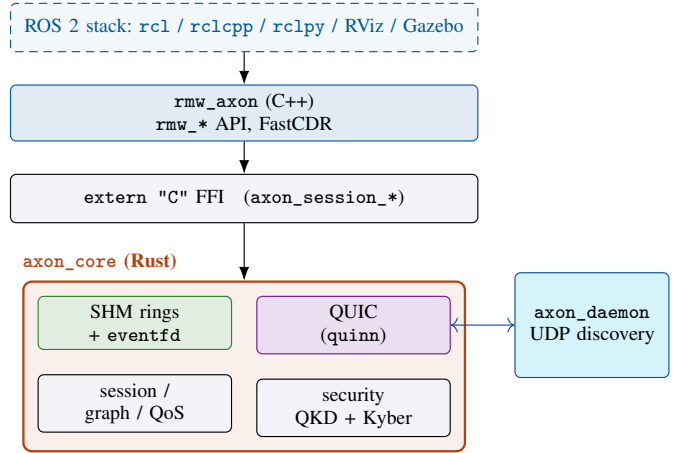


Figure 1. AXON’s two-layer architecture. A thin C++ adapter implements the ROS 2 `rmw_*` contract and calls a Rust core through a stable C FFI. The core owns shared-memory (local) and QUIC (remote) data planes; an auto-spawned daemon owns discovery and graph synchronization.

Post-quantum cryptography instead resists quantum attacks computationally; ML-KEM (CRYSTALS-Kyber), standardized in FIPS 203 [10], [11], is a lattice-based key encapsulation mechanism. The current TLS working-group specification defines hybrid groups that combine an ephemeral classical exchange with ML-KEM, including X25519MLKEM768 [26]. AXON offers only that group in its classic configuration. Its QKD configuration uses TLS 1.3 external pre-shared keys [27], [28], which allow high-entropy key material provisioned out of band to seed the TLS key schedule. The pairwise derivation applies project-specific domain separation and includes the KME `key_ID` in both the HKDF context and the TLS identity; the exact construction, its relation to external-PSK importers [29], and its limitations are stated in Section VIII.

III. SYSTEM ARCHITECTURE

AXON is split into two layers connected by a stable `extern "C"` FFI boundary (Fig. 1).

C++ RMW adapter (`rmw_axon`). Implements the RMW entry points used by the supported ROS 2 scenarios, handles ROS type support and CDR encapsulation via FastCDR [30], and forwards all transport decisions to the core. It contains no networking logic of its own.

Rust core (`axon_core`). Owns all transport and coordination: SHM ring buffers, the discovery daemon client, QUIC data transport, session lifecycle and routing, the graph cache for introspection, the `epoll` wait set, QoS interpretation, ACL and encryption, CDR serialization, subscriber queues, and leaky-bucket rate limiting. Rust’s ownership and type systems prevent several classes of memory-safety defect in safe code, although the C FFI boundary still requires explicit review.

Session model. Each `rmw_init`/`rmw_shutdown` pair is an isolated `session` with its own transport endpoints and graph cache. Local SHM rings and their `eventfd` rendezvous sockets are keyed by `ROS_DOMAIN_ID`, so stale samples cannot leak between domains.

Control plane vs. data plane. AXON separates the two explicitly. The control plane (daemon discovery, graph synchronization, security negotiation) establishes *that* a peer and route exist; the data plane (SHM or QUIC) moves samples. Many middleware failures become tractable once these are distinguished: a graph can be correct while a route is unreachable, and a route can be healthy while a wait set fails to wake.

IV. LOCAL TRANSPORT: SHARED MEMORY

For same-host peers, copying large sensor frames through the network stack is wasteful. AXON allocates a POSIX shared-memory object [21] per topic and maps it into publisher and subscriber processes as a ring of fixed-size slots. A publisher writes into the next slot and signals readers through an eventfd [22]; readers are woken through the epoll-based wait set [23]. The eventfds themselves are passed between processes over Unix-domain sockets using SCM_RIGHTS.

Ring depth is sized from QoS and message type. High-rate bursty topics such as a Gazebo /clock keep a burst-tolerant minimum depth even when the ROS QoS depth is one, so a slow consumer recovers to the newest retained sample rather than failing a take. The per-ring data budget is bounded (`AXON_RING_BUFFER_SIZE_MB`) and clamps slot counts for very large message types (images, point clouds). Shared memory is a host resource protected by filesystem permissions; AXON treats a same-host peer with sufficient OS privilege as trusted, and applies encryption only to traffic that leaves the host (Section VIII).

V. DISCOVERY AND THE DAEMON

AXON auto-spawns an `axon_daemon` that owns discovery and graph exchange. It uses UDP multicast (with a broadcast fallback on every non-loopback IPv4 interface) to find peers, and shared memory to exchange local graph/match information with co-located sessions. A daemon-backed `GraphCache` answers topic, service, node, publisher, and subscription queries, so standard `ros2 topic/node/service` tooling works. Static peers can be configured with `AXON_DAEMON_PEERS` for networks where multicast is blocked, and advertised addresses can be overridden (`AXON_ADVERTISE_ADDRS`) so a container behind a NAT bridge does not advertise an unreachable address. Because discovery lives in a separate process, a data-plane fault does not corrupt the graph, and a fresh session can re-synchronize from the daemon’s warm state.

VI. REMOTE TRANSPORT: QUIC

Once the daemon has discovered a remote peer, cross-host data flows over QUIC [18], [19] using quinn [20]. QUIC gives AXON multiplexed streams, removing transport-layer head-of-line blocking between streams; streams still share connection congestion control and sender resources. Defaults target local robot networks: an MTU-safe 1200-byte UDP payload avoids IP fragmentation on WiFi, a 16 MiB connection send window leaves room for one large sensor frame alongside small control streams, and remote payloads above 1 KiB are

zstd-compressed by default [31]. The remote send pipeline is ordered per (peer, topic): reliable publishers use a lossless sender queue, whereas best-effort publishers retain at most their configured history depth under backpressure. Services map to two internal request/response topics with type-bounded allocation, and route over the same QUIC path when the peer is remote.

VII. QoS, GRAPH, SERVICES, AND ACTIONS

AXON implements a documented subset of ROS 2 QoS behavior and checks publisher/subscription compatibility: reliability (best-effort/reliable), durability (volatile/transient-local), history (KEEP_LAST/KEEP_ALL), and deadline, lifespan, and liveliness. Graph introspection is treated as a correctness property, not a convenience: reporting a wrong type or endpoint count is a semantic bug, because tools and users act on that metadata. Services are implemented as paired internal request/response topics with response ownership tracked per client, so multiple clients of one service receive their own replies. Actions build on services and topics. Wait sets multiplex subscription, service, and guard-condition eventfds through epoll with optional timerfd polling, with a shorter poll slice when services/clients are present to avoid false lifecycle timeouts under load. Remote reliability has not yet been qualified as DDS-equivalent; its resource trade-offs and bounded receive histories are stated in Section XI.

VIII. TRANSPORT SECURITY DESIGN

AXON always uses QUIC packet protection for remote ROS traffic. In QKD messages10 mode it additionally applies an application-level AEAD envelope to remote topic, service, and action payloads; QKD session and classic add no such envelope. UDP discovery announcements remain unauthenticated and unencrypted. Same-host shared-memory payloads never enter QUIC and are not encrypted; their boundary is the Unix account, /dev/shm permissions, and host integrity.

What AXON does contribute is *how the key that protects that path is established*. Two mutually exclusive modes are selected with `AXON_SECURITY_MODE` (Table I), and both are fail-closed: neither can negotiate its way down to a weaker construction.

A. Threat model and authentication boundary

The remote channel is intended to resist passive capture, packet modification, and replay after the TLS handshake has authenticated the relevant channel secret. The two configurations do not provide identical peer authentication. In `qkd`, a high-entropy pairwise PSK authenticates possession of the KME-delivered secret, subject to correct KME provisioning and identity binding [19], [28]. In the current `classic` configuration, certificates are self-signed and accepted without a CA or pinned fingerprint. The hybrid exchange therefore protects recorded traffic against later cryptanalysis, but it does not authenticate a peer against an active man-in-the-middle. Deployments that require active-peer authentication must add certificate validation or pinning; this is future work.

Table I
THE TWO AXON SECURITY MODES. BOTH USE QUIC 1-RTT PACKET PROTECTION, BUT DIFFER IN KEY ESTABLISHMENT, PEER AUTHENTICATION, AND FORWARD SECRECY.

	classic	qkd
TLS establishment	Hybrid X25519 + ML-KEM-768	ETSI QKD 014 key as external PSK
Key-exchange groups	Exactly one	<i>Empty</i>
Application AEAD	None	Optional; default rotates every 10 messages
Forward secrecy	Yes (ephemeral DH)	No (<i>psk_ke</i>)
Peer authentication	No (current certificate policy)	Pairwise PSK
Fallback	None	None

The QKD authentication statement likewise assumes that each SAE credential is provisioned exclusively to its intended host. The bundled QuKayDee beta profiles trade that property for deployment convenience and therefore are test fixtures, not production identity provisioning.

B. Design goals

- **Explicit protection layers.** QUIC/TLS always protects remote traffic; `messages10` optionally adds KME-keyed application AEAD.
- **No silent downgrade.** If the configured mode cannot be established, communication does not happen.
- **Bounded key consumption.** `session` consumes one KME key per daemon pair, while `messages10` amortizes each data key across ten outgoing messages.
- **Standard primitives only.** AXON contributes configuration and integration, not new cryptography.

C. Classic mode: mandatory hybrid key exchange

In `classic` mode the `rustls` crypto provider is built with a key-exchange group list containing exactly one entry, X25519MLKEM768, and the protocol version is pinned to TLS 1.3. That group is itself hybrid: the derived secret depends on both the classical X25519 exchange and ML-KEM-768 (CRYSTALS-Kyber, FIPS 203) [10], [11]. Under the assumptions of the hybrid specification, the combiner is intended to retain secrecy while at least one component remains secure [26].

Because the list has a single member, there is no classical-only group to negotiate down to, and a peer that cannot perform the hybrid exchange is rejected rather than accommodated. This is a deliberate departure from the `rustls` provider’s multi-group defaults. The `prefer-post-quantum` feature changes priority but does not by itself remove classical groups from the provider [32].

D. QKD mode: quantum key material inside TLS

In `qkd` mode the key does not come from a Diffie-Hellman exchange at all. The daemon obtains a 256-bit key from its local

Key Management Entity following ETSI GS QKD 014 [12]: the daemon with the lower identifier calls `enc_keys`, and the peer retrieves the matching value by its `public_key_ID` with `dec_keys`. Only that identifier travels over AXON’s discovery channel; the key itself never does.

AXON then derives a TLS-specific 256-bit secret with HKDF-SHA256 [33] under the domain label AXON-QKD-TLS13-EXTERNAL-PSK-v1 and imports it into the TLS 1.3 key schedule as an *external pre-shared key*, together with a namespaced identity containing the KME `key_ID`. The deployment assumes that each KME key is restricted to one SAE/daemon pair. This is a project-specific domain-separated derivation, not a claim of conformance to the RFC 9258 importer. The client offers `psk_ke` with no `supported_groups` and no `key_share`; the QKD provider’s key-exchange group list is empty. The server resolves the identity, verifies the TLS binder, and only then selects the PSK.

The bootstrap KME key protects the session through the standard TLS key schedule. A successful handshake proves that both endpoints hold the same pairwise PSK. In a physical QKD deployment that PSK originates in quantum-distributed material; a simulator exercises only the API integration. The handshake cannot fall back to X25519, to ML-KEM, to a certificate-only exchange, or to plaintext, because none of those paths is configured.

Application-key strategies. The environment variable `AXON_QKD_KEY_MODE` selects one of two strategies. `session` uses the bootstrap PSK only and leaves application protection to QUIC. The default `messages10` strategy wraps each remote topic or service message in an AXQKD001 envelope before it enters QUIC. The sender obtains a 256-bit KME key for the receiving SAE and uses it for at most ten outgoing messages, with a fresh 96-bit nonce for every AES-256-GCM encryption. The authenticated metadata binds the message kind, topic hash, sender SAE, and KME `key_ID`. The receiver retrieves the matching key with `dec_keys`; co-located ROS processes coordinate that retrieval through a user-only shared-memory cache. The SAE and `key_ID` travel on the wire, but the key bytes do not. Topic fan-out to several processes on one remote host reuses one sealed copy of the same logical publication rather than consuming a distinct key use per process.

Extending the TLS implementation. This required work below AXON. `rustls` does not expose TLS 1.3 external PSKs through its public API, so AXON includes the narrow `rustls-axon` fork [34], pinned to an immutable commit of the official release and vendored as a Git subtree. The fork adds an external-PSK type with a public identity and a zeroized secret, a server-side resolver, external-binder derivation using the RFC 8446 `ext_binder` label, and PSK-only handshake paths that carry no key share. All record and packet protection remains upstream `rustls` and `quinn` code. This extension cannot be reproduced through configuration alone.

Security trade-offs. `psk_ke` provides no independent Diffie-Hellman forward secrecy. QKD-mode security rests on the bootstrap PSK remaining secret and being erased when the daemon session ends; compromise of that key exposes

captured QUIC traffic from the same session. In `messages10`, compromise of an application data key additionally exposes its batch of at most ten outgoing messages. Classic mode retains ephemeral hybrid key establishment and therefore forward secrecy against later key compromise, but, as noted above, its current certificate policy does not prevent active MITM. RFC 9257 recommends combining external PSKs with an ephemeral exchange where possible; AXON deliberately uses `psk_ke` to make QKD-key possession the only configured key-establishment path [28].

E. Traffic protection

Both modes use ordinary QUIC 1-RTT packet protection. QKD `messages10` adds the application AEAD described above; its AES-256-GCM choice is independent of the negotiated QUIC suite. The QUIC traffic cipher is selected with `AXON_QUIC_CIPHER`: either ChaCha20-Poly1305 [35], the portable default, or AES-256-GCM. This paper does not claim a measured performance advantage for either suite on the evaluated hosts. AES-128 is not offered as a 1-RTT traffic suite.

One protocol constraint deserves explicit mention because it is easily misread as a weakness: QUIC v1 mandates AES-128-GCM for *Initial* packet protection. Those keys are derived from a published salt and the connection ID, and are independent of the negotiated 1-RTT suite. Because an observer can derive them, Initial packets are not considered to have confidentiality or integrity protection [19]. No QUIC implementation can substitute a different cipher there while remaining QUIC v1 compliant.

F. Fail-closed enforcement

Configuration is validated before the daemon starts, so an invalid setup surfaces as a startup error rather than as an RMW process waiting on a daemon that correctly refuses to run. Startup rejects any mode other than `classic` or `qkd`, any cipher other than the two above, QKD mode without a complete KME and SAE configuration, and — notably — the *obsolete* variables from earlier designs (`AXON_SECURITY_PROFILE`, `AXON_ENCRYPTION_MODE`, `AXON_ENCRYPTION_KEY`), so that a stale deployment script cannot silently produce a weaker configuration than its author intended.

Connection setup rejects peers advertising a different security mode (the mode travels in the daemon HELLO), classic peers that do not negotiate the hybrid group, QKD peers with no locally available daemon-pair key, and unknown external-PSK identities or incorrect binders.

G. What this design does and does not claim

After a valid handshake, QUIC packet protection provides confidentiality, integrity, and replay protection for remote ROS payloads relative to the authenticated channel secret [19]. In `qkd`, the pairwise PSK also authenticates possession of the KME-delivered secret. In `classic`, these channel properties do not establish peer identity under the current self-signed-certificate policy.

Accordingly, AXON does not claim to be “quantum-proof” or information-theoretically secure: QKD material seeds symmetric AEAD keys and is not consumed as a one-time pad. `messages10` has constant key-material cost per daemon pair; `messages10` consumes one application key per batch of ten outgoing messages. UDP discovery is neither authenticated nor confidential, so an active attacker can spoof announcements, cause failed connections, observe traffic metadata, or deny service. Without the pairwise PSK it cannot complete a `qkd` handshake, but it can mount a MITM against `classic` because certificates are not validated against a trust root. There are no per-node authenticated identities, certificate revocation, or signed discovery. Local shared memory and a compromised endpoint lie outside the remote cryptographic boundary. The KME link is a separate trust boundary whose own post-quantum properties AXON cannot upgrade. A QKD *simulator* validates the API integration but is not evidence of a physical QKD link. Finally, AXON has not undergone a third-party cryptographic audit, and its QKD mode depends on a forked TLS implementation that must be rebased and re-reviewed whenever the upstream version changes.

IX. IMPLEMENTATION

`axon_core` is a Rust crate (~25k source lines) exposing a multi-session C FFI (`axon_session_create`, `graph`, and service APIs). `rmw_axon` is a C++ shared library (~5k source/header lines) built by CMake, which first compiles the Rust core (`cargo build --release`) and links the resulting static library. QUIC is provided by `quinn` over `rustls` with the `aws-lc-rs` cryptographic provider. Classic mode overrides the provider’s key-exchange group list with the single entry `X25519MLKEM768`; QKD mode leaves that list empty and supplies an external PSK instead. The KME client uses `request` with mutual TLS, and key material is zeroized on drop. Configuration validation runs before the daemon is spawned, so an invalid fail-closed setup surfaces as a startup error rather than a hang.

QKD mode uses a fork of `rustls` 0.23.40, pinned to an immutable commit and vendored under `third_party/rustls-axon`. It exposes TLS 1.3 external PSKs: an external-PSK type with a public identity and zeroized secret, a server-side resolver, external-binder derivation with the RFC 8446 `ext_binder` label, and PSK-only handshake paths carrying no key share. Record and packet protection remain upstream code. This is an operational commitment as much as a technical one: the fork must be rebased and re-reviewed on every upstream version change. A normal clone contains the complete fork and requires no second repository or SSH credential at build time.

The build produces a standard ROS 2 package selectable with `RMW_IMPLEMENTATION=rmw_axon` across Humble through Rolling. Because AXON contributes configuration and protocol integration rather than new primitives, its security claims reduce to the correctness of the underlying libraries, the narrow forked API, the deployment’s authentication policy, and the enforcement paths we test.

An ordinary colcon build selects no SAE identity and leaves `classic` as the runtime default. For reproducible two-host simulator tests, the build option `AXON_QKD_ROLE=1` or `2` installs the corresponding bundled QuKayDee beta profile beside the daemon. The resulting installation can switch between `qkd` and `classic` at runtime without separate KME-path variables; custom deployments instead provide their own SAE material explicitly.

Software availability. The project source and build instructions are maintained in the [AXON GitHub repository](#) [36]. The TLS modifications are also maintained in the [rustls-axon GitHub repository](#) [34] and are fully vendored in the main tree. At the time of writing, the linked repositories still require GitHub authorization; a public main-tree release or archival snapshot is therefore required for independent reproduction.

X. VALIDATION SCOPE

The implementation is checked at three boundaries that correspond to its architecture. Core checks exercise shared-memory and QUIC transport semantics, including ordered remote delivery and the distinct backpressure policies for reliable and best-effort publishers. ROS-facing checks cover publication and subscription, request–response correlation for services and actions, graph synchronization, wait-set readiness, and daemon restart behavior. Security checks cover strict mode and cipher selection, the single hybrid group offered by `classic`, the external-PSK-only configuration used by `qkd`, KME request/response handling, fail-closed peer negotiation, and the authenticated application envelope used by `messages10`.

This scope establishes implementation-level consistency for the mechanisms described in this paper. It does not constitute a cryptographic proof, a third-party security audit, qualification against the complete ROS 2 RMW conformance suite, a comparative performance benchmark, or validation against a physical QKD link. Those forms of evidence require separate controlled studies and are not claimed here.

XI. LIMITATIONS

AXON is not DDS wire-compatible and cannot interoperate with an existing DDS domain — by design. Best-effort remote queues discard their oldest pending sample at the configured history depth under backpressure. Reliable remote queues preserve send order without a fixed queue bound, which avoids silent sender-side loss but can increase memory use when a peer is persistently slow; receive and shared-memory histories remain bounded. These semantics have not been qualified as DDS-equivalent reliability. The implementation has not been qualified with the complete ROS 2 RMW conformance suite. Certificates are self-signed; `classic` therefore lacks authenticated peer identity, whereas `qkd` authenticates pairwise PSK possession. QUIC congestion control has not been tuned for shared WAN links. Some QoS events are observable only by polling. The local data plane depends on Linux primitives.

Three limitations are specific to the security design. First, `qkd` mode uses `psk_ke` and therefore has no independent

Diffie-Hellman forward secrecy: compromise of a session key exposes captured traffic from that session, whereas `classic` mode retains ephemeral hybrid key establishment. Second, the mode must match on both peers and mismatches are rejected, so enabling a mode is a fleet-wide decision rather than a per-node one — there is no gradual migration path. The QKD application-key strategy must also match; unlike the security mode, it is not advertised during discovery, so a mismatch manifests as a data-path failure. Third, `qkd` mode depends on a forked TLS implementation that must be rebased and re-reviewed whenever the upstream version changes, although the pinned snapshot is bundled with AXON. The bundled QuKayDee identities are beta test fixtures: distributing their private credentials removes exclusive SAE identity and is unsuitable for production authentication claims.

Finally, we have not quantified either mode’s handshake and steady-state overhead, the redesigned security path has not yet been validated in a controlled two-host campaign, and AXON has not had a third-party cryptographic audit. A public release or archival snapshot is still required for independent reproduction.

XII. CONCLUSION

AXON demonstrates an alternative ROS 2 RMW architecture using shared memory on the host, QUIC between hosts, and a daemon-based control plane, with the API and QoS limitations documented above. On that substrate it makes key establishment and rotation explicit: QUIC protects all remote traffic, and AXON constrains how the TLS key schedule is seeded — either by a hybrid X25519/ML-KEM exchange with no classical-only group, or by KME-delivered material imported as an external PSK. The default QKD strategy additionally rotates AES-256-GCM application keys after ten outgoing messages.

The second path required extending `rustls` because its public API does not expose TLS 1.3 external PSKs. Other production TLS stacks do expose external-PSK interfaces [28]; the claim is specific to the selected implementation, not to TLS libraries in general. The post-quantum exchange, by contrast, is configured through the `rustls` cryptographic provider.

Future work includes authenticated peer identity for `classic`, full RMW conformance testing, congestion control for shared links, quantifying the overhead of each mode, a two-host campaign against the redesigned path, reproducible comparisons with DDS and Zenoh RMWs, third-party review of the `rustls` fork, and validation against physical QKD hardware rather than a simulator.

REFERENCES

- [1] Open Robotics. “ROS 2 middleware interface,” Accessed: Jul. 27, 2026. [Online]. Available: https://design.ros2.org/articles/ros_middleware_interface.html
- [2] S. Macenski, T. Foote, B. Gerkey, C. Lalancette, and W. Woodall, “Robot operating system 2: Design, architecture, and uses in the wild,” *Science Robotics*, vol. 7, no. 66, eabm6074, 2022. DOI: [10.1126/scirobotics.abm6074](https://doi.org/10.1126/scirobotics.abm6074)

- [3] Open Robotics. “ROS on DDS,” Accessed: Jul. 27, 2026. [Online]. Available: https://design.ros2.org/articles/ros_on_dds.html
- [4] Object Management Group, “DDS interoperability wire protocol (DDSI-RTPS), version 2.5,” Object Management Group, OMG Specification formal/22-04-01, 2022. Accessed: Jul. 27, 2026. [Online]. Available: <https://www.omg.org/spec/DDSI-RTPS/2.5>
- [5] K. Scott, C. Lalancette, and A. Nash. “2021 ROS Middleware Evaluation Report,” Accessed: Jul. 27, 2026. [Online]. Available: <https://osrf.github.io/TSC-RMW-Reports/humble/>
- [6] Open Robotics. “rmw_zenoh: RMW for ROS 2 using Zenoh as the middleware,” Accessed: Jul. 27, 2026. [Online]. Available: https://github.com/ros2/rmw_zenoh
- [7] A. Corsaro, L. Cominardi, O. Hecart, et al., “Zenoh: Unifying communication, storage and computation from the cloud to the microcontroller,” in *2023 26th Euromicro Conference on Digital System Design (DSD)*, 2023, pp. 422–428. DOI: [10.1109/DSD60849.2023.00065](https://doi.org/10.1109/DSD60849.2023.00065)
- [8] P. W. Shor, “Algorithms for quantum computation: Discrete logarithms and factoring,” in *Proceedings 35th Annual Symposium on Foundations of Computer Science*, 1994, pp. 124–134. DOI: [10.1109/SFCS.1994.365700](https://doi.org/10.1109/SFCS.1994.365700)
- [9] M. Mosca, “Cybersecurity in an era with quantum computers: Will we be ready?” *IEEE Security & Privacy*, vol. 16, no. 5, pp. 38–41, 2018. DOI: [10.1109/MSP.2018.3761723](https://doi.org/10.1109/MSP.2018.3761723)
- [10] National Institute of Standards and Technology, “Module-lattice-based key-encapsulation mechanism standard,” NIST, Federal Information Processing Standards Publication FIPS 203, 2024. DOI: [10.6028/NIST.FIPS.203](https://doi.org/10.6028/NIST.FIPS.203)
- [11] J. Bos et al., “CRYSTALS-Kyber: A CCA-secure module-lattice-based KEM,” in *IEEE European Symposium on Security and Privacy (EuroS&P)*, 2018, pp. 353–367. DOI: [10.1109/EuroSP.2018.00032](https://doi.org/10.1109/EuroSP.2018.00032)
- [12] ETSI, “Quantum key distribution (QKD); protocol and data format of REST-based key delivery API,” European Telecommunications Standards Institute, Group Specification GS QKD 014 V1.1.1, 2019. Accessed: Jul. 27, 2026. [Online]. Available: https://www.etsi.org/deliver/etsi_gs/QKD/001_099/014/01.01.01_60/gs_qkd014v010101p.pdf
- [13] C. H. Bennett and G. Brassard, “Quantum cryptography: Public key distribution and coin tossing,” in *Proc. IEEE International Conference on Computers, Systems and Signal Processing*, 1984, pp. 175–179.
- [14] Open Robotics. “ROS 2 Quality of Service policies,” Accessed: Jul. 27, 2026. [Online]. Available: <https://design.ros2.org/articles/qos.html>
- [15] eProsima. “Fast DDS: A C++ implementation of the DDS standard,” Accessed: Jul. 27, 2026. [Online]. Available: <https://github.com/eProsima/Fast-DDS>
- [16] Eclipse Foundation. “Eclipse Cyclone DDS,” Accessed: Jul. 27, 2026. [Online]. Available: <https://github.com/eclipse-cyclonedds/cyclonedds>
- [17] Real-Time Innovations. “RTI Connex Professional,” Accessed: Jul. 29, 2026. [Online]. Available: <https://www.rti.com/products/connex-professional>
- [18] J. Iyengar and M. Thomson, “QUIC: A udp-based multiplexed and secure transport,” Internet Engineering Task Force, RFC 9000, 2021. DOI: [10.17487/RFC9000](https://doi.org/10.17487/RFC9000) Accessed: Jul. 27, 2026. [Online]. Available: <https://www.rfc-editor.org/info/rfc9000>
- [19] M. Thomson and S. Turner, “Using TLS to secure QUIC,” Internet Engineering Task Force, RFC 9001, 2021. DOI: [10.17487/RFC9001](https://doi.org/10.17487/RFC9001) Accessed: Jul. 29, 2026. [Online]. Available: <https://www.rfc-editor.org/info/rfc9001>
- [20] Quinn project. “quinn: Async-friendly QUIC implementation in Rust,” Accessed: Jul. 27, 2026. [Online]. Available: <https://docs.rs/quinn/latest/quinn/>
- [21] M. Kerrisk. “shm_overview(7) – Linux manual page,” Accessed: Jul. 27, 2026. [Online]. Available: https://man7.org/linux/man-pages/man7/shm_overview.7.html
- [22] M. Kerrisk. “eventfd(2) – Linux manual page,” Accessed: Jul. 27, 2026. [Online]. Available: <https://man7.org/linux/man-pages/man2/eventfd.2.html>
- [23] M. Kerrisk. “epoll(7) – Linux manual page,” Accessed: Jul. 27, 2026. [Online]. Available: <https://man7.org/linux/man-pages/man7/epoll.7.html>
- [24] S. Pirandola, U. L. Andersen, L. Banchi, et al., “Advances in quantum cryptography,” *Advances in Optics and Photonics*, vol. 12, no. 4, pp. 1012–1236, 2020. DOI: [10.1364/AOP.361502](https://doi.org/10.1364/AOP.361502)
- [25] QuKayDee. “QuKayDee: A QKD network simulator with an ETSI GS QKD 014 API,” Accessed: Jul. 27, 2026. [Online]. Available: <https://qukaydee.com/>
- [26] K. Kwiatkowski, P. Kampanakis, B. Westerbaan, and D. Stebila, “Post-quantum hybrid ECDHE-MLKEM key agreement for TLSv1.3,” Internet Engineering Task Force, Internet-Draft draft-ietf-tls-ecdhe-mlkem-05, May 2026. Accessed: Jul. 29, 2026. [Online]. Available: <https://datatracker.ietf.org/doc/draft-ietf-tls-ecdhe-mlkem/>
- [27] E. Rescorla, “The transport layer security (TLS) protocol version 1.3,” Internet Engineering Task Force, RFC 8446, 2018. DOI: [10.17487/RFC8446](https://doi.org/10.17487/RFC8446) Accessed: Jul. 29, 2026. [Online]. Available: <https://www.rfc-editor.org/info/rfc8446>
- [28] R. Housley, J. Hoyland, M. Sethi, and C. A. Wood, “Guidance for external pre-shared key (PSK) usage in TLS,” Internet Engineering Task Force, RFC 9257, 2022. DOI: [10.17487/RFC9257](https://doi.org/10.17487/RFC9257) Accessed: Jul. 29, 2026.

[Online]. Available:

<https://www.rfc-editor.org/info/rfc9257>

- [29] D. Benjamin and C. A. Wood, “Importing external pre-shared keys (PSKs) for TLS 1.3,” Internet Engineering Task Force, RFC 9258, 2022. DOI: [10.17487/RFC9258](https://doi.org/10.17487/RFC9258) Accessed: Jul. 29, 2026. [Online]. Available: <https://www.rfc-editor.org/info/rfc9258>
- [30] eProsima. “Fast CDR: C++ serialization library implementing CDR,” Accessed: Jul. 27, 2026. [Online]. Available: <https://github.com/eProsima/Fast-CDR>
- [31] Y. Collet and M. Kucherawy, “Zstandard compression and the application/zstd media type,” Internet Engineering Task Force, RFC 8878, 2021. DOI: [10.17487/RFC8878](https://doi.org/10.17487/RFC8878) Accessed: Jul. 27, 2026. [Online]. Available: <https://www.rfc-editor.org/info/rfc8878>
- [32] rustls project. “Rustls default cryptographic configuration and X25519MLKEM768,” Accessed: Jul. 29, 2026. [Online]. Available: https://docs.rs/rustls/latest/rustls/manual/_05_defaults/index.html
- [33] H. Krawczyk and P. Eronen, “HMAC-based extract-and-expand key derivation function (HKDF),” Internet Engineering Task Force, RFC 5869, 2010. DOI: [10.17487/RFC5869](https://doi.org/10.17487/RFC5869) Accessed: Jul. 27, 2026. [Online]. Available: <https://www.rfc-editor.org/info/rfc5869>
- [34] rustls-axon contributors. “rustls-axon: TLS 1.3 external-PSK support for AXON,” Accessed: Jul. 29, 2026. [Online]. Available: <https://github.com/ssanecd03/rustls-axon>
- [35] Y. Nir and A. Langley, “ChaCha20 and Poly1305 for IETF protocols,” Internet Engineering Task Force, RFC 8439, 2018. DOI: [10.17487/RFC8439](https://doi.org/10.17487/RFC8439) Accessed: Jul. 27, 2026. [Online]. Available: <https://www.rfc-editor.org/info/rfc8439>
- [36] rmw_axon contributors. “rmw_axon: Shared-memory and QUIC middleware for ROS 2,” Accessed: Jul. 29, 2026. [Online]. Available: https://github.com/AXON-rmw/rmw_axon