

FolDeX: A Physical-World Benchmark for Long-Horizon Robotic Manipulation of Deformable Objects

Chenhuan Liu^{1,2}, Yi Xu^{2*}, Feng Wu^{1,2}, Hanyang Wang², Wenxiao Kuai²,
Weihao Ding², Shan Wang², Yang Liu³, Shuyong Gao^{1*}, Wenqiang Zhang^{1*}

¹Fudan University

²AI Research Center, Midea Group (Shanghai) Co., Ltd.

³Carnegie Mellon University

Abstract

Embodied AI, including vision-language-action and world-action models, must operate reliably in the **physical** world. However, models and methods that achieve strong performance in simulation can suffer substantial degradation when deployed on real robots. This gap is particularly severe in long-horizon deformable-object manipulation, where policies must reason over continuously changing states and execute reliable multi-stage bimanual interactions. Existing real-robot benchmarks primarily focus on short-horizon rigid-object manipulation and provide limited coverage of long-horizon deformable tasks. We introduce **FolDeX**, a physical-world benchmark built entirely from real-robot data for long-horizon robotic manipulation of **deformable** objects, with garment **folding** as its primary task. Because collecting real-robot data is expensive, a goal of FolDeX is to study how heterogeneous physical experience can be reused efficiently. We organize the benchmark around four research axes: utilizing human intervention and recovery data collected during policy deployment; transferring data across tasks, including across garment categories and from rigid-object to deformable-object manipulation; reusing data across scenes with changes in lighting, background, and spatial layout; and transferring real-robot data across different embodiments. FolDeX provides 2,000+ hours of real-robot data spanning 20+ tasks and 10+ robotic embodiments. Building on FolDeX, we establish a fair real-robot evaluation platform for externally submitted policies, with standardized task definitions, held-out physical objects, controlled initializations, and a unified execution protocol. The evaluation platform is publicly accessible at <https://ai.midea.com/#/fold-challenge>. We hope that FolDeX will serve as a unified testbed for advancing heterogeneous real-robot data reuse and reliable long-horizon deformable manipulation.

Introduction

The ultimate test of physical AI lies in the real world. Vision-language-action (VLA) models combine large-scale visual and linguistic pretraining with robot-trajectory finetuning to predict future action trajectories from current observations and robot states (Brohan et al. 2023; Kim et al. 2024; Octo Model Team et al. 2024; Black et al. 2024). Recent world-action models (WAMs) pursue a more ambitious vision: predicting future visual dynamics may enable embodied models to better understand the physical world and generate action

trajectories that are more consistent with its underlying dynamics (Hu et al. 2024; Ye et al. 2026; Yuan et al. 2026). Regardless of the modeling paradigm, however, models and ideas must ultimately move beyond simulation and curated demonstrations and be validated through reliable execution on physical robots.

Simulation enables ideas from computer vision, large language models, and generative modeling to be rapidly transferred to embodied intelligence. Nevertheless, two fundamental gaps remain. The first is the *sim-to-real gap*: simulation cannot fully reproduce the visual, physical, and system-level factors that affect real-robot execution, including friction, object placement, calibration, latency, sensing noise, and reset variation. Consequently, methods that achieve state-of-the-art performance or demonstrate clear improvements in simulation may degrade substantially or even fail on physical robots. The second is the *rigid-to-deformable gap*: methods developed for rigid-object manipulation often transfer poorly to deformable tasks, where objects continuously change shape, self-occlude, entangle, and respond differently after every contact. This gap is particularly visible in WAMs. Although future visual prediction provides an appealing mechanism for physical reasoning, richer visual imagination does not necessarily yield stronger deformable manipulation. Recent results from Fast-WAM further show that explicit test-time future imagination is not always necessary and that a more streamlined, action-oriented design can perform better on challenging deformable tasks (Yuan et al. 2026). As illustrated in the top row of Figure 1, these two gaps motivate direct and standardized evaluation in the physical world.

Several real-robot benchmarks have recently emerged to evaluate embodied policies on physical hardware, including RoboChallenge (Yakefu et al. 2025). However, two important problems remain. First, existing real-robot benchmarks primarily emphasize short-horizon rigid-object manipulation and provide limited coverage of long-horizon deformable tasks. This omission is particularly important for household robotics, where garments and other deformable objects require policies to track continuously changing states, coordinate contact-rich bimanual actions, preserve progress across multiple semantic stages, and recover from errors that accumulate throughout an episode. Prior work has developed

*Corresponding author.

FolDeX

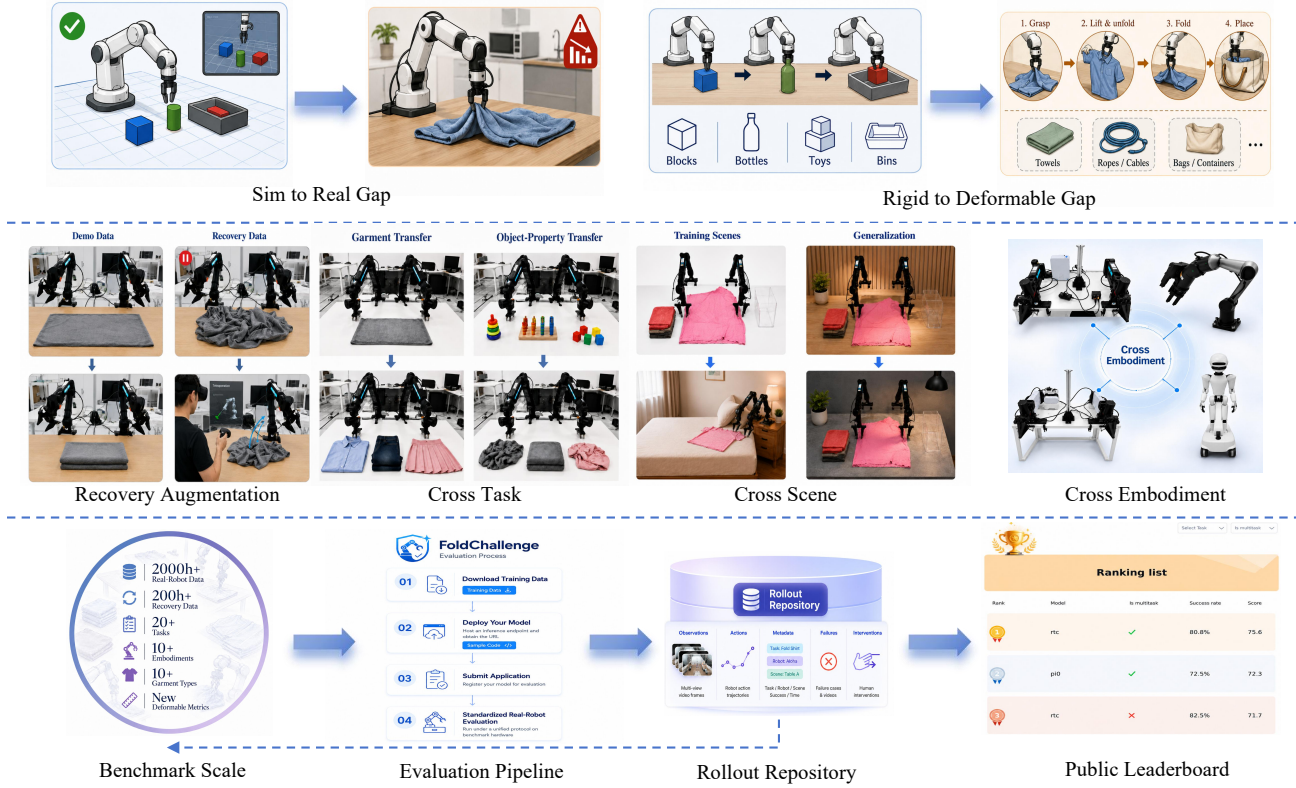


Figure 1: **FolDeX and the FoldChallenge.** FolDeX organizes real-robot data along recovery augmentation, task, scene, and embodiment axes. These diagnostic tracks standardize how future methods can study robustness and data reuse by holding the target evaluation protocol fixed while varying either the available training data or the test distribution. FoldChallenge executes externally submitted policies under a standardized physical protocol and reports component-wise metrics with auditable rollout videos.

effective systems for smoothing, unfolding, and folding selected garments (Avigal et al. 2022; Mo et al. 2023), while simulation benchmarks such as SoftGym and GarmentLab provide scalable deformable-object environments (Lin et al. 2021; Lu et al. 2024). Datasets such as Flat’n’Fold further support garment perception and subtask analysis (Zhuang et al. 2025). Nevertheless, a shared real-robot benchmark for complete, long-horizon deformable manipulation remains missing. Second, real-robot evaluation is highly sensitive to data composition, reset procedures, inference settings, calibration, communication latency, and engineering implementation. Even for the same base policy, such as π_0 , incorporating real-time chunking (RTC) during training can affect deployment performance (Black et al. 2025). Without carefully engineered reference implementations and a unified physical protocol, an apparent improvement may result from an under-optimized baseline, a favorable data split, or a particular evaluation setting rather than a meaningful algorithmic advantage. Model rankings may consequently change when the scene, data composition, initialization, or system configuration changes, making such comparisons difficult to reproduce and interpret.

To address these limitations, we introduce **FolDeX**, the first real-robot benchmark focused on long-horizon robotic manipulation of deformable objects, with garment folding as its primary task family. FolDeX contains 2,000+ hours of real-robot data spanning 20+ tasks and 10+ robotic embodiments. Building on FolDeX, we establish **FoldChallenge**, a fair and challenging real-robot evaluation platform with standardized task definitions, held-out physical objects, controlled initializations, and a unified execution protocol. We also provide carefully engineered and validated reference implementations, including a strong π_0 baseline trained with RTC (Black et al. 2025), so that future methods can be compared against competitive real-robot policies rather than weak reproductions. Because binary success alone cannot characterize the quality of a complete folding episode, FoldChallenge introduces *FoldScore*, which jointly considers task success, final-state flatness, and completion time. FoldChallenge is an operational real-robot evaluation platform that was deployed before the submission of this manuscript. It supports externally submitted policies, standardized physical execution, rollout auditing, and leaderboard-based reporting. To preserve double-blind anonymity, identifying information

and access links are omitted during review and will be restored in the final version.

Meanwhile, the development of embodied intelligence is increasingly driven by the pursuit of data scaling. Large multi-task and multi-robot datasets, interactive data collection, and cross-embodiment aggregation have greatly expanded the amount and diversity of available robot experience (Open X-Embodiment Collaboration et al. 2023; Ross, Gordon, and Bagnell 2011; Liu et al. 2023; Chen et al. 2024). However, a key obstacle to scaling real-robot learning may be not only how to collect more data, but how to reuse the data that have already been collected. Real-robot data are expensive assets, yet data collected for previous models, tasks, scenes, or embodiments may not remain effective under a new model or deployment setting. Likewise, human intervention, recovery, and policy-rollout data should not be treated as disposable by-products of a single training cycle. Understanding whether such experience can be repeatedly incorporated into new models and settings is essential for establishing meaningful scaling behavior in physical AI.

Motivated by this perspective, FolDeX organizes heterogeneous real-robot experience along four research axes. The *recovery* axis studies how human intervention and recovery data collected during policy deployment can improve subsequent policies. The *cross-task* axis studies data transfer across garment categories and from rigid-object to deformable-object manipulation. The *cross-scene* axis studies how previously collected data can be reused when lighting, background, and spatial layout change. The *cross-embodiment* axis studies how real-robot experience can be transferred across platforms with different kinematics, sensors, and action spaces. For each axis, FolDeX defines standardized data partitions, controlled comparisons, fixed factors, and reporting requirements, enabling the effects of heterogeneous data reuse to be measured under consistent physical conditions.

Our contributions are threefold:

- We introduce **FolDeX**, the first large-scale real-robot dataset and benchmark dedicated to long-horizon deformable manipulation, containing 2,000+ hours of physical robot data across 20+ tasks and 10+ robotic embodiments.
- We establish **FoldChallenge**, a publicly released and operational real-robot evaluation system that supports standardized tasks and controlled physical execution.
- We establish a carefully engineered and highly competitive baseline for long-horizon folding. Improvements over this baseline under the same training and physical evaluation protocol would provide strong evidence of meaningful model advances.

Related Work

Generalist robot policies. Vision-language-action (VLA) models map visual observations, language instructions, and robot states to actions by adapting pretrained vision-language backbones (Brohan et al. 2023; Kim et al. 2024; Black et al. 2024). Octo provides an open framework for generalist policy pretraining (Octo Model Team et al. 2024), while $\pi_{0.5}$

studies heterogeneous co-training for open-world generalization (Physical Intelligence 2025). World-action models and predictive policies use future visual prediction as an auxiliary learning objective (Hu et al. 2024; Ye et al. 2026; Yuan et al. 2026). As models and training data become more heterogeneous, standardized evaluation becomes a bottleneck: results obtained under different robots, task definitions, initial-state distributions, reset procedures, and scoring rules are difficult to compare directly.

Real-robot benchmarking infrastructure. Simulation benchmarks such as CALVIN, LIBERO, and BEHAVIOR-1K provide scalable evaluation of long-horizon control, transfer, and household activities (Mees et al. 2022; Liu et al. 2023; Li et al. 2023). Complementary systems increasingly support physical-robot evaluation. RoboChallenge provides remotely accessible platforms and the Table30 benchmark, evaluating generalist policies on 30 real-world tasks using task success and stage-based progress scores (Yakefu et al. 2025). RoboDojo combines 42 simulated and 18 physical tasks and provides RoboDojo-RealEval for remotely hosted evaluation across three robot embodiments (Chen et al. 2026). AutoEval automates success detection, scene reset, and evaluation-job scheduling on real robot workstations (Zhou et al. 2025), whereas RoboArena aggregates double-blind pairwise evaluations across a distributed network of real-robot evaluators (Atreya et al. 2025). VLA-REPLICA specifies a low-cost, locally reproducible physical setup with standardized in-distribution and out-of-distribution test scenes (Huang et al. 2026). These systems expand access to real-robot evaluation, but broad manipulation suites provide limited depth for individual deformable-object task families.

Deformable-object and garment benchmarks. SoftGym standardizes simulated deformable-object manipulation tasks (Lin et al. 2021), while GarmentLab provides 20 garment and deformable-object tasks, multiple simulated manipulators, and selected real-world evaluations (Lu et al. 2024). RGBench focuses on high-fidelity garment simulation and evaluates it using measured real-world garment dynamics across grasping, folding, and flinging interactions (Hu et al. 2026). The ICRA 2024 Cloth Competition establishes a physical benchmark for grasp selection in in-air cloth unfolding, with evaluation on a shared dual-arm platform and 679 unfolding attempts across 34 garments (De Gusseme et al. 2026). Garment folding also appears in broader real-robot suites: VLA-REPLICA includes towel folding among ten tasks, while RoboChallenge Table30 includes dishcloth folding (Huang et al. 2026; Yakefu et al. 2025). These benchmarks provide important physical evaluation precedents, but emphasize simulation fidelity, specific primitives such as grasp selection and unfolding, or folding as an isolated task in a general-purpose suite. Complementary work studies individual garment-manipulation tasks. SpeedFolding and FoldsFormer address efficient or sequential garment folding (Avigal et al. 2022; Mo et al. 2023), while Flat’n’Fold provides synchronized multimodal demonstrations for garment perception and subtask analysis (Zhuang et al. 2025). In contrast, FolDeX evaluates complete closed-loop, long-horizon

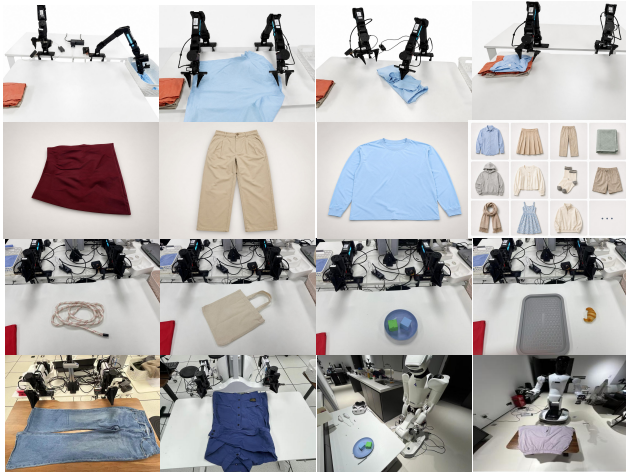


Figure 2: **Overview of FolDeX.** Rows show, from top to bottom, the major stages of a long-horizon folding task, garment categories, other deformable- and rigid-object manipulation tasks, and the robotic embodiments and scenes.

deformable-manipulation episodes, with deep coverage of garment categories, semantic stages, intermediate and failure states, and final-state quality under a standardized external physical evaluation protocol.

FolDeX

FolDeX is a physical-world benchmark and dataset built entirely from real-robot data for long-horizon deformable manipulation. It covers continuous deformation, multi-stage state transitions, contact-rich bimanual coordination, partial observability, and errors accumulating over long episodes. Garment folding is the central task because it requires reasoning about garment structure and continuously changing physical states. The suite also includes other deformable-object manipulation tasks and a few rigid-object tasks for studying rigid-to-deformable transfer.

Benchmark scope. FolDeX focuses on long-horizon deformable manipulation and the efficient reuse of real-robot data under heterogeneous data settings. In particular, it studies how models utilize recovery data and how robot experience transfers across tasks, scenes, and embodiments. FolDeX serves three purposes. First, it provides real-robot trajectories for training and evaluating long-horizon deformable-manipulation policies. Second, it provides a standardized physical testbed for comparing policies under consistent real-world conditions. Third, it organizes heterogeneous robot data along recovery, task, scene, and embodiment to study data-reuse efficiency and transfer performance.

Design Principles

FolDeX follows three design principles. First, it focuses on long-horizon closed-loop manipulation, where errors in early stages directly affect all subsequent actions. Second, it emphasizes deformable objects, whose continuously changing

shapes, self-occlusion, and contact dynamics make real-world execution substantially more challenging than rigid-object manipulation. Third, because real-robot data are expensive to collect, FolDeX organizes heterogeneous experience across recovery, task, scene, and embodiment axes to support systematic data reuse and transfer.

Task Suite and Policy Interface

Most FolDeX tasks focus on long-horizon garment folding, with fewer tasks covering other deformable objects and only a few involving rigid objects. The rigid-object tasks support studies of joint training and data-efficient adaptation to deformable manipulation.

Observation and action interface. At each inference step, the policy receives synchronized RGB observations from two wrist-mounted hand-eye cameras and one external workspace camera, together with a natural-language instruction and the robot proprioceptive state. The policy predicts a future trajectory of robot end-effector poses.

Long-horizon garment folding. A folding episode starts with a garment placed in a basket. The robot retrieves the garment and places it on the table, where it initially appears in a random configuration. The robot then flips and flattens the garment, performs multiple folding operations, and finally places or stacks the folded garment on top of previously folded garments. These dependent stages form a complete long-horizon episode from retrieval to final stacking. Representative tasks, garment categories, stages, robotic embodiments, and scenes are shown in Figure 2.

Data Collection and Organization

FolDeX is constructed from 2,000+ hours of heterogeneous real-robot experience spanning 20+ manipulation tasks and 10+ robotic embodiments. The platforms include Aloha, YAM, Piper, Astribot, Franka, UR5, a self-developed mobile dual-arm platform, AgiBot G2, and additional robotic systems. Together, they cover single-arm, dual-arm, mobile, and humanoid configurations across tabletop and household environments.

The robotic platforms differ substantially in kinematics, workspace geometry, camera placement, control interfaces, and action representations. To support unified training and analysis, the data are organized using a common schema containing synchronized visual observations, robot proprioception, timestamped actions, natural-language task instructions, and episode-level metadata. The metadata records the task, object category, object instance, scene, embodiment, operator, data source, completion status, and failure or termination reason.

Benchmark Tracks

FolDeX organizes its real-robot data into four benchmark tracks to evaluate models and learning methods in recovery-data utilization, multi-task and cross-task training, multi-embodiment and cross-embodiment training, and cross-scene transfer and generalization.

Benchmark	Evaluation Setting	Deformable-Object Scope	Full LH Episode	Community Evaluation	Reported Signals
GarmentLab (Lu et al. 2024)	Simulation + real	20 garment and deformable-object tasks	Selected	Local benchmark	Task-specific metrics
RGBench (Hu et al. 2026)	Simulation + real	Garment grasping, folding, and flinging	No	Local benchmark	Simulation and task errors
ICRA Cloth Competition (De Gusseme et al. 2026)	Real	In-air cloth-unfolding grasp selection	No	Live competition	Grasp success and final coverage
VLA-REPLICA (Huang et al. 2026)	Real	General 10-task suite with one towel-folding task	Limited	Local + leaderboard	ID/OOD task success
RoboChallenge / Table30 (Yakefu et al. 2025)	Real	General 30-task suite with one dishcloth-folding task	Limited	Remotely hosted	Success and stage progress
RoboDojo (Chen et al. 2026)	Simulation + real	General manipulation; no dedicated deformable track	No	Remotely hosted	Task and capability performance
FolDeX	Real	Folding-centered deformable task family	Yes	External physical evaluation	Success, quality, recovery, and efficiency

Table 1: **Comparison with representative manipulation benchmarks.** “Full LH Episode” indicates evaluation of complete, dependent, long-horizon deformable-manipulation episodes. “Limited” indicates that folding appears as an isolated task inside a broader suite rather than a deeply covered task family. “Selected” indicates that the benchmark includes some long-horizon tasks but does not define a benchmark-wide external protocol for complete physical deformable-manipulation episodes.

Recovery-data utilization. A shared policy is first deployed to generate real-robot rollout states, during which human operators collect intervention and recovery trajectories. The recovery trajectories are combined with independently collected demonstration data to train and evaluate a separately initialized policy. This setting evaluates a model’s ability to utilize recovery data and the highest performance achievable under the recovery-augmented training setup.

Cross-task transfer. This track studies whether rigid- and deformable-object data can benefit each other during joint training. Although garment manipulation is deformable overall, stages such as garment retrieval and final stacking share action patterns with rigid-object grasping and placement. The track also evaluates whether a model trained on a rigid-object task can learn a complete long-horizon deformable-manipulation task using only a limited amount of deformable-object data.

Cross-scene transfer and generalization. This track changes the robot workspace through variations in spatial layout, lighting, visual background, and surrounding environment. It evaluates how much previously collected data remain useful after the scene changes, how efficiently a policy adapts to the new setting, and how well it generalizes without additional data.

Cross-embodiment transfer. Cross-embodiment transfer is one of the most challenging real-robot settings. Different robot morphologies have substantially different kinematics, control interfaces, and action spaces, while modifying the action head can strongly affect the learned policy. This track studies which task knowledge and action patterns can be shared across embodiments and whether multi-robot data can reduce the amount of target-robot data required for learning

long-horizon deformable manipulation.

Evaluation Metrics

Binary success rate alone cannot fully characterize performance on complete garment-folding tasks. Policies with similar success rates may differ substantially in final-state quality and execution efficiency. We therefore report task success rate, average completion time, final-state neatness, and **FoldScore**.

Final-state neatness. We assess the final folded garment using a six-level neatness score from 0 to 5, considering its overall shape, compactness, flatness, structural stability, and edge alignment. A score of 0 represents a largely unfolded garment, whereas a score of 5 represents a compact, flat, stable, and well-aligned result approaching careful human folding quality. The score is determined solely from the final garment state. The detailed scoring rubric is provided in the Appendix.

FoldScore. FoldScore summarizes final-state quality, task success, and execution efficiency as

$$\text{FoldScore} = 35\bar{Q} + 35R + 30 \max\left(0, 1 - \frac{t}{T_{\max}}\right), \quad (1)$$

where $\bar{Q} \in [0, 1]$ is the average normalized final-state quality, $R \in [0, 1]$ is the complete-task success rate, t is the average completion time over successful trials, and $T_{\max}$ is the maximum episode duration. The time component is set to zero when no trial succeeds. The mapping from neatness levels to normalized quality scores is provided in the Appendix.

All policies are evaluated using the same physical tasks, garment instances, initialization procedure, maximum episode duration, and robot execution protocol.

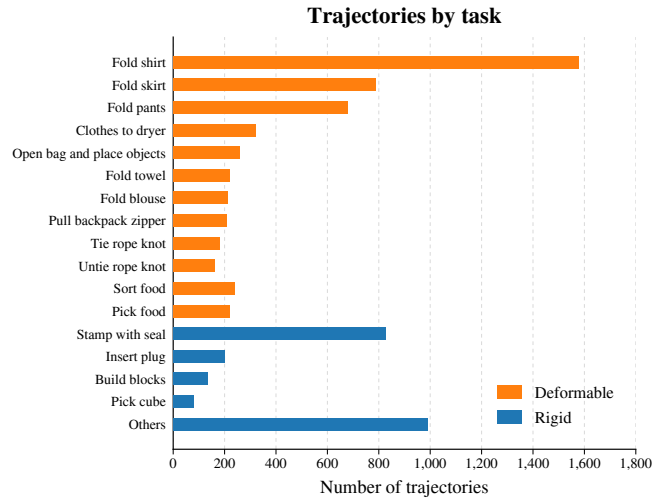
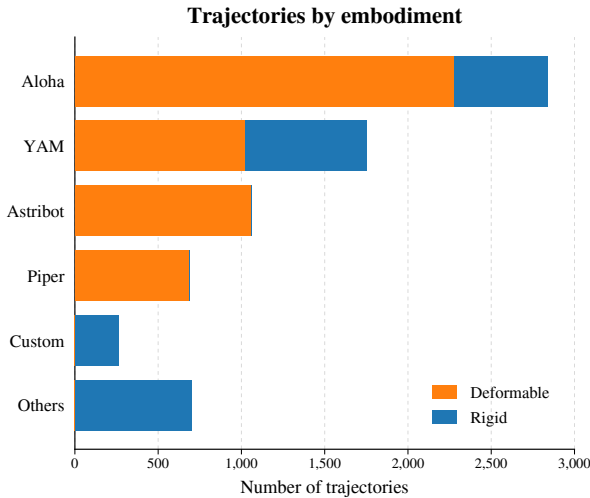


Figure 3: **FolDeX embodiments and data composition.** The benchmark contains 2,000+ hours of real-robot experience spanning 20+ tasks and 10+ robotic embodiments. The statistics summarize the distribution of garment-manipulation tasks, other deformable-object tasks, rigid-object tasks, and robotic embodiments.

Experiments

We conduct preliminary real-robot experiments corresponding to the four research questions defined by FolDeX: recovery-data utilization, cross-task transfer, cross-scene transfer, and cross-embodiment transfer. These experiments provide reference results and comparisons for future research. We first establish multi-task reference baselines and compare unified multi-task training with task-specific training under standard and RTC-based training configurations. We then evaluate the effect of augmenting multi-task training with DAgger recovery data. Finally, we report preliminary observations on rigid-to-deformable, cross-scene, and cross-embodiment transfer. All experiments use the same observation and action interfaces. Unless otherwise specified, each garment category is evaluated using 30 independent physical trials with randomized garment configurations. A trial is considered successful only when the policy completes the entire long-horizon folding sequence without human intervention or unrecoverable failure. All models are trained on 16 GPUs with a batch size of 16. For fair evaluation, all qualitative scores are independently assessed by at least two evaluators, with the same evaluators used across methods. A score is recorded only upon agreement.

Baselines

We first establish reference baselines for unified multi-task garment folding and compare them with task-specific policies. In the multi-task setting, data from different garment categories are mixed to train a single unified policy. This setting evaluates whether a shared policy can acquire long-horizon folding capabilities across multiple garment types. For comparison, we train a separate task-specific policy for each garment category using only the corresponding garment data. This comparison evaluates whether unified multi-task training provides useful transfer across garment categories or introduces interference between tasks. All reference mod-

Task / Metric	RTC Multi	Standard Multi	RTC Single
Shirt SR (%)	93.00	90.00	100.00
Shirt FoldScore	79.62	71.50	71.43
Skirt SR (%)	90.00	100.00	100.00
Skirt FoldScore	83.38	80.00	87.57
Pants SR (%)	63.33	50.00	80.00
Pants FoldScore	70.52	73.33	76.23
Towel SR (%)	76.67	50.00	50.00
Towel FoldScore	68.87	64.40	51.54
Average SR (%)	80.75	72.50	82.50
FoldScore	75.59	72.30	71.69

Table 2: Multi-task and task-specific reference results under the FoldChallenge protocol. All reference policies use π_0 and expert demonstrations only. RTC denotes real-time chunking during training. SR denotes success rate, while FoldScore considers final-state quality, complete-task success, and execution time.

els use π_0 and are trained using expert demonstrations only. For multi-task training, we compare standard training with training-time real-time chunking (RTC). The task-specific policies are trained with RTC. Training-time RTC simulates inference delay and conditions the model on action prefixes that have already been committed for execution, avoiding inference-time inpainting overhead (Black et al. 2025).

Table 2 shows that multi-task and task-specific training exhibit different advantages under different evaluation metrics. The RTC task-specific policies achieve the highest average success rate of 82.50%, whereas the RTC multi-task policy obtains the highest average FoldScore of 75.59. This discrepancy illustrates that binary success alone does not completely characterize the physical quality and efficiency of a folding

Task	Success Rate	Average Time	FoldScore
Shirt	90.00%	2:29	76.88
Skirt	90.00%	1:54	81.25
Pants	100.00%	1:48	85.50
Towel	100.00%	1:40	86.50
Average	95.00%	1:58	82.53

Table 3: **Recovery-augmented multi-task real-robot results.** A single π_0 policy with RTC is trained using demonstrations and recovery data from four garment categories.

policy. Within the multi-task setting, RTC improves the average success rate from 72.50% to 80.75% and increases the average FoldScore from 72.30 to 75.59. The improvement is particularly visible on Pants and Towel, which require longer-horizon state tracking and more substantial manipulation of deformable configurations. Task-specific training performs strongly on Shirt, Skirt, and Pants. In contrast, the RTC multi-task policy substantially outperforms the task-specific policy on Towel, achieving a success rate of 76.67% compared with 50.00%. These results indicate that multi-task training can provide useful transfer for selected garment categories, although its benefits are not uniform across all tasks. We use the demo-only RTC multi-task policy as the reference baseline for evaluating the effect of recovery data.

Supplementary baselines. We additionally reproduce $\pi_{0.5}$ and evaluate π_0 with inference-time RTC on the Shirt task. The $\pi_{0.5}$ policy is evaluated from a pre-flattened garment state and therefore covers only the subsequent folding process, whereas the inference-time RTC baseline is evaluated on the complete long-horizon task from garment retrieval and flattening to folding and final placement. The two results are thus reported only as supplementary references rather than as a direct comparison. The reproduced $\pi_{0.5}$ policy achieves a success rate of 100.0% with an average completion time of 41 s, although its folded results generally remain in the lowest non-zero final-state quality tier. In comparison, π_0 with inference-time RTC achieves a success rate of 42.9% on the complete task. The main comparison remains restricted to methods evaluated across all garment categories under the complete evaluation protocol.

Recovery-Data Utilization

We evaluate the model’s ability to utilize recovery data. Starting from the demonstration-only RTC multi-task baseline in Table 2, we add recovery trajectories from Shirt, Skirt, Pants, and Towel and train a single π_0 policy with RTC. As shown in Table 3, adding recovery data improves the average success rate from 80.75% to 95.00% and the average FoldScore from 75.59 to 82.53. The improvement is clear on Pants and Towel, both of which reach a success rate of 100.00%.

Preliminary Observations on Other Transfer Axes

Beyond recovery-data utilization, we conduct preliminary experiments on cross-task, cross-scene, and cross-embodiment data reuse. These experiments are intended to verify that the

corresponding benchmark axes represent practically important challenges, rather than to provide complete solutions to each transfer setting.

For heterogeneous task data, including rigid-object and deformable-object manipulation, we evaluate both joint training and continued training. Direct joint training often introduces substantial interference in action generation, while continued training frequently causes the policy to forget previously acquired action behaviors. Although some short manipulation stages can still be completed, the resulting policies rarely preserve reliable performance over complete long-horizon deformable-manipulation episodes. We observe a similar but more severe problem in cross-embodiment training. We evaluate both joint training across multiple robotic embodiments and continued training from one embodiment to another. Differences in robot kinematics, camera configurations, control interfaces, and action representations lead to severe action-space interference and catastrophic forgetting. Under these settings, the policies generally fail to complete the full task reliably, even when the individual embodiments can be trained successfully with their own data.

In contrast, policies show stronger robustness to changes in lighting, background, and moderate workspace layout. Cross-scene variation is therefore less disruptive than changes in task dynamics or robotic embodiment in our preliminary evaluations. These observations indicate that heterogeneous real-robot data cannot be effectively reused through naive data mixing or continued training alone. They also motivate the controlled data partitions and evaluation protocols introduced by FolDeX. As a benchmark, FolDeX exposes these unresolved challenges and provides a physical testbed for future methods addressing negative transfer, catastrophic forgetting, and cross-embodiment action alignment.

Discussion and Limitations

Our comparison is constrained by the time and hardware cost of long-horizon real-robot evaluation, and additional model evaluations will be continuously released through FoldChallenge. The four tracks provide dataset partitions, standardized evaluation settings, and empirical results, rather than exhaustive methodological studies of recovery, cross-task, cross-scene, and cross-embodiment transfer. The current benchmark primarily relies on visual observations and proprioception, without explicit tactile sensing. Future versions will incorporate tactile feedback to better capture contact states and local deformations during deformable manipulation.

Conclusion

We presented **FolDeX**, the first real-robot benchmark focused on long-horizon deformable manipulation, together with **FoldChallenge**, a fair and challenging evaluation platform. FolDeX highlights that effectively organizing and reusing heterogeneous real-robot data may be more valuable than blindly scaling data collection. By structuring research across recovery, task, scene, and embodiment axes, FolDeX provides a foundation for reliable embodied AI and physical-world robotic manipulation.

Use of Generative AI. Generative AI tools were used for language editing and visual drafting; all technical content, results, and final figures were verified by the authors.

References

- Atreya, P.; Pertsch, K.; Lee, T.; Kim, M. J.; Jain, A.; Kuramshin, A.; Neary, C.; Hu, E. S.; Arora, K.; Ellis, K.; Macesanu, L.; Leonard, M.; Cho, M.; Aslan, O.; Dass, S.; Wang, T.; Yuan, X.; Gupta, A.; Jayaraman, D.; Berseth, G.; Danilidis, K.; Martín-Martín, R.; Lee, Y.; Liang, P.; Finn, C.; and Levine, S. 2025. RoboArena: Distributed Real-World Evaluation of Generalist Robot Policies. In *Proceedings of the Conference on Robot Learning*, volume 305 of *Proceedings of Machine Learning Research*, 336–364. PMLR.
- Avigal, Y.; Berscheid, L.; Asfour, T.; Kröger, T.; and Goldberg, K. 2022. SpeedFolding: Learning Efficient Bimanual Folding of Garments. In *IEEE/RSJ International Conference on Intelligent Robots and Systems*, 1–8.
- Black, K.; Brown, N.; Driess, D.; Esmail, A.; Equi, M.; Finn, C.; Fusai, N.; Groom, L.; Hausman, K.; Ichter, B.; et al. 2024. π_0 : A Vision-Language-Action Flow Model for General Robot Control. *arXiv preprint arXiv:2410.24164*.
- Black, K.; Ren, A. Z.; Equi, M.; and Levine, S. 2025. Training-Time Action Conditioning for Efficient Real-Time Chunking. *arXiv preprint arXiv:2512.05964*.
- Brohan, A.; Brown, N.; Carbajal, J.; Chebotar, Y.; Chen, X.; et al. 2023. RT-2: Vision-Language-Action Models Transfer Web Knowledge to Robotic Control. *arXiv preprint arXiv:2307.15818*.
- Chen, L. Y.; Xu, C.; Dharmarajan, K.; Irshad, M. Z.; Cheng, R.; Keutzer, K.; Tomizuka, M.; Vuong, Q.; and Goldberg, K. 2024. RoVi-Aug: Robot and Viewpoint Augmentation for Cross-Embodiment Robot Learning. *arXiv preprint arXiv:2409.03403*.
- Chen, T.; Chen, Y.; Li, Z.; Tang, J.; Su, K.; et al. 2026. RoboDojo: A Unified Sim-and-Real Benchmark for Comprehensive Evaluation of Generalist Robot Manipulation Policies. *arXiv preprint arXiv:2607.04434*.
- De Gusseme, V.-L.; Lips, T.; Proesmans, R.; Hietala, J.; Lee, G.; Choi, J.; et al. 2026. A Dataset and Benchmark for Robotic Cloth Unfolding Grasp Selection: The ICRA 2024 Cloth Competition. *The International Journal of Robotics Research*.
- Hu, W.; Tang, X.; E, Y.; Li, Y.; Shu, Z.; Li, W.; Wang, H.; and Yang, R. 2026. Real Garment Benchmark (RGBench): A Comprehensive Benchmark for Robotic Garment Manipulation Featuring a High-Fidelity Scalable Simulator. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 40, 18306–18314.
- Hu, Y.; Guo, Y.; Wang, P.; Chen, X.; Wang, Y.-J.; Zhang, J.; Sreenath, K.; Lu, C.; and Chen, J. 2024. Video Prediction Policy: A Generalist Robot Policy with Predictive Visual Representations. *arXiv preprint arXiv:2412.14803*.
- Huang, A. S.; Zhang, J.; Tang, S.; and Xiang, Y. 2026. VLA-REPLICA: A Low-Cost, Reproducible Benchmark for Real-World Evaluation of Vision-Language-Action Models. *arXiv:2605.20774*.
- Kim, M. J.; Pertsch, K.; Karamcheti, S.; Xiao, T.; Balakrishna, A.; Nair, S.; Rafailov, R.; Foster, E.; Lam, G.; Sanketi, P.; Vuong, Q.; Kollar, T.; Burchfiel, B.; Tedrake, R.; Sadigh,

- D.; Levine, S.; Liang, P.; and Finn, C. 2024. OpenVLA: An Open-Source Vision-Language-Action Model. *arXiv preprint arXiv:2406.09246*.
- Li, C.; Zhang, R.; Wong, J.; Gokmen, C.; Srivastava, S.; Martín-Martín, R.; Wang, C.; et al. 2023. BEHAVIOR-1K: A Benchmark for Embodied AI with 1,000 Everyday Activities and Realistic Simulation. In *Proceedings of the Conference on Robot Learning*, volume 205, 80–93. PMLR.
- Lin, X.; Wang, Y.; Olkin, J.; and Held, D. 2021. Soft-Gym: Benchmarking Deep Reinforcement Learning for Deformable Object Manipulation. In *Proceedings of the Conference on Robot Learning*, volume 155, 432–448. PMLR.
- Liu, B.; Zhu, Y.; Gao, C.; Feng, Y.; Liu, Q.; Zhu, Y.; and Stone, P. 2023. LIBERO: Benchmarking Knowledge Transfer for Lifelong Robot Learning. In *Advances in Neural Information Processing Systems: Datasets and Benchmarks Track*.
- Lu, H.; Wu, R.; Li, Y.; Li, S.; Zhu, Z.; Ning, C.; Shen, Y.; Luo, L.; Chen, Y.; and Dong, H. 2024. GarmentLab: A Unified Simulation and Benchmark for Garment Manipulation. In *Advances in Neural Information Processing Systems*, volume 37.
- Mees, O.; Hermann, L.; Rosete-Beas, E.; and Burgard, W. 2022. CALVIN: A Benchmark for Language-Conditioned Policy Learning for Long-Horizon Robot Manipulation Tasks. *IEEE Robotics and Automation Letters*, 7(3): 7327–7334.
- Mo, K.; Xia, C.; Wang, X.; Deng, Y.; Gao, X.; and Liang, B. 2023. Foldsformer: Learning Sequential Multi-Step Cloth Manipulation With Space-Time Attention. *IEEE Robotics and Automation Letters*, 8(2): 760–767.
- Octo Model Team; Ghosh, D.; Walke, H.; Pertsch, K.; Black, K.; Mees, O.; Dasari, S.; Hejna, J.; Kreiman, T.; Xu, C.; Luo, J.; et al. 2024. Octo: An Open-Source Generalist Robot Policy. In *Robotics: Science and Systems*.
- Open X-Embodiment Collaboration; O’Neill, A.; Rehman, A.; Gupta, A.; Maddukuri, A.; Gupta, A.; Padalkar, A.; Lee, A.; et al. 2023. Open X-Embodiment: Robotic Learning Datasets and RT-X Models. *arXiv preprint arXiv:2310.08864*.
- Physical Intelligence. 2025. $\pi_{0.5}$: A Vision-Language-Action Model with Open-World Generalization. *arXiv preprint arXiv:2504.16054*.
- Ross, S.; Gordon, G.; and Bagnell, D. 2011. A Reduction of Imitation Learning and Structured Prediction to No-Regret Online Learning. In *Proceedings of the Fourteenth International Conference on Artificial Intelligence and Statistics*, 627–635. PMLR.
- Yakefu, A.; Xie, B.; Xu, C.; Zhang, E.; Zhou, E.; Jia, F.; Yang, H.; Fan, H.; Zhang, H.; Peng, H.; et al. 2025. RoboChallenge: Large-scale Real-robot Evaluation of Embodied Policies. *arXiv preprint arXiv:2510.17950*.
- Ye, S.; Ge, Y.; Zheng, K.; Gao, S.; Yu, S.; Kurian, G.; Indupuru, S.; Tan, Y. L.; Zhu, C.; Xiang, J.; et al. 2026. World Action Models are Zero-shot Policies. *arXiv preprint arXiv:2602.15922*.
- Yuan, T.; Dong, Z.; Liu, Y.; and Zhao, H. 2026. Fast-WAM: Do World Action Models Need Test-time Future Imagination? *arXiv preprint arXiv:2603.16666*.
- Zhou, Z.; Atreya, P.; Tan, Y. L.; Pertsch, K.; and Levine, S. 2025. AutoEval: Autonomous Evaluation of Generalist Robot Manipulation Policies in the Real World. In *Proceedings of the Conference on Robot Learning*, volume 305 of *Proceedings of Machine Learning Research*, 1997–2017. PMLR.
- Zhuang, L.; Fan, S.; Ru, Y.; Audonnet, F.; Henderson, P.; and Aragon-Camarasa, G. 2025. Flat’n’Fold: A Diverse Multi-Modal Dataset for Garment Perception and Manipulation. In *IEEE International Conference on Robotics and Automation*, 7937–7944.