

Where the Quantum Lives in D-Wave Hybrid Portfolio Optimization

Luis Lozano*

*EGADE Business School, Tecnológico de Monterrey,
Santa Fe, Mexico City, Mexico*

Abstract

We audit how much of D-Wave’s hybrid quantum-classical portfolio-optimization service is actually quantum. On cardinality-constrained mean-variance-turnover instances spanning $N = 10$ to 640 with a Gurobi MIQP optimality anchor, the constraint-native LeapHybrid-CQM service matches Gurobi’s proven optimum on all 54 instances where Gurobi proves optimality, but mean QPU access time is only 0.034 seconds out of a 5-second wall-clock budget, roughly 0.7% of the run. The remaining $\sim 99\%$ is the service’s classical decomposition, sub-problem assembly, and feasibility-aware reassembly. The reported D-Wave hybrid win on this problem class is therefore a constraint-native classical pipeline with a small QPU contribution, not a quantum-sampling win. Two structural results sharpen this audit: (i) the cardinality penalty contributes a dense rank-one term that makes the penalty-encoded logical graph fully connected regardless of the original covariance density, collapsing the intended density benchmark axis for all penalty-encoded paths while leaving CQM’s sparsity intact; (ii) the CQM service returns identical solutions at every tested wall-clock budget from 5 to 300 seconds and across 10 repeated calls, a determinism property of the service on this problem class. Together with two classical baselines (Gurobi MIQP and simulated annealing) and a comparison against the penalty-encoded LeapHybridBQM interface, these results extend the prior CQM-vs-BQM observation of Sakuler et al. [2025] from “CQM handles constraints natively” to the operational decomposition of where the win actually originates, a finding that reframes how D-Wave hybrid performance should be reported in quantum-finance benchmarks.

Keywords: D-Wave hybrid solver; quantum-classical decomposition; constrained quadratic model; portfolio optimization; cardinality constraint; QPU access time

1 Introduction

Quantum annealing has attracted sustained interest as a potential accelerator for combinatorial portfolio optimization [Orús et al., 2019, Herman et al., 2023]. The standard approach encodes a cardinality-constrained mean-variance objective as a quadratic unconstrained binary optimization (QUBO) problem, adds a quadratic penalty term to enforce the cardinality constraint, embeds the resulting logical graph onto the hardware topology via minor embedding, and samples on the quantum processing unit (QPU) [Venturelli and Kondratyev, 2019, Mugel et al., 2022, Sakuler et al., 2025]. A parallel line of work uses D-Wave’s hybrid cloud solvers, which accept either penalty-encoded binary quadratic models (BQMs) or constraint-native constrained quadratic models (CQMs) and allocate classical and QPU resources internally [Mugel et al., 2022].

Despite this body of work, the relative performance of these formulation choices has not been systematically characterized across the joint space of problem size, covariance density, and solver

*e-mail address: lalozanom@tec.mx; ORCID: 0000-0001-7202-3437

budget. Most studies benchmark a single solver at a single scale. We address this gap by defining a canonical mean-variance-turnover (MVT) portfolio problem and comparing four solver paths (direct QPU, hybrid BQM, hybrid CQM, and classical baselines: Gurobi MIQP and simulated annealing) across controlled synthetic instances and real equity data from the Fama–French 49 industry portfolios [French, 2026]. In practical portfolio rebalancing, turnover is not a cosmetic term: changing positions incurs transaction costs, market impact, and operational frictions. A solver that spends its budget satisfying an artificial cardinality penalty rather than improving the risk-return-turnover objective can produce portfolios whose implementation cost overwhelms the expected return benefit. The intended users of these results are D-Wave practitioners choosing between solver interfaces, fintech engineering teams evaluating hybrid solvers for constrained allocation problems, and quantitative researchers benchmarking quantum-assisted portfolio optimization.

Our contributions are:

1. **Quantum-classical decomposition audit.** Mean QPU access time for the constraint-native CQM service is 0.034 s out of the 5 s minimum wall-clock budget, or approximately 0.7% of the run; the remaining $\sim 99\%$ is the service’s classical decomposition, sub-problem assembly, and feasibility-aware reassembly. The reported hybrid win on this problem class is therefore a constraint-native classical pipeline with a small QPU contribution, not a quantum-sampling win, and this reframes how D-Wave hybrid performance should be reported in quantum-finance benchmarks.
2. **Density-axis collapse under penalty encoding.** The cardinality penalty contributes a dense rank-one matrix $A\mathbf{1}\mathbf{1}^\top$ that makes the penalty-encoded logical graph fully connected regardless of the original covariance density, collapsing the density benchmark axis for all penalty-encoded paths (BQM and direct QPU). The CQM path preserves original sparsity, an asymmetry that partially explains the formulation gap.
3. **Budget saturation with determinism.** On the tested instance families, the hybrid CQM service returns identical solutions at every wall-clock budget from 5 to 300 seconds and across 10 repeated calls per configuration. Budget tuning is eliminated as a design variable on this problem class.
4. **Extension of the CQM-vs-BQM observation with classical anchors.** The qualitative observation that CQM handles constraints natively without penalty tuning [Sakuler et al., 2025] is extended here with a Gurobi MIQP optimality anchor: CQM matches the proven optimum on all 54 instances where Gurobi proves optimality ($N = 10$ through 120), while the penalty-encoded BQM gap grows monotonically with N . Simulated annealing applied to the same penalty-encoded BQM exhibits the same degradation, confirming that the gap is a formulation effect, not a solver-specific artifact.
5. **Confirmation of penalty encoding as the direct-QPU bottleneck on the mean-variance-turnover objective.** Chain-break fractions exceeding 0.9 at $N \geq 50$ and embedding overheads of $9.4\times$ at $N = 80$ apply the penalty-dilution diagnosis [Lozano, 2026] to a richer objective that includes a switching-cost term; the turnover term itself absorbs into the QUBO diagonal and does not change the penalty-density mechanism.

This study sits next to several portfolio-optimization benchmarks using quantum and hybrid methods. Mugel et al. [2022] study dynamic portfolio optimization on real data with quantum and quantum-inspired methods. Sakuler et al. [2025] compare QBSolv, Hybrid BQM, Hybrid CQM, and exact classical solutions for a production portfolio-optimization use case, finding that CQM is useful for handling constraints without manual penalty tuning. Lang et al. [2022] and Buonaiuto et al. [2023] benchmark annealing and gate-model workflows for portfolio optimization, while Acharya et al. [2025] develop a decomposition pipeline for large constrained portfolio and

rebalancing problems. Morapakula et al. [2025] build an end-to-end deployable pipeline that combines CQM-based discrete asset selection with classical weight allocation and rebalancing, demonstrating the operational viability of hybrid annealing in a real market context. Stopfer and Wagner [2025] provide a broad quantum-portfolio benchmark and conclude that classical MIP and tailored heuristics dominate the tested quantum approaches. Our contribution is narrower and more diagnostic: we isolate the formulation choice for a mean-variance-turnover problem, sweep size, covariance density, and solver budget, and connect the hybrid BQM/CQM gap to the direct-QPU embedding mechanism.

We note explicitly that this is a formulation-and-platform study within the D-Wave ecosystem, not a broad quantum-vs-classical superiority claim. Classical solvers (Gurobi MIQP) find provably optimal solutions on all tested instances; the practical question addressed here is which D-Wave solver interface to use when a practitioner has chosen to use D-Wave hardware.

Relationship to a companion paper. A companion paper by the same author [Lozano, 2026] addresses an adjacent but distinct practitioner question: how to make *direct-QPU* portfolio optimization viable in the first place, by replacing the standard penalty-encoded QUBO with an objective-only QUBO and a classical feasibility projector. The two papers share a root diagnosis (the cardinality penalty contributes a dense rank-one matrix that makes the logical graph complete regardless of Σ) but follow it into two different layers of the D-Wave stack: the companion paper builds a custom direct-QPU pipeline, while the present paper benchmarks the existing hybrid CQM/BQM service interfaces. Together they map the formulation-choice question across the two main D-Wave access modes; each can be read independently, but neither subsumes the other’s empirical content.

2 Background

2.1 Cardinality-Constrained Portfolio Selection

The classical mean-variance portfolio problem [Markowitz, 1952] selects asset weights to maximize expected return for a given risk level. Adding a cardinality constraint (select exactly K out of N candidate assets) makes the problem NP-hard in general [Lucas, 2014]. In the binary formulation, each asset i has a selection variable $z_i \in \{0, 1\}$ and the objective is:

$$\min_{z \in \{0,1\}^N} -\boldsymbol{\mu}^\top z + \lambda z^\top \Sigma z \quad \text{s.t.} \quad \mathbf{1}^\top z = K, \quad (1)$$

where $\boldsymbol{\mu}$ is the expected return vector, Σ is the covariance matrix, and $\lambda > 0$ is the risk-aversion parameter.

2.2 Mean-Variance-Turnover Formulation

For repeated re-optimization across consecutive decision periods, we extend (1) with a switching-cost penalty:

$$\min_{z \in \{0,1\}^N} -\boldsymbol{\mu}^\top z + \lambda z^\top \Sigma z + \boldsymbol{\tau}^\top |z - z_{t-1}| \quad \text{s.t.} \quad \mathbf{1}^\top z = K, \quad (2)$$

where z_{t-1} is the previous binary portfolio and $\boldsymbol{\tau}$ is the per-asset switching cost. Because both z and z_{t-1} are binary, the absolute-value term is linear: $|z_i - z_{t-1,i}| = z_i(1 - z_{t-1,i}) + (1 - z_i)z_{t-1,i}$, which absorbs into the QUBO diagonal without introducing auxiliary variables or additional pairwise couplers.

2.3 Penalty-Encoded QUBO (BQM Path)

The standard QUBO encoding promotes the cardinality constraint into the objective via a quadratic penalty:

$$Q_{\text{BQM}} = -\text{diag}(\boldsymbol{\mu}) + \lambda \Sigma + A \cdot \mathbf{1}\mathbf{1}^\top - 2AK \cdot I + \text{diag}(\boldsymbol{\tau}_{\text{shift}}), \quad (3)$$

where $A > 0$ is the penalty weight and $\tau_{\text{shift},i} = \tau_i(1 - 2z_{t-1,i})$. The $A \cdot \mathbf{1}\mathbf{1}^\top$ term makes the QUBO fully connected regardless of the sparsity of Σ , a phenomenon termed *constraint dilution* [Verma and Lewis, 2022, Lozano, 2026]. This full connectivity forces $N(N-1)/2$ couplers in the logical graph and long minor-embedding chains on hardware topologies with bounded degree.

2.4 Constraint-Native CQM (CQM Path)

D-Wave’s constrained quadratic model (CQM) interface accepts the cardinality constraint natively, eliminating the penalty term entirely:

$$Q_{\text{CQM}} = -\text{diag}(\boldsymbol{\mu}) + \lambda \Sigma + \text{diag}(\boldsymbol{\tau}_{\text{shift}}), \quad \text{constraint: } \mathbf{1}^\top \mathbf{z} = K. \quad (4)$$

The CQM objective preserves the sparsity structure of Σ . The hybrid solver handles constraint satisfaction internally through a combination of classical and quantum resources.

2.5 Density-Axis Collapse

A structural consequence of (3) is that the original covariance density ρ of Σ is irrelevant to the encoded logical graph density when using penalty encoding: the $A \cdot \mathbf{1}\mathbf{1}^\top$ term produces a complete graph for any Σ . This means that the “density” benchmark axis collapses for all penalty-encoded paths (direct QPU and hybrid BQM) but remains meaningful for the CQM path, which preserves the original sparsity. We confirm this empirically in Section 4.1: chain-break fractions and embedding overheads are nearly identical across diagonal ($\rho < 0.01$), block ($\rho \approx 0.2$), and dense ($\rho \approx 1.0$) families at each N . Figure 1 illustrates the mechanism schematically, and Figure 2 summarizes the practical consequences of this asymmetry for D-Wave practitioners.

2.6 D-Wave Hardware

We use two D-Wave systems:

- **Advantage_system4.1** (Pegasus topology): 5,760 ideal qubits, degree-15 connectivity. The active working graph used in our runs contained 5,627 qubits; embedding statistics in Section 4.1 are computed against this active set.
- **Advantage2_system1.13** (Zephyr topology): 4,800 ideal qubits, degree-20 connectivity.¹

Direct QPU access requires minor embedding of the logical QUBO graph into the hardware topology. Hybrid solvers (LeapHybridBQMSampler, LeapHybridCQMSampler) accept arbitrary problem structures and manage embedding and QPU allocation internally, with a minimum time limit of approximately 5 seconds [D-Wave Systems, 2025]. Figure 3 illustrates the hybrid solver architecture.

¹On 2026-04-10, D-Wave renamed this solver to **Advantage2_system1** and removed qubit 4374 (and its couplers) from the working graph. We verified across all 4,468 saved embedding records used in this paper and the companion penalty-encoding paper that qubit 4374 was never selected by the embedder for any chain; the rename therefore does not affect any reported result. All experiments here were run before the rename.

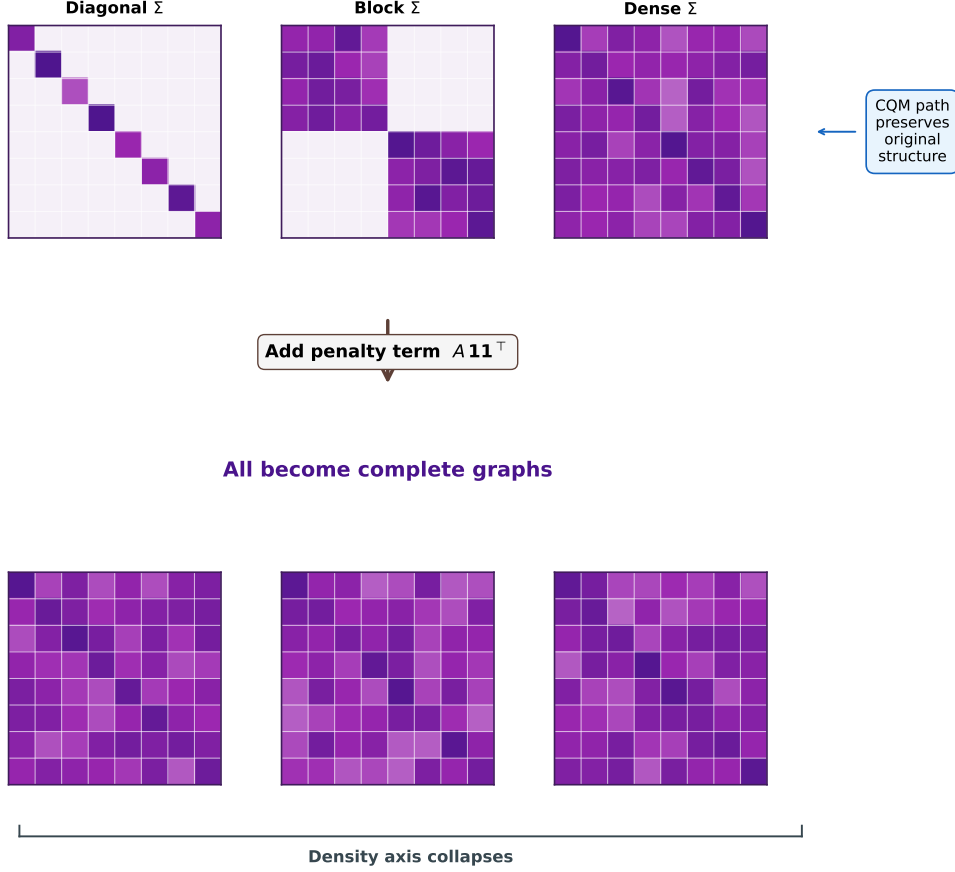


Figure 1: Density-axis collapse under penalty encoding. Three structurally different covariance matrices (diagonal, block, dense) all become complete graphs after adding the cardinality penalty $A \cdot \mathbf{1}\mathbf{1}^\top$. The CQM path preserves the original structure.

3 Experimental Setup

3.1 Synthetic Controlled Instances

We generate controlled benchmark instances across three covariance-density families:

- **Diagonal:** near-independent assets with small off-diagonal perturbations ($\rho < 0.01$).
- **Block-diagonal:** equicorrelated blocks with zero cross-block interaction ($\rho \approx 0.15\text{--}0.25$).
- **Dense:** full covariance matrices from Wishart draws ($\rho \approx 1.0$).

Expected returns μ are drawn from $\mathcal{N}(0.0005, 0.0002)$ (unitless signal coefficients, not literal daily percentage returns). All covariance matrices are symmetric positive definite by construction. Each configuration is run with three random seeds. Cardinality is set to $K = \lfloor 0.3N \rfloor$ and risk aversion to $\lambda = 0.5$.

3.2 Real Equity Data

We use the Fama–French 49 industry daily return portfolios [French, 2026], constructing rolling estimation windows of 252 trading days with monthly rebalancing. Five evenly spaced windows are selected. Industry subsets of $N \in \{10, 20, 30\}$ are formed by selecting the industries with the largest absolute expected-return magnitude.

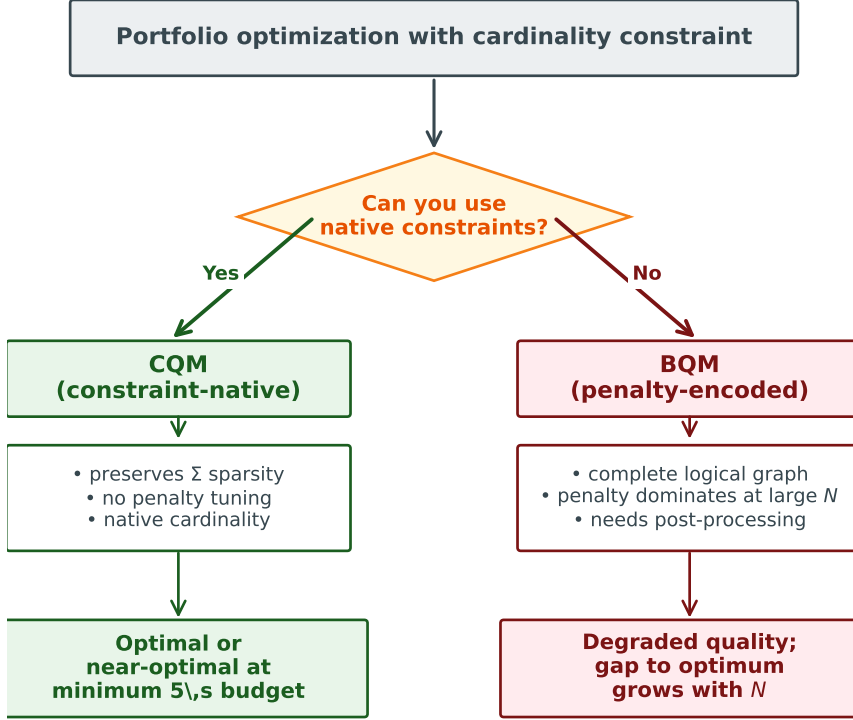


Figure 2: Formulation choice for D-Wave portfolio optimization. The constraint-native CQM path preserves sparsity, requires no penalty tuning, and achieves optimal solutions at the minimum budget. The penalty-encoded BQM path creates a dense graph, degrades with N , and requires budget tuning.

3.3 Solver Configurations

Direct QPU. Forward annealing on both Pegasus and Zephyr with 1000 reads, annealing time $20\ \mu\text{s}$, chain strengths $\{0.5, 1.0, 2.0\}$, and multi-seed embedding search (5 seeds, 20 tries per seed). Post-processing projects each sample to exact- K feasibility using the greedy projection of Lozano [2026].

Hybrid BQM. LeapHybridBQMSampler with the penalty-encoded QUBO (3), $A = 4.0$. The penalty value is consistent with the calibration study of Lozano [2026]; we verify robustness to $A \in \{2.0, 4.0, 8.0\}$ in Appendix A. Post-processing projects to exact- K .

Hybrid CQM. LeapHybridCQMSampler with the constraint-native formulation (4). Cardinality is enforced natively; the solver returns feasible solutions directly.

Gurobi MIQP. The cardinality-constrained MVT problem (2) is solved as a native mixed-integer quadratic program using Gurobi 13.0 with a 300-second time limit. Gurobi proves optimality on all tested instances and serves as the gold-standard reference.

Simulated annealing. D-Wave’s `neal` simulated-annealing sampler (1000 reads, 1000 sweeps) applied to the penalty-encoded BQM (3). Solutions are projected to exact- K with the same post-

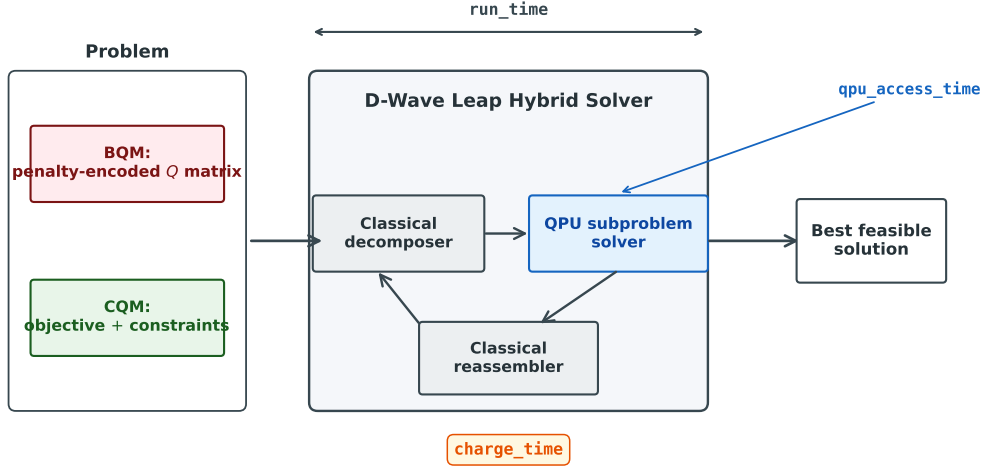


Figure 3: D-Wave hybrid solver architecture. The solver iterates between classical decomposition and QPU subproblem solving. Timing fields (`run_time`, `charge_time`, `qpu_access_time`) are reported separately, allowing analysis of whether the QPU actively contributed to the solution.

processing as the QPU path.

3.4 Benchmark Axes

1. **Problem size N :** $\{10, 20, 30, 50, 80\}$ for direct QPU; $\{10, 20, 30, 50, 80, 120, 200, 400, 640\}$ for hybrid and classical solvers.
2. **Covariance density:** diagonal, block, dense.
3. **Wall-clock budget:** $\{5, 30, 60, 180, 300\}$ seconds for hybrid budget sweep (Section 4.7).

4 Results

4.1 Direct QPU: Chain-Break Fractions and Embedding Overhead

Table 1 reports the mean chain-break fraction and embedding overhead for direct QPU sampling of the penalty-encoded QUBO, and Figure 4 visualizes these trends split by hardware topology (Pegasus vs Zephyr). Chain-break fractions increase monotonically with N , reaching 0.937 ± 0.016 at $N = 80$. The embedding overhead grows from $1.6\times$ at $N = 10$ to $9.4\times$ at $N = 80$. These trends are consistent with the cross-generation chain-break and embedding-overhead measurements reported by Pelofske [2025] for combinatorial benchmark problems on Pegasus and Zephyr.

At chain-break fractions above 0.9, the majority of QPU samples contain broken chains, meaning the decoded solutions reflect the post-processing repair heuristic more than the annealing dynamics. This is a direct consequence of the $A \cdot \mathbf{11}^\top$ penalty term, which forces the complete-graph embedding regardless of the original Σ density. Figure 5 confirms this empirically: chain-break fractions are nearly identical across diagonal, block, and dense families at each N , on both Pegasus and Zephyr.

Table 1: Direct QPU embedding statistics (mean $\pm$ std over all families, seeds, topologies, and chain strengths; 270 runs, all embedded successfully). Chain-break fractions and embedding overheads are nearly identical across density families at each N , confirming the density-axis collapse of Section 2.5.

N	K	Chain-break frac.	Phys. qubits	Overhead
10	3	0.543 ± 0.058	16	$1.6\times$
20	6	0.756 ± 0.034	51	$2.5\times$
30	9	0.820 ± 0.019	107	$3.6\times$
50	15	0.894 ± 0.023	298	$6.0\times$
80	24	0.937 ± 0.016	750	$9.4\times$

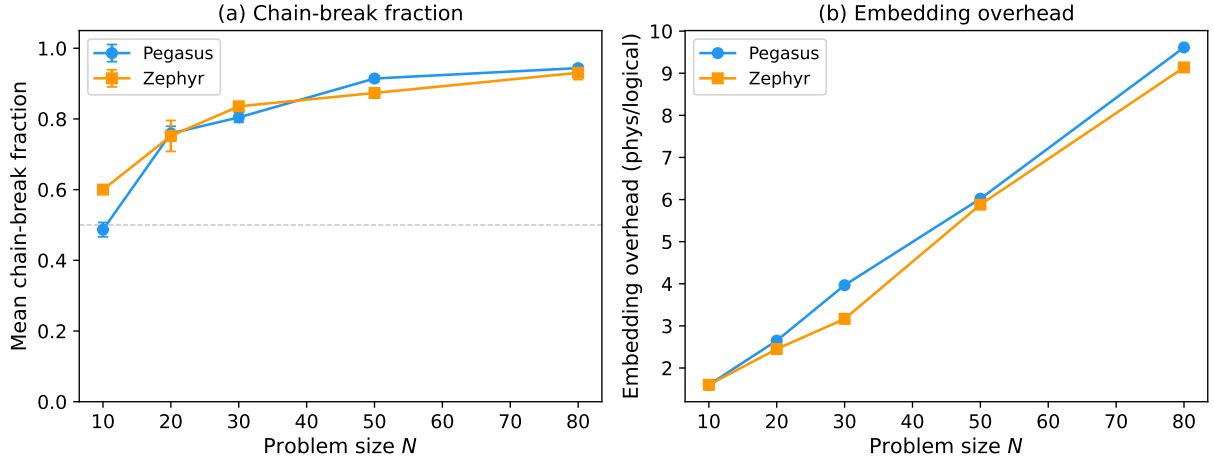


Figure 4: (a) Mean chain-break fraction and (b) embedding overhead (physical / logical qubits) vs problem size for direct QPU on penalty-encoded QUBOs, split by hardware topology.

4.2 Hybrid CQM vs BQM: Formulation Comparison

Table 2 compares the mean objective values achieved by hybrid BQM and CQM across problem sizes. All values are evaluated on the original constrained objective (2): BQM solutions are projected to exact- K before evaluation.

At $N \geq 200$, the BQM objective becomes positive: the penalty term dominates the economic signal, and the hybrid solver allocates its budget to penalty satisfaction rather than objective optimization. Under the exact- K cardinality constraint, a positive objective value indicates a portfolio whose risk-adjusted cost exceeds its expected return. The CQM formulation avoids this failure mode because the cardinality constraint is handled natively.

Figure 6 visualizes the solver comparison including classical baselines.

4.3 Gap to Gurobi Optimal

Table 3 and Figure 7 report the relative gap to Gurobi’s proven optimum, defined as $(f_{\text{solver}} - f^*)/|f^*|$ where f^* is the Gurobi-optimal objective. CQM matches the proven optimum exactly (gap = 0) on all 54 instances where Gurobi proves optimality ($N = 10$ through 120). BQM and SA, both operating on the penalty-encoded formulation, show monotonically increasing gaps.

4.4 Classical Baselines: Gurobi MIQP and Simulated Annealing

Gurobi MIQP solves all tested instances to proven optimality at $N \leq 200$ (62 of 63 runs; one $N = 200$ run reached the time limit). At $N \geq 400$, the free academic license does not support

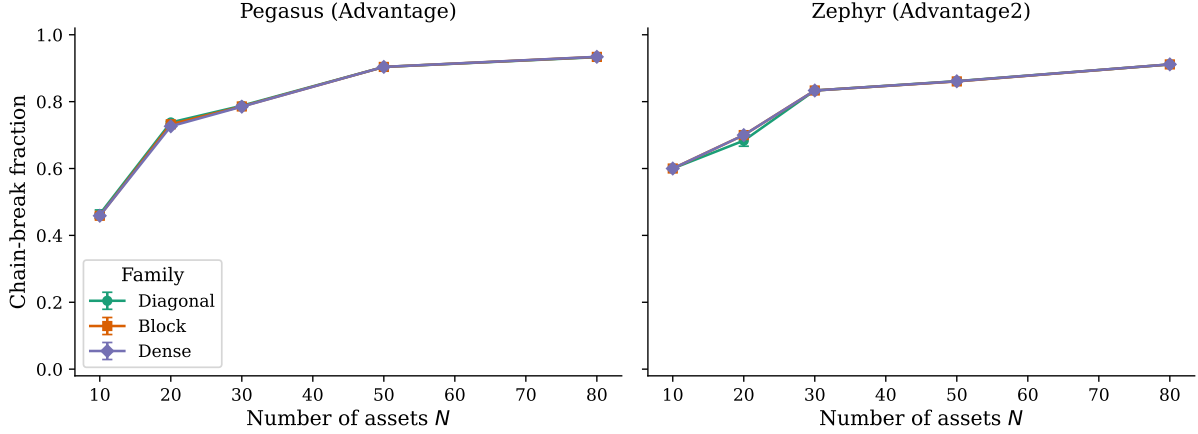


Figure 5: Chain-break fraction vs N split by covariance-density family (diagonal, block, dense), on Pegasus (left) and Zephyr (right). The three curves nearly overlap at each N , confirming that penalty encoding collapses the density axis.

Table 2: Hybrid CQM vs BQM: mean objective value by N (averaged over 3 density families $\times$ 3 seeds = 9 instances per N ; 162 runs total). Lower is better. CQM produces a lower objective at every $N > 10$ on the tested instances.

N	BQM objective	CQM objective	CQM wins
10	-0.139	-0.139	0/9
20	-0.310	-0.315	7/9
30	-0.417	-0.455	9/9
50	-0.540	-0.654	9/9
80	-0.622	-0.955	9/9
120	-0.628	-1.247	9/9
200	+0.024	-1.525	9/9
400	+4.480	+0.040	9/9
640	+16.452	+6.229	9/9

the model size. The neal simulated-annealing heuristic, which operates on the same penalty-encoded BQM as the hybrid BQM solver, exhibits a similar degradation pattern: objective quality deteriorates at large N where the penalty term dominates. This confirms that the BQM degradation is a formulation effect, not a solver-specific artifact.

4.5 QPU Contribution in Hybrid Runs

D-Wave hybrid solvers allocate work between classical and QPU resources internally. We report the fraction of runs where the QPU actively contributed (`qpu_access_time` > 0): hybrid BQM 99% (80/81 runs), hybrid CQM 98% (79/81 runs). Mean QPU access time was 0.163 s for BQM and 0.034 s for CQM. In the budget sweep (Section 4.7), QPU contributed in 95% of runs across both solvers.

These numbers carry an important interpretive nuance. For hybrid CQM at the 5 s minimum budget, the QPU consumed 0.034 s on average, roughly 0.7% of the wall-clock window. The remaining $\sim 99\%$ of the run is spent in the service’s classical decomposition, sub-problem assembly, and feasibility-aware reassembly stages. The CQM advantage we report is therefore properly read as: *CQM’s classical pipeline, with a small QPU contribution, dominates BQM’s penalty-encoded QPU phase that has no analogous classical guard against constraint dilution.* This sharpens rather than weakens the practical recommendation: the component that actually

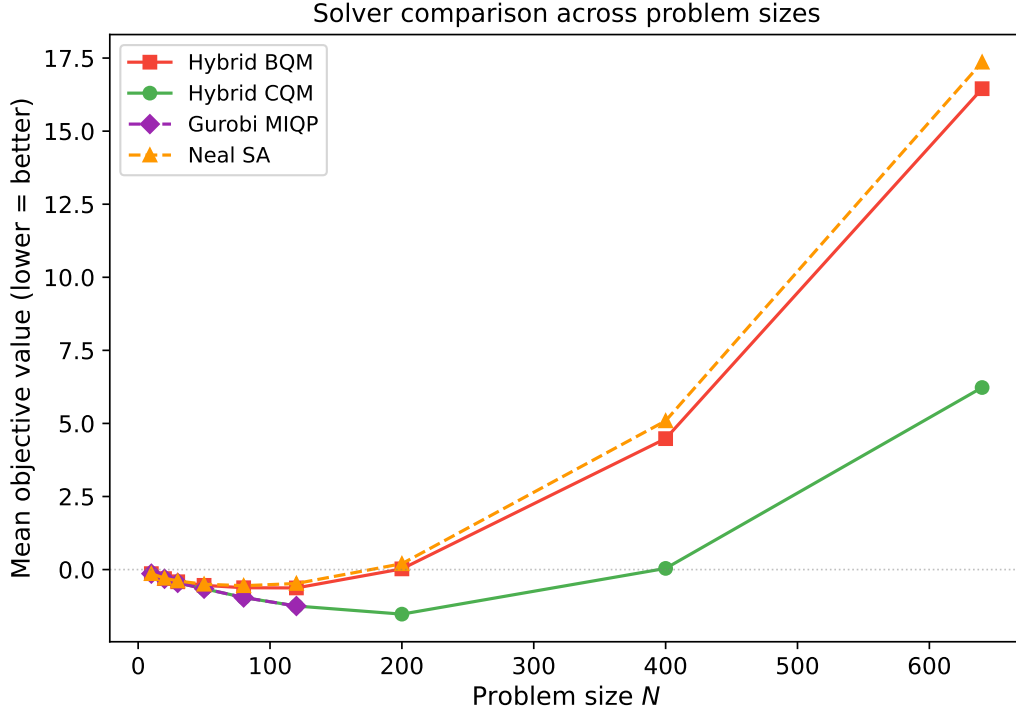


Figure 6: Mean objective value vs problem size across solver families (averaged over 3 density families $\times$ 3 seeds). Gurobi MIQP (dashed purple) provides provably optimal solutions. Hybrid CQM (green) tracks Gurobi closely. Hybrid BQM (red) and Neal SA (orange) both operate on the penalty-encoded QUBO and diverge at large N .

wins on this problem class is the classical decomposer that respects the cardinality constraint natively, and the QPU contributes incrementally on top of that.

4.6 Direct QPU on Real Equity Data

We confirm the synthetic findings on Fama–French 49 industry data as a directional sanity check (90 runs). Chain-break fractions follow the same pattern as the synthetic instances: 0.483 at $N = 10$, 0.759 at $N = 20$, and 0.802 at $N = 30$ (Pegasus means). All 90 embeddings succeeded; the constraint is solution quality, not embedding feasibility. Figure 8 shows the chain-break trend on real data.

4.7 Budget Sweep: Does More Time Help?

Table 4 reports hybrid objective values across wall-clock budgets from 5 to 300 seconds, and Figure 9 visualizes the corresponding budget response curves. The budget sweep uses $N \in \{50, 100, 200, 400\}$ (differing from the main N -sweep grid to include mid-range sizes relevant for budget sensitivity).

Stochastic validation. To verify that the budget-saturation finding is not an artifact of single-shot runs, we repeat the hybrid CQM and BQM solves 10 times each at $N \in \{50, 100, 200\}$, both density families, and budgets $\{5, 300\}$ s (228 runs total). CQM returns *identical* solutions (zero variance) across all 10 repetitions at every tested (N, ρ, B) combination, at both 5s and 300s. BQM shows measurable stochastic variance (std 0.01–0.11) and improves with budget, but its best run at 300s never reaches the CQM objective at 5s on any tested instance. Figure 10 visualizes this contrast.

Table 3: Relative gap to Gurobi optimal (mean $\pm$ std over 9 instances per N). CQM achieves zero gap at every N . BQM and SA gaps grow with N as penalty dilution intensifies.

N	CQM gap	BQM gap	SA gap
10	0.000	0.000	0.000
20	0.000	0.016 ± 0.019	0.065 ± 0.044
30	0.000	0.084 ± 0.026	0.146 ± 0.033
50	0.000	0.184 ± 0.063	0.250 ± 0.082
80	0.000	0.622 ± 0.701	0.728 ± 0.631
120	0.000	3.136 ± 5.181	3.985 ± 6.868

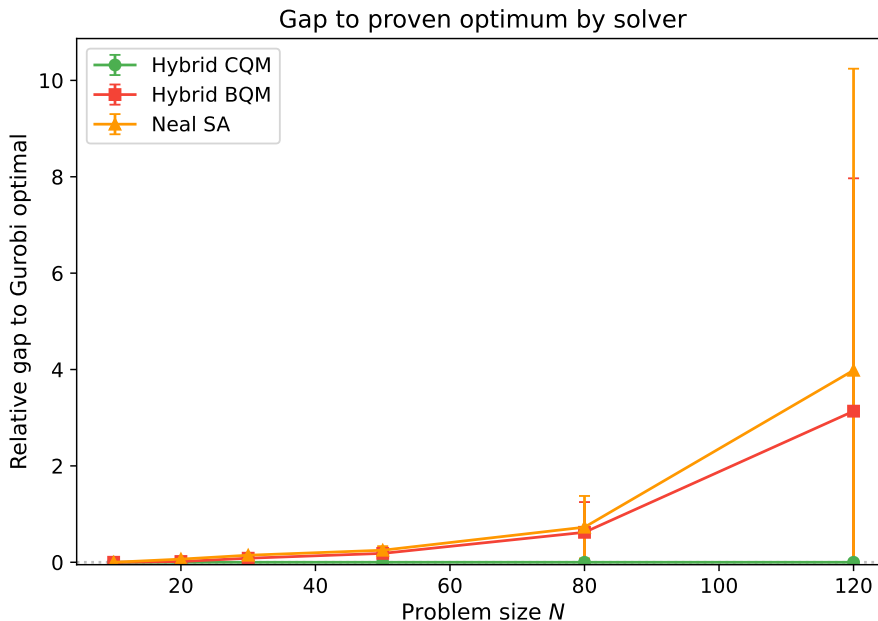


Figure 7: Relative gap to Gurobi optimal vs N . CQM (green) is indistinguishable from the optimal baseline; BQM (red) and SA (orange) diverge as penalty dilution intensifies.

5 Discussion

5.1 Formulation Choice Dominates Solver Choice

On the tested instance families, the constraint-native CQM formulation produces lower objective values than the penalty-encoded BQM formulation at every $N > 10$, across all three density families, and at every tested budget. The mechanism is clear: the penalty term $A \cdot \mathbf{1}\mathbf{1}^\top$ adds $O(N^2)$ couplers with magnitude A to the QUBO, while the economic signal in Σ is distributed across entries whose individual magnitudes diminish as N grows. At $N = 200$, the penalty dominates entirely. This is consistent with the constraint-dilution diagnosis of Lozano [2026], now confirmed in the hybrid setting.

5.2 Density Collapse as Structural Explanation

The density-axis collapse (Section 2.5) provides a structural explanation for the formulation gap. For direct QPU and hybrid BQM, the penalty term forces a complete logical graph regardless of the original Σ density. Chain-break fractions and embedding overheads at each N are virtually identical across diagonal, block, and dense families. For CQM, the original density is preserved, potentially allowing the hybrid solver’s classical component to exploit sparsity. This asymmetry

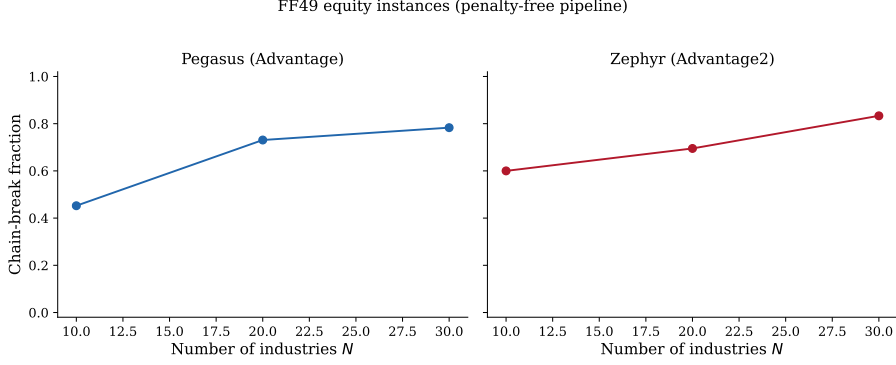


Figure 8: Direct QPU on real Fama–French 49 equity data: chain-break fraction vs N on Pegasus and Zephyr, confirming the synthetic-data pattern on real financial covariance matrices.

Table 4: Hybrid objective value by wall-clock budget (dense family; block family shows the same pattern). On the tested instances, CQM returns identical solutions at all budgets; BQM improves with time but does not reach the CQM objective at any budget.

N	Solver	5 s	30 s	60 s	180 s	300 s
50	BQM	−0.633	−0.669	−0.709	−0.696	−0.734
50	CQM	−0.799	−0.799	−0.799	−0.799	−0.799
100	BQM	−1.309	−1.368	−1.593	−1.792	−1.695
100	CQM	−1.839	−1.839	−1.839	−1.839	−1.839
200	BQM	−2.420	−2.460	−2.423	−2.447	−2.480
200	CQM	−3.598	−3.598	−3.598	−3.598	−3.598
400	BQM	−4.427	−4.921	−5.080	−5.740	−5.899
400	CQM	−7.454	−7.454	−7.454	−7.454	−7.454

means that density is a meaningful benchmark axis only for the CQM path.

5.3 CQM Budget Saturation

On the tested instances, the CQM solver returns identical solutions at 5 and 300 seconds. We interpret this cautiously: it indicates that the hybrid CQM solver’s internal classical-plus-quantum allocation reaches a stable point quickly for problems of this structure and scale ($N \leq 400$, binary variables, single equality constraint). It does not imply that CQM always converges in 5 seconds for richer constraint sets or non-binary variables.

5.4 Role of Direct QPU

Direct QPU access with penalty-encoded QUBOs is structurally disadvantaged for this problem class due to the fully-connected logical graph. At $N = 80$, embedding requires 750 physical qubits ($9.4\times$ overhead) and produces chain-break fractions above 0.93. For practitioners choosing within the D-Wave ecosystem, hybrid CQM offers better solution quality with no embedding or post-processing overhead. Direct QPU remains relevant for studying annealing dynamics and for problem classes with naturally sparse logical graphs.

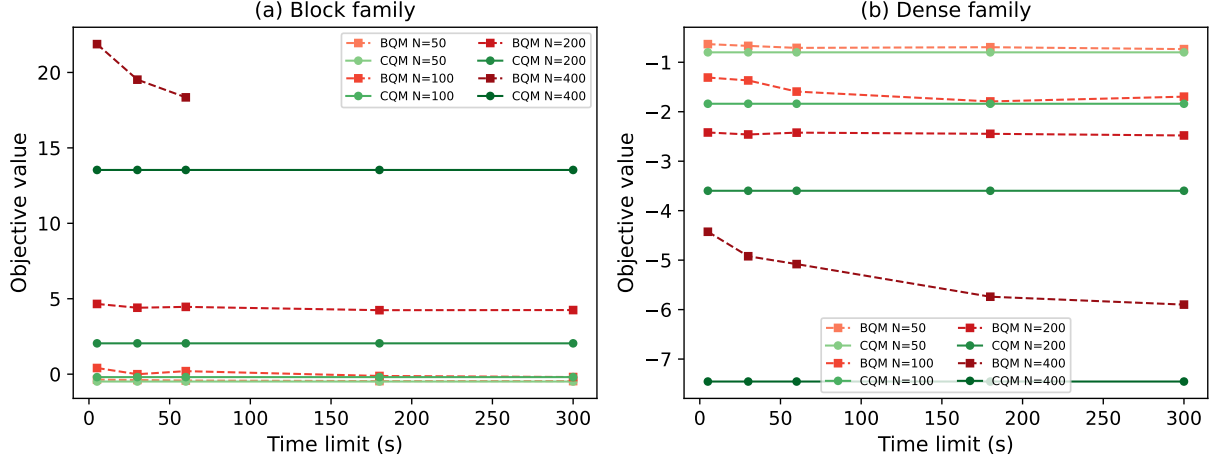


Figure 9: Budget response curves for hybrid BQM (dashed) and CQM (solid) across problem sizes. CQM lines are flat; BQM lines improve with budget but remain above CQM at all tested budgets.

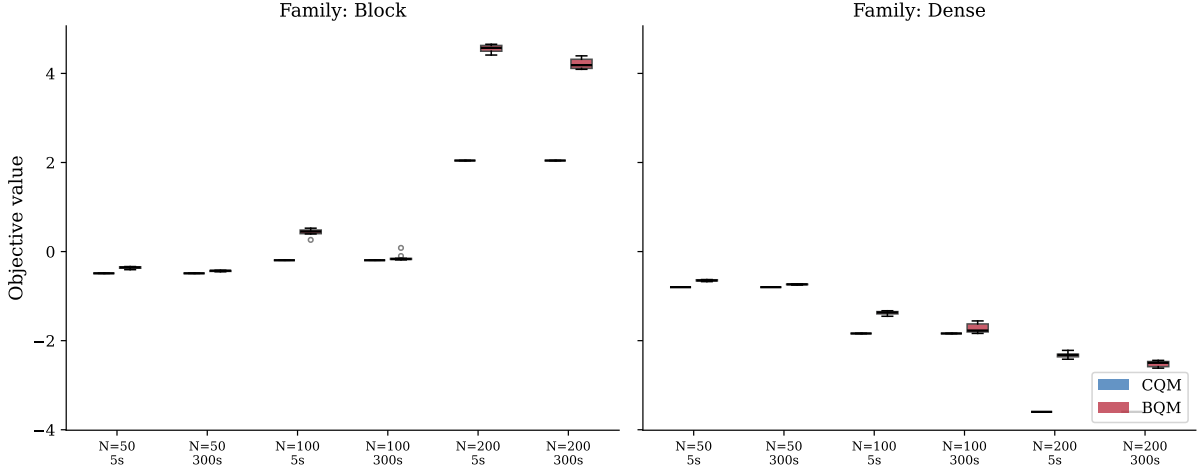


Figure 10: Stochastic validation: box plots of objective values across 10 repeated runs for CQM (green, flat lines = zero variance) and BQM (red, visible spread) at budgets of 5 s and 300 s, split by density family.

5.5 Implications for Quantum Finance Benchmarks and Deployment

These results should temper the broad “quantum advantage in finance” narrative. The CQM path matches Gurobi on the tested instances, but Gurobi also proves optimality, so the result is a practical D-Wave deployment finding rather than a classical-superiority finding. The field-level implication is that quantum-finance evaluations can be dominated by modeling-interface choices: the same financial problem looks weak when the constraint is penalty-encoded as BQM and Gurobi-optimal when expressed as CQM. Future quantum-finance claims should therefore separate three questions: modeling fidelity (does the formulation faithfully represent the financial problem?), hybrid-solver usefulness (does the D-Wave workflow produce good solutions within operational time budgets?), and classical competitiveness (does the quantum-assisted path outperform strong classical alternatives?).

For financial institutions evaluating D-Wave, the immediate recommendation is to prototype constrained portfolio and allocation problems in CQM first, measure against a strong MIQP baseline, and avoid treating QUBO penalty tuning as the default production route. This is

especially relevant to prediction-market optimization systems and market venues where portfolio selection over bets or contracts combines cardinality, exposure limits, budget constraints, and turnover costs.

A second deployment-relevant consequence comes from the budget-saturation result of Section 4.7. For periodic-rebalancing systems with a decision cadence on the order of the hybrid solver’s 5s minimum or longer (intraday sector-rotation engines, end-of-period portfolio re-allocation, batch contract-basket re-sizing, or any periodic re-optimization over many simultaneously open events or contracts), the relevant operational metric is not per-call quality at unbounded budget, but the quality reachable within the shortest acceptable budget. On the tested instances the CQM service returns the same solution at the 5s minimum and at every longer budget up to 300s, and the same solution across repeated calls. In a system where the rebalancing rate, not per-call solve time, is the binding constraint, the orchestrator’s decision collapses to “how often to re-solve?” rather than “how long to wait?”, and budget tuning ceases to be a system-level parameter. We deliberately exclude latency-critical execution paths (sub-second in-play markets, microsecond execution venues) from this discussion: a 5s minimum solve time is incompatible with those use cases regardless of solution quality. The penalty-encoded BQM path admits no analogous guarantee on the tested instances at any tested budget.

5.6 Scope and Limitations

This study compares formulations and solver interfaces within the D-Wave platform. It is not a general quantum-vs-classical benchmark: Gurobi MIQP solves all tested instances to proven optimality in under 300 seconds, and we make no claim that any D-Wave path is competitive with state-of-the-art classical solvers on this problem class.

Additional limitations:

- The penalty weight $A = 4.0$ is held fixed following the calibration of Lozano [2026]; Appendix A verifies robustness to $A \in \{2, 4, 8\}$ but does not perform a full per-instance sweep.
- The real-data section uses only $N \leq 30$; it serves as a directional sanity check, not as the primary evidence.
- Warm-start / reverse-annealing experiments are deferred to future work.
- Richer constraint sets (sector exposure caps, ESG exclusions, mutual exclusivity, and multi-period turnover budgets) would test whether the CQM advantage persists under institutional-grade complexity. Prediction-market and sports-betting allocation, where a trader selects a limited number of contracts subject to budget and rebalancing costs, provides a natural sparse-graph extension.
- Stochastic validation (10 repetitions) is performed on a representative subset; the full grid is single-shot per configuration.

6 Conclusion

We have audited where the quantum contribution actually lives in D-Wave’s hybrid quantum-classical service for cardinality-constrained portfolio selection with switching costs. The headline observation is structural: the constraint-native LeapHybridCQM service matches Gurobi’s proven optimum on every instance where Gurobi proves optimality, but the mean QPU access time is 0.034s out of a 5s wall-clock budget, roughly 0.7% of the run. The remaining $\sim 99\%$ is the service’s classical decomposition, sub-problem assembly, and feasibility-aware reassembly. The reported D-Wave hybrid win on this problem class is therefore a constraint-native classical

pipeline with a small QPU contribution, not a quantum-sampling win. Three further results sharpen this audit:

1. The cardinality penalty contributes a dense rank-one matrix that makes the penalty-encoded logical graph fully connected regardless of covariance density, collapsing the density benchmark axis for all penalty-encoded paths (BQM and direct QPU).
2. The CQM service returns identical solutions at every tested wall-clock budget from 5 to 300 seconds and across 10 repeated calls, eliminating budget tuning as a design variable on this problem class.
3. Constraint-native CQM produces lower objective values than the penalty-encoded BQM interface at every tested $N > 10$ across all density families, extending the qualitative CQM-vs-BQM observation of Sakuler et al. [2025] with a Gurobi MIQP optimality anchor and showing that the BQM degradation is a formulation effect rather than a solver-specific artifact (simulated annealing applied to the same BQM exhibits the same degradation).

For practitioners using D-Wave hybrid solvers, these results recommend the constraint-native CQM interface and, more importantly, change how D-Wave hybrid performance should be reported. A reported "hybrid win" carries no automatic implication that the QPU is doing material work; the quantum contribution must be measured and disclosed alongside the wall-clock and quality numbers. We propose that future quantum-finance benchmarks report `run_time`, `charge_time`, and `qpu_access_time` separately, together with the QPU-fraction of wall-clock, so that the quantum-versus-classical attribution of any reported advantage is unambiguous.

Data and Code Availability

Synthetic instances are generated from parametric covariance models with fixed random seeds for reproducibility. Equity returns are from the Kenneth French Data Library, 49 industry portfolios, daily [French, 2026]. Source code for all experiments, including QUBO/CQM construction, solver wrappers, and analysis scripts, is available from the corresponding author upon reasonable request.

Acknowledgments

We thank the D-Wave team for providing access to quantum computing resources through the Leap cloud platform and for their continuous technical support. Live QPU experiments used `Advantage_system4.1` (Pegasus) and `Advantage2_system1.13` (Zephyr).

Statements and Declarations

Competing Interests

The author declares no competing interests.

Funding

This research received no external funding. QPU access was obtained through a D-Wave Leap cloud subscription.

Authors' Contributions

The sole author conceived the study, designed the experiments, implemented the code, ran the experiments, analyzed the results, and wrote the manuscript.

AI Assistance Disclosure

AI-based coding assistants and editorial tools were used for code scaffolding and language support; all experimental design, verification, analysis, and final manuscript decisions were performed by the author.

A Penalty Robustness Check

The penalty weight $A = 4.0$ used in the main experiments is consistent with the calibration study of Lozano [2026]. We verify that the BQM results are not artifacts of a single penalty value by running the hybrid BQM solver at $A \in \{2, 4, 8\}$ on a subset of 12 instances ($N \in \{20, 50, 80, 120\}$, all three density families, seed 0).

Table 5 reports the projected objective values. All 36 runs returned raw-feasible solutions (the hybrid solver satisfied the penalty-encoded cardinality constraint before post-processing in every case). The objective values are qualitatively similar across penalty values at each (N, ρ) , with no systematic trend favoring any particular A . The BQM degradation at large N is present at all three penalty levels, confirming that it is a structural consequence of the fully-connected penalty term rather than a tuning artifact.

Table 5: Hybrid BQM objective by penalty weight A (projected to exact- K). All 36 runs returned raw-feasible solutions. Objective values are qualitatively stable across A .

N	Family	$A = 2$	$A = 4$	$A = 8$
20	diagonal	−0.340	−0.340	−0.340
50	diagonal	−0.587	−0.604	−0.590
80	diagonal	−0.929	−0.931	−0.910
120	diagonal	−1.239	−1.155	−1.181
20	block	−0.252	−0.252	−0.264
50	block	−0.348	−0.361	−0.395
80	block	−0.059	−0.069	−0.040
120	block	+0.909	+1.003	+0.982
20	dense	−0.365	−0.365	−0.350
50	dense	−0.672	−0.677	−0.693
80	dense	−1.119	−1.093	−1.060
120	dense	−1.613	−1.462	−1.453

References

- Atithi Acharya, Romina Yalovetzky, Pierre Minssen, Shouvanik Chakrabarti, Ruslan Shaydulin, Rudy Raymond, Yue Sun, Dylan Herman, Ruben S. Andrist, Grant Salton, Martin J. A. Schuetz, Helmut G. Katzgraber, and Marco Pistoia. Decomposition pipeline for large-scale portfolio optimization with applications to near-term quantum computing. *Physical Review Research*, 7:023142, 2025. doi: 10.1103/PhysRevResearch.7.023142.
- Giuseppe Buonaiuto, Francesco Gargiulo, Giuseppe De Pietro, Massimo Esposito, and Marco Pota. Best practices for portfolio optimization by quantum computing, experimented on real quantum devices. *Scientific Reports*, 13:19434, 2023. doi: 10.1038/s41598-023-45392-w.
- D-Wave Systems. Hybrid solver service, 2025. URL https://docs.dwavequantum.com/en/latest/quantum_research/hybrid.html. Accessed April 7, 2026.

- Kenneth R. French. 49 industry portfolios, 2026. URL https://mba.tuck.dartmouth.edu/pages/faculty/ken.french/Data_Library/det_49_ind_port.html. Accessed March 31, 2026.
- Dylan Herman, Cody Googin, Xiaoyuan Liu, Yue Sun, Alexey Galda, Ilya Safro, Marco Pistoia, and Yuri Alexeev. Quantum computing for finance. *Nature Reviews Physics*, 5(8):450–465, 2023. doi: 10.1038/s42254-023-00603-1.
- Jonas Lang, Sebastian Zielinski, and Sebastian Feld. Strategic portfolio optimization using simulated, digital, and quantum annealing. *Applied Sciences*, 12(23):12288, 2022. doi: 10.3390/app122312288.
- Luis Lozano. A penalty-free pipeline for direct quantum-annealer portfolio optimization. Zenodo preprint, 2026. URL <https://doi.org/10.5281/zenodo.20103217>. Submitted to Quantum Machine Intelligence (Submission ID 916c2dc7-611d-4c42-aeb8-8b1e4ccb9fa5).
- Andrew Lucas. Ising formulations of many NP problems. *Frontiers in Physics*, 2:5, 2014. doi: 10.3389/fphy.2014.00005.
- Harry Markowitz. Portfolio selection. *The Journal of Finance*, 7(1):77–91, 1952. doi: 10.2307/2975974.
- Sai Nandan Morapakula, Sangram Deshpande, Rakesh Yata, Rushikesh Ubale, Uday Wad, and Kazuki Ikeda. End-to-end portfolio optimization with hybrid quantum annealing. *Advanced Quantum Technologies*, 2025. doi: 10.1002/qute.202500753.
- Samuel Mugel, Carlos Kuchkovsky, Escolástico Sánchez, Samuel Fernández-Lorenzo, Jorge Luis-Hita, Enrique Lizaso, and Román Orús. Dynamic portfolio optimization with real datasets using quantum processors and quantum-inspired tensor networks. *Physical Review Research*, 4:013006, 2022. doi: 10.1103/PhysRevResearch.4.013006.
- Román Orús, Samuel Mugel, and Enrique Lizaso. Quantum computing for finance: Overview and prospects. *Reviews in Physics*, 4:100028, 2019. doi: 10.1016/j.revip.2019.100028.
- Elijah Pelofske. Comparing three generations of D-Wave quantum annealers for minor embedded combinatorial optimization problems. *Quantum Science and Technology*, 10(2):025025, 2025. doi: 10.1088/2058-9565/adb029.
- Wolfgang Sakuler, Johannes M. Oberreuter, Riccardo Aiolfi, Luca Asproni, Branislav Roman, and Jürgen Schiefer. A real-world test of portfolio optimization with quantum annealing. *Quantum Machine Intelligence*, 7:43, 2025. doi: 10.1007/s42484-025-00268-2.
- Eric Stopfer and Friedrich Wagner. Quantum portfolio optimization: An extensive benchmark, 2025. arXiv preprint.
- Davide Venturelli and Alexei Kondratyev. Reverse quantum annealing approach to portfolio optimization problems. *Quantum Machine Intelligence*, 1:17–30, 2019. doi: 10.1007/s42484-019-00001-w.
- Amit Verma and Mark Lewis. Penalty and partitioning techniques to improve performance of QUBO solvers. *Discrete Optimization*, 44:100594, 2022. doi: 10.1016/j.disopt.2020.100594.