

CometVLA: Co-Training on an Embodied Data Pyramid towards Physical Understanding

Hanwen Wan^{1,2,3}, Dafeng Chi¹, Linbo Zhai^{1,5}, Tianao Shen^{2,3},
Yuzheng Zhuang¹, Tianle Zhang¹, Peidong Liu¹, Liang Lin^{1,6}, and Xiaoqiang Ji^{2,3,4,†}

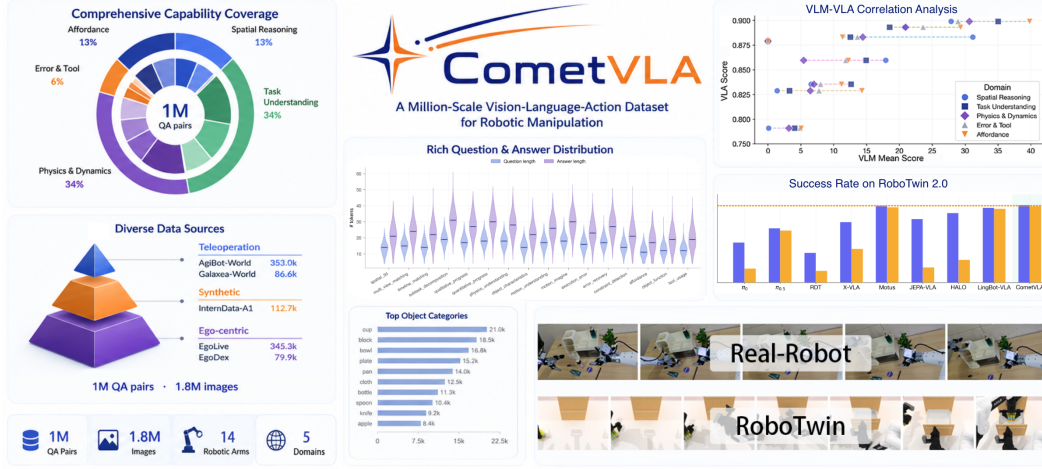


Figure 1: CometVLA overview.

Abstract: Vision-language-action (VLA) models remain brittle in manipulation tasks that require physical commonsense. Current physical VQA data is typically disembodied and misaligned with robot action domains. Egocentric videos are used only as auxiliary pre-training. It remains unclear whether improved VLM physical understanding actually benefits downstream action generation. Therefore, we present CometVLA to close this gap. We construct CometData and CometBench, an embodied physical VQA corpus and benchmark strictly aligned with the robot’s action data and embodiment. We introduce Global Action Prior (GAP) tokens, a compact learnable bottleneck that isolates task-agnostic motion regularities and lets the action head consume physical commonsense without corrupting the pre-trained VLM backbone. We co-train CometVLA across the embodied data pyramid, spanning teleoperation, simulation, egocentric trajectories, and VQA layers. On real-world manipulation tasks and RoboTwin simulation, CometVLA consistently outperforms strong VLA baselines. Correlation analysis shows that stronger VLM performance on CometBench indicates higher VLA success rates. Results demonstrate that physical understanding pre-training genuinely benefits downstream manipulation.

Keywords: Robot Foundation Models, Robot manipulation, Embodied VQA, Physical Understanding

¹JD Explore Academy, China.

²School of Science and Engineering, The Chinese University of Hong Kong, Shenzhen, China.

³Shenzhen Institute of Artificial Intelligence and Robotics for Society, China.

⁴School of Artificial Intelligence, The Chinese University of Hong Kong, Shenzhen, China.

⁵South China University of Technology, China.

⁶Sun Yat-sen University, China

[†]The corresponding author is Xiaoqiang Ji whose e-mail is jixiaoqiang@cuhk.edu.cn

1 Introduction

Vision-Language-Action models have made remarkable strides by repurposing large visuo-linguistic backbones as the perceptual and planning front-end of manipulation policies, inheriting grounding, spatial reasoning, and instruction following essentially for free [1, 2, 3]. VLM4VLA [4] has shown that while VLM pre-training and VLA training share a broadly aligned learning trajectory early on, their representations eventually diverge into distinct regions. Although starting from fine-tuned VLMs [5, 1], they are systematically misaligned with the contact-rich, temporally evolving physical dynamics that are required by VLAs. This mismatch reveals a clear gap between VLMs and VLAs, and closing it is essential for physically reliable manipulation.

Physical commonsense is widely acknowledged as indispensable for robust robotic manipulation. Despite this recognition, existing efforts to incorporate physical knowledge into VLMs have largely remained confined to static settings [6]. Prior work typically injects physical priors through curated Visual Question Answering (VQA) datasets [7], supervised fine-tuning [8], or alignment techniques [9], and evaluates the resulting capabilities on disembodied benchmarks [10]. While recent studies have begun to explore transferring such capabilities to embodied settings, they often decouple perception from action [11, 12] or simplify the control problem to high-level planning or discrete primitives [4], leaving open a fundamental question of whether improved physical understanding in VLMs actually translates to better action generation in realistic manipulation scenarios. From the perspective of data sources, most existing VQA corpora are harvested from internet images or simulation renderings [13], while Robo2VLM [14] attempts to extract VQA pairs directly from robot trajectories. Nevertheless, the VQA scenarios rarely match the data distribution of the robot action stream or the specific embodiment used during policy training in most cases, resulting in a persistent domain gap between physical reasoning and physical acting.

Beyond VQA data, another important component of the embodied data pyramid is ego-centric human video, which provides scalable, diverse, and natural interaction data from real-world environments [15]. Such videos are appealing because they capture fine-grained manipulation behaviors at scale with relatively low collection cost. Existing robot foundation models typically either treat ego-centric video as an auxiliary pre-training corpus mixed into the overall data blend [16], or leverage it to learn world models [17] or latent representations [18] for downstream control policies. In contrast, our method introduces an alternative paradigm by curating physical-understanding VQA pairs from ego-centric video for co-training.

This analysis exposes two complementary gaps that explain why physical commonsense has so far failed to translate into reliable manipulation. We propose **CometVLA**, an end-to-end framework with physical understanding. We take a systematic route among data, model, and training. (i) At the data level, we build **CometData** and CometBench, an embodied physical-commonsense corpus and benchmark aligned with the recipe of the training robot data. Specifically, we curate CometData following the same recipe used for the VLA training dataset, thereby ensuring in-domain physical understanding enhancement. (ii) At the model architecture level, we introduce Global Action Prior (GAP) tokens, the information bottleneck for the action head to actively consume physical commonsense and to exploit motion regularities shared across various samples. (iii) At the training level, we implemented a single pre-training stage by leveraging knowledge insulation [19]. The co-training paradigm couples all layers of the embodied data pyramid along with structural designs. The resulting system demonstrates robust action generation performance on both simulation benchmarks and real-world manipulation tasks. Moreover, the pre-trained models exhibit a positive correlation between performance on CometBench and action generation. Per-domain analysis reveals the contribution of different QA tasks.

In summary, the contributions of this work are: (1) CometData and CometBench (data). The first embodied physical-commonsense VQA corpus and benchmark that is aligned with the visual domain and embodiment of the robot action data used for policy training. Validation on CometBench shows a positive correlation with action generation. (2) Global Action Prior token (architecture). An inductive bias that lets the action head explicitly consume physical commonsense and aggregate cross-sample

motion priors. (3) CometVLA (training). Training with embodied data pyramid for end-to-end action generation with physical understanding. Evaluations show robust real-world manipulation skills and superior performance compared to SOTA methods.

2 Related Work

2.1 Action Generation with Embodied Data Pyramid

A fundamental challenge for embodied agents is the scarcity of high-quality, ego-centric robot data. To address this, recent work adopts an embodied data pyramid. Levels in the pyramid vary by source and collection method. The pyramid has a broad base of abundant, low-cost data and narrower upper layers of scarcer, more expensive data. From bottom to top: VQA data, ego-centric human videos [20, 21], simulation data [22], and finally real robot teleoperation [23, 24]. This pyramid offers a data-centric view of different action generation methods: imitation learning policies [25], Vision-Language-Action models (VLAs), and World Action Models (WAMs) [17]. Each leverages different combinations of pyramid levels to predict actions or their consequences.

Initial attempts typically consume the top, most expensive tier of the pyramid. RT-2 [1] first showed that a web-scale VLM could be fine-tuned on a modest amount of teleoperation data to directly output action tokens. OpenVLA [2], Octo [26], and $\pi_0/\pi_{0.5}$ [3, 27] further refined this paradigm, demonstrating that the language-conditioned action distribution can be effectively learned from hundreds of hours of real robot demonstrations. The pyramid’s middle tier, consisting of simulation and scripted data, has been exploited by InternVLA_A1 [28] to pre-train on human video, synthetic data, and real-world data. In contrast, WAMs aim to leverage the abundant ego-centric human video tier to train video generation abilities. EgoScale [29] and FastWAM [17] learn predictive world models from large-scale, unlabeled ego-centric video, enabling the agent to imagine future states without requiring action labels. Our work leverages each pyramid tier to form a comprehensive framework that systematically correlates embodied VLM capabilities with downstream VLA action performance, without conflating architectural changes or sacrificing action expert fidelity.

2.2 Fine-tuning VLMs with Embodied/Physical VQAs

A growing amount of work fine-tunes VLMs on curated VQA corpora targeting embodied or physical reasoning [30, 31, 32, 33, 34, 35, 36], see section A for a detailed comparison. Each introduces a dedicated fine-tuning dataset that emphasizes a distinct slice of the competence space, such as 2D/3D grounding, affordance reasoning, task planning, or error detection. Such models can be viewed as explicit carriers of capabilities to be inherited by downstream robot control. However, three limitations persist. First, most corpora remain disembodied, drawing their visual input from generic web imagery or short third-person videos rather than robot-centric observations. Second, although incorporating visual cues such as bounding boxes may provide guidance and improve performance, particularly for grounding and affordance tasks, such annotations are difficult to obtain and deploy in real-world settings. Third, few of these benchmarks have been validated in realistic VLA scenarios. Moreover, several methods rely on backbones of 32B parameters or larger, whose inference latency yields control frequencies too low to be practical for current VLA deployment. In contrast, our approach is sourced exclusively from robot action data spanning teleoperation, simulation, and ego-centric robot observations, ensuring direct alignment with real-world VLA deployment scenarios.

2.3 Correlation Analysis from VLMs to VLAs

Since RT-2 [1] first repurposed a web-scale VLM as the backbone of a manipulation policy, a steady stream of vision-language-action (VLA) models, e.g., OpenVLA [2] and π_0 [3], has converged on a shared premise: general visuo-linguistic pre-training supplies the grounding and instruction following that scarce robot data can no longer afford to teach from scratch. However, systematic investigation of how action generation benefits from VLMs remains absent. Recent VLA works have leveraged embodied VQA data while simultaneously improving multiple components, including architecture,

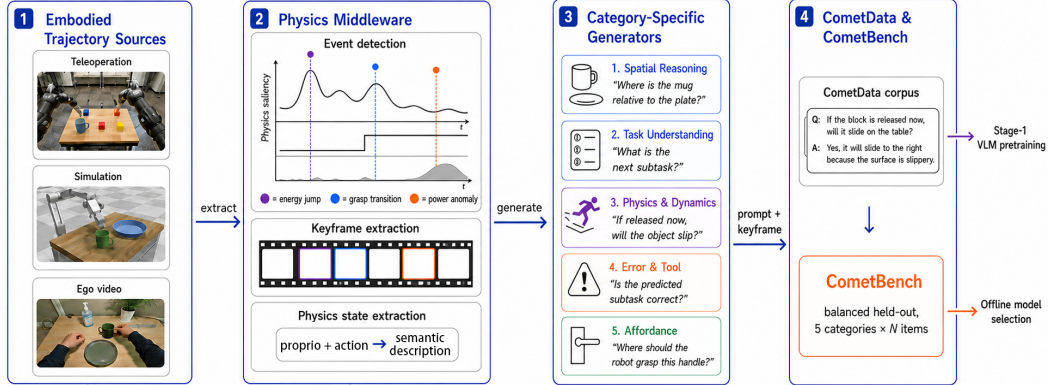


Figure 2: Overview of the proposed CometData generation pipeline for physics-aware embodied VLMs. (1) Multi-source embodied trajectories are collected from teleoperation, simulation, and ego-centric videos, forming a hierarchical embodied data pyramid with increasing physical grounding. (2) A physics middleware extracts keyframes, detects interaction events and converts low-level proprioceptive and action signals into semantic physical state descriptions. (3) Category-specific generators construct diverse embodied VQA tasks, spanning 5 domains with 16 categories. (4) The generated samples are curated into the CometData corpus and the sampled CometBench benchmark.

data, and training strategies, to boost VLA performance, as seen in MIMO-Embodied [12], HY-Embodied-0.5 [11], and GenieReasoner [37]. While effective, these approaches couple various improvements, making it difficult to isolate the specific contribution of VLM representations. In contrast, VLM4VLA [4] has taken a first step toward correlating VLMs and VLAs by simplifying the action expert to a minimal set of parameters. While this successfully isolates the influence of VLM representations from different action expert designs, it also limits the practical applicability of its conclusions, as the action expert network is an inherent and non-separable variable in the VLA pipeline. Complementing this, Lin et al. [38] provide large-scale evidence that the VLM backbone’s understanding directly correlates with policy generalization even under a full, non-simplified action expert, showing that effective co-training preserves VLM capabilities and yields stronger robot performance. In contrast to these existing efforts, we proposed a different analytical framework that neither couples all components nor simplifies the action expert. This allows a systematic assessment of how specific VLM capacities translate into downstream action performance.

3 Method

3.1 Overview

CometVLA integrates physical commonsense into a VLA through a coherent sequence of design choices. We construct CometData, a large corpus of embodied physical VQA pairs automatically harvested from the full embodied data pyramid. We then leverage knowledge insulation to implement VLM-VLA co-pre-training as the first stage. This stage simultaneously trains the VLM backbone with a FAST action tokenizer and a flow-matching action expert. The pre-trained backbone is extended with a small set of learnable GAP tokens. These GAP tokens are globally shared and decoupled from the vision-language stream, forming a bottleneck that encodes task-agnostic motion regularities.

3.2 CometData Data Construction

CometData is constructed through a physics-aware embodied data generation pipeline with 1 million QA pairs and incorporates more than 1.8 million images. We build a data pipeline that integrates heterogeneous trajectory sources, structured physical state extraction, and category-specific QA synthesis, as shown in fig. 2. At the generator level, 16 generators from 5 domains transform these descriptors into question-answer pairs. See section B for details of the generators. Generators fill

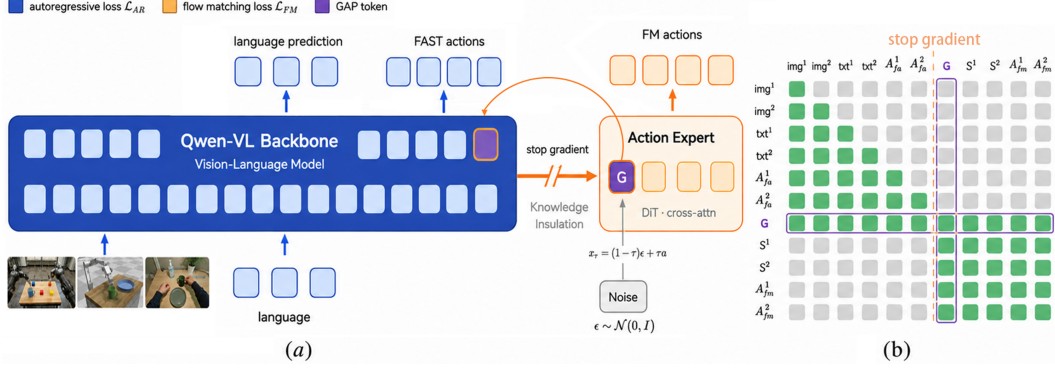


Figure 3: **CometVLA architecture and global action prior token.** (a) CometVLA unifies autoregressive vision-language modeling and continuous action generation within a single framework. Multi-view observations, language tokens, and FAST actions are processed by a pre-trained Qwen3-VL backbone under the auto-regressive objective $\mathcal{L}_{AR}$. A lightweight diffusion-based action expert predicts continuous FM actions using flow matching $\mathcal{L}_{FM}$, while a stop-gradient barrier preserves pre-trained multimodal representations during policy learning. (b) Attention visibility grid of CometVLA. The orange dashed line denotes the stop-gradient barrier, and the purple block highlights the GAP token, which serves as the sole communication interface between the auto-regressive backbone and the diffusion action expert. img^i , $text^i$, A_{fa}^i , G , S^i , and A_{fm}^i denote image tokens, language tokens, FAST action tokens, the GAP token, robot state tokens, and flow-matching action tokens, respectively.

category templates with the middleware descriptors, renders the selected keyframes, and prompts a strong teacher VLM to produce grounded answers. Notably, we construct CometData following the same recipe of robot data for pre-training, which ensures an in-domain semantic enhancement.

At the core of CometData is a physics-aware middleware that consumes synchronized proprioceptive state s_t and commanded action a_t , and emits compact descriptors of trajectory dynamics. Instead of uniform sampling, we identify manipulation-critical keyframes via dynamics-based criteria. [39]. Keyframes are scored using three embodiment-agnostic criteria: Hamiltonian jump $\mathcal{C}_A(t)$, gripper step $\mathcal{C}_B(t)$, and power anomaly $\mathcal{C}_C(t)$. The saliency score $\mathcal{S}_t$ aggregates these indicators to prioritize physically salient frames. Keyframes are obtained by retaining the top- K frames per episode. See section C for more details.

CometBench A balanced held-out subset of CometData is reserved as CometBench. It comprises 2,000 questions with reference answers for evaluating embodied physical reasoning in vision-language models. CometBench tests co-trained VLAs using curated question-answer pairs that span five distinct domains from CometData. The evaluation is conducted by a large language model as a consistent and fair judge. For each question, the judge compares the candidate answer against the reference answer on correctness, logical coherence, relevance, completeness, and physical reasoning with a total of 100 scores. Results are averaged among the full 2000 questions of CometBench. All the QA-pairs are reviewed by human testers for integrity and soundness.

3.3 CometVLA Architecture

CometVLA combines auto-regressive vision-language modeling with diffusion-based continuous action generation in a unified architecture, as illustrated in fig. 3. Given multi-view visual observations, proprioceptive states, and language instructions, a pre-trained Qwen3-VL [40] backbone jointly models vision-language tokens and discrete FAST action tokens [41] under a standard autoregressive objective $\mathcal{L}_{AR} + \mathcal{L}_{fast}$. Specifically, $\mathcal{L}_{AR}$ is a cross-entropy loss for language generation, while $\mathcal{L}_{fast}$ supervises discretized action tokens produced by the FAST tokenizer.

To enable high-frequency continuous control, we further attach a lightweight diffusion-based action expert trained with a flow-matching objective $\mathcal{L}_{fm}$. Continuous actions are noised via a Beta-sampled



Figure 4: Captured frames during the real-robot experiment of organizing the liquid foundation.

Table 1: Success rate of real-robot experiment.

Task name	bb cream	liquid foundation	lotion	makeup sponge	serum
SR (%)	75.00	31.25	37.50	93.75	43.75

timestep and optimized through velocity regression, where the model predicts the ground-truth flow field from latent action representations conditioned on VLM embeddings, GAP tokens, and state tokens. During training, a stop-gradient barrier isolates the action expert from the backbone, ensuring that $\mathcal{L}_{\text{fm}}$ only updates the action head and GAP token parameters while preserving the pre-trained multimodal reasoning capability of the VLM. The overall training objective is:

$$\mathcal{L}_{\text{total}} = \mathcal{L}_{\text{AR}} + \mathcal{L}_{\text{fast}} + \mathcal{L}_{\text{fm}}. \quad (1)$$

Global Action Prior To bridge the auto-regressive VLM domain and the bidirectional diffusion policy domain, we introduce a dedicated GAP token as the sole communication interface between the two modules. The idea of an information bottleneck has been widely validated for improving efficiency and modularity in VLMs [42]. Recent VLA works have explored latent bottlenecks and compressed interfaces to decouple high-level reasoning from low-level control, such as latent intent variables in DIAL [43] and token compression or latent action representations in VLA pre-training frameworks [44, 45]. However, existing approaches typically rely on either fully shared representations or symmetric cross-attention, which can still lead to optimization interference between language modeling and low-level control.

In contrast, the GAP token is inserted directly into the backbone token sequence and transferred to the action expert through a detached latent pathway. Functionally, it serves as a global action prior that aggregates high-level semantic and temporal context within the VLM backbone, similar to a [CLS] token [46], and conditions action generation inside the DiT-based action expert via cross-attention. During attention computation, the GAP token is permitted to traverse the stop-gradient boundary, enabling controlled semantic information flow while preventing gradient leakage into the backbone. This asymmetric attention topology decouples language modeling from continuous control, improving optimization stability while preserving the pretrained multimodal reasoning capabilities.

4 Experiments

4.1 Experimental Setup

Training details We train CometVLA in two stages. In the co-training stage, we combine a Qwen3-VL-4B backbone, a FAST action tokenizer, and a DiT-B flow-matching action head with a learnable GAP token. The model is jointly trained on AgiBot-World-Beta [23], InternData-A1 [22], EgoLive [16], EgoDex [20], common VQA dataset[47] and the CometData VQA dataset. All robot datasets are retargeted to a bi-manual format with the action space padded to 32 dimensions. We train distributed across 4 nodes with $8 \times \text{H200}$ GPUs each. In the post-training stage, we further fine-tune the model on task-specific datasets, including real-world teleoperation data for deployment and RoboTwin for simulation benchmarks, respectively.

4.2 Real-Robot Experiments

We conduct real-world experiments on the G1 dual-arm robot from AgiBot Robotics. The manipulation policy runs on local workstation, forming the control client. We set up a dressing table

Table 2: **Comparison of VLA methods on RoboTwin 2.0.** Metrics originally reported with single-decimal precision are zero-padded.

Model	Split	Baseline Methods								Ours		
		π_0	$\pi_{0.5}$	RDT	X-VLA	Motus	JEPA-VLA	HALO	LingBot-VLA	w/o phys. VQA	w/o GAP	CometVLA
RoboTwin	Easy	46.42	62.86	34.50	70.00	88.66	73.50	80.50	86.50	83.54	86.38	89.24
	Hard	16.34	60.30	13.72	39.00	87.02	17.70	26.40	85.34	83.46	85.12	88.38

organization scenario with multiple tasks. Pre-trained CometVLA is fine-tuned on task-specific datasets. We tested each task for 16 trials, results are recorded in table 1 and fig. 4. Success rate varies across different objects resulting from object size and textures. More details are shown in section E.

4.3 Evaluation on RoboTwin

We compare CometVLA against representative VLA baselines spanning discrete-token, diffusion, and flow-matching action heads. As summarized in table 2, CometVLA achieves an 89.24% success rate on the RoboTwin easy (clean) split and 88.38% on the hard (randomized) split, outperforming prior methods including $\pi_{0.5}$ [27]. Ablations trained under the same configuration further validate the contribution of each proposed component. Replacing the curated embodied physical VQA corpus with same amount of generic VQA datasets (*w/o phys. VQA*) during pre-training leads to the largest performance drop, indicating that physical understanding learned from embodied data substantially improves downstream manipulation performance. Removing the Global Action Prior (GAP) token also consistently degrades performance. Additional results are provided in the appendix, including per-task success rates in section F.1, qualitative rollout visualizations in section F.2, and action trajectory analysis in section F.3.

4.4 VLM-VLA Performance Correlation Analysis

We conduct a correlation analysis between VLM performance on CometBench and VLA performance on the RoboTwin 2.0 easy benchmark. See per-domain analysis in section F.4. All results are obtained from a set of models trained under identical VLM backbone and action expert configurations with full parameters activated for training. These trials differ in robot action dataset mixtures or training configurations, yielding a diverse range of data points. As shown in fig. 5a and summarized in fig. 5c, we observe a consistent positive correlation between VLM and VLA performance across all semantic domains. The overall trend indicates that stronger physical understanding is predictive of downstream robotic manipulation success. Among different categories, Spatial Reasoning exhibits the strongest correlation, suggesting that geometric and spatial priors transfer most effectively to embodied control. Physics & Dynamics shows the second strongest correlation, which validates our proposed claim. Moreover, Task Understanding’s moderate correlation may stem from the sub-task structure embedded in the robot action data, where additional enhancement is less critical.

4.5 Analysis on GAP token

A natural question is whether the bottleneck imposed by a single 1024-d GAP token learns the desired physical commonsense aggregation of the 2560-d VLM backbone. To examine this, we conduct two complementary analysis on a held-out subset of AgiBot-World-Beta. The first is a qualitative semantic preservation test via t-SNE and TF-IDF of token-level features. The second is a quantitative action information content test via linear probing on action-relevant labels. We compare the GAP token against a mean-pooled final-layer VLM representation, which serves as an unrestricted, higher-capacity baseline. See implementation details in App. section G.

We clustered task annotations with TF-IDF and visualize the GAP features with t-SNE, as shown in fig. 5b. The GAP token yields a t-SNE layout where broad embodiment concepts like “arm” and “left” form continuous global regions, and interaction-centric semantics like “bottle” and “door”

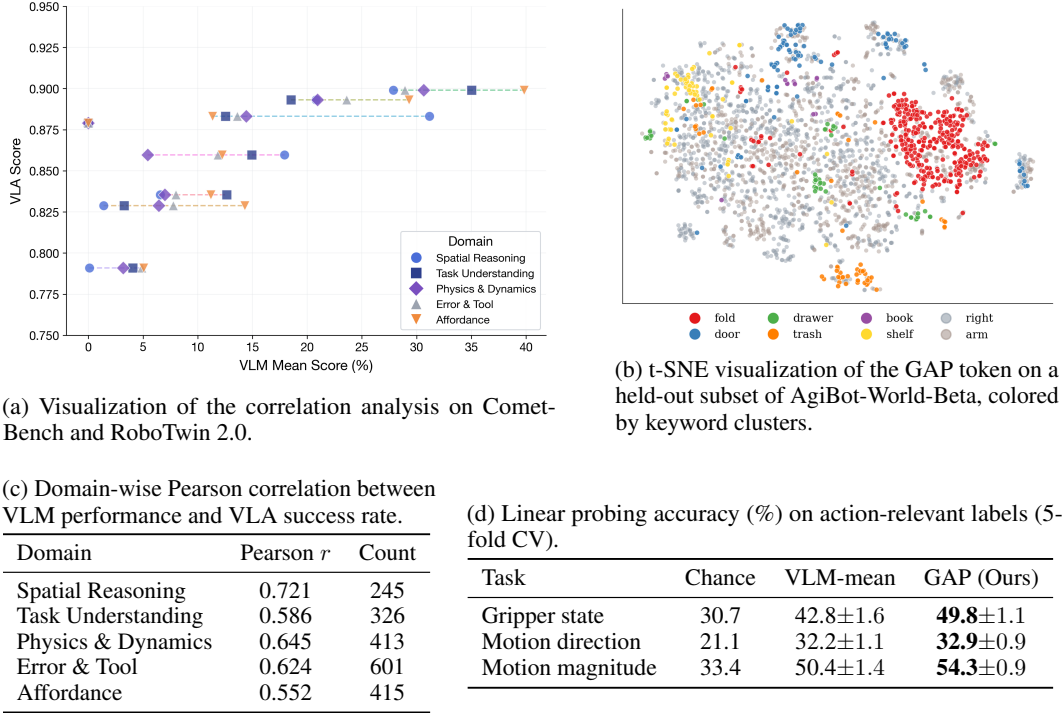


Figure 5: Analysis of VLM-VLA correlation, GAP token semantics, and action probing test.

emerge as localized clusters. This indicates that the bottleneck learns a semantic-level representation of the actions. Beyond semantics, fig. 5d shows that the GAP token consistently outperforms VLM-mean on action-relevant probing. It achieves +7.0% on gripper state and +3.9% on motion magnitude. Taken together, these results support our central design claim that despite a $2.5\times$ smaller dimensionality, the GAP token preserves the backbone’s semantic structure while selectively distilling control-relevant information into a compact latent interface for the action expert.

5 Limitations

Several limitations of the current study should be acknowledged. First, the correlation analysis may benefit from a wider range of data points. The corresponding VLA success rates are concentrated within a moderate range around 85%. A more diverse set of model checkpoints with greater performance disparity would further strengthen the statistical basis of the observed correlation. Second, the real-robot evaluation could be extended with more scenarios and tasks. The current experiments cover only a subset of manipulation behaviors. Expanding to a broader set of environments and task difficulties would provide additional evidence for the generalizability of our findings.

6 Conclusion

In this work, we presented CometVLA, an end-to-end vision-language-action framework for physical commonsense reasoning. We constructed CometData and CometBench—the first embodied physical VQA corpus and benchmark aligned with the robot action data pyramid, demonstrating positive correlation with downstream action performance. We introduced GAP tokens, a lightweight information bottleneck that enables the action head to explicitly consume physical commonsense and aggregate cross-sample motion regularities. We trained CometVLA with a co-training paradigm that jointly leverages the full embodied data pyramid. Extensive evaluations show that CometVLA achieves superior performance on both simulation benchmarks and real-world dual-arm manipulation tasks. Correlation analysis and action probing further validate the proposed methods.

References

- [1] B. Zitkovich, T. Yu, S. Xu, P. Xu, T. Xiao, F. Xia, J. Wu, P. Wohlhart, S. Welker, A. Wahid, et al. Rt-2: Vision-language-action models transfer web knowledge to robotic control. In *Conference on Robot Learning*, pages 2165–2183. PMLR, 2023.
- [2] M. Kim, K. Pertsch, S. Karamcheti, T. Xiao, A. Balakrishna, S. Nair, R. Rafailov, E. Foster, G. Lam, P. Sanketi, Q. Vuong, T. Kollar, B. Burchfiel, R. Tedrake, D. Sadigh, S. Levine, P. Liang, and C. Finn. Openvla: An open-source vision-language-action model. *arXiv preprint arXiv:2406.09246*, 2024.
- [3] K. Black, N. Brown, D. Driess, A. Esmail, M. Equi, C. Finn, N. Fusai, L. Groom, K. Hausman, B. Ichter, et al. π_0 : A vision-language-action flow model for general robot control. *arXiv preprint arXiv:2410.24164*, 2024.
- [4] J. Zhang, X. Chen, Q. Wang, M. Li, Y. Guo, Y. Hu, J. Zhang, S. Bai, J. Lin, and J. Chen. Vlm4vla: Revisiting vision-language-models in vision-language-action models. *arXiv preprint arXiv:2601.03309*, 2026.
- [5] A. Brohan, N. Brown, J. Carbajal, Y. Chebotar, J. Dabis, C. Finn, K. Gopalakrishnan, K. Hausman, A. Herzog, J. Hsu, et al. Rt-1: Robotics transformer for real-world control at scale. *arXiv preprint arXiv:2212.06817*, 2022.
- [6] C. Zhou, M. Wang, Y. Ma, C. Wu, W. Chen, Z. Qian, X. Liu, Y. Zhang, J. Wang, H. Xu, et al. From perception to cognition: A survey of vision-language interactive reasoning in multimodal large language models. *arXiv preprint arXiv:2509.25373*, 2025.
- [7] A. Foss, C. Evans, S. Mitts, K. Sinha, A. Rizvi, and J. T. Kao. Causalvqa: A physically grounded causal reasoning benchmark for video models. *arXiv preprint arXiv:2506.09943*, 2025.
- [8] S. Karamcheti, S. Nair, A. Balakrishna, P. Liang, T. Kollar, and D. Sadigh. Prismatic vlms: Investigating the design space of visually-conditioned language models. In *Forty-first International Conference on Machine Learning*, 2024.
- [9] P. Mazzaglia, T. Verbelen, B. Dhoedt, A. Courville, and S. Rajeswar. Genrl: Multimodal-foundation world models for generalization in embodied agents. *Advances in neural information processing systems*, 37:27529–27555, 2024.
- [10] Z. Zhang, K. Chen, X. Lin, L. Jiang, X. Zheng, Y. Lyu, L. Guo, Y. Li, and Y.-C. Chen. Phystool-bench: Benchmarking physical tool understanding for mllms. *arXiv preprint arXiv:2510.09507*, 2025.
- [11] T. R. X and H. V. Team. Hy-embodied-0.5: Embodied foundation models for real-world agents. *arXiv preprint arXiv:2604.07430*, 2026.
- [12] X. E. I. Team. Mimo-embodied: X-embodied foundation model technical report, 2025. URL <https://arxiv.org/abs/2511.16518>.
- [13] R. Kabir, N. Haque, M. S. Islam, et al. A comprehensive survey on visual question answering datasets and algorithms. *arXiv preprint arXiv:2411.11150*, 2024.
- [14] K. Chen, S. Xie, Z. Ma, P. R. Sanketi, and K. Goldberg. Robo2vlm: Visual question answering from large-scale in-the-wild robot manipulation datasets. *arXiv preprint arXiv:2505.15517*, 2025.
- [15] X. Cai, R.-Z. Qiu, G. Chen, L. Wei, I. Liu, T. Huang, X. Cheng, and X. Wang. In-n-on: Scaling egocentric manipulation with in-the-wild and on-task data. *arXiv preprint arXiv:2511.15704*, 2025.

- [16] T. Zhang, Z. Yuan, D. Chi, P. Liu, D. Li, K. Hu, L. Zhang, J. Nie, Z. Wei, Z. Chen, et al. Joyai-ra 0.1: A foundation model for robotic autonomy. *arXiv preprint arXiv:2604.20100*, 2026.
- [17] T. Yuan, Z. Dong, Y. Liu, and H. Zhao. Fast-wam: Do world action models need test-time future imagination? *arXiv preprint arXiv:2603.16666*, 2026.
- [18] H. Luo, W. Zhang, Y. Feng, S. Zheng, H. Xu, C. Xu, Z. Xi, Y. Fu, and Z. Lu. Being-h0. 7: A latent world-action model from egocentric videos. *arXiv preprint arXiv:2605.00078*, 2026.
- [19] D. Driess, J. Springenberg, B. Ichter, L. Yu, A. Li-Bell, K. Pertsch, A. Ren, H. Walke, Q. Vuong, L. X. Shi, et al. Knowledge insulating vision-language-action models: Train fast, run fast, generalize better. *Advances in Neural Information Processing Systems*, 38:102867–102888, 2026.
- [20] R. Hoque, P. Huang, D. J. Yoon, M. Sivapurapu, and J. Zhang. Egodex: Learning dexterous manipulation from large-scale egocentric video. *ArXiv*, abs/2505.11709, 2025. URL <https://api.semanticscholar.org/CorpusID:278739529>.
- [21] K. Grauman, A. Westbury, E. Byrne, Z. Chavis, A. Furnari, R. Girdhar, J. Hamburger, H. Jiang, M. Liu, X. Liu, et al. Ego4d: Around the world in 3,000 hours of egocentric video. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 18995–19012, 2022.
- [22] I.-A. contributors. Interndata-a1. <https://github.com/InternRobotics/InternManip>, 2025.
- [23] M. Shi, Y. Lu, H. Wang, C. Xie, and Q. Bu. Introducing agibot world colosseum: A large-scale manipulation platform for scalable and intelligent embodied systems. <https://opendrivelab.com/AgiBot-World/>, March 2025. Blog post.
- [24] T. Jiang, T. Yuan, Y. Liu, C. Lu, J. Cui, X. Liu, S. Cheng, J. Gao, H. Xu, and H. Zhao. Galaxea open-world dataset and g0 dual-system vla model. *arXiv preprint arXiv:2509.00576*, 2025.
- [25] T. Z. Zhao, V. Kumar, S. Levine, and C. Finn. Learning fine-grained bimanual manipulation with low-cost hardware. *arXiv preprint arXiv:2304.13705*, 2023.
- [26] O. M. Team, D. Ghosh, H. Walke, K. Pertsch, K. Black, O. Mees, S. Dasari, J. Hejna, T. Kreiman, C. Xu, et al. Octo: An open-source generalist robot policy. *arXiv preprint arXiv:2405.12213*, 2024.
- [27] P. Intelligence, K. Black, N. Brown, J. Darpinian, K. Dhabalia, D. Driess, A. Esmail, M. Equi, C. Finn, N. Fusai, et al. $\pi_{0.5}$: a vision-language-action model with open-world generalization. *arXiv preprint arXiv:2504.16054*, 2025.
- [28] J. Cai, Z. Cai, J. Cao, Y. Chen, Z. He, L. Jiang, H. Li, H. Li, Y. Li, Y. Liu, et al. Internvla-a1: Unifying understanding, generation and action for robotic manipulation. *arXiv preprint arXiv:2601.02456*, 2026.
- [29] R. Zheng, D. Niu, Y. Xie, J. Wang, M. Xu, Y. Jiang, F. Castañeda, F. Hu, Y. L. Tan, L. Fu, et al. Egoscale: Scaling dexterous manipulation with diverse egocentric human data. *arXiv preprint arXiv:2602.16710*, 2026.
- [30] A. Das, S. Datta, G. Gkioxari, S. Lee, D. Parikh, and D. Batra. Embodied question answering. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 1–10, 2018.
- [31] A. Majumdar, A. Ajay, X. Zhang, P. Putta, S. Yenamandra, M. Henaff, S. Silwal, P. Mcvay, O. Maksymets, S. Arnaud, et al. Openeqa: Embodied question answering in the era of foundation models. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 16488–16498, 2024.

- [32] P. Sermanet, T. Ding, J. Zhao, F. Xia, D. Dwibedi, K. Gopalakrishnan, C. Chan, G. Dulac-Arnold, S. Maddineni, N. J. Joshi, et al. Robovqa: Multimodal long-horizon reasoning for robotics. In *2024 IEEE International Conference on Robotics and Automation (ICRA)*, pages 645–652. IEEE, 2024.
- [33] G. R. Team, S. Abeyruwan, J. Ainslie, J.-B. Alayrac, M. G. Arenas, T. Armstrong, A. Balakrishna, R. Baruch, M. Bauza, M. Blokzijl, et al. Gemini robotics: Bringing ai into the physical world. *arXiv preprint arXiv:2503.20020*, 2025.
- [34] W. Chow, J. Mao, B. Li, D. Seita, V. Campagnolo Guizilini, and Y. Wang. Physbench: Benchmarking and enhancing vision-language models for physical world understanding. In *International Conference on Learning Representations*, volume 2025, pages 97959–98108, 2025.
- [35] W. Zhou, M. Tao, C. Zhao, H. Guo, H. Dong, M. Tang, and J. Wang. Physvlm: Enabling visual language models to understand robotic physical reachability. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pages 6940–6949, 2025.
- [36] Y. Ji, H. Tan, J. Shi, X. Hao, Y. Zhang, H. Zhang, P. Wang, M. Zhao, Y. Mu, P. An, et al. Robobrain: A unified brain model for robotic manipulation from abstract to concrete. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 1724–1734, 2025.
- [37] Y. Liu, S. Wang, D. Wei, X. Cai, L. Zhong, J. Yang, G. Ren, J. Zhang, M. Yao, C. Li, et al. Unified embodied vlm reasoning with robotic action via autoregressive discretized pre-training. *arXiv preprint arXiv:2512.24125*, 2025.
- [38] F. Lin, K. Arora, J. Mercat, H. Nishimura, P. Shah, C. Xu, M. Zhang, M. Zolotas, M. Angeles, O. Pfannenstiehl, A. Beaulieu, and J. Barreiros. A systematic study of data modalities and strategies for co-training large behavior models for robot manipulation, 2026. URL <https://arxiv.org/abs/2602.01067>.
- [39] B. Yu, S. Lian, X. Lin, Z. Shen, Y. Wei, C. Wu, H. Yuan, H. Liu, B. Wang, C. Huang, and K. Chen. Frameskip: Learning from fewer but more informative frames in vla training, 2026. URL <https://arxiv.org/abs/2605.13757>.
- [40] S. Bai, Y. Cai, R. Chen, K. Chen, X. Chen, Z. Cheng, L. Deng, W. Ding, C. Gao, C. Ge, W. Ge, Z. Guo, Q. Huang, J. Huang, F. Huang, B. Hui, S. Jiang, Z. Li, M. Li, M. Li, K. Li, Z. Lin, J. Lin, X. Liu, J. Liu, C. Liu, Y. Liu, D. Liu, S. Liu, D. Lu, R. Luo, C. Lv, R. Men, L. Meng, X. Ren, X. Ren, S. Song, Y. Sun, J. Tang, J. Tu, J. Wan, P. Wang, P. Wang, Q. Wang, Y. Wang, T. Xie, Y. Xu, H. Xu, J. Xu, Z. Yang, M. Yang, J. Yang, A. Yang, B. Yu, F. Zhang, H. Zhang, X. Zhang, B. Zheng, H. Zhong, J. Zhou, F. Zhou, J. Zhou, Y. Zhu, and K. Zhu. Qwen3-vl technical report. *arXiv preprint arXiv:2511.21631*, 2025.
- [41] K. Pertsch, K. Stachowicz, B. Ichter, D. Driess, S. Nair, Q. Vuong, O. Mees, C. Finn, and S. Levine. Fast: Efficient action tokenization for vision-language-action models. *arXiv preprint arXiv:2501.09747*, 2025.
- [42] J.-B. Alayrac, J. Donahue, P. Luc, A. Miech, I. Barr, Y. Hasson, K. Lenc, A. Mensch, K. Millican, M. Reynolds, R. Ring, E. Rutherford, S. Cabi, T. Han, Z. Gong, S. Samangooei, M. Monteiro, J. Menick, S. Borgeaud, A. Brock, A. Nematzadeh, S. Sharifzadeh, M. Binkowski, R. Barreira, O. Vinyals, A. Zisserman, and K. Simonyan. Flamingo: a visual language model for few-shot learning, 2022. URL <https://arxiv.org/abs/2204.14198>.
- [43] Y. Chen, Y. Ge, H. Zhou, M. Ding, Y. Ge, and X. Liu. Dial: Decoupling intent and action via latent world modeling for end-to-end vla, 2026. URL <https://arxiv.org/abs/2603.29844>.
- [44] S. Ye, J. Jang, B. Jeon, S. Joo, J. Yang, B. Peng, A. Mandlekar, R. Tan, Y.-W. Chao, B. Y. Lin, et al. Latent action pretraining from videos. *arXiv preprint arXiv:2410.11758*, 2024.

- [45] J. Gao, F. Ye, J. Zhang, and W. Qian. Compressor-vla: Instruction-guided visual token compression for efficient robotic manipulation, 2025. URL <https://arxiv.org/abs/2511.18950>.
- [46] M. V. Koroteev. Bert: a review of applications in natural language processing and understanding. *arXiv preprint arXiv:2103.11943*, 2021.
- [47] S. Tong, E. Brown, P. Wu, S. Woo, M. Middepogu, S. C. Akula, J. Yang, S. Yang, A. Iyer, X. Pan, Z. Wang, R. Fergus, Y. LeCun, and S. Xie. Cambrian-1: A fully open, vision-centric exploration of multimodal llms, 2024. URL <https://arxiv.org/abs/2406.16860>.
- [48] L. Yu, P. Poirson, S. Yang, A. C. Berg, and T. L. Berg. Modeling context in referring expressions. In *European conference on computer vision*, pages 69–85. Springer, 2016.
- [49] W. Yuan, J. Duan, V. Blukis, W. Pumacay, R. Krishna, A. Murali, A. Mousavian, and D. Fox. Robopoint: A vision-language model for spatial affordance prediction for robotics. *arXiv preprint arXiv:2406.10721*, 2024.
- [50] M. Deitke, C. Clark, S. Lee, R. Tripathi, Y. Yang, J. S. Park, M. Salehi, N. Muennighoff, K. Lo, L. Soldaini, et al. Molmo and pixmo: Open weights and open data for state-of-the-art vision-language models. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pages 91–104, 2025.
- [51] E. Zhou, J. An, C. Chi, Y. Han, S. Rong, C. Zhang, P. Wang, Z. Wang, T. Huang, L. Sheng, et al. Roborefer: Towards spatial referring with reasoning in vision-language models for robotics. *Advances in Neural Information Processing Systems*, 38:28404–28481, 2026.
- [52] Y. Tang, L. Zhang, S. Zhang, Y. Zhao, and X. Hao. Roboafford: A dataset and benchmark for enhancing object and spatial affordance learning in robot manipulation. In *Proceedings of the 33rd ACM International Conference on Multimedia*, pages 12706–12713, 2025.
- [53] H. Wan, Y. Zhang, J. Wang, D. Wu, M. Li, X. Chen, Y. Deng, Y. Huang, Z. Sun, L. Zhang, et al. Toward universal embodied planning in scalable heterogeneous field robots collaboration and control. *Journal of Field Robotics*, 42(5):2318–2336, 2025.
- [54] H. Wan, Y. Chen, Y. Deng, Z. Wei, D. Li, Z. Lin, D. Wu, J. Cheng, and X. Ji. Embodiedagent: A scalable hierarchical approach to overcome practical challenge in multi-robot control. In *2025 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, pages 12140–12146. IEEE, 2025.
- [55] A. Azzolini, J. Bai, H. Brandon, J. Cao, P. Chattopadhyay, H. Chen, J. Chu, Y. Cui, J. Diamond, Y. Ding, et al. Cosmos-reason1: From physical common sense to embodied reasoning. *arXiv preprint arXiv:2503.15558*, 2025.
- [56] C. H. Song, V. Blukis, J. Tremblay, S. Tyree, Y. Su, and S. Birchfield. Robospatial: Teaching spatial understanding to 2d and 3d vision-language models for robotics. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pages 15768–15780, 2025.
- [57] Y. Chen, Y. Ge, Y. Ge, M. Ding, B. Li, R. Wang, R. Xu, Y. Shan, and X. Liu. Egoplan-bench: Benchmarking multimodal large language models for human-level planning. *International Journal of Computer Vision*, 134(3):118, 2026.
- [58] Y. Luo, C.-K. Fan, M. Dong, J. Shi, M. Zhao, B.-W. Zhang, C. Chi, J. Liu, G. Dai, R. Zhang, et al. Robobench: A comprehensive evaluation benchmark for multimodal large language models as embodied brain. *arXiv preprint arXiv:2510.17801*, 2025.

Appendix

This appendix provides additional details and experimental results referenced in the main paper. Section A compares related embodied VQA datasets and benchmarks, section B documents the data generators used to construct CometData, section C describes the keyframe extraction algorithm, section E contains further real-robot experiment details, and section F.1 reports per-task RoboTwin success rates together with action analysis and per-domain correlation results.

A Comparisons of Embodied VQA Datasets and Benchmarks

Table A1 and table A2 provide a detailed comparison of representative embodied VQA datasets and benchmarks discussed in section 2.2. Table A1 categorizes each dataset according to its data sources, distinguishing between robot-centric data (teleoperation, robot simulation, ego-centric robot views) and non-robot data (common web images, non-robot simulation). Table A2 summarizes the reasoning capabilities covered by each benchmark, including spatial, planning, dynamics, error detection and recovery, affordance reasoning, and tool use, together with the scale of each benchmark where available.

Table A1: Data source composition of representative embodied VQA datasets. For each dataset, we categorize its data sources into robot data (teleoperation, robot simulation, robot ego-centric view) and non-robot data (common web images, non-robot simulation).

Dataset	Visual cues	Robot Data			Non-Robot Data	
		Tele	Sim (Robot)	Ego (Robot)	Common	Sim (Non-Robot)
RoboVQA [32]	●	●	○	●	○	○
RefCOCO [48]	●	○	○	○	●	○
RoboPoint [49]	●	○	○	○	○	●
PixMo-Points [50]	○	○	○	○	●	○
RefSpatial [51]	●	○	○	○	●	●
RoboAfford [52]	●	○	●	○	●	○
Robo2VLM [14]	○	●	○	○	○	○
MultiPlan [53, 54]	○	○	○	○	●	○
Cosmos-Reason1 [55]	●	●	○	●	○	●
CometData (Ours)	○	●	●	●	○	○

● Fully Supported ● Partially Supported ○ Not Supported

Table A2: Reasoning capability coverage of embodied VQA benchmarks. Scale indicates the number of question-answer pairs. Each benchmark is evaluated across six reasoning categories: Spatial, Planning, Dynamics, Error Detection & Recovery, Affordance, and Tool Use.

Benchmark	Scale	Reasoning Categories					
		Spatial	Plan	Dyn	Error	Afford	Tool
RoboSpatial [56]	6,350	●	○	○	○	○	○
EgoPlan [57]	1,584	○	●	○	○	○	○
Cosmos-Reason1 [55]	1,205	●	●	○	●	○	○
ERQA [33]	400	○	●	○	●	○	○
RoboVQA [32]	1,000	●	●	●	○	●	○
RoboBench [58]	6,092	●	●	○	●	○	○
ERIQ [37]	6,052	●	●	○	●	○	○
CometBench (Ours)	—	●	●	●	●	●	●

● Fully Supported ● Partially Supported ○ Not Supported

B Data Generators

This appendix documents the procedural data generators used to produce visual question answering instances from raw robot manipulation trajectories. Each generator consumes a trajectory sample composed of synchronized multi-view video frames, a tabular telemetry timeline, and high-level task annotations. From these inputs, a generator selects evidence frames, instantiates a question template, and queries a vision language model server to obtain a grounded answer. The keyframe selection policy and the physics state extractor have been described in the main text, so the following subsections focus on the supervisory role of each generator and provide a representative question for every one.

B.1 Spatial Reasoning

Spatial 3D Generator This generator supervises three-dimensional spatial reasoning by asking the model to describe the relative arrangement of two task-relevant objects in terms of front, back, left, etc. It consumes a triple of evidence frames spanning the manipulation episode together with their physics state summaries. Example question:

Where is the bottle relative to the cup?

Multi-View Matching Generator This generator targets viewpoint-invariant object grounding. At a single anchor moment, it presents synchronized frames from at least two camera views and asks the model to identify the same manipulated object across them, treating cross-view occlusion and perspective distortion as the central challenge. This generator is only activated when dataset has multiple views. Example question:

Across the synchronized views shown, identify the object the robot is currently manipulating and explain how the views correspond.

Timeline Matching Generator This generator combines cross view and temporal correspondence. Two views are sampled at two distinct anchor moments, yielding four frames presented in a fixed view by time order. The model must first match the target object across views at each moment and then track it between the two moments, supervising joint viewpoint and temporal grounding. Example question:

Across these four frames covering two views and two moments, track the bottle and describe how its state changes between the two moments.

B.2 Task Understanding

Subtask Decomposition Generator This generator supervises task planning at the subtask level. Given a single image and the high-level task description, it asks the model to predict what the next subtask should be, optionally conditioned on the current subtask. The prompt forbids the model from referencing hidden metadata, so the prediction must be grounded in observable robot configuration, object placement and tool state. Example question:

The overall task is: pour water from a bottle into a cup and hand it to the user. The current subtask is: grasp the bottle. What should be the next subtask?

Qualitative Progress Generator This generator supervises qualitative progress estimation. The model is asked to describe, in natural language, where the robot currently stands within the overall task, for example whether execution is just starting, advancing, or nearly complete. The hidden

completion ratio and the history of executed subtasks are exposed only as latent context, and the model must justify its qualitative answer purely from visual evidence. Example question:

The overall task is: pour water from a bottle into a cup and hand it to the user. What is the current progress of the task?

Quantitative Progress Generator This generator supervises quantitative progress estimation by asking the model to justify a numerical completion percentage from the visible scene. The completion ratio is defined as the average of a structural component, computed as the fraction of planned subtasks already entered, and a temporal component, computed as the relative position of the current frame within the episode. The model is required to argue why the visible scene is consistent with this hidden ratio. Example question:

The overall task is: pour water from a bottle into a cup and hand it to the user. The current subtask is: grasp the bottle. What is the progress percentile of this subtask?

B.3 Physics & Dynamics

Physics Understanding Generator This generator supervises causal physical reasoning. The model is shown a physically salient frame and asked to explain how gravity, contact and energy will determine the immediate next outcome, for example whether the held object will stay stable, slip, or fall. Example question:

If the robot releases the bottle now, what physical outcome is most likely?

Object Characteristic Generator This generator supervises dense object centric description. For each evidence frame, the model is asked to enumerate strongly task relevant objects and characterize them along a fixed schema covering visual evidence, color, material, shape and size, surface, rigidity, weight class, tool function, canonical and task specific use, role in the task pipeline, expected robot interaction and likely failure modes. Example question:

Describe the physical and tool related properties of the clothes. Is it heavy?

Motion Understanding Generator This generator supervises action recognition from short, contact centered trajectory windows. The model is presented with a stack of consecutive frames around a physically salient keyframe and is asked to infer which manipulation action is being executed in the window, link motion and contact to causality, and analysis stability and risk. Example question:

Looking at these images, what manipulation action is the robot executing, and what contact and stability cues support your answer?

Motion Imagination Generator This generator supervises short horizon action prediction. Given the current physical state, the model is asked to output a single immediate action that safely advances the high-level task, in a fixed seven-dimensional schema $[x, y, z, r_x, r_y, r_z, g]$ encoding body frame translation, rotation and a binary gripper command. The model is expected to respond with descriptive answers like "move along the x negative axis" or "close the gripper". Example question:

The overall task is: pour water from a bottle into a cup and hand it to the user. The current subtask is: grasp the bottle. Considering the physics state, what should the robot do next?"

B.4 Error & Tool

Execution Error Generator This generator supervises error detection. The ground truth task description is deliberately corrupted by substituting a verb or object token with a different one drawn from a curated pool, and the model is asked to judge whether the perturbed description correctly describes the current scene. The expected response is an explicit refutation, an analysis of the discrepancy with respect to gripper status and spatial relations, and a justified statement of the correct task. Example question:

The current subtask is predicted as 'push the bottle'. Is this correct? If not, point out the error and provide the correct subtask.

Error Recovery Generator This generator supervises recovery planning under counterfactual failure. Reusing the same perturbation operator, it presents a hypothetical failed task together with the ground truth task and the physics state, and asks the model to design a minimal safe recovery procedure that returns the robot to the correct task while respecting torque limits and workspace constraints. Example question:

Suppose the robot mistakenly attempted to push the bottle instead of grasping it. What is a minimal safe recovery plan to resume the correct task?

Constraint Detection Generator This generator supervises reasoning about the physical and geometric constraints that must be respected for safe execution. A keyword router classifies the constraint into one of three types: direction constraints for tasks involving containers or doors that must remain in a particular orientation, force constraints for fragile or deformable objects that require compliant contact, and space constraints for obstacle avoidance and reachability. The model is asked to explain the relevant constraints, why they matter, and how to satisfy them. Example question:

For the task 'pour water from the bottle into the cup', what orientation constraints must the robot respect, and why?

Tool Usage Generator This generator supervises tool selection and identification. An upstream perception middle layer first issues a separate vision language query to detect whether a tool is present in the scene and, if so, returns its bounding box. The generator then asks the model to identify the appropriate tool, locate it when visible, and explain why it is suitable for the task, in either a single image or a multi image variant that exposes the workspace from several temporal vantage points. Example question:

Which tool in the scene is most appropriate for the current task, where is it located, and why is it suitable?

B.5 Affordance

Affordance Reasoning Generator This generator supervises grasp and interaction affordance prediction, that is, where on a target object the robot should make contact in order to perform a given action. Frames around gripper transitions are preferred as evidence, since they typically capture the moment of contact establishment or release. The model is asked to point out the contact location and to explain the rationale. Example question:

Where on the bottle should the robot grasp in order to lift it, and why?

Object Function Generator This generator supervises functional understanding of objects. The model is asked to describe the canonical function of a target object, the way it is used by the robot,

and the purpose it serves in the depicted scene, using the image as primary support and the telemetry summary as secondary. Example question:

What is the typical function of the cup in this scene, and what role does it play in the manipulation pipeline?

C Keyframe extraction

At frame t , let s_t and a_t denote the synchronized proprioceptive state and commanded action. Let $\mathcal{G}$ be the set of proprioceptive groups, and define the per-group tracking residual as $\Delta_t^g \triangleq a_t^g - s_t^g$. Based on these quantities, we compute the instantaneous Hamiltonian H_t , command effort $\mathcal{E}_t$, and dimensionless command-to-response ratio $\mathcal{R}_t$ as defined in eq. (2)

$$H_t = \frac{1}{2} \sum_{g \in \mathcal{G}} \|\Delta_t^g\|_2^2 + m g_0 z_t^{\text{ee}}, \quad \mathcal{E}_t = \sum_{g \in \mathcal{G}} \|\Delta_t^g\|_2, \quad \mathcal{R}_t = \frac{H_t - H_{t-1}}{\mathcal{E}_t + \varepsilon}, \quad (2)$$

where m is the manipulator mass, g_0 is gravitational acceleration, z_t^{ee} is the end-effector height (set to zero if pose is not in a world frame), and $\varepsilon > 0$ is a small constant for numerical stability.

Keyframes are identified using three complementary criteria in eq. (3), eq. (4), and eq. (5). We use $\mathbb{I}[\cdot]$ as the indicator function (1 if true, 0 otherwise), with thresholds τ_H , τ_g , $\tau_{\mathcal{E}}$, and $\tau_{\mathcal{R}}$. Hamiltonian jump $\mathcal{C}_A$ detects abrupt energy redistribution during contact formation, impact, or release. Gripper step $\mathcal{C}_B$ captures grasp/release boundaries through the normalized aperture $g_t \in [0, 1]$ and its first difference $\Delta g_t \triangleq g_t - g_{t-1}$, where $\text{Sustain}_{K_{\text{sus}}}(t)$ indicates that $|\Delta g_t| > \tau_g$ has held for the most recent K_{sus} frames. Power anomaly $\mathcal{C}_C$ flags phases where command effort is large but Hamiltonian change or response ratio is disproportionately small; α controls the attenuated energy threshold in this criterion.

$$\mathcal{C}_A(t) = \mathbb{I}[|H_t - H_{t-1}| > \tau_H], \quad (3)$$

$$\mathcal{C}_B(t) = \mathbb{I}[|\Delta g_t| > \tau_g \wedge \text{Sustain}_{K_{\text{sus}}}(t)] \vee \mathbb{I}[(g_{t-1} - \frac{1}{2})(g_t - \frac{1}{2}) < 0], \quad (4)$$

$$\mathcal{C}_C(t) = \mathbb{I}[\mathcal{E}_t > \tau_{\mathcal{E}} \wedge (|H_t - H_{t-1}| < \alpha \tau_H \vee |\mathcal{R}_t| < \tau_{\mathcal{R}})]. \quad (5)$$

The final saliency score aggregates these indicators to prioritize physically salient frames:

$$\mathcal{S}_t = \frac{|H_t - H_{t-1}|}{\tau_H} + w_A \mathcal{C}_A(t) + w_B \mathcal{C}_B(t) + w_C \mathcal{C}_C(t), \quad (6)$$

with saliency mixing weights $(w_A, w_B, w_C) = (1.0, 1.5, 1.3)$ in our implementation. Keyframes are obtained by retaining the top- K frames per episode, where K is the per-episode keyframe budget.

Each selected keyframe is paired with a structured descriptor that includes the triggered criteria, normalized energy change $|\Delta H_t|/\tau_H$, aperture change Δg_t , command effort $\mathcal{E}_t$, response ratio $\mathcal{R}_t$, and an inferred task phase (grasp/release/manipulation). This descriptor serves as shared conditioning for all downstream category-specific QA generators. All quantities are computed solely from (s_t, a_t, g_t) , requiring no direct force or tactile sensing and ensuring uniform applicability across embodiments and data sources.

D Model Training configurations

The training is generally divided into two stages: pre-training and post-training. For both stages, actions are denoted with end-effector position $ee_{l/r} = [x_{l/r}, y_{l/r}, z_{l/r}, rx_{l/r}, ry_{l/r}, rz_{l/r}, gl/r]$, where x, y, z denote spatial coordinates, rx, ry, rz denote rotation angle, and g denotes gripper open/close. This design generates a total of 14 dimensions for bi-manual control commands. We padded the action space to 32 dimensions for future adaptation. We use an action chunk size of 30 and perform inference with 4 flow-matching steps. In addition, CometVLA is trained with full parameters with no modules frozen.

In the pre-training stage, the model is trained on a mixture of vision-language and vision-language-action data. The VLM data includes general VQA and CometData with a per-device batch size of 4. The VLA data uses a mixture of AgiBot-World-Beta, InternData-A1, EgoLive, and EgoDex with a per-device batch size of 8. The training runs for 100,000 steps with a cosine learning rate scheduler. The base learning rate is set to $3e-5$ and the warmup steps are 5000. The loss weights for VLA and VLM tasks are 1.0 and 0.1 respectively. The model is optimized with AdamW and gradient checkpointing and mixed precision training are enabled. The framework employs DiT-B as the action model and Qwen3-VL-4B-Instruct for the vision backbone.

In the post-training stage, the model is initialized from the pretrained checkpoint and fine-tuned on the RoboTwin or real-robot-specific dataset. The per-device batch size for VLA data is 16. The base learning rate remains $3e-5$ with 5000 warmup steps and a cosine scheduler with minimum learning rate. The loss scale keeps VLA at 1.0 and VLM at 0.1. The model is trained in a fully fine-tuned manner without freezing any modules. The action model uses DiT-B with isolated embeddings and the same optimizer and training techniques as in the pre-training stage..

E Details of Real-Robot Experiments


E.1 Experiment Configurations

The workstation runs the robot DDS middleware and directly sends end-effector pose commands in the camera coordinate system to the robot actuators. The computation-intensive policy inference runs on a remote H200 server cluster, which serves as the server. We establish WebSocket connections between the server and client through port forwarding, enabling low-latency command streaming. This hybrid architecture separates cloud-based inference from edge control, where the H200 cluster handles high-concurrency model inference and the 5090 workstation manages real-time robot control and state feedback.

E.2 Visualization of the Real-Robot Experiments

This appendix provides a per-task visual gallery of the five real-robot manipulation tasks. Each task is illustrated by six uniformly sampled keyframes arranged left-to-right to show the execution progression, followed by the corresponding language instruction.

Task 1 – Lotion. *The right arm picks up the lotion from the desk and places the lotion into the long strip-shaped compartment at the back of the top layer of the storage box.*

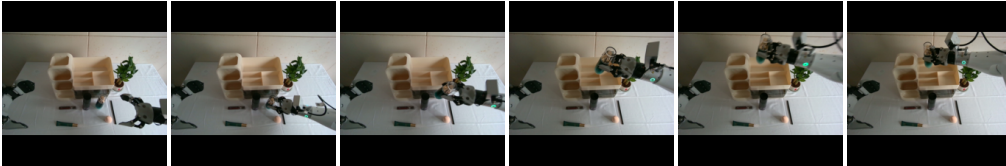


Task 2 – Serum. *The right arm picks up the serum from the desk and places the serum into the long strip-shaped compartment at the back of the top layer of the storage box.*



Task 3 – Makeup Sponge. *The right arm picks up the makeup sponge from the desk and places the makeup sponge into the right compartment at the front of the top layer of the storage box.*



Task 4 – BB Cream. *The left arm picks up the BB cream from the desk and places the BB cream into the middle compartment at the front of the top layer of the storage box.*

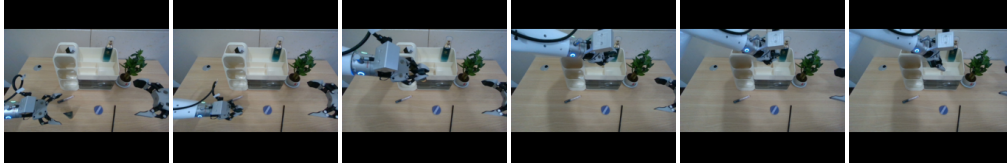

Task 5 – Liquid Foundation. *The left arm picks up the liquid foundation from the desk and places the liquid foundation into the top open compartment on the left side of the storage box.*



E.3 Failure case analysis

We visualize a representative failure case from the real-robot experiments in fig. A1. The robot is instructed to pick up the lotion bottle with the right arm from the desk and place it into the long strip-shaped compartment located at the back of the top layer of the storage box. While the left arm correctly remains static as instructed, the right arm opens the gripper prematurely before reaching the lotion bottle, causing the object to be knocked over. The testers subsequently terminated the execution to avoid potential collisions and unsafe motions.

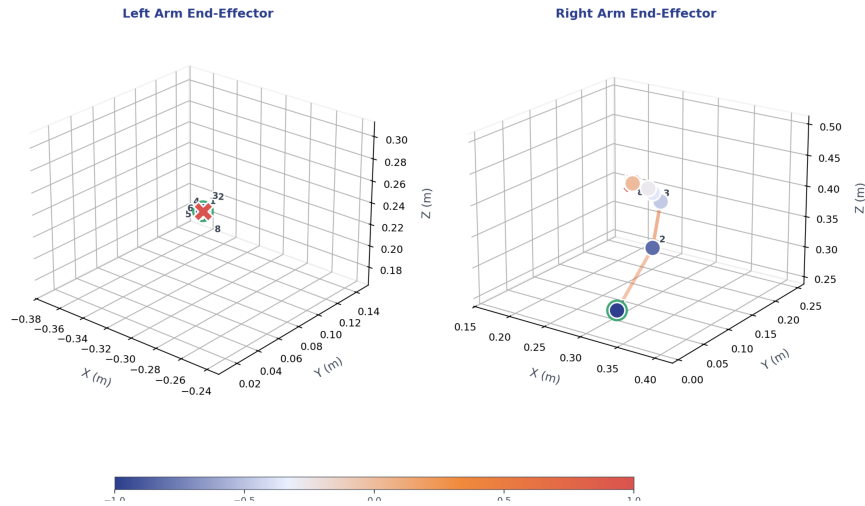


Figure A1: A failure case of lotion organization.

F Details of Evaluation on RoboTwin 2.0

F.1 Per-task Success Rate

We report the success rate of the full 50 tasks of CometVLA on RoboTwin 2.0 in table A3.

Table A3: Per-task success counts

Task	Easy (Clean)	Hard (Randomized)
adjust_bottle	100%	95%
beat_block_hammer	100%	96%
blocks_ranking_rgb	100%	97%
blocks_ranking_size	96%	79%
click_alarmclock	71%	71%
click_bell	94%	100%
dump_bin_bigbin	98%	80%
grab_roller	99%	100%
handover_block	83%	52%
handover_mic	99%	97%
hanging_mug	53%	54%
lift_pot	100%	100%
move_can_pot	55%	97%
move_pillbottle_pad	90%	95%
move_playingcard_away	97%	92%
move_stapler_pad	91%	93%
open_laptop	100%	98%
open_microwave	92%	81%
pick_diverse_bottles	91%	65%
pick_dual_bottles	85%	72%
place_a2b_left	85%	97%
place_a2b_right	79%	86%
place_bread_basket	97%	98%
place_bread_skillet	100%	89%
place_burger_fries	96%	96%
place_can_basket	84%	51%
place_cans_plasticbox	99%	98%
place_container_plate	93%	100%
place_dual_shoes	94%	98%
place_empty_cup	99%	100%
place_fan	82%	95%
place_mouse_pad	78%	82%
place_object_basket	85%	89%
place_object_scale	96%	83%
place_object_stand	94%	74%
place_phone_stand	86%	98%
place_shoe	97%	84%
press_stapler	95%	98%
put_bottles_dustbin	99%	91%
put_object_cabinet	71%	74%
rotate_qrcode	83%	89%
scan_object	80%	80%
shake_bottle	92%	100%
shake_bottle_horizontally	98%	100%
stack_blocks_three	96%	97%
stack_blocks_two	97%	94%
stack_bowls_three	72%	86%
stack_bowls_two	83%	93%
stamp_seal	87%	95%
turn_switch	71%	90%
Average	89.24%	88.38%

F.2 Visualization of CometVLA on Simulation Tasks

We provide sampled rollout frames from RoboTwin 2.0 simulations in fig. A2.

F.3 Action Analysis

During the RoboTwin benchmark evaluation, we record the full 14-dimensional action sequence produced by our policy to diagnose the quality and temporal structure of generated robot motions.

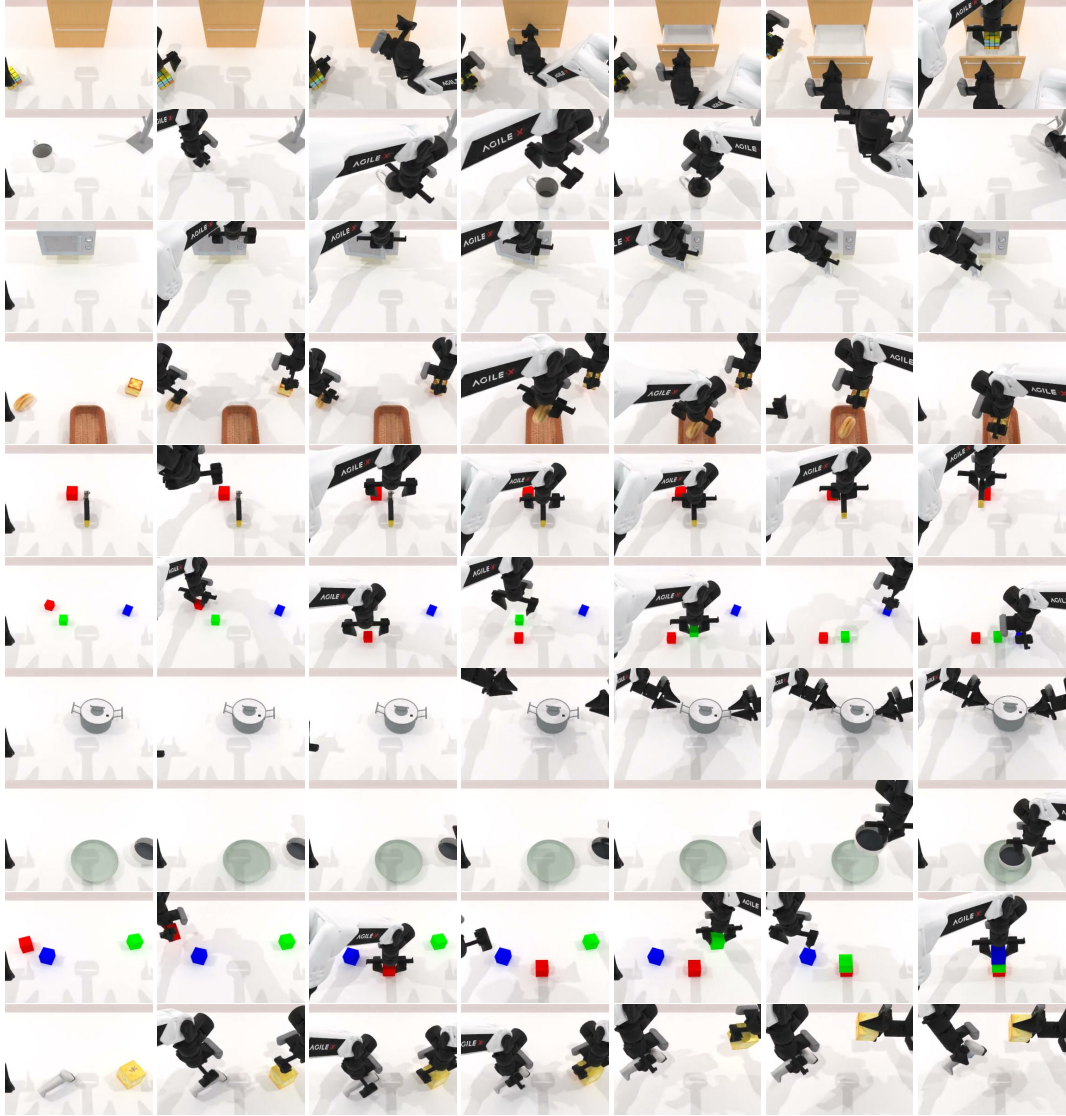


Figure A2: Per-episode qualitative previews. Each row shows sampled frames from one rollout during the RoboTwin 2.0 Easy evaluation.

This appendix provides a complete visualization of a representative evaluation episode, including raw action time series, 3D end-effector trajectories, frequency-domain analysis, and gripper actuation events. These figures complement the quantitative success-rate metrics reported in the main text by revealing that our policy outputs smooth and physically plausible trajectories with minimal high-frequency jitter, while also demonstrating well-coordinated temporal alignment between the two grippers during bi-manual manipulation.

F.4 Per-domain Correlation Analysis

We further provide per-domain scatter plots between VLM performance on CometBench and VLA success rate on RoboTwin 2.0, as shown in fig. A7. Each subplot includes a linear regression fit and the corresponding Pearson correlation coefficient. Across all domains, linear fits consistently show positive slopes, reinforcing the conclusion that VLM improvements reliably translate to VLA gains, albeit with domain-dependent strength.

Action time series (T=481, D=14)

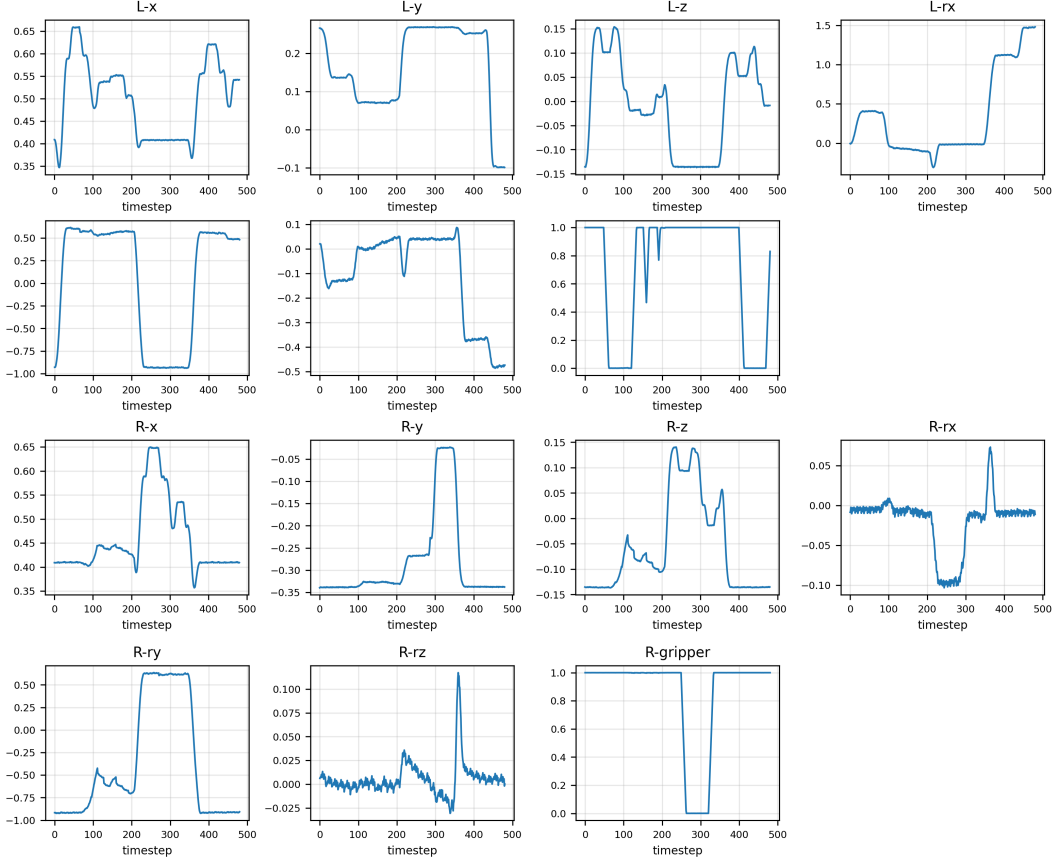


Figure A3: Complete action time series of a RoboTwin evaluation episode (timestep $T = 481$, action dimension $D = 14$). Step-like transitions and plateaus correspond to gripper actuation events and target-reaching phases.

G Ablation on the GAP Token

We use the final checkpoint of our model trained on the full co-training mixture, and extract token-level features on a held-out subset of AgiBot-World-Beta. For every sampled frame, we run a single forward pass with the original training-time data pipeline and record both GAP token and VLM mean pooling baseline representations. The GAP token is taken before being passed into the cross-attention of the DiT-based action expert. The VLM mean pooling baseline is computed by averaging the hidden states of all language and visual tokens at the final layer of the VLM backbone, excluding padding tokens. Both features are extracted in `bf16`. We collect $N=3,000$ frames sampled uniformly across episodes from the held-out split. To prevent any single trajectory from dominating, we cap the number of sampled frames per episode.

Visualization Experiment AgiBot-World-Beta provides language instructions at the granularity of individual trajectories. We aggregate them into coarse task clusters via standard TF-IDF + KMeans (1–2 grams, English stop-words removed, $k=15$). Each resulting cluster is named after the two terms with highest centroid weight (e.g., “open / drawer”, “pick / bottle”). We retain frames belonging to the remaining clusters for all subsequent analysis. We use scikit-learn’s TSNE with `perplexity= 30`, `init=pca`, `learning_rate=auto`, `max_iter= 1000` and `random_state= 42`.

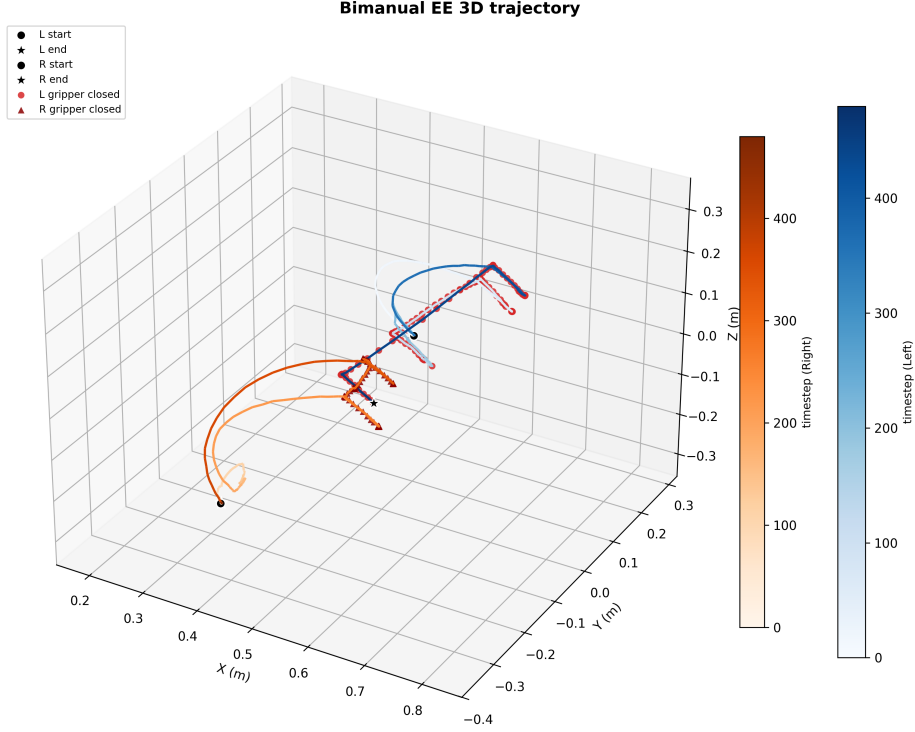


Figure A4: Three-dimensional end-effector trajectories of both arms. The blue and orange curves denote the left and right end-effector paths, respectively. Circles (●) and stars (★) mark the starting and ending poses. Red dots and triangles highlight timesteps where the left and right grippers are closed.

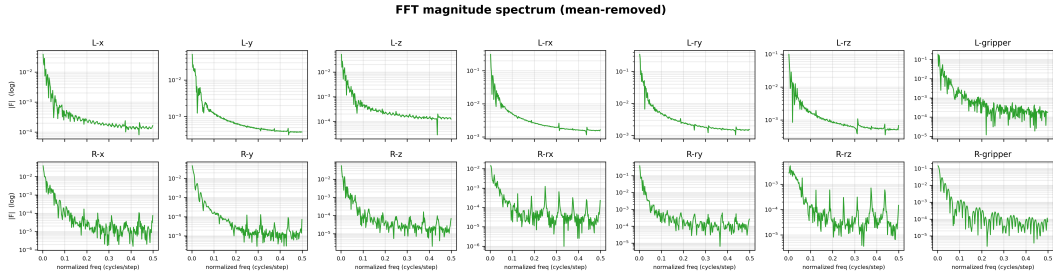


Figure A5: Mean-removed FFT magnitude spectrum for each of the 14 action dimensions. The vertical axis is logarithmic. Most signal energy is concentrated at low normalized frequencies ($\ll 0.1$ cycles/step), indicating that the manipulation motion is predominantly smooth and quasi-static, with relatively little high-frequency jitter.

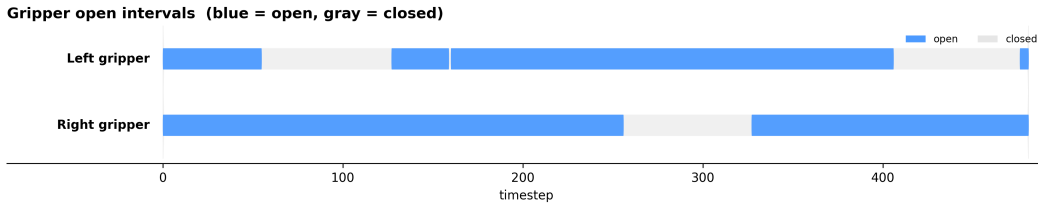


Figure A6: Gripper open/close event timeline during the evaluation episode. Blue segments indicate open states and gray segments indicate closed states. The left and right grippers exhibit asynchronous actuation patterns, reflecting the coordinated bi-manual manipulation strategy required by the task. The short closed gap within the left gripper open interval is transient actuator jitter and recovers instantly.

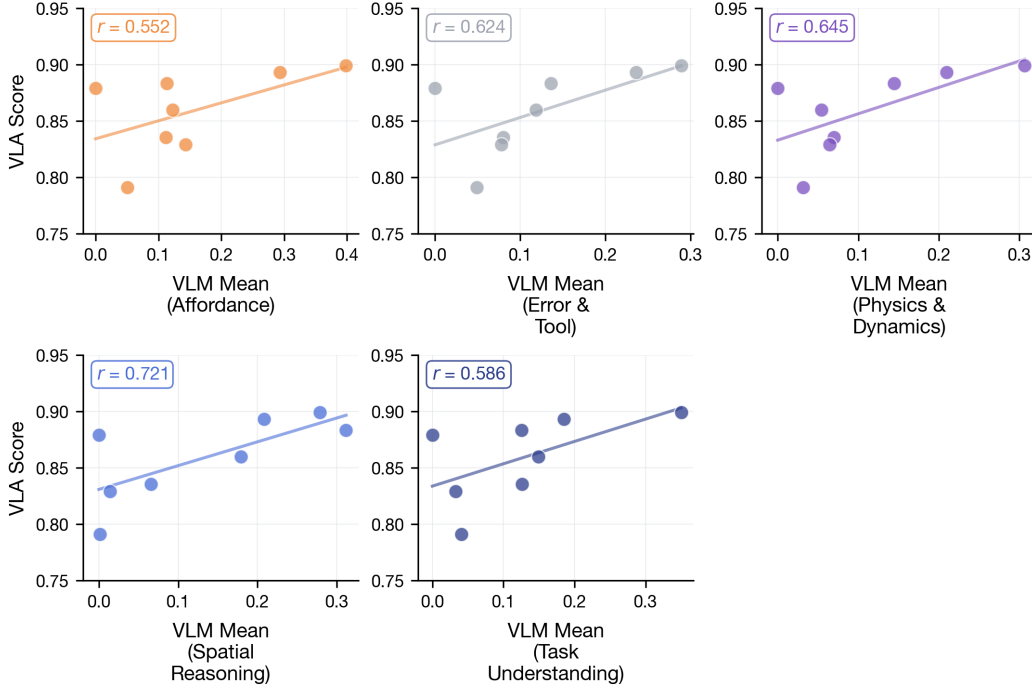


Figure A7: **Per-domain scatter plots between VLM performance on CometBench and VLA success rate on RoboTwin 2.0**

Action Linear Probing Experiment We test whether the GAP token fulfills its role as a physical commonsense aggregation bottleneck. Linear probing measures how much of a target attribute remains linearly separable in this compressed representation. Unlike downstream policy evaluation, probing isolates representation quality from the action head and optimizer. Results show the GAP token aggregates action-relevant commonsense; attributes like gripper state and motion magnitude should be linearly extractable. Probing turns this architectural hypothesis into a quantitative test.

Let $a_t \in \mathbb{R}^{32}$ denote the action vector predicted at step t inside an action chunk, where a chunk is the contiguous block of 30 future control commands $\{a_t\}_{t=0}^{29}$ that the policy emits in one forward pass; within each a_t , dimensions 6 and 13 encode the binary open/close states of the left and right grippers, dimensions 0–2 encode the left end-effector Cartesian xyz position in the robot base frame, and the trailing 14 dimensions are unused zero padding that we therefore exclude from all probing analysis. From the chunk $\{a_t\}_{t=0}^{29}$ we derive three complementary classification targets that together cover the principal facets the action expert must condition on.

The first target is the **gripper state** with four classes defined as:

$$y_g = 2 \cdot \mathbb{I}[a_0^{(6)} > 0.5] + \mathbb{I}[a_0^{(13)} > 0.5], \quad (7)$$

which jointly encodes whether each of the two grippers is open or closed at the start of the chunk and thus probes how well a representation captures the discrete bi-manual control intent that gates every manipulation primitive.

The second target is the **motion direction** with six classes, constructed by first computing the displacement of the left end-effector across the chunk $\Delta = a_{29}^{(0:3)} - a_0^{(0:3)}$, then identifying its dominant translation axis $j^* = \arg \max_j |\Delta_j|$, and finally assigning $y_d = 2j^* + \mathbb{I}[\Delta_{j^*} > 0]$ so that the chunk is labeled by one of $\{\pm x, \pm y, \pm z\}$, which probes whether the representation linearly encodes the geometric direction of the intended motion in workspace coordinates.

The third target is the **motion magnitude** with three classes $y_m \in \{\text{static, slow, fast}\}$, obtained by binning $\|\Delta\|_2$ at the empirical 1/3 and 2/3 quantiles of the dataset, which measures how readily the overall scale of motion, ranging from near stationary holds to fast transport.

Taken together, these three targets respectively probe discrete control intent, geometric direction, and motion scale, giving a quantitative complement to the qualitative t-distributed Stochastic Neighbor Embedding (t-SNE) visualizations.