

Temporal Forcing: 4D Representation Alignment for Vision-Language-Action Models

Xingyu Ding^{1,2}, Yuzhong Zhao³, Chunhai Zhao²,
Yinghuan Shi¹, Chaoyang Zhao^{2*}, Yifan Zhang^{2,3*}

¹Nanjing University, Nanjing, China

²Institute of Automation, Chinese Academy of Sciences, Beijing, China

³University of Chinese Academy of Sciences, Beijing, China

Abstract

Recent vision-language-action (VLA) methods improve manipulation performance by aligning their representations with 3D scene geometry. However, these methods often struggle with long-horizon manipulation and observation aliasing between visually similar states due to a lack of temporal information: the 3D scene geometry captures only the current state, rather than how it has evolved over time. To resolve this, we present **Temporal Forcing**, a 4D representation alignment method for VLA models. Specifically, we first introduce a history pathway that enables a vanilla VLA model to summarize observation history into temporally aware latent representations. Then, the latent representations are aligned with the geometric features extracted by a pretrained 4D foundation model, which captures the evolving 3D world through temporally consistent geometric representations, enabling a deeper understanding of dynamic environments. Temporal Forcing reaches 98.8% on LIBERO, outperforming its base model by 2.2 points. On a physical hidden-placement task, it raises full-task success from 20.0% to 43.3%. Code will be publicly available.

1 Introduction

Vision-language-action (VLA) methods map language instructions and visual observations to robot actions (Zitkovich et al. 2023; Kim et al. 2024; Team et al. 2024; Black et al. 2024). Recent methods improve manipulation performance by aligning model representations with geometric features from pretrained 3D models (Li et al. 2025a; Guo et al. 2025; Li et al. 2025b). A representative method is Spatial Forcing (Li et al. 2025a), which aligns the model’s latent representations with the geometric features of the current observations.

However, these methods often struggle with long-horizon manipulation and observation aliasing between visually similar states due to a lack of temporal information: the 3D scene geometry captures only the current state, rather than how it has evolved over time. For example, as shown in Fig. 1(a), once one block is placed into the opaque box and becomes invisible, the current frame no longer reveals the earlier object-state transition needed to resolve “the other”, resulting in observation aliasing between visually similar states. Later in the same long-horizon task, deciding to close

the drawer requires tracking whether both placement stages have been completed, even though this task progress cannot be recovered from the current frame alone. These two cases require the model to track object-state transitions and task progress over time.

To address these limitations, we introduce Temporal Forcing, a 4D representation alignment method that equips a vanilla VLA model with temporally aware latent representations (Fig. 1(c)). We first introduce a history pathway to summarize a bounded observation history into latent representations. We then align these representations with geometric features extracted by a pretrained 4D foundation model, which processes a longer causal context and captures the evolving 3D world through temporally consistent geometric representations. Temporal alignment supervises the evolution of the history representations, while current-frame alignment anchors the model representation to contextualized dense geometry. The pretrained 4D foundation model and all alignment heads are used only during training; at inference, Temporal Forcing retains only the history pathway and the base VLA model.

Temporal Forcing reaches a 98.8% average success rate on LIBERO, improving its base model by 2.2 points, with the largest gain on the Long suite. On twelve bimanual RoboTwin 2.0 tasks, it raises the average success rate from 53.5% to 62.8% and outperforms the base model on nine tasks. Controlled experiments further show that providing observation history alone is insufficient, while 4D representation alignment enables the resulting model to use its history at inference. On the physical multi-stage task in Fig. 1(a), Temporal Forcing raises full-task success from 20.0% to 43.3% while remaining comparable to the base model on the same manipulation stages evaluated in isolation. Our main contributions are as follows:

- We identify two limitations of framewise 3D geometric alignment in long-horizon manipulation: it cannot represent object-state transitions or disambiguate task progress when the current observation is insufficient.
- We propose Temporal Forcing, which equips a vanilla VLA model with a history pathway and aligns its temporally aware latent representations with geometric features from a pretrained 4D foundation model.
- We demonstrate gains on LIBERO, RoboTwin 2.0, and a

*Corresponding author.

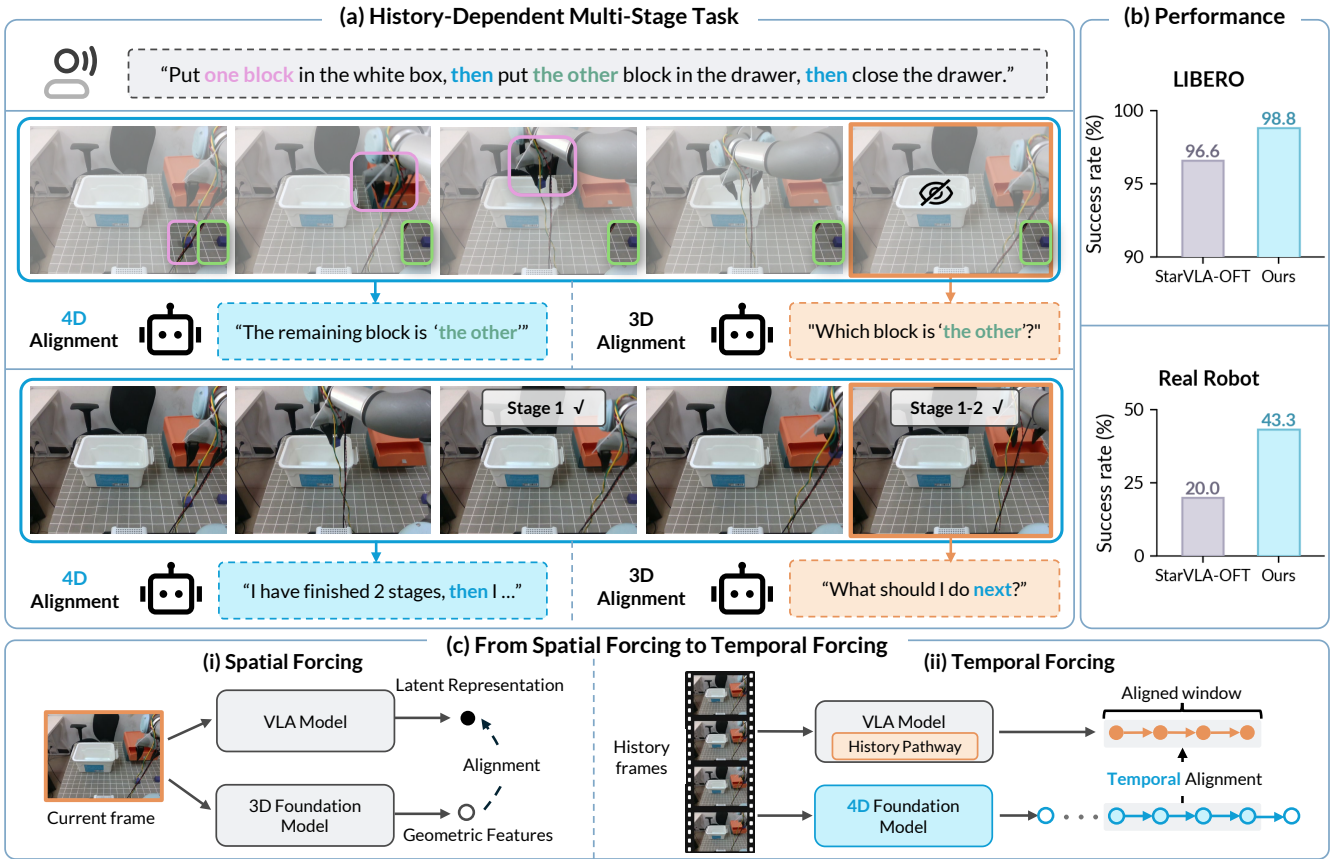


Figure 1: (a) A physical multi-stage task with two history-dependent decisions. Once one of two identical blocks is placed in the opaque box and becomes invisible, the model must use the earlier placement to resolve “the other” and track completed steps to decide what comes next. Colored contours are visualization-only and track the two blocks across frames; the crossed-eye icon marks the block hidden inside the box. Framewise 3D alignment captures only the visible geometry, whereas 4D alignment represents how the scene evolves over time. (b) Success rates on LIBERO and the physical task. (c) Spatial Forcing aligns a current-frame VLA representation with features from a pretrained 3D model, whereas Temporal Forcing equips the VLA model with a history pathway and aligns its history latent representations with features from a pretrained 4D foundation model.

physical multi-stage task, and confirm that 4D representation alignment makes observation history useful to the model.

2 Related Work

Training-time representation alignment for VLAs.

Aligning intermediate model representations with features from pretrained encoders has improved generative models (Yu et al. 2024; Wu et al. 2025). Recent work applies the same principle to VLA models, improving manipulation performance without changing their deployment interface. Spatial Forcing (Li et al. 2025a) aligns image-token features with VGGT (Wang et al. 2025) features of the current image, GLaD (Guo et al. 2025) and ROCKET (Sun et al. 2026) extend this alignment across multiple layers, and QDepth-VLA (Li et al. 2025b) predicts quantized depth tokens. An earlier line instead feeds explicit 3D inputs such as point clouds or rendered views (Li et al. 2026a; Sun et al. 2025; Singh et al. 2025), at the cost of additional geometric inputs or

preprocessing at deployment. These methods derive geometric supervision from the current observation and therefore cannot represent how the scene has evolved over time. Temporal Forcing extends this training-time alignment paradigm from framewise 3D geometry to 4D representations by aligning model representations with geometric features extracted by a pretrained 4D foundation model.

History-augmented VLAs. History-conditioned visuo-motor models predate VLAs, from recurrent behavior cloning to diffusion-based models with short observation windows (Mandlekar et al. 2021; Chi et al. 2025). A complementary family feeds observation history to VLA models. HAMLET (Koo et al. 2025) inserts learned per-timestep tokens with a lightweight temporal module, MemoryVLA (Shi et al. 2025) maintains a retrieval memory bank, ReMem-VLA (Li et al. 2026b) adapts memory for few-shot transfer, and others aggregate 3D or 4D history on the input side (Zhang et al. 2025a; Xiao et al. 2026; Zhou, Ma, and Lee 2025). These methods primarily extend what the model

observes or stores, but do not directly supervise whether its latent representations preserve temporal information. Temporal Forcing instead combines a lightweight History Pathway with 4D representation alignment, making the History Latent Representation encode how the scene evolves over time. Our controlled experiments show that providing observation history alone is insufficient.

Temporal supervision for VLAs. World-model-based VLA methods introduce temporal supervision through future prediction or generation (Li et al. 2026c; Zhang et al. 2025b). StreamVGGT (Zhuo et al. 2025), in contrast, processes an observation stream causally and produces temporally consistent geometric representations of the evolving 3D world. Temporal Forcing uses the Causal Geometric Features and Dense Geometric Features only for training-time alignment. Unlike future-prediction approaches, it requires no generative model; at inference, only the History Pathway and the base VLA model are retained.

3 Method

This section describes Temporal Forcing (Fig. 2). We first introduce the base VLA model, its action loss, and the frame-wise geometric-alignment paradigm in Sec. 3.1. We then present 4D representation acquisition in Sec. 3.2, the history pathway with zero-init gated fusion in Sec. 3.3, and the alignment objectives and full training objective in Sec. 3.4.

3.1 Task Formulation

At each timestep t , the base VLA model observes images $o_t = \{I_t^c : c \in \mathcal{C}\}$ from a camera set $\mathcal{C}$ and a language instruction ℓ , and predicts a chunk of H future actions $\hat{A}_t = \pi(o_t, \ell) \in \mathbb{R}^{H \times d_a}$. Following the OFT recipe (Kim, Finn, and Liang 2025; Community 2026), a vision-language backbone tokenizes the inputs and an MLP head regresses the chunk. The model is trained with the action loss

$$\mathcal{L}_{\text{act}} = \frac{1}{H d_a} \|A_t - \hat{A}_t\|_1, \quad (1)$$

where A_t is the ground-truth chunk. Alignment-based methods (Li et al. 2025a; Guo et al. 2025) add the framewise loss $\mathcal{L}_{\text{align}} = 1 - \cos(\phi(h_t), g(o_t))$, where h_t denotes backbone features at image-token positions, ϕ is a learned projection, and $g(o_t)$ is a geometric feature extracted by a pretrained 3D model from the current observation. Because both the base VLA model and g receive only one timestep, aliased states yield indistinguishable inputs and targets.

3.2 4D Representation Acquisition

We use the pretrained StreamVGGT model (Zhuo et al. 2025) to acquire 4D representations offline from a long causal context of each training trajectory. StreamVGGT reconstructs the observations in a shared reference frame, so its intermediate features represent each frame as part of a temporally consistent scene history rather than as independent 3D geometry. For each anchor timestep t , we pool the Causal Geometric Features for every history offset Δ_k and camera c , yielding the normalized feature $\bar{y}_{t,k}^c$, together with the normalized

Dense Geometric Features $\tilde{G}_t^c$ of the current frame. The sequence of pooled Causal Geometric Features is used by Temporal Alignment, while the Dense Geometric Features are used by Current-Frame Alignment. All extracted features are treated as stop-gradient targets; the supplementary material gives the exact construction.

3.3 History Pathway

The base VLA model processes only the current observation and does not natively accept frames from multiple timesteps. We therefore introduce a history pathway that compresses past observations into a fixed number of tokens and injects them through zero-initialized gated cross-attention.

History window and gist tokens. We sample K strictly past frames per camera at uniform offsets $\Delta_1 > \dots > \Delta_K > 0$, ordered from the oldest frame $t - \Delta_1$ to the most recent frame $t - \Delta_K$. The temporal span is benchmark-specific and reported in Sec. 4.1. The current frame is excluded, so the pathway can only contribute information the current observation lacks. A frozen DINOv2 encoder (Oquab et al. 2023) and a Q-Former (Li et al. 2023) compress the frame at offset Δ_k from camera c into two gist tokens $u_k^c \in \mathbb{R}^{2 \times d}$, each tagged with a time embedding of its offset and a camera embedding.

Temporal summary and gated injection. A transformer with causal masking runs over the gist-token sequence, so the representation of each timestep depends only on earlier timesteps, and $M=16$ learned output queries produce the history tokens $m_1, \dots, m_M$, giving a token budget independent of the number of frames in the window. A single gated cross-attention block (Alayrac et al. 2022) at the input of the first decoder layer updates the primary-camera image tokens with these tokens. The residual is scaled by $\tanh(\alpha)$ with α initialized to zero (Zhang, Rao, and Agrawala 2023), so at initialization the block is the identity and the model reproduces the base model outputs.

3.4 4D Representation Alignment

The alignment objective supervises both the history latent representations and the current-frame representation.

Temporal alignment. Let $\bar{u}_k^c$ denote the mean of the camera- c gist tokens at offset Δ_k after the temporal transformer, and let $z_k^c = \psi(\bar{u}_k^c)$ with a learned projection ψ . This loss is applied to the pre-gate features, so the entire pathway receives gradients even while the gate is closed. It combines three terms. A state term matches each timestep to its target,

$$\mathcal{L}_{\text{state}} = \frac{1}{|\mathcal{C}|K} \sum_{c \in \mathcal{C}} \sum_{k=1}^K \left(1 - \cos(z_k^c, \bar{y}_{t,k}^c)\right). \quad (2)$$

A change term matches differences between adjacent timesteps. Writing $\delta z_k^c = z_{k+1}^c - z_k^c$ and $\delta \bar{y}_{t,k}^c = \bar{y}_{t,k+1}^c - \bar{y}_{t,k}^c$ for these differences,

$$\mathcal{L}_{\text{change}} = \frac{1}{|\mathcal{C}|(K-1)} \sum_{c \in \mathcal{C}} \sum_{k=1}^{K-1} \left(1 - \cos(\delta z_k^c, \delta \bar{y}_{t,k}^c)\right), \quad (3)$$

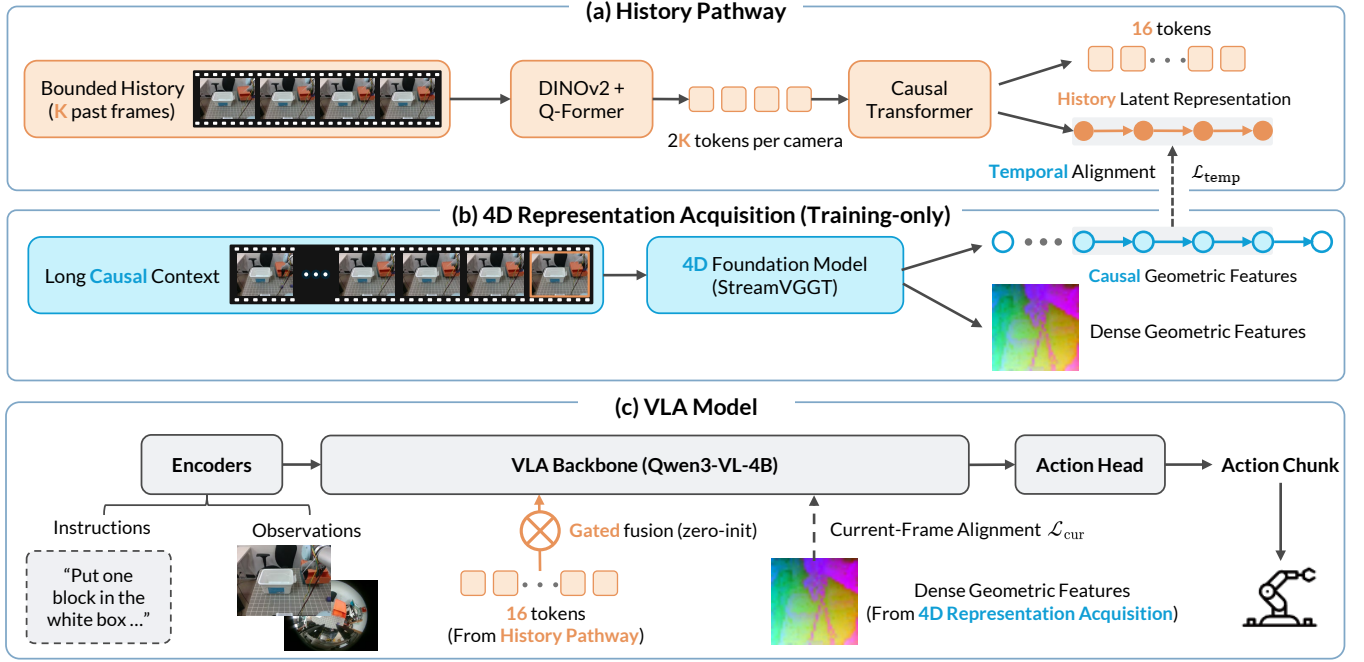


Figure 2: Overview of Temporal Forcing. (a) The History Pathway compresses K past frames per camera into gist tokens and summarizes them into the History Latent Representation and 16 tokens (Sec. 3.3). (b) 4D Representation Acquisition uses a pretrained 4D foundation model to extract Causal Geometric Features and Dense Geometric Features, visualized here as their top three PCA components (Sec. 3.2). (c) Temporal Alignment aligns the History Latent Representation with the Causal Geometric Features, while Current-Frame Alignment aligns current-frame image tokens with the Dense Geometric Features (Sec. 3.4). Gated fusion (zero-init) injects the 16 tokens without extending the backbone sequence (Sec. 3.3). The pretrained 4D foundation model and all alignment heads are training-only.

where pairs whose target difference is near zero are masked (supplementary material). A readout term asks the summary to reproduce the most recent timestep:

$$\mathcal{L}_{\text{read}} = \frac{1}{|\mathcal{C}|} \sum_{c \in \mathcal{C}} \left(1 - \cos(\psi(\bar{m}), \tilde{y}_{t,K}^c) \right), \quad (4)$$

where $\bar{m}$ is the mean of the history tokens. This term gives the output queries a gradient path before the gate opens. The change term isolates temporal variation: components constant across the window, including scene identity and context inherited from before it, cancel in the difference, so the term can only be reduced by content that changes inside the window. The combined loss is

$$\mathcal{L}_{\text{temp}} = \frac{1}{6} (\mathcal{L}_{\text{state}} + 4 \mathcal{L}_{\text{change}} + \mathcal{L}_{\text{read}}). \quad (5)$$

Current-frame alignment. The second scale anchors the present. Backbone features at the current-frame image tokens of every camera in $\mathcal{C}$, taken from one intermediate layer, are projected by a head ϕ and matched to the dense targets,

$$\mathcal{L}_{\text{cur}} = \frac{1}{|\mathcal{C}|N} \sum_{c \in \mathcal{C}} \sum_{n=1}^N \left(1 - \cos(\phi(h_{t,n}^c), \tilde{G}_{t,n}^c) \right), \quad (6)$$

where n indexes spatial positions. This loss uses the same cosine-alignment form as framewise geometric alignment, but its targets are extracted by the pretrained 4D model after processing the preceding context. They therefore encode

temporally contextualized geometry that the current pixels alone do not determine.

The full objective is

$$\mathcal{L} = \mathcal{L}_{\text{act}} + \lambda_{\text{cur}} \mathcal{L}_{\text{cur}} + \lambda_{\text{temp}} \mathcal{L}_{\text{temp}}, \quad (7)$$

with $\lambda_{\text{cur}} = \lambda_{\text{temp}} = 0.5$. The 4D features are precomputed offline at strided anchor timesteps; steps without an anchor use the action loss only. At inference, the pretrained 4D model, both alignment losses, and their projection heads are removed. Only the history pathway and its gated cross-attention block are added to the base VLA model; the backbone sequence length is unchanged, and no 3D or 4D foundation model is used. Because each gist token depends only on its own frame, per-frame features are cached across control steps at deployment, and latency stays inside the control budget (Sec. 4.1).

4 Experiments

We evaluate overall performance on LIBERO and RoboTwin 2.0, use controlled studies to isolate the roles of the history pathway and 4D representation alignment, and evaluate on a long-horizon physical task.

4.1 Setup

Simulation. We use LIBERO (Liu et al. 2023) with four suites (Spatial, Object, Goal, Long), evaluating 500 trials per

suite (50 per task). A single model is trained jointly on all four suites and evaluated on each, whereas several published baselines train a separate model per suite. We use the QwenOFT implementation of StarVLA (Community 2026) as the base model: a Qwen3-VL-4B backbone (Bai et al. 2025) with an MLP action head trained with $\mathcal{L}_{\text{act}}$. On LIBERO, the camera set $\mathcal{C}$ contains the primary and wrist cameras for both the history representations and the alignment targets. We compare against published general, framewise-aligned, and history-augmented VLAs (Zheng et al. 2024; Kim et al. 2024; Qu et al. 2025; Li et al. 2024; Black et al. 2024; Guo et al. 2025; Li et al. 2025a; Zhang et al. 2025a; Shi et al. 2025; Koo et al. 2025). We report two training regimes. Main results train from scratch for 50k steps with the official training recipe (global batch 128). Controlled studies use a separate compute-constrained protocol, specified with its controls in Sec. 4.3. We additionally evaluate on RoboTwin 2.0 (Chen et al. 2025), which contains fifty bimanual tasks. Following prior subset-based evaluations such as Spatial Forcing, we select twelve tasks with published base-model results, favoring multi-object, multi-stage tasks in which completed steps can leave the current view. Training uses the benchmark’s 50 clean demonstrations per task, and evaluation runs 100 trials per task in the easy (clean) configuration; the reported average is the unweighted mean over the twelve per-task success rates. On this benchmark, the history pathway and the alignment use the head camera only.

Implementation. Main training runs use eight NVIDIA A100 GPUs, while the controlled studies use four NVIDIA A800 GPUs. The bounded history window uses $K=7$ past frames per camera, spanning 2.8 seconds on LIBERO; the same frame offsets span 3.7 seconds on RoboTwin, whose demonstrations are recorded at 15 frames per second. The 4D targets are extracted at stride-4 anchors, using a causal context of up to 12 seconds on LIBERO and the full episode prefix available up to each anchor on RoboTwin and the real robot; current-frame alignment uses one intermediate VLA layer and one stored StreamVGGT layer.

Real robot. We deploy on a UR3 arm at 10 Hz with a static RealSense D435 and a wrist-mounted fisheye camera. Real-robot inference runs on a single NVIDIA GeForce RTX 5090 GPU; an action chunk takes 45 ms for the base model and 58 ms for ours, both well inside the 10 Hz budget. We consider a single long-horizon, multi-stage hidden-placement task with two identical blocks (Fig. 4): the robot must place one block into a box, place the other into a drawer, and close the drawer. The first block becomes invisible after placement, so the remaining stages must be inferred from history. All four models are fine-tuned on the same 100 demonstration trajectories and evaluated under two protocols. The isolated protocol turns each stage into a standalone single-stage task with its own instruction and only the objects that stage requires: placing a block into the box, placing a block into the drawer, and closing the drawer. No completed stage precedes the episode and no second block is present, so the correct behavior is determined by the current observation and nothing has to be retained. Each stage is run for 30 trials, giving 90 isolated trials per model. The sequential protocol runs the complete

Method	Spatial	Object	Goal	Long	Avg.
<i>General VLAs</i>					
TraceVLA	84.6	85.2	75.1	54.1	74.8
OpenVLA	84.7	88.4	79.2	53.7	76.5
SpatialVLA	88.2	89.9	78.6	55.5	78.1
CogACT	97.2	98.0	90.2	88.8	93.6
π_0	96.8	98.8	95.8	85.2	94.2
<i>Framewise geometric alignment</i>					
GLaD	95.0	97.4	94.4	89.4	94.1
Spatial Forcing	99.4	99.6	98.8	96.0	98.5
<i>History-augmented VLAs</i>					
4D-VLA	88.9	95.2	90.9	79.1	88.6
MemoryVLA [†]	98.4	98.4	96.4	93.4	96.7
HAMLET	99.0	100.0	99.2	92.2	97.6
<i>Same base model (Qwen3-VL-OFT)</i>					
StarVLA-OFT	97.8	98.6	96.2	93.8	96.6
Temporal Forcing	99.6	99.8	98.4	97.2	98.8

Table 1: LIBERO results (success rate %). Our row is a single model trained jointly on all four suites, whereas several baselines train separately per suite. Best per column in bold. [†]Average recomputed over the four suites shown; the published average includes LIBERO-90.

task for 30 trials per model without intervention and scores cumulative stage completion, so a stage counts as successful only when every preceding stage has also succeeded.

4.2 Main Results

Table 1 reports LIBERO results. Trained from scratch with the official training recipe plus the two alignment losses, Temporal Forcing reaches 99.6/99.8/98.4/97.2 on the four suites, an average of 98.8 against 96.6 for the base model. The largest gain is on Long (93.8 to 97.2), whose multi-stage tasks depend most on history.

On the twelve bimanual RoboTwin 2.0 tasks, Temporal Forcing raises the mean success rate from 53.5% to 62.8%, improving nine of the twelve tasks. The largest gains are on the two handover tasks, in which the object is repeatedly occluded during the hand-off between the arms: handover block rises from 0 to 44 and handover mic from 39 to 79. Fig. 3 shows seven tasks spanning the single-stage, multi-object, multi-stage, and bimanual handover settings; the full per-task table is given in the supplementary material. Across both benchmarks, the largest gains occur when the current observation omits evidence of earlier interactions, consistent with the intended role of temporal supervision.

4.3 Ablation Study

Under a compute-constrained protocol, we train each configuration for 10k steps from the same initialization with global batch size 64. All variants share data, backbone, optimizer, schedule, and evaluation; only the history pathway, geometric targets, and alignment objectives vary.

History or 4D targets alone do not improve the recipe. Row 3 of Table 2 adds only the history pathway. The gate stays

ID	Variant	Configuration				Success rate (%)				
		Geometric target	History	$\mathcal{L}_{\text{cur}}$	$\mathcal{L}_{\text{temp}}$	Spatial	Object	Goal	Long	Avg.
1	Base model	none	—	—	—	98.4	97.2	91.0	76.2	90.7
2	4D target only	4D	—	✓	—	97.8	99.2	96.6	68.2	90.5
3	History only	none	✓	—	—	97.8	93.2	88.8	72.8	88.2
4	w/o $\mathcal{L}_{\text{temp}}$	4D	✓	✓	—	94.6	98.2	79.0	63.0	83.7
5	w/o $\mathcal{L}_{\text{cur}}$	4D	✓	—	✓	97.2	97.4	91.4	77.2	90.8
6	3D target only	3D	—	✓	—	96.6	98.0	91.6	64.6	87.7
7	3D alignment	3D	✓	✓	✓	97.2	98.6	81.0	63.2	85.0
8	Temporal Forcing	4D	✓	✓	✓	98.4	99.6	92.6	83.8	93.6

Table 2: Component study on LIBERO under the compute-constrained protocol of 10k training steps from scratch. The geometric target is either absent, extracted by the pretrained 4D model from causal context, or extracted framewise as a 3D target. History denotes the history pathway; $\mathcal{L}_{\text{cur}}$ aligns the current-frame representation, and $\mathcal{L}_{\text{temp}}$ aligns the history latent trajectory with the corresponding geometric feature trajectory. Row 8 is Temporal Forcing. Best per column in bold.

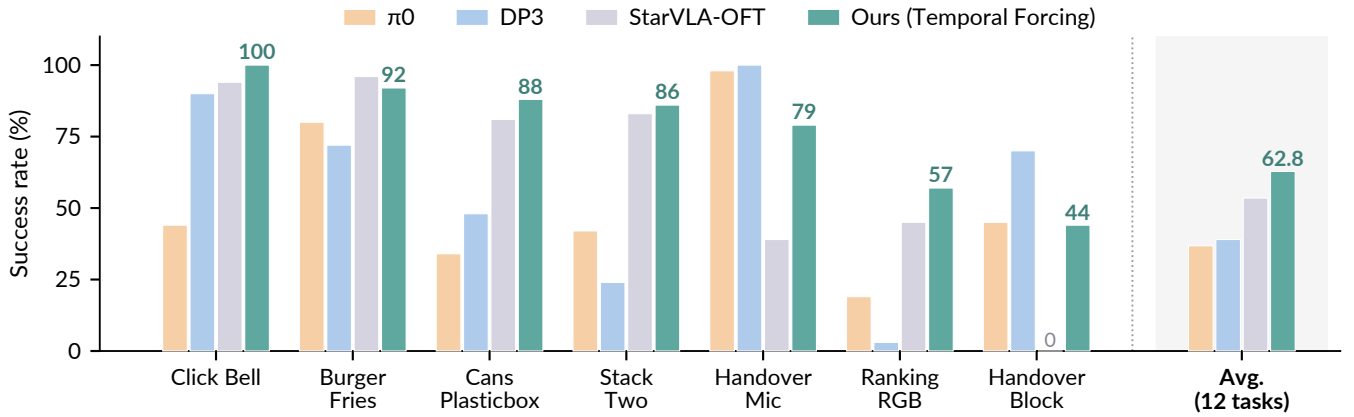


Figure 3: RoboTwin 2.0 results (success rate %) for π_0 (Black et al. 2024), DP3 (Ze et al. 2024), the base model, and ours: seven representative tasks and the macro-average over all twelve evaluated tasks.

at 0.6×10^{-3} , removing history at inference changes almost nothing (-0.3), and the average drops 2.5 points below the base model: the pathway remains inert as an information channel, and its injection noise costs performance. Row 2 instead adds only current-frame alignment with 4D targets. Precision suites improve (Object $+2.0$, Goal $+5.6$), but Long drops by 8.0 points because the targets contain temporal context that the current-frame model cannot recover.

Combining them without temporal alignment is worst. Row 4 combines the history pathway with current-frame 4D alignment but provides no direct supervision to the history latent representations. It scores 83.7, below every other row and 7.0 points under the base model. The history pathway receives no guidance about what to retain, while the 4D targets contain context that it does not reliably supply to the backbone; the two failures compound.

Temporal alignment makes history useful. Under this controlled protocol, row 8 adds temporal alignment and

raises the average from 83.7 to 93.6, a gain of 9.9 points over row 4 and 2.9 points over the base model. Removing history at inference costs 5.4 points, concentrated on Goal (-7.8) and Long (-7.8), showing that the model uses the history representations for action prediction rather than only as a training regularizer. For this intervention, we set the injection gate to zero while keeping the current observation and all model weights unchanged. We also train a history-blind predictor that receives only the current frame and the same 4D targets. During training, the change term descends to 0.21 while this predictor cannot go below 0.54, indicating that the history latent trajectory carries trajectory-specific content rather than dataset statistics.

The two alignments are complementary. Row 5 removes only the current-frame alignment from row 8. Temporal alignment still activates the otherwise inert history pathway (88.2 to 90.8) and avoids the collapse of row 4, but it recovers little beyond the base model (90.8 vs. 90.7), and the largest

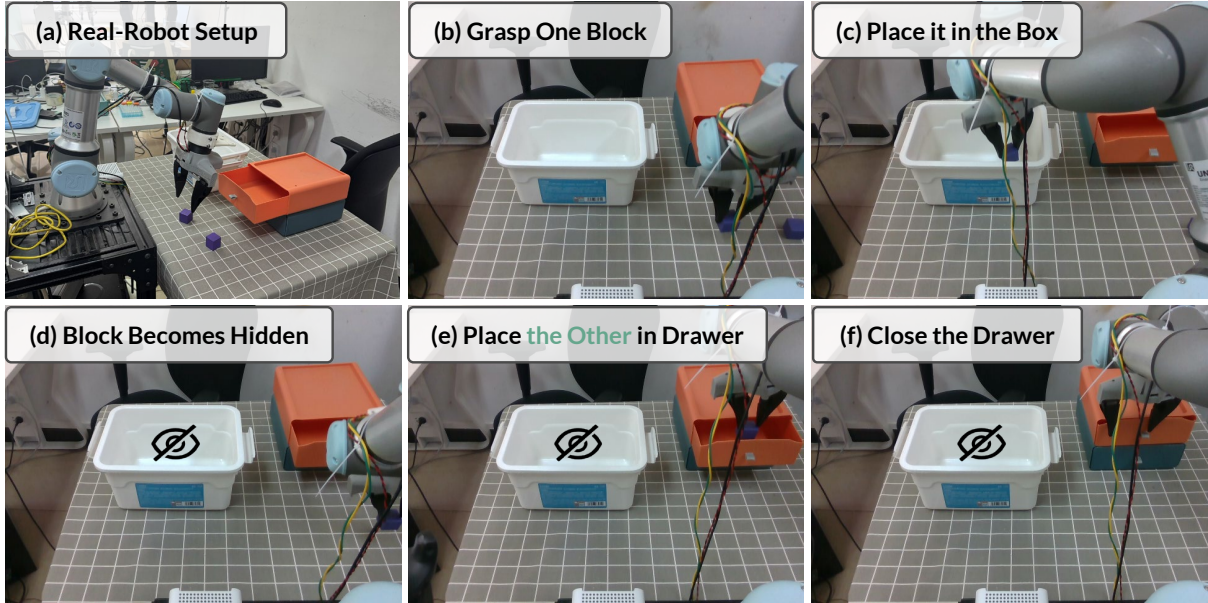


Figure 4: Real-robot hidden-placement task on the UR3. (a) Initial setup: an opaque storage box, a drawer, and two identical blocks. (b–f) Stages of one sequential trial; once a block is inside the box it is no longer visible from any camera.

loss relative to row 8 falls again on Long (77.2 vs. 83.8). Both removals are harmful, although their effects are asymmetric: dropping $\mathcal{L}_{\text{temp}}$ costs 9.9 points (row 4), whereas dropping $\mathcal{L}_{\text{cur}}$ costs 2.8 (row 5). Thus, neither loss alone accounts for the gain. Current-frame alignment structures the backbone features, while temporal alignment structures the injected history representations.

Temporally consistent 4D targets are necessary. Rows 6 and 7 of Table 2 repeat rows 2 and 8 with one change: StreamVGGT processes each anchor frame in isolation, with identical architecture, weights, and feature space, producing framewise 3D rather than context-conditioned 4D targets. Without the history pathway, 4D targets improve the average by 2.8 points over 3D targets (90.5 vs. 87.7). With the history pathway, the gap widens to 8.6 points (93.6 vs. 85.0), because only the 4D targets provide temporal information for supervising the history representations. Row 7 is also worse than row 6, showing that a history pathway supervised by frame-wise geometry remains a liability. Stalling on Long follows the same pattern, occurring in 50 of 500 trials for row 7, 6 for row 3, and 2 for Temporal Forcing.

4.4 Real-Robot Experiments

As Table 3 shows, Temporal Forcing and its base model show similar competence on the isolated skills, completing 78/90 and 75/90 trials, respectively. Their results also remain close at the first stage of the sequential task (27/30 vs. 25/30). The advantage of Temporal Forcing emerges after the first block becomes hidden. It completes the second placement in 20/30 trials, compared with 12/30 for the base model, and completes the full task in 13/30 trials, compared with 6/30. Temporal Forcing therefore more than doubles full-task success from 20.0% to 43.3%. The gap widens after the

Method	Isolated	Sequential task		
	Total	S_1	$S_{1:2}$	$S_{1:3}$
OpenVLA	58/90	18/30	5/30	0/30
π_0	70/90	22/30	10/30	4/30
StarVLA-OFT (base)	75/90	25/30	12/30	6/30
Temporal Forcing	78/90	27/30	20/30	13/30

Table 3: Real-robot successes over trials. Isolated aggregates three standalone stages (30 trials each); per-stage results are in the supplementary material. Sequential columns report cumulative completion over 30 full trials through box placement (S_1), drawer placement ($S_{1:2}$), and full-task completion after drawer closure ($S_{1:3}$).

completed placement leaves view, showing that the model retains task progress rather than merely improving individual manipulation skills.

5 Conclusion

Existing geometric alignment for VLA models is framewise: its 3D targets describe the current observation but not how the scene has evolved. Temporal Forcing equips a vanilla VLA model with a history pathway and aligns its temporally aware latent representations with geometric features from a pretrained 4D foundation model. Controlled experiments show that history input alone is insufficient and that temporally consistent 4D targets make the history representations useful. Temporal Forcing reaches 98.8% on LIBERO and raises full-task success on the physical multi-stage task from 20.0% to 43.3%, while remaining comparable to its base model on the same stages evaluated in isolation.

References

- Alayrac, J.-B.; Donahue, J.; Luc, P.; Miech, A.; Barr, I.; Hasson, Y.; Lenc, K.; Mensch, A.; Millican, K.; Reynolds, M.; et al. 2022. Flamingo: a visual language model for few-shot learning. *Advances in neural information processing systems*, 35: 23716–23736.
- Bai, S.; Cai, Y.; Chen, R.; Chen, K.; Chen, X.; Cheng, Z.; Deng, L.; Ding, W.; Gao, C.; Ge, C.; et al. 2025. Qwen3-vl technical report. *arXiv preprint arXiv:2511.21631*.
- Black, K.; Brown, N.; Driess, D.; Esmail, A.; Equi, M.; Finn, C.; Fusai, N.; Groom, L.; Hausman, K.; Ichter, B.; et al. 2024. π_0 : A Vision-Language-Action Flow Model for General Robot Control. *arXiv preprint arXiv:2410.24164*.
- Chen, T.; Chen, Z.; Chen, B.; Cai, Z.; Liu, Y.; Li, Z.; Liang, Q.; Lin, X.; Ge, Y.; Gu, Z.; et al. 2025. Robotwin 2.0: A scalable data generator and benchmark with strong domain randomization for robust bimanual robotic manipulation. *arXiv preprint arXiv:2506.18088*.
- Chi, C.; Xu, Z.; Feng, S.; Cousineau, E.; Du, Y.; Burchfiel, B.; Tedrake, R.; and Song, S. 2025. Diffusion policy: Visuomotor policy learning via action diffusion. *The International Journal of Robotics Research*, 44(10-11): 1684–1704.
- Community, S. 2026. StarVLA: A Lego-like Codebase for Vision-Language-Action Model Developing. *arXiv:2604.05014*.
- Guo, M.; Cao, M.; Tao, J.; Xu, R.; Yan, Y.; Liang, X.; Laptev, I.; and Chang, X. 2025. GLaD: Geometric Latent Distillation for Vision-Language-Action Models. *arXiv preprint arXiv:2512.09619*.
- Kim, M. J.; Finn, C.; and Liang, P. 2025. Fine-tuning vision-language-action models: Optimizing speed and success. *arXiv preprint arXiv:2502.19645*.
- Kim, M. J.; Pertsch, K.; Karamcheti, S.; Xiao, T.; Balakrishna, A.; Nair, S.; Rafailov, R.; Foster, E.; Lam, G.; Sanketi, P.; et al. 2024. Openvla: An open-source vision-language-action model. *arXiv preprint arXiv:2406.09246*.
- Koo, M.; Choi, D.; Kim, T.; Lee, K.; Kim, C.; Seo, Y.; and Shin, J. 2025. Hamlet: Switch your vision-language-action model into a history-aware policy. *arXiv preprint arXiv:2510.00695*.
- Li, C.; Wen, J.; Peng, Y.; Peng, Y.; and Zhu, Y. 2026a. Pointvla: Injecting the 3d world into vision-language-action models. *IEEE Robotics and Automation Letters*, 11(3): 2506–2513.
- Li, F.; Song, W.; Zhao, H.; Wang, J.; Ding, P.; Wang, D.; Zeng, L.; and Li, H. 2025a. Spatial forcing: Implicit spatial representation alignment for vision-language-action model. *arXiv preprint arXiv:2510.12276*.
- Li, H.; Shen, F.; Chen, D.; Yang, L.; Wang, X.; Shi, J.; Bing, Z.; Liu, Z.; and Knoll, A. 2026b. Remem-vla: Empowering vision-language-action model with memory via dual-level recurrent queries. *arXiv preprint arXiv:2603.12942*.
- Li, J.; Li, D.; Savarese, S.; and Hoi, S. 2023. Blip-2: Bootstrapping language-image pre-training with frozen image encoders and large language models. In *International conference on machine learning*, 19730–19742. PMLR.
- Li, Q.; Liang, Y.; Wang, Z.; Luo, L.; Chen, X.; Liao, M.; Wei, F.; Deng, Y.; Xu, S.; Zhang, Y.; et al. 2024. Cogact: A foundational vision-language-action model for synergizing cognition and action in robotic manipulation. *arXiv preprint arXiv:2411.19650*.
- Li, Y.; Chen, Y.; Zhou, M.; Li, H.; Zhang, Z.; and Zhao, D. 2025b. QDepth-VLA: quantized depth prediction as auxiliary supervision for vision-language-action models. *arXiv preprint arXiv:2510.14836*.
- Li, Y.; Wei, X.; Cao, J.; Wang, H.; Chi, X.; Bai, C.; Sun, Q.; Li, J.; Zhang, X.; Tang, J.; et al. 2026c. WAM4D: Fast 4D World Action Model via Spatial Register Tokens. *arXiv preprint arXiv:2606.14048*.
- Liu, B.; Zhu, Y.; Gao, C.; Feng, Y.; Liu, Q.; Zhu, Y.; and Stone, P. 2023. Libero: Benchmarking knowledge transfer for lifelong robot learning. *Advances in Neural Information Processing Systems*, 36: 44776–44791.
- Mandlekar, A.; Xu, D.; Wong, J.; Nasiriany, S.; Wang, C.; Kulkarni, R.; Fei-Fei, L.; Savarese, S.; Zhu, Y.; and Martín-Martín, R. 2021. What matters in learning from offline human demonstrations for robot manipulation. *arXiv preprint arXiv:2108.03298*.
- Oquab, M.; Darcet, T.; Moutakanni, T.; Vo, H.; Szafraniec, M.; Khalidov, V.; Fernandez, P.; Haziza, D.; Massa, F.; El-Nouby, A.; et al. 2023. Dinov2: Learning robust visual features without supervision. *arXiv preprint arXiv:2304.07193*.
- Qu, D.; Song, H.; Chen, Q.; Yao, Y.; Ye, X.; Ding, Y.; Wang, Z.; Gu, J.; Zhao, B.; Wang, D.; et al. 2025. Spatialvla: Exploring spatial representations for visual-language-action model. *arXiv preprint arXiv:2501.15830*.
- Shi, H.; Xie, B.; Liu, Y.; Sun, L.; Liu, F.; Wang, T.; Zhou, E.; Fan, H.; Zhang, X.; and Huang, G. 2025. Memoryvla: Perceptual-cognitive memory in vision-language-action models for robotic manipulation. *arXiv preprint arXiv:2508.19236*.
- Singh, I.; Goyal, A.; Birchfield, S.; Fox, D.; Garg, A.; and Blukis, V. 2025. OG-VLA: Orthographic Image Generation for 3D-Aware Vision-Language Action Model. *arXiv preprint arXiv:2506.01196*.
- Sun, G.; Du, T.; Feng, K.; Luo, C.; Ding, X.; Shen, Z.; Wang, Z.; He, Y.; and Li, A. 2026. ROCKET: Residual-Oriented Multi-Layer Alignment for Spatially-Aware Vision-Language-Action Models. *arXiv preprint arXiv:2602.17951*.
- Sun, L.; Xie, B.; Liu, Y.; Shi, H.; Wang, T.; and Cao, J. 2025. Geovla: Empowering 3d representations in vision-language-action models. *arXiv preprint arXiv:2508.09071*.
- Team, O. M.; Ghosh, D.; Walke, H.; Pertsch, K.; Black, K.; Mees, O.; Dasari, S.; Hejna, J.; Kreiman, T.; Xu, C.; et al. 2024. Octo: An open-source generalist robot policy. *arXiv preprint arXiv:2405.12213*.
- Wang, J.; Chen, M.; Karaev, N.; Vedaldi, A.; Rupprecht, C.; and Novotny, D. 2025. Vggt: Visual geometry grounded transformer. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, 5294–5306.
- Wu, H.; Wu, D.; He, T.; Guo, J.; Ye, Y.; Duan, Y.; and Bian, J. 2025. Geometry forcing: Marrying video diffusion and 3d

representation for consistent world modeling. *arXiv preprint arXiv:2507.07982*.

Xiao, J.; She, Y.; Li, K.; Sha, Y.; and Cheng, Z. 2026. StemVLA: An Open-Source Vision-Language-Action Model with Future 3D Spatial Geometry Knowledge and 4D Historical Representation. *arXiv preprint arXiv:2602.23721*.

Yu, S.; Kwak, S.; Jang, H.; Jeong, J.; Huang, J.; Shin, J.; and Xie, S. 2024. Representation alignment for generation: Training diffusion transformers is easier than you think. *arXiv preprint arXiv:2410.06940*.

Ze, Y.; Zhang, G.; Zhang, K.; Hu, C.; Wang, M.; and Xu, H. 2024. 3d diffusion policy: Generalizable visuomotor policy learning via simple 3d representations. *arXiv preprint arXiv:2403.03954*.

Zhang, J.; Chen, Y.; Xu, Y.; Huang, Z.; Zhou, Y.; Yuan, Y.-J.; Cai, X.; Huang, G.; Quan, X.; Xu, H.; et al. 2025a. 4d-vla: Spatiotemporal vision-language-action pretraining with cross-scene calibration. *Advances in Neural Information Processing Systems*, 38: 33914–33937.

Zhang, L.; Rao, A.; and Agrawala, M. 2023. Adding conditional control to text-to-image diffusion models. In *Proceedings of the IEEE/CVF international conference on computer vision*, 3836–3847.

Zhang, W.; Liu, H.; Qi, Z.; Wang, Y.; Yu, X.; Zhang, J.; Dong, R.; He, J.; Lu, F.; Wang, H.; et al. 2025b. Dreamvla: a vision-language-action model dreamed with comprehensive world knowledge. *arXiv preprint arXiv:2507.04447*.

Zheng, R.; Liang, Y.; Huang, S.; Gao, J.; Daumé III, H.; Kolobov, A.; Huang, F.; and Yang, J. 2024. Tracevla: Visual trace prompting enhances spatial-temporal awareness for generalist robotic policies. *arXiv preprint arXiv:2412.10345*.

Zhou, H.; Ma, C.; and Lee, G. H. 2025. VLA-4D: Embedding 4D Awareness into Vision-Language-Action Models for SpatioTemporally Coherent Robotic Manipulation. *arXiv preprint arXiv:2511.17199*.

Zhuo, D.; Zheng, W.; Guo, J.; Wu, Y.; Zhou, J.; and Lu, J. 2025. Streaming 4d visual geometry transformer. *arXiv preprint arXiv:2507.11539*.

Zitkovich, B.; Yu, T.; Xu, S.; Xu, P.; Xiao, T.; Xia, F.; Wu, J.; Wohlhart, P.; Welker, S.; Wahid, A.; et al. 2023. Rt-2: Vision-language-action models transfer web knowledge to robotic control. In *Conference on Robot Learning*, 2165–2183. PMLR.

Supplementary Material

A Implementation Details

4D target construction. StreamVGGT processes each training trajectory offline in causal order. For LIBERO, it operates on causal segments of up to 12 seconds; for RoboTwin and the real robot, it uses the full episode prefix available at each anchor. Targets are extracted every four timesteps from StreamVGGT layer 21 and stored in fp16. For each history timestep and camera, we spatially average the target frame’s feature grid to obtain the Causal Geometric Feature used by temporal alignment. For current-frame alignment, the corresponding 37×37 Dense Geometric Feature grid is average-pooled to 8×8 . The pooled causal targets are centered separately for each camera and then layer-normalized, whereas the dense targets are directly layer-normalized. For the change term, we compute adjacent differences after per-camera centering but before the final layer normalization. Applying layer normalization independently at each timestep would rescale the two features differently and distort their temporal difference. Pairs whose target difference has an ℓ_2 norm below 10^{-4} are masked; these pairs mainly arise near the start of an episode, where history-window clamping can duplicate frames.

History Pathway. Each past frame is encoded at 224×224 resolution by a frozen DINOv2 ViT-L/14 and compressed by a lightweight Q-Former into two 512-dimensional gist tokens. Time-offset and camera embeddings are added before a two-layer causal temporal transformer aggregates the ordered gist-token sequence. Sixteen learned queries then summarize the sequence into a fixed set of history tokens, independent of the history-window length. These tokens are injected into the VLA backbone through zero-initialized gated cross-attention, so the added pathway is an identity mapping at initialization. Alignment uses features from VLA layer 24 and targets from StreamVGGT layer 21; the projection heads and StreamVGGT are used only during training.

B Training Protocols

	LIBERO		RoboTwin	Real robot
	Main	Controlled		
Training steps	50k	10k	10k	8k
Global batch size	128	64	64	48
GPUs	$8 \times A100$	$4 \times A800$	$4 \times A800$	$4 \times A800$
Control frequency (Hz)	20	20	15	10
Window offsets (frames)	$-56 \dots -8$		$-56 \dots -8$	$-28 \dots -4$
Window span (s)	2.8	2.8	3.7	2.8
History cameras	2	2	1 (head)	2
Alignment cameras	2	2	1 (head)	2
Anchor stride	4	4	4	4
Causal context	12 s	12 s	episode	episode
Action dim / horizon	7 / 8	7 / 8	14 / 16	7 / 8

Table 4: Per-benchmark training protocols. The instruction template, image resolution, and action normalization follow the base recipe.

Across all experiments, we use learning rates of 10^{-5} for the backbone, 10^{-4} for the action head and newly added modules, and 2.5×10^{-5} for the remaining parameters. We clip the gradient norm to 1.0; other optimization settings follow the base recipe.

Table 4 lists the per-benchmark settings. On RoboTwin the History Pathway and both alignment losses use the head camera only, since the benchmark’s two wrist cameras do not map onto the primary-plus-wrist scheme; the window offsets are unchanged in frames and therefore span 3.7 seconds at the benchmark’s 15 frames per second. On the real robot the backbone vision tower is frozen during fine-tuning to protect the pretrained visual representation on the small demonstration set; the base model is fine-tuned under the same setting. OpenVLA and π_0 are fine-tuned on the same demonstrations with their official recipes.

Representation and temporal probes. For the layer probe in Fig. 5(a), we sample 120 anchor windows from the primary-camera trajectories of LIBERO-Spatial, LIBERO-Object, and LIBERO-Long. Each window contains eight log-spaced frames at offsets $[-64, -32, -16, -8, -4, -2, -1, 0]$. At every layer, a ridge read-out (ℓ_2 coefficient 10) predicts the frozen StreamVGGT depth head’s patch-wise log-depth from 256 sampled current-frame patch features per anchor. We split anchors, rather than patches, into 80% training and 20% test sets and report held-out R^2 . Motion sensitivity is the Pearson correlation, computed across spatial patches and then averaged over anchors, between the ℓ_2 feature change over the final two frames and the corresponding patch-pooled absolute pixel change. Depth read-out saturates in the late layers, while motion sensitivity continues to vary. We use layer 21, the earliest layer jointly reaching depth $R^2 \geq 0.99$ and motion correlation ≥ 0.36 ; the final two layers increase motion correlation only modestly, to at most 0.376.

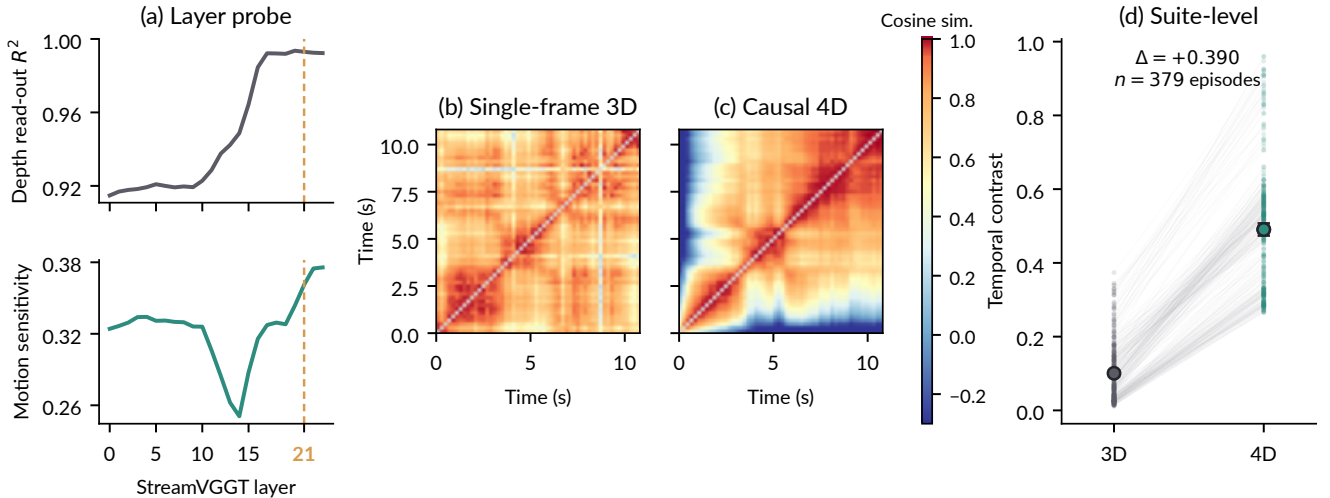


Figure 5: Representation probes for StreamVGGT features. (a) Held-out depth read-out and motion sensitivity across layers; layer 21 is used for alignment. (b–c) Pairwise cosine similarity of single-frame 3D and causal 4D targets from the same trajectory; diagonals are masked. (d) Temporal contrast on LIBERO-Long.

The similarity matrices show the difference between the two targets. Single-frame 3D features assign high similarity to many temporally distant observations, including states from different portions of the trajectory (Fig. 5(b)). Causal 4D features instead separate early-prefix states from later states (Fig. 5(c)). Temporal contrast is the mean cosine similarity between nearby frames (lag at most one eighth of a segment) minus that between distant frames (lag at least one third). Over the first 60-anchor (12-s) segment of 379 LIBERO-Long episodes, it increases from 0.101 for 3D targets to 0.491 for causal 4D targets ($\Delta = +0.390$; Fig. 5(d)).

C Additional Results

Task	π_0	DP3	StarVLA-OFT	Ours
Click Bell	44	90	94	100
Place Burger Fries	80	72	96	92
Place Cans Plasticbox	34	48	81	88
Stack Blocks Two	42	24	83	86
Handover Mic	98	100	39	79
Place Bread Skillet	23	19	56	59
Place Bread Basket	17	26	52	58
Blocks Ranking RGB	19	3	45	57
Handover Block	45	70	0	44
Stack Blocks Three	17	1	41	40
Blocks Ranking Size	7	2	27	29
Place Dual Shoes	15	13	28	22
Average	36.8	39.0	53.5	62.8

Table 5: Per-task RoboTwin 2.0 success rates (%) over all twelve evaluated tasks in the easy (clean) configuration. Baseline numbers are the published benchmark results with 50 clean demonstrations per task; ours are evaluated over 100 episodes per task. Best per row in bold.

Per-task RoboTwin results. Table 5 reports all twelve evaluated tasks: Temporal Forcing improves over the base model on nine of them. Its largest gains occur on Handover Block (0 to 44) and Handover Mic (39 to 79), where the object is occluded during hand-off. The three small regressions occur on tasks whose completed stages remain visible.

Zero-shot robustness on LIBERO-Plus. LIBERO-Plus tests static distribution shifts rather than history-dependent decisions. Without training on its perturbations, Temporal Forcing improves the pooled success rate from 75.0 to 77.8, with its largest gain

(a) Zero-shot robustness on LIBERO-Plus

Method	Camera	Robot	Language	Light	Background	Noise	Layout	Total
OpenVLA	0.8	3.5	23.0	8.1	34.8	15.2	28.5	15.6
OpenVLA-OFT	56.4	31.9	79.5	88.7	93.3	75.8	74.2	69.6
π_0	13.8	6.0	58.8	85.0	81.4	79.0	68.9	53.6
π_0 -Fast	65.1	21.6	61.0	73.2	73.2	74.4	68.8	61.6
StarVLA-OFT (base)	47.0	60.1	87.0	96.3	95.3	73.1	79.2	75.0
Temporal Forcing	47.2 (+0.2)	63.7 (+3.6)	88.7 (+1.7)	96.3 (+0.0)	97.4 (+2.1)	81.3 (+8.2)	81.6 (+2.4)	77.8 (+2.8)

(b) Isolated real-robot stages

Method	Box	Drawer	Close	Total
OpenVLA	24/30	13/30	21/30	58/90
π_0	26/30	19/30	25/30	70/90
StarVLA-OFT (base)	28/30	21/30	26/30	75/90
Temporal Forcing	29/30	24/30	25/30	78/90

Table 6: Additional results. (a) Zero-shot LIBERO-Plus success rates (%) across seven perturbation dimensions. All models are trained on standard LIBERO only; Total is pooled over 10,030 perturbed tasks rather than the unweighted mean of the dimensions. Published baseline values are from prior work. Parenthesized values following the Temporal Forcing results show absolute gains over StarVLA-OFT (base). (b) Isolated real-robot stage successes over 30 trials per stage. Best per column in bold.

under sensor noise (73.1 to 81.3; Table 6(a)).

Per-stage isolated real-robot results. Each stage is evaluated as a standalone single-stage task with its own instruction and only the objects that stage requires: placing a block into the box, placing a block into the drawer, and closing the drawer. Table 6(b) breaks the isolated protocol of the main text into these three stages. Temporal Forcing and the base model remain close on every isolated stage; their sequential-task difference therefore cannot be attributed to a large gap in individual-skill performance.

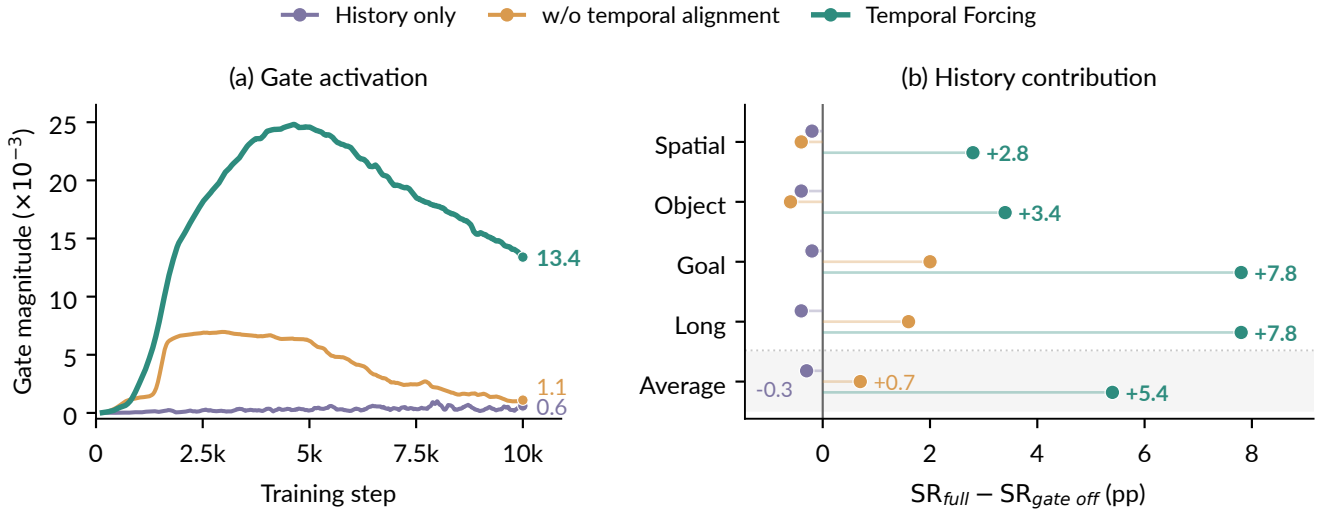


Figure 6: History utilization in the controlled configurations from Table 2 of the main text. (a) Injection-gate magnitude during training. (b) Change in success rate when the gate is closed at inference, reported by LIBERO suite and on average.

Gate dynamics. Fig. 6(a) tracks the magnitude of the injection gate $\tanh(\alpha)$ over the 10k controlled protocol for the configurations of Table 2 in the main text. With the action loss alone (row 3) the gate stays at 0.6×10^{-3} ; in the unaligned combination (row 4) it opens transiently and then collapses to 1.1×10^{-3} , indicating that the backbone tries and then learns to ignore the unsupervised pathway; with Temporal Alignment (row 8) it opens to 13.4×10^{-3} , about 22 times the action-loss-only

value, and remains open. The decision-time contribution of history follows the same pattern (Fig. 6(b)): success with history minus success with the gate closed is -0.3 points for row 3 and $+0.7$ for row 4, both within evaluation noise, but $+5.4$ for row 8, concentrated on Goal and Long ($+7.8$ each).

History removal at test time. The history-removal intervention closes the gate at evaluation time, so the gated block becomes the identity while the current observation and weights stay unchanged. As a complementary representation-level control, we train a history-blind predictor that receives only the current frame and the same 4D targets, thereby measuring how much temporal change is predictable without observation history. The History Pathway reduces the change term to 0.21, whereas the history-blind predictor cannot reduce it below 0.54. The difference measures trajectory-specific change information unavailable from the current observation.

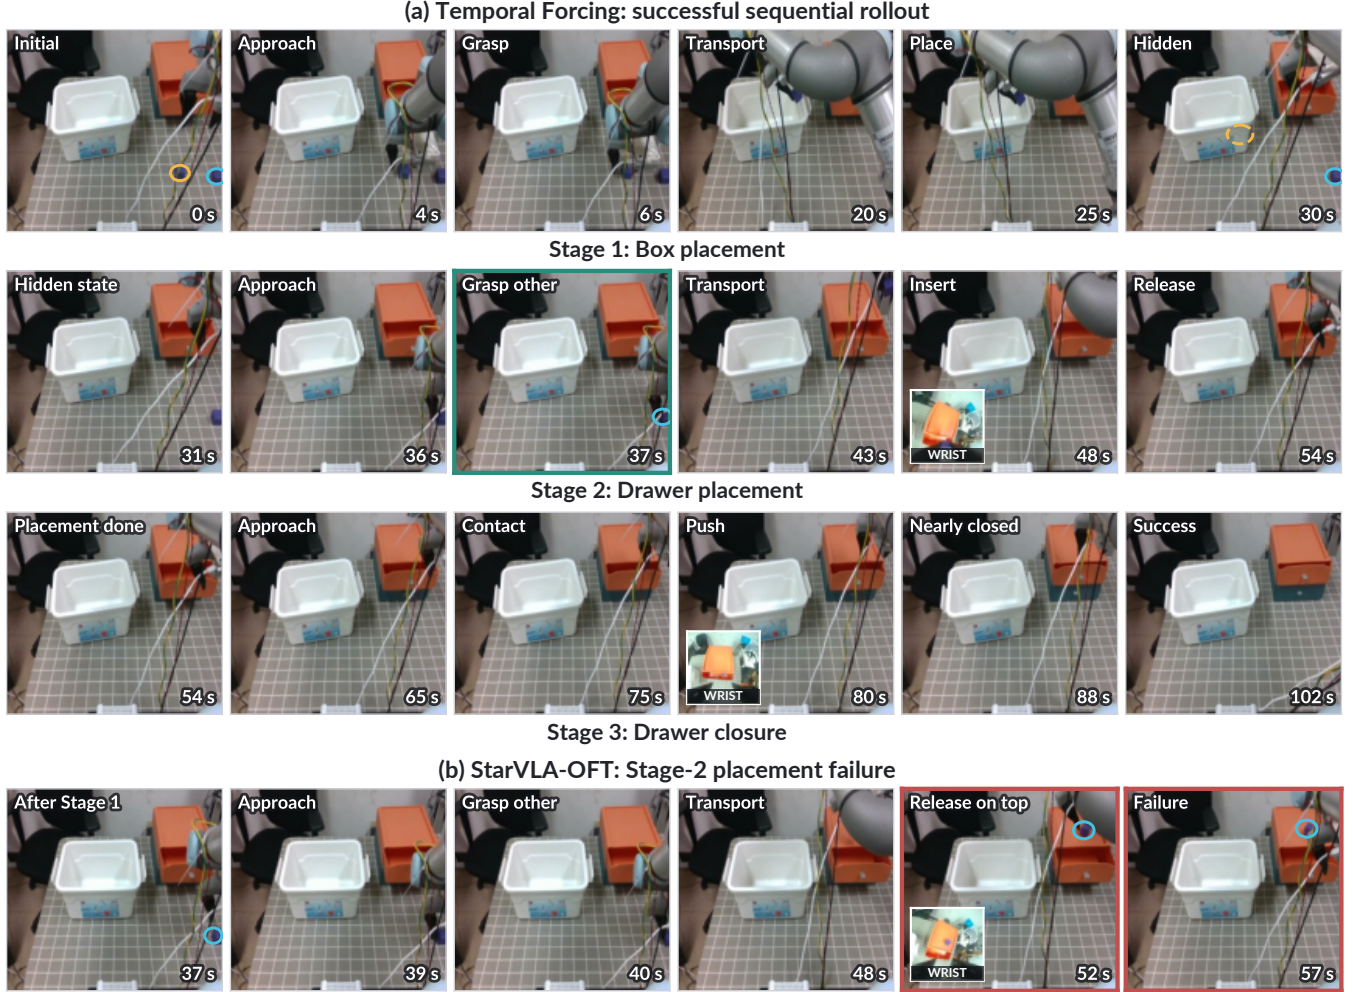


Figure 7: Qualitative real-robot rollouts. (a) Temporal Forcing completes box placement, drawer placement, and drawer closure in one uninterrupted execution. (b) StarVLA-OFT fails during drawer placement by releasing the block on top of the drawer. Green and red borders mark the key decision and failure states. Circles distinguish the two blocks, and wrist-camera insets show manipulation details occluded in the main view. Annotations are visualization-only.

Qualitative sequential rollouts. After the first block is hidden, the current observation no longer indicates whether box placement is complete. In the successful Temporal Forcing rollout in Fig. 7(a), the policy selects the remaining block, places it in the drawer, and closes the drawer without a reset. In the StarVLA-OFT rollout in Fig. 7(b), the policy reaches the second stage and transports the correct block but releases it on top of the drawer. The isolated-stage totals are 78/90 and 75/90, respectively, while the full-task totals are 13/30 and 6/30.