

Learning Robust Execution in Robotic Manipulation with Agentic Reinforcement Learning

Xiaopeng Zhang¹, Yueyang Weng¹, Qi Liu², Yongjin Mu¹ and Yanjie Li^{1†}

Abstract—Robotic manipulation poses fundamental challenges due to uncertainty, long-horizon execution, and compounding errors, which can easily destabilize execution and lead to task failure. Although recent vision-language-action (VLA) models exhibit strong generalization, they typically lack explicit mechanisms to assess execution stability and to recover when execution deviates from its nominal behavior. In this paper, we propose: (1) two complementary metrics to assess execution quality at runtime, and (2) an agentic reinforcement learning framework that learns to restore effective execution through high-level decision-making rather than directly learning low-level actions. In this framework, an agentic policy reasons over recent execution history and selects among a small set of execution modes to regulate the execution process. Under execution degradation, it triggers appropriate recovery mechanisms to restore the robot to previously visited nominal states, enabling the task to continue. We evaluate the proposed method on the LIBERO benchmark, achieving up to a 13.7% improvement in success rate under standard settings and up to a 39.2% improvement under disturbance settings, demonstrating substantially enhanced execution robustness.

I. INTRODUCTION

Robotic manipulation is a fundamental capability for embodied intelligent systems [1]–[3], yet remains challenging due to uncertainty, contact-rich interactions, and long-horizon execution. Even when a manipulation policy performs well under nominal conditions, small deviations in perception and dynamics can accumulate over time, causing execution to drift away from expected behavior. Such execution degradation often leads to unstable behaviors, loss of task progress, or irreversible failures, directly limiting robustness in complex manipulation tasks [4], [5].

Recent progress in learning-based manipulation policy, particularly vision-language-action (VLA) models, demonstrates strong generalization across objects, tasks, and scenes through large-scale pretraining [6]–[8]. However, despite their impressive performance under familiar distributions, VLAs remain vulnerable to execution-level deviations during deployment in long-horizon tasks. As illustrated in Fig. 1, execution can bifurcate from a nominal trajectory due to slight grasp misalignment. Without active recovery, the system drifts into a degraded state where the policy is no longer

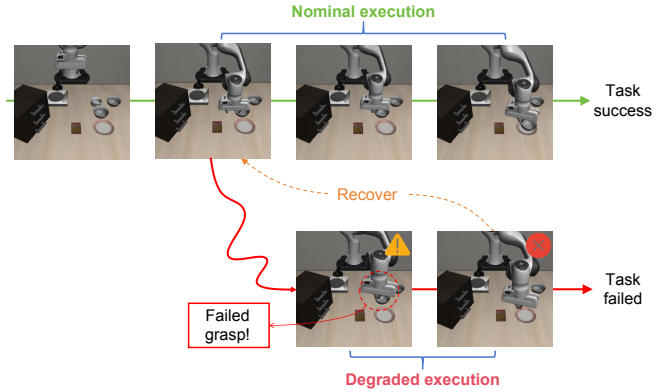


Fig. 1. Under nominal conditions, manipulation policies can successfully complete tasks through stable execution. However, small execution errors may accumulate over time, causing execution to drift into degraded states. Once execution becomes unstable, task progress stalls and failures occur, motivating explicit mechanisms for execution-level monitoring and recovery.

effective, causing small errors to accumulate into irreversible task failures. We refer to such failures, where execution deviates from nominal behavior, as execution-level failures.

One straightforward way to mitigate such failures is to expand training data and further fine-tune VLAs to cover a broader range of conditions [6]. Although effective, this approach is often resource-intensive due to the high cost of data collection and the substantial computational overhead required to retrain foundation-scale models. Moreover, the long-tail distribution of failure cases limits the effectiveness of data scaling alone. As a result, relying solely on data scaling can be costly and may not always suffice.

An alternative strategy introduces additional reasoning components, such as vision-language models (VLMs), to detect failures and replan execution [9], [10]. Although these methods demonstrate strong recovery and replanning capabilities, they often introduce additional system complexity and inference latency, which can limit scalability and efficiency. Moreover, language-driven replanning is sensitive to instruction distribution shifts, further complicating reliable execution management [11].

Notably, execution-level failures are not unique to VLAs. Similar issues arise in manipulation methods trained via imitation learning [12], where policies lack explicit mechanisms to assess execution quality or adapt when execution deviates from expected behavior.

To address these issues, we improve execution robustness from an execution-level perspective. First, we design two complementary metrics, termed local execution quality and global execution quality, to assess execution performance

This work was supported by Shenzhen Fundamental Research ZDCY20250901095402003, Guangdong Provincial Natural Science Foundation 2026A1515011727 and the Open Fund of Innovation Center for Control Actuators.

¹ School of Intelligence Science and Engineering, the Harbin Institute of Technology Shenzhen, 518055, China. autolyj@hit.edu.cn

² Faculty of Robot Science and Engineering, Northeastern University, Shenyang, 110819, China.

[†] Corresponding author

at runtime. Second, instead of learning new actions or relying on heavy external reasoning modules, we regulate the execution process of a manipulation policy. We formulate this as an **agentic reinforcement learning** problem by proposing a high-level agentic policy that observes recent execution history and selects among a set of execution modes (e.g., execute, retry, repair, reset) to determine how execution proceeds. Importantly, the agentic policy does not generate control commands but governs the application of the low-level policy. We term this formulation *agentic* because the learned policy acts as an execution manager, separating execution regulation from action generation. In this way, the overall system evolves from a purely conditional action generator into a decision-driven execution framework with exploration and recovery capability.

We apply the proposed method to multiple VLAs and diffusion policy, and evaluate on the LIBERO benchmark [13], covering four subsets: *LIBERO-Spatial*, *LIBERO-Object*, *LIBERO-Goal*, and *LIBERO-Long*. Experimental results show that our method consistently improves task success rates and enhances recovery from execution degradation without modifying or retraining the low-level policies. Moreover, it demonstrates improved robustness under disturbance.

II. RELATED WORK

A. Vision-Language-Action Models for Robotic Manipulation

Vision-language-action models have emerged as a powerful paradigm for robotic manipulation by leveraging large-scale pretraining on diverse multimodal datasets [6]–[8], [14]. By directly mapping visual observations and language instructions to actions, these methods demonstrate strong generalization across objects, tasks, and scenes, and have advanced the scalability of learning-based manipulation systems. Recent benchmarks and real-world deployments show that VLAs can successfully execute complex, multi-step manipulation tasks under nominal conditions [15], [16].

Despite these advances, VLAs are typically deployed as monolithic executors and lack explicit mechanisms to monitor execution quality or adapt behavior once execution deviates from its nominal trajectory. During long-horizon tasks, small disturbances, contact uncertainty, and compounding errors can gradually degrade execution, leading to unstable behavior and task failure [11], [17], [18].

Our method complements VLAs by proposing a lightweight, execution-level decision mechanism that operates on top of frozen manipulation policies. Rather than modifying or retraining VLAs, we focus on learning to manage execution when degradation occurs to improve robustness.

B. Failure Recovery and Hierarchical Decision-Making

Failure recovery in robotic manipulation has evolved from reactive correction strategies to more structured hierarchical decision-making frameworks [9], [19], [20]. Early approaches rely on explicit failure detection and local corrective behaviors. Runtime monitoring methods such as [21] analyze execution consistency to detect policy deviations, and [22]

estimate the likelihood of execution failure at runtime, but they do not learn recovery behaviors themselves.

Hierarchical reinforcement learning (HRL) [23] employs structured decision layers above low-level controllers, where a high-level policy selects skills executed by a lower-level policy. For example, [4] models recovery as a hierarchical RL problem, where a recovery policy operates over primitive actions and nominal controllers to return the system to states from which nominal execution can succeed.

Recent research explores dual-system architectures, which introduce explicit high-level reasoning above reactive control, separating fast visuomotor execution from slower semantic planning and verification. These methods typically introduce an additional VLM as a reasoning component to interpret task progress and guide recovery. [9] exemplifies this paradigm by combining a reasoning model for subgoal decomposition, a VLA executor, and a VLM-based verifier, forming a closed-loop coordination mechanism.

In contrast, our method focuses on execution-level regulation of a low-level policy. Our method learns a lightweight agentic policy that selects among predefined execution modes to regulate how execution proceeds, including when to invoke recovery. Unlike dual-system methods that rely on semantic reasoning or verification to guide recovery, the agentic policy operates purely on execution history and execution quality signals to make low-latency execution decisions.

III. PROBLEM STATEMENT

We consider the execution degradation in robotic manipulation, where a robot executes a task using a frozen low-level policy (e.g., a VLA policy), but disturbances, contact uncertainty, and compounding errors cause the robot to gradually deviate from nominal behavior.

To address this issue, we propose an agentic reinforcement learning (RL) framework, as shown in Fig. 2. In this framework, a frozen low-level policy continuously outputs low-level actions, while a high-level agentic policy regulates the execution process. Instead of generating low-level control actions directly, the agentic policy decides whether to proceed with the low-level policy or to trigger predefined recovery mechanisms based on execution history. We formulate this process as a partially observable Markov decision process (POMDP), defined by tuple $\mathcal{M} = \langle \mathcal{S}, \mathcal{A}, P, R, \gamma \rangle$. Here, $\mathcal{S}$ represents the state space, which is partially observable. $\mathcal{A}$ denotes a discrete set of agentic execution modes. $P : \mathcal{S} \times \mathcal{A} \times \mathcal{S} \rightarrow [0, 1]$ describes the transition dynamics determined jointly by the simulation environment and the low-level policy. $R : \mathcal{S} \times \mathcal{A} \rightarrow \mathbb{R}$ is the reward function, and γ is the discount factor.

Given a low-level policy $\hat{\pi}$ and a high-level agentic policy π_{agent} , at each time step t , $\hat{\pi}$ continuously generates low-level actions $\hat{a}_t$ conditioned on visual observations and language instructions. In contrast, the agentic policy π_{agent} runs at decision steps with a fixed time interval.

At each decision step, π_{agent} observes an execution history h_t (comprising recent proprioception, low-level actions, and execution quality) with a fixed horizon and

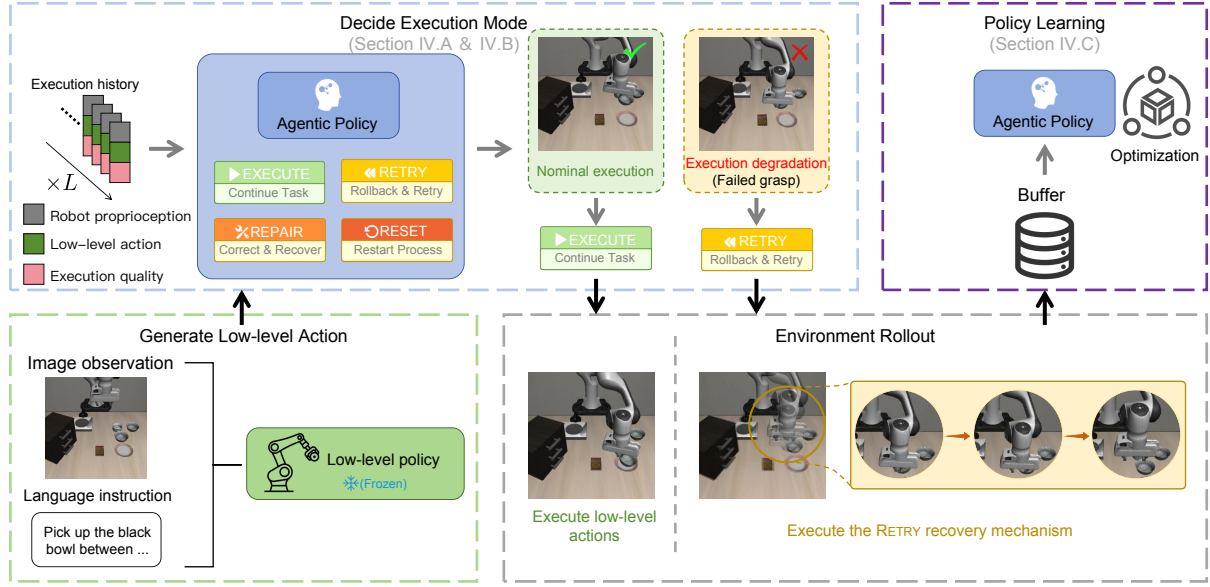


Fig. 2. Agentic reinforcement learning framework. A frozen low-level policy generates low-level actions, while a high-level agentic policy observes execution history and selects execution modes (EXECUTE, RETRY, REPAIR, RESET) to regulate the execution process. Rollout data are stored for policy learning, enabling recovery from execution degradation without modifying the low-level policy.

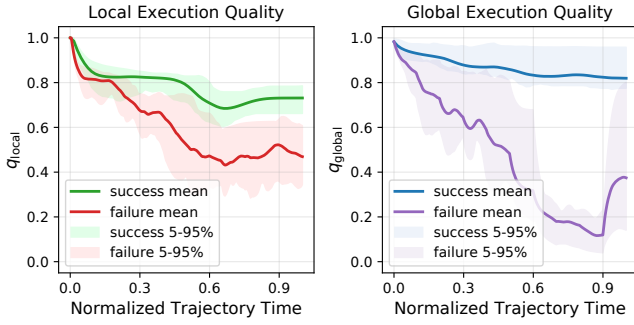


Fig. 3. Local and global execution quality over normalized trajectory time for successful and failed executions. Successful trajectories maintain higher and more stable execution quality, while failed trajectories exhibit faster degradation. Shaded regions indicate the 5th–95th percentile ranges.

selects an execution mode $a_t \in \mathcal{A}$ to regulate the execution process. The action space is defined as a finite set: $\mathcal{A} = \{\text{EXECUTE}, \text{RETRY}, \text{REPAIR}, \text{RESET}\}$. Specifically, EXECUTE mode continues executing the actions output by $\hat{\pi}$, and other modes trigger distinct recovery mechanisms to handle execution degradation. The objective of the proposed framework is to learn π_{agent} via RL to enhance execution robustness, ensuring the robot can recover from execution degradation and successfully complete tasks.

We refer to π_{agent} as the *agentic policy*, and the overall formulation as *agentic reinforcement learning*, because the policy operates as an autonomous execution-level decision maker. Rather than generating low-level control actions, it governs how the low-level policy $\hat{\pi}$ is applied over time. This explicitly separates execution management from action generation. For notational convenience, we denote the agentic policy as π_{θ} in the remainder of the paper, where θ represents the network parameters.

IV. METHOD

A. Local and Global Execution Quality

Under nominal conditions, a policy should complete tasks smoothly, and the trajectories should exhibit consistent behavioral patterns. To assess execution quality, we propose two complementary metrics. **Local execution quality** monitors short-term stability, while **global execution quality** captures long-horizon drift from nominal behaviors. Together, these metrics summarize temporal execution behavior and inform the decision-making of the agentic policy.

1) *Local Execution Quality*: At each step t , we maintain a sliding window of size W over recent end-effector positions $\{p_k\}_{k=t-W+1}^t$ and low-level actions $\{\hat{a}_k\}_{k=t-W+1}^t$.

We first compute a *motion effectiveness* term E to detect stagnation or jamming. Intuitively, this metric measures the ratio between the actual distance moved by the end-effector and the commanded action magnitude. A low E indicates that the robot is exerting control effort but making little physical progress:

$$E = \frac{\|p_t - p_{t-W+1}\|}{\frac{1}{W} \sum_{k=t-W+1}^t \|\hat{a}_k\| + \epsilon}. \quad (1)$$

Here, W is the window size and ϵ ensures numerical stability. To map this unbounded ratio to a normalized range $[0, 1]$, we apply a saturation transform:

$$E_{\text{norm}} = \frac{E}{E + c}. \quad (2)$$

The scalar c controls the sensitivity of the saturation, ensuring that the metric smoothly approaches 1 as effectiveness increases.

Simultaneously, we assess *motion smoothness* S based on the instantaneous speeds $v_k = \|p_k - p_{k-1}\|$. We utilize the in-

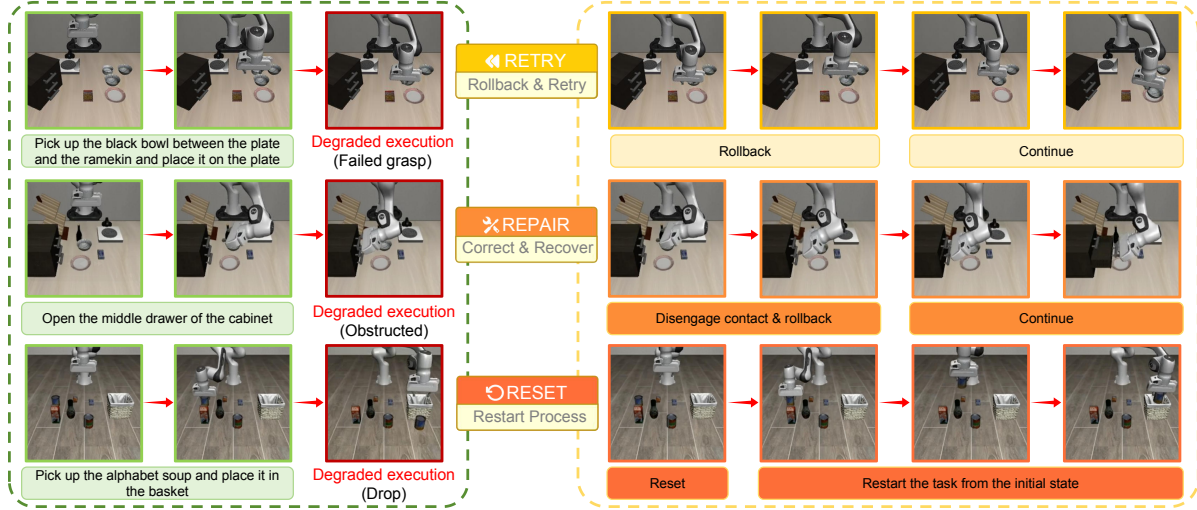


Fig. 4. Illustration of the three recovery mechanisms under different execution degradation cases. RETRY restores the robot to a recent high-quality state and resumes execution. REPAIR restores the robot to a contact-free high-quality state within a longer horizon before continuing execution. RESET terminates the current episode and restarts the task from the initial configuration.

verse coefficient of variation to penalize erratic fluctuations:

$$S = \frac{1}{1 + \frac{\sigma_v^2}{\mu_v^2 + \epsilon}}, \quad (3)$$

where μ_v and σ_v^2 denote the mean and variance of the speeds $\{v_k\}$ within the sliding window, respectively.

Subsequently, we aggregate these terms via a weighted sum, normalize the result through a sigmoid function $\sigma(\cdot)$, and finally apply exponential moving average smoothing:

$$q_{\text{local}}(t) = \beta q_{\text{local}}(t-1) + (1-\beta) \cdot \sigma(k \cdot (w_1 E_{\text{norm}} + w_2 S - b)). \quad (4)$$

Here, b and k determine the threshold and sensitivity, and β controls smoothing. The local execution quality score is initialized to $q_{\text{local}}(0) = 1.0$ at the beginning of each episode.

2) *Global Execution Quality*: While local quality measures physical stability, it fails to detect execution-level deviation (e.g., moving smoothly but towards an incorrect target). To address this, we propose a global execution quality q_{global} that compares the current execution prefix against successful reference trajectories.

At each time step t , we encode the recent execution window into a compact feature vector $z_t = [\mu_s, \mu_{\hat{a}}, m, \bar{a}]$, where μ_s and $\mu_{\hat{a}}$ denote the window-averaged robot state (including end-effector pose and gripper width) and low-level action, $m = \|p_t - p_{t-W+1}\|$ is the net displacement, and $\bar{a} = \frac{1}{W} \sum_{k=t-W+1}^t \|\hat{a}_k\|$ is the mean action magnitude.

Before deployment, we collect $N = 50$ successful trajectories for each task using the frozen low-level policy. For each trajectory of max length T , we compute the feature vector z_t at every time step t . To account for temporal misalignment across trajectories of different lengths, we normalize each time step by its progress ratio $\frac{t}{T}$ and discretize the normalized progress into $B = 10$ bins. Feature vectors whose normalized progress falls into the same bin are grouped together, forming a stage-aware reference library. For a new task, this reference library can be extended

by collecting additional successful trajectories, enabling the global execution quality to be readily applied.

During execution, the current feature z_t is compared against the k nearest neighbors ($k = 5$) within the corresponding progress bin of the reference library. Let d_t denote the average Euclidean distance to these neighbors. The global quality score is then computed as $q_{\text{global}}(t) = \beta q_{\text{global}}(t-1) + (1-\beta) \exp(-\alpha d_t)$, where α controls sensitivity to deviation. A high score indicates close alignment with successful behaviors, whereas persistent deviation leads to a lower score. The global execution quality score is initialized to $q_{\text{global}}(0) = 1.0$ at the beginning of each episode.

As shown in Fig. 3, successful executions maintain higher and more stable quality, while failed executions exhibit rapid local instability and pronounced long-horizon degradation.

B. Recovery Mechanisms

To restore the robot to nominal execution when execution degradation occurs, we design three recovery mechanisms: RETRY, REPAIR, and RESET, which correspond to the latter three actions in the agentic action space defined in Section III. These three mechanisms are designed to cover the majority of recovery behaviors required under common execution degradation scenarios.

Our key insight is that different degrees of execution degradation require different levels of recovery. For instance, a slight grasp misalignment may only require a short rollback, whereas more severe contact misalignment may require temporarily releasing contact and repositioning the robot before continuing. Importantly, these recovery mechanisms are not intended to generate new actions, but to restore the robot to previously visited nominal states, thereby recovering the effectiveness of the low-level policy.

First, we aggregate the local and global execution quality scores proposed in Section IV-A into a single scalar score at each time step t :

$$q_{\text{agg}}(t) = \lambda q_{\text{local}}(t) + (1-\lambda) q_{\text{global}}(t). \quad (5)$$

Here, $\lambda \in [0, 1]$ is a weighting coefficient. This aggregated score is used to evaluate overall execution health and serves as a criterion for selecting rollback states during recovery.

In practice, both RETRY and REPAIR realize rollback by using an operational space controller (OSC) to drive the robot back to a selected historical state. During this process, the gripper is commanded to remain open, and the OSC tracks incremental end-effector pose commands as control targets. In contrast, RESET handles irrecoverable severe errors by terminating the current episode and restarting the task from the initial configuration. RETRY drives the robot back to the state with the highest aggregated execution quality q_{agg} among the most recent M steps and then resumes nominal execution. REPAIR performs a stronger rollback by restoring the robot to the state with the highest q_{agg} among the contact-free states within the most recent N steps ($N > M$). Contact-free states are identified by thresholding the end-effector contact force from the MuJoCo simulator [24]. Contact forces are not used as continuous inputs. Instead, we compute a binary contact indicator using a fixed threshold $\tau = 5 \text{ N}$. This treatment provides broad generality and can be applied to different contact signals, such as force sensors and joint torques.

While the rollback horizons M and N can be learned, we find that this reduces training stability. Fixed values $M = 15$ and $N = 30$ are sufficient and used throughout. Fig. 4 illustrates the recovery mechanisms triggered by the agentic policy under different types of execution degradation.

C. Agentic Reinforcement Learning

Our goal is to learn an agentic policy that determines how execution should proceed based on recent execution history, including proprioception, low-level actions, and execution quality. Specifically, when execution progresses normally, the agentic policy allows the robot to continue following the low-level policy (EXECUTE). When encountering execution degradation, the agentic policy adaptively selects an appropriate recovery mechanism (RETRY, REPAIR, RESET).

1) *Observation*: At each decision step, the agentic policy observes a fixed-length execution history h_t , constructed as a sliding window over the most recent L low-level steps. The history includes recent robot proprioception, low-level actions produced by $\hat{\pi}$, and the two execution quality scores. This compact representation summarizes execution dynamics and progress without requiring access to raw visual observations or privileged simulator states.

The critic has access to additional privileged global state information from the simulator, which is not available to the actor at test time. This asymmetry improves value estimation under sparse and delayed rewards while preventing information leakage to the deployed policy.

Notably, information generated during recovery phases is not recorded into the execution history. This prevents recovery behaviors from contaminating the history used for subsequent decision making.

2) *Action Space*: The agentic policy makes decisions at an interval of K low-level steps. At each agentic decision

TABLE I
REWARD COMPONENTS AND TRAINING HYPERPARAMETERS.

Reward		Training Hyperparameters	
Success reward	+1.0	Learning rate	1×10^{-4}
Failure penalty	-1.0	Discount γ	0.99
Time penalty	-0.02	PPO clip	0.2
EXECUTE cost	0	Value coef.	0.1
RETRY cost	-0.1	Entropy coef.	0.01
REPAIR cost	-0.3	Decision interval K	5
RESET cost	-0.5	History length L	20

step, the agentic policy outputs a categorical distribution over execution modes

$$a_t \in \mathcal{A} = \{\text{EXECUTE}, \text{RETRY}, \text{REPAIR}, \text{RESET}\}. \quad (6)$$

The selected action determines how execution proceeds in the subsequent phase. EXECUTE allows the low-level policy to continue nominal execution until the next decision step, while the other modes invoke predefined recovery mechanisms. The agentic policy does not generate low-level control commands. In implementation, the action space is encoded as four discrete integers $\{0, 1, 2, 3\}$ corresponding to the four execution modes. During training, the critic outputs a scalar value used to evaluate the expected return.

3) *Reward Function and Optimization Objective*: We design the reward function to encourage task completion and efficient execution while penalizing unnecessary recovery. Specifically, task success and failure yield terminal rewards of +1.0 and -1.0 respectively, and each timestep incurs a small time penalty of -0.02 to discourage prolonged execution. Invoking recovery mechanisms introduces fixed costs proportional to their recovery strength, with penalties of -0.1, -0.3, and -0.5 for RETRY, REPAIR, and RESET, respectively. EXECUTE incurs no additional cost. The complete reward components are summarized in Table I (left).

The agentic policy π_θ is trained to maximize the expected discounted return

$$\max_{\pi_\theta} \mathbb{E}_{\pi_\theta} \left[\sum_{t=0}^T \gamma^t r_t \right], \quad (7)$$

where r_t denotes the reward at time step t and γ is the discount factor. We optimize θ using Proximal Policy Optimization (PPO) [25], which updates the policy by maximizing a clipped surrogate objective to ensure stable learning in the discrete action space. Both the agentic policy and the critic are implemented as lightweight multi-layer perceptrons. Table I (right) summarizes the main training hyperparameters.

V. EXPERIMENTS

The experiments are designed to evaluate whether our method improves task success and execution robustness while keeping the low-level policy frozen.

In particular, we seek to answer the following questions: (1) Can the agentic policy improve success and robustness under execution degradation? (2) Can the framework be

TABLE II

QUANTITATIVE RESULTS ON THE LIBERO BENCHMARK. WE REPORT SUCCESS RATES (%) UNDER TWO SETTINGS: (I) STANDARD NOMINAL CONDITIONS, AND (II) ROBUSTNESS TESTING WITH RANDOM KINEMATIC DISTURBANCES. SHADED ROWS HIGHLIGHT THE AVERAGE PERFORMANCE GAINS (Δ), DEMONSTRATING SIGNIFICANT RESILIENCE IN THE DISTURBANCE SETTING.

Method	Spatial		Object		Goal		Long	
	w/o Agentic	w/ Agentic	w/o Agentic	w/ Agentic	w/o Agentic	w/ Agentic	w/o Agentic	w/ Agentic
<i>I. Standard Evaluation (Nominal Conditions)</i>								
OpenVLA (FT)	77.8	90.2	70.8	88.7	74.0	92.4	54.0	74.5
π_0 (FT)	96.4	97.2	97.0	97.4	96.8	96.2	81.0	90.6
$\pi_{0.5}$ (FT)	97.4	96.6	97.4	98.2	98.0	97.4	92.4	95.2
Diffusion Policy	78.3	86.4	90.2	92.5	68.3	77.6	50.5	72.4
Avg. Δ		+5.1		+5.4		+6.6		+13.7
<i>II. Robustness Evaluation (w/ Random Disturbance)</i>								
OpenVLA (FT)	47.2	83.0	43.6	76.2	47.0	81.4	33.4	67.6
π_0 (FT)	58.0	85.5	60.0	86.0	58.0	85.0	33.8	79.5
$\pi_{0.5}$ (FT)	80.0	90.4	64.0	92.8	67.2	88.8	40.2	87.2
Diffusion Policy	45.0	74.0	48.2	70.5	45.0	75.0	30.5	60.5
Avg. Δ		+25.7		+27.4		+28.3		+39.2

applied to different tasks and low-level policies? (3) Does the policy adapt decisions to degradation severity? (4) Do different decisions yield distinct execution quality outcomes? (5) Is robustness gained with limited cost?

A. Experimental Setup

Benchmarks and Baselines. We evaluate on the four task suites of the LIBERO benchmark, namely *LIBERO-Spatial*, *LIBERO-Object*, *LIBERO-Goal*, and *LIBERO-Long*, which span increasing task diversity and long-horizon compositionality. We compare against representative end-to-end manipulation policies without execution-level decision-making, including OpenVLA, π_0 , $\pi_{0.5}$, and diffusion policy, all initialized from models fine-tuned on LIBERO.

Training and Evaluation. The agentic policy is trained separately for each task, with up to 1,000,000 high-level decision steps per task. Here, a training step corresponds to one agentic decision per environment, and the total step count is accumulated across all environments. Training spans multiple tasks within each LIBERO subset, and episodes terminate upon success or timeout.

At evaluation time, the learned agentic policy is deployed without fine-tuning and performance is measured by task **success rate** under identical task settings. When computing success rates, episodes in which RESET is invoked are counted as failures to ensure fair comparison.

To evaluate robustness, we additionally conduct a stress test with random disturbances. In each episode, a disturbance is injected once at a random timestep by replacing the low-level action with noise $\xi \sim \mathcal{U}(-\delta, \delta)$ for 5 consecutive steps, with $\delta = 3.0$ in all experiments.

B. Main Results (Q1, Q2)

Table II reports task success rates. Our framework consistently improves performance for policies prone to execu-

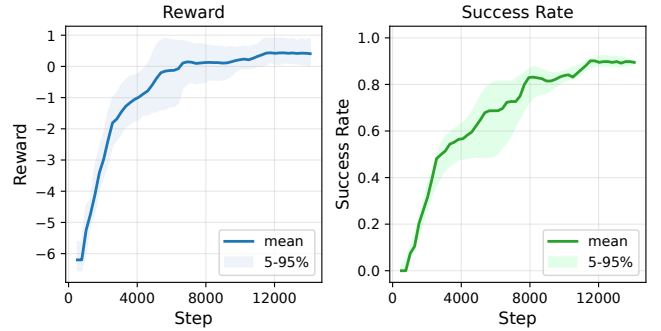


Fig. 5. PPO training curves of the agentic policy on LIBERO-Spatial with a frozen OpenVLA policy. Mean reward (left) and success rate (right) are shown with 95% CIs over 3 seeds.

tion degradation, with the largest gains observed for OpenVLA and the diffusion policy, especially on the challenging *LIBERO-Long* suite (e.g., +20.5% for OpenVLA). For strong baselines such as π_0 and $\pi_{0.5}$ that already achieve near-saturated performance, our method preserves their high success rates without degradation. Overall, the average improvement increases with task complexity, indicating effective mitigation of long-horizon execution degradation.

Under the disturbance setting (Table II, Part II), baseline performance degrades substantially, most notably for OpenVLA, whose success rate drops to 33.4% on *LIBERO-Long*. In contrast, our method maintains a success rate of 67.6%, demonstrating strong robustness to unmodeled state deviations. Across all baselines, the agentic policy consistently recovers from disturbed executions by triggering appropriate recovery routines, converting many otherwise irreversible failures into successful task completions.

C. Further Analysis

Agentic Decision Preference Conditioned on Execution Degradation



Fig. 6. Conditional distribution of agentic decision across execution degradation types. Statistics are computed over trajectory segments where the agentic policy deviates from nominal execution. The agentic policy prefers RETRY for mild degradations, REPAIR for collision-induced failures, and RESET for irrecoverable states.

1) *Training Performance*: Fig. 5 presents the PPO training curves of the agentic policy trained in the *LIBERO-Spatial* environment with a frozen OpenVLA policy. Both the training reward and task success rate increase steadily over training, with shaded regions indicating 95% confidence intervals (CIs) across three random seeds.

The smooth and consistent improvement in both metrics suggests that the agentic policy can be trained stably using sparse task-level rewards, and that execution-level decisions learned through PPO effectively improve task outcomes without modifying the low-level policy.

2) *Decision Distribution (Q3)*: We analyze the distribution of agentic decisions conditioned on execution degradation types to understand how the agentic policy adapts its behavior under execution degradation. The execution degradation types are defined based on observable execution-level characteristics, such as grasp outcomes, object motion, contact-induced constraints, and task feasibility. For this analysis, trajectory segments where the agentic policy deviates from nominal execution are manually inspected and categorized into degradation types according to these criteria. The statistics in Fig. 6 are computed over trajectory segments where the agentic policy selects a non-EXECUTE execution mode (RETRY, REPAIR, or RESET).

As shown in Fig. 6, the agentic policy exhibits a preference pattern aligned with degradation severity. Mild degradations, such as transient noise and grasp-related failures, predominantly lead to RETRY decisions, while collision or obstruction cases favor REPAIR. In irrecoverable states, such as when objects fall outside the reachable workspace or execution deviates from nominal behavior and execution quality remains persistently low, the policy tends to select RESET. This monotonic shift toward stronger execution modes indicates that the agentic policy differentiates execution degradation types and adapts its decisions accordingly, rather than relying on a single fixed recovery strategy.

3) *Agentic Decisions and Execution Quality (Q4)*: We analyze the relationship between agentic decisions and execution quality from two perspectives: how decision distribu-

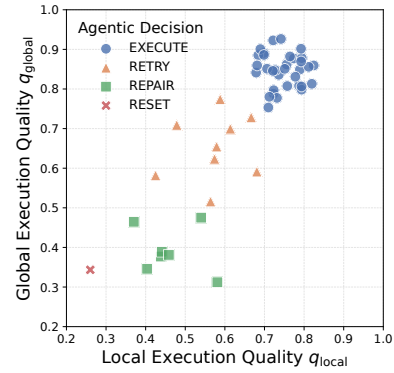


Fig. 7. Agentic decisions plotted in the local-global execution quality space, showing how different execution modes are selected under varying execution conditions.

tions vary with execution quality, and how different decisions affect subsequent execution quality.

As shown in Fig. 7, different execution modes occupy distinct regions in the local-global execution quality space. EXECUTE is primarily selected when both local and global quality are high, indicating stable and effective execution. RETRY appears at intermediate quality levels, where execution is mildly degraded but still recoverable. In contrast, REPAIR and RESET are concentrated in low-quality regions, corresponding to more severe or irrecoverable degradation.

Table III shows that these decisions have different effects on subsequent execution quality. The quality change is computed as the difference between execution quality at the decision step and that observed a fixed number of steps later. Values are reported as mean $\pm$ standard. EXECUTE is often followed by slight quality decay, reflecting continued execution under marginal instability. Recovery actions yield positive quality changes. In particular, stronger recovery actions lead to higher probabilities of global quality improvement, confirming that the agentic policy not only conditions its decisions on execution quality, but also selects execution modes that induce appropriate, graded recovery effects.

TABLE III
EVENT-CONDITIONED CHANGE IN EXECUTION QUALITY AFTER
DIFFERENT AGENTIC DECISIONS.

Decision	Δq_{local}	Δq_{global}	$P(\Delta q_{\text{global}} > 0)$
EXECUTE	-0.01 ± 0.02	-0.02 ± 0.03	0.18
RETRY	$+0.08 \pm 0.04$	$+0.02 \pm 0.03$	0.61
REPAIR	$+0.05 \pm 0.03$	$+0.09 \pm 0.06$	0.73
RESET	$+0.20 \pm 0.08$	$+0.22 \pm 0.07$	0.95

4) *Recovery Cost and Efficiency (Q5)*: We analyze the execution overhead introduced by agentic decision-making in terms of recovery frequency and episode length. As summarized in Table IV, based on 50 successful trajectories collected for each baseline policy on each task subset, augmenting the baseline with the agentic policy results in a moderate increase in the number of non-EXECUTE modes, accompanied by a corresponding increase in episode length.

Notably, the overhead scales with the fragility of the low-

TABLE IV
RECOVERY COST AND EXECUTION EFFICIENCY INTRODUCED BY THE
AGENTIC POLICY.

Baseline Policy	Number of Recoveries	Episode Length
OpenVLA	+1.8 $\pm$ 0.6	+12%
π_0	+1.2 $\pm$ 0.4	+8%
$\pi_{0.5}$	+0.9 $\pm$ 0.3	+5%
Diffusion Policy	+2.1 $\pm$ 0.7	+15%

level policy. Stronger policies such as π_0 and $\pi_{0.5}$ incur fewer recovery actions and smaller episode length increases, whereas more error-prone policies such as OpenVLA and the diffusion policy trigger more frequent recovery actions. This reflects the agentic policy’s tendency to intervene only when execution degradation is detected, rather than applying recovery indiscriminately.

Overall, the added execution cost remains modest relative to the substantial gains in success rate and robustness reported above.

VI. CONCLUSIONS

We propose an agentic reinforcement learning framework that improves robustness in robotic manipulation by separating execution management from low-level action generation. A high-level agentic policy reasons over execution history and selects execution modes that regulate how execution proceeds, while keeping the low-level policy frozen. This execution-level abstraction enables effective recovery from execution degradation without retraining task-specific skills or introducing additional planning modules. Experiments on the LIBERO benchmark demonstrate consistent improvements in task success rates for pretrained VLAs, together with interpretable execution-level behaviors.

A major limitation of our method is its limited ability to recover from more severe execution degradation and out-of-distribution scenarios. Since the agentic policy relies only on proprioceptive signals and low-level actions without requiring privileged simulator information, the framework is highly amenable to sim-to-real deployment. Future work will focus on improving recovery under severe degradation and validating the approach in real-world settings.

REFERENCES

- [1] S. Bai, W. Song, J. Chen, Y. Ji, Z. Zhong, J. Yang, H. Zhao, W. Zhou, W. Zhao, Z. Li, *et al.*, “Towards a unified understanding of robot manipulation: A comprehensive survey,” *arXiv preprint arXiv:2510.10903*, 2025.
- [2] S. Bai, W. Song, J. Chen, Y. Ji, Z. Zhong, J. Yang, H. Zhao, W. Zhou, Z. Li, P. Ding, *et al.*, “Embodied robot manipulation in the era of foundation models: Planning and learning perspectives,” *arXiv preprint arXiv:2512.22983*, 2025.
- [3] K. Kawaharazuka, J. Oh, J. Yamada, I. Posner, and Y. Zhu, “Vision-language-action models for robotics: A review towards real-world applications,” *IEEE Access*, 2025.
- [4] S. Vats, D. K. Jha, M. Likhachev, O. Kroemer, and D. Romeres, “Recoverychaining: Learning local recovery policies for robust manipulation,” in *2025 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, 2025, pp. 9776–9783.
- [5] H. Zhang, S. Zhang, J. Jin, Q. Zeng, R. Li, and D. Wang, “Robustvla: Robustness-aware reinforcement post-training for vision-language-action models,” *arXiv preprint arXiv:2511.01331*, 2025.

- [6] M. J. Kim, K. Pertsch, S. Karamcheti, T. Xiao, A. Balakrishna, S. Nair, R. Rafailov, E. Foster, G. Lam, P. Sanketi, *et al.*, “Openvla: An open-source vision-language-action model,” *arXiv preprint arXiv:2406.09246*, 2024.
- [7] K. Black, N. Brown, D. Driess, A. Esmail, M. Equi, C. Finn, N. Fusai, L. Groom, K. Hausman, B. Ichter, *et al.*, “ π_0 : A vision-language-action flow model for general robot control,” in *Proceedings of Robotics: Science and Systems (RSS)*, 2025.
- [8] P. Intelligence, K. Black, N. Brown, J. Darpinian, K. Dhabalia, D. Driess, A. Esmail, M. Equi, C. Finn, N. Fusai, *et al.*, “ $\pi_{0.5}$: a vision-language-action model with open-world generalization,” in *9th Annual Conference on Robot Learning (CoRL)*, 2025.
- [9] Z. Yang, Y. Chen, X. Zhou, J. Yan, D. Song, Y. Liu, Y. Li, Y. Zhang, P. Zhou, H. Chen, *et al.*, “Agentic robot: A brain-inspired framework for vision-language-action models in embodied agents,” *arXiv preprint arXiv:2505.23450*, 2025.
- [10] J. Duan, W. Pumacay, N. Kumar, Y. R. Wang, S. Tian, W. Yuan, R. Krishna, D. Fox, A. Mandlkar, and Y. Guo, “Aha: A vision-language-model for detecting and reasoning over failures in robotic manipulation,” in *Proceedings of the International Conference on Learning Representations (ICLR)*, 2025.
- [11] X. Wu, S. Chakraborty, R. Xian, J. Liang, T. Guan, F. Liu, B. M. Sadler, D. Manocha, and A. S. Bedi, “On the vulnerability of llm/vlm-controlled robotics,” in *2025 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, 2025, pp. 1914–1921.
- [12] C. Chi, Z. Xu, S. Feng, E. Cousineau, Y. Du, B. Burchfiel, R. Tedrake, and S. Song, “Diffusion policy: Visuomotor policy learning via action diffusion,” *The International Journal of Robotics Research*, vol. 44, no. 10–11, pp. 1684–1704, 2025.
- [13] B. Liu, Y. Zhu, C. Gao, Y. Feng, Q. Liu, Y. Zhu, and P. Stone, “Liber0: Benchmarking knowledge transfer for lifelong robot learning,” *Advances in Neural Information Processing Systems*, vol. 36, pp. 44 776–44 791, 2023.
- [14] B. Zitkovich, T. Yu, S. Xu, P. Xu, T. Xiao, F. Xia, J. Wu, P. Wohlhart, S. Welker, A. Wahid, *et al.*, “Rt-2: Vision-language-action models transfer web knowledge to robotic control,” in *7th Annual Conference on Robot Learning (CoRL)*, 2023, pp. 2165–2183.
- [15] P. Intelligence, A. Amin, R. Aniceto, A. Balakrishna, K. Black, K. Conley, G. Connors, J. Darpinian, K. Dhabalia, J. DiCarlo, *et al.*, “ $\pi_{0.6}^*$: a vla that learns from experience,” *arXiv preprint arXiv:2511.14759*, 2025.
- [16] Y. Fan, P. Ding, S. Bai, X. Tong, Y. Zhu, H. Lu, F. Dai, W. Zhao, Y. Liu, S. Huang, *et al.*, “Long-vla: Unleashing long-horizon capability of vision language action model for robot manipulation,” in *9th Annual Conference on Robot Learning (CoRL)*, 2025.
- [17] R. Yang, Z. An, L. Zhou, and Y. Feng, “Seqvla: Sequential task execution for long-horizon manipulation with completion-aware vision-language-action model,” *arXiv preprint arXiv:2509.14138*, 2025.
- [18] M. U. Din, W. Akram, L. S. Saoud, J. Rosell, and I. Hussain, “Vision language action models in robotic manipulation: A systematic review,” *arXiv preprint arXiv:2507.10672*, 2025.
- [19] H. Li, K. Lei, S. Zang, K. Hu, Y. Liang, B. An, X. Li, and H. Xu, “Failure-aware rl: Reliable offline-to-online reinforcement learning with self-recovery for real-world manipulation,” *arXiv preprint arXiv:2601.07821*, 2026.
- [20] A. Reichlin, G. L. Marchetti, H. Yin, A. Ghadirzadeh, and D. Kragic, “Back to the manifold: Recovering from out-of-distribution states,” in *2022 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, 2022, pp. 8660–8666.
- [21] C. Agia, R. Sinha, J. Yang, Z.-a. Cao, R. Antonova, M. Pavone, and J. Bohg, “Unpacking failure modes of generative policies: Runtime monitoring of consistency and progress,” in *8th Annual Conference on Robot Learning (CoRL)*, 2024.
- [22] R. Römer, A. Kobras, L. Worbis, and A. P. Schoellig, “Failure prediction at runtime for generative robot policies,” *Advances in Neural Information Processing Systems*, vol. 38, 2025.
- [23] S. Pateria, B. Subagdja, A.-h. Tan, and C. Quek, “Hierarchical reinforcement learning: A comprehensive survey,” *ACM Computing Surveys (CSUR)*, vol. 54, no. 5, pp. 1–35, 2021.
- [24] E. Todorov, T. Erez, and Y. Tassa, “Mujoco: A physics engine for model-based control,” in *2012 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, 2012, pp. 5026–5033.
- [25] J. Schulman, F. Wolski, P. Dhariwal, A. Radford, and O. Klimov, “Proximal policy optimization algorithms,” *arXiv preprint arXiv:1707.06347*, 2017.