

MALT: Lightweight Curvature-Aware Muon via Diagonal Preconditioning

Tongle Wu^{1*} Huanyu Dong^{1*} Ying Sun¹ Ziyi Ma²

¹School of Electrical Engineering and Computer Science,
The Pennsylvania State University, University Park, PA, USA

²Department of Computer Science,
City University of Hong Kong, Hong Kong SAR, China

August 6, 2026

Abstract

Muon has recently emerged as a promising alternative to AdamW for language model pre-training by orthogonalizing momentum matrices using NewtonSchulz iterations. Although Muon mitigates gradient anisotropy, it does not explicitly account for the curvature geometry of the loss landscape and may therefore remain sensitive to curvature anisotropy. We bridge this gap by proposing **MALT**(**M**uon **A**ugmented by **L**ightweight **T**wo-sided preconditioning), which uses lightweight diagonal preconditioners to reduce the sensitivity of Muon to curvature anisotropy. Specifically, MALT uses two-sided diagonal preconditioners with low memory and computational overhead to approximately capture the curvature geometry of the loss landscape. It orthogonalizes the preconditioned momentum using NewtonSchulz iterations and maps the result back to define the update direction, while norm grafting controls the update magnitude. To improve the robustness of MALT to stochastic gradient noise, we further propose **MALTER**(**MALT** with Adaptive stEpsilon **R**escaling). Convergence guarantees are provided for **MALT** in the stochastic non-convex setting. Experiments on GPT-2 Small, Medium, and Large pretraining show that the proposed methods outperform Muon while maintaining nearly the same memory footprint and wall-clock time.

1 Introduction

Recent progress in large language models (LLMs) has substantially accelerated the development of modern artificial intelligence [8, 78, 45]. Models such as GPT [51], DeepSeek [13], LLaMA [44], and Gemini [22] have demonstrated strong capabilities across a wide range of tasks. However, scaling laws [31] suggest that further performance gains of LLMs often require scaling up the model size, the amount of training data, and the training compute budget, which leads to substantial costs in training time, GPU memory [53], communication [47], and energy consumption [52]. As a result, developing efficient optimizers becomes a critical component to reduce these training costs for large models [54, 39].

*Equal contribution.

For decades, Adam [33] and its variant AdamW [41] have remained the default optimizers for training deep neural networks and LLMs. Adam provides elementwise adaptivity by maintaining a second moment estimate. This is equivalent to applying a diagonal preconditioner to the vectorized matrix parameter, neglecting correlations across rows and columns [26]. Optimizers such as Shampoo [26] and SOAP[66] are subsequently proposed to address this limitation by constructing structure-aware preconditioners that exploit the matrix structure of the parameters, rather than relying on elementwise rescaling. For matrix parameter updates, the gradient or momentum matrix may have a highly unbalanced singular spectrum, causing the updates to be dominated by a few singular directions and slowing convergence [34, 28]. The recently proposed matrix optimizer Muon [30] addresses this challenge by using NewtonSchulz iterations to approximately orthogonalize the momentum matrix, thereby flattening its singular spectrum and producing a nearly isotropic update direction.

However, Muon does not explicitly address curvature anisotropy of the loss landscape. Curvature anisotropy describes how sharp or flat the training loss landscape is across different directions, and is reflected by the condition number of the Hessian matrix of the loss function [50, 23, 58]. When the curvature anisotropy is high, using an update with the same magnitude may be too aggressive along sharp directions but too conservative along flat directions. High curvature anisotropy is known to slow down the convergence of first order optimization methods, whose rate depends directly on the condition number of the Hessian matrix [50, 70]. Figure 1 (a) illustrates the effect of curvature anisotropy on Muon using a toy example. We consider solving the matrix quadratic regression problem $\min_{\mathbf{X}} f(\mathbf{X}) := \frac{1}{2} \|\mathbf{A}\mathbf{X}\mathbf{B} - \mathbf{C}\|_F^2$ under a warmup-stable-decay (WSD) learning rate scheduling, one that is widely adopted in training modern language models [29, 67]. We observe that as the Hessian condition number of $f(\mathbf{X})$ increases, the convergence of Muon becomes substantially slower.

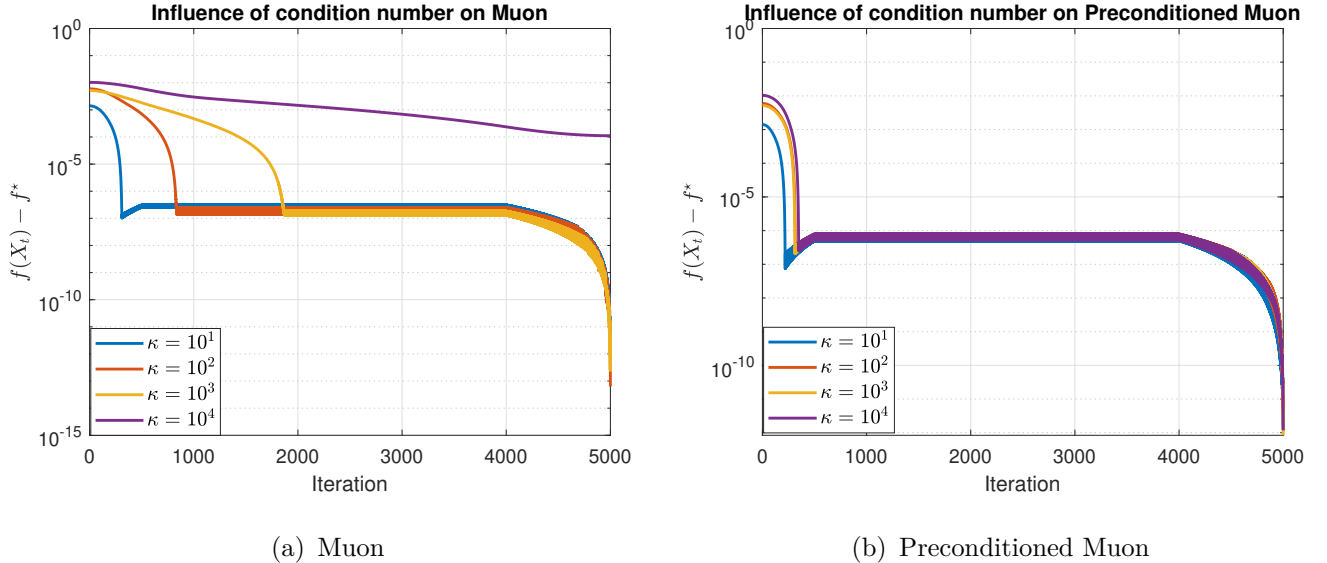


Figure 1: Comparison of Muon with and without curvature-aware preconditioning under the same WSD learning-rate schedule. Detailed setting for this simulation is provided in Appendix B.

This sensitivity of Muon to curvature anisotropy motivates us to propose a new optimizer MALT to incorporate curvature-aware preconditioning into Muon. As demonstrated in Figure 1

(b), curvature-aware preconditioned Muon is less affected by the condition number and converges substantially faster for ill-conditioned loss. Our main contributions are summarized as follows:

- We develop a formulation of Muon in a preconditioned space based on a local quadratic approximation of the loss. A positive definite curvature surrogate induces a transformed space in which the quadratic term becomes isotropic. Motivated by this formulation, MALT orthogonalizes the preconditioned momentum and maps the resulting direction back to the original parameter space. This formulation allows preconditioning and orthogonalization to address curvature anisotropy and gradient anisotropy simultaneously.
- We develop a lightweight diagonal preconditioning scheme for Muon. It maintains exponential moving averages of row-wise and column-wise squared gradient norms to construct left and right diagonal preconditioners, with the goal of preserving matrix structure without introducing excessive extra memory and computational cost. To stabilize the update scale, MALT further uses norm grafting to rescale update magnitude. In addition to proposing MALT, we establish its convergence guarantees for stochastic nonconvex optimization.
- To make MALT more robust to stochastic gradient noise, we propose an adaptive variant of it named MALTER. MALTER introduces a single scalar stepsize for the grafted update direction, which is adaptively adjusted using norm based Adam-type noise adaptation in preconditioned space. Compared to MALT, MALTER shows improved empirical performance with negligible extra memory and computation overhead.
- We evaluate MALT and MALTER on pretraining GPT-2 Small, Medium, and Large models. Both methods consistently outperform Muon while costing nearly the same memory footprint and wall-clock training time. Among all compared optimizers, MALTER achieves the best overall performance. The performance gain of MALTER over Muon is comparable to that of Muon over AdamW. This shows that noise adaptive stepsize control and preconditioned orthogonalization are both important and complementary mechanisms for optimizer design.

2 Related Work

Muon and its variants. Muon has recently attracted attention as a matrix optimizer that mitigates gradient anisotropy through NewtonSchulz orthogonalization. Existing variants of Muon mainly improve it from three aspects: how orthogonalization is computed, how the orthogonalized direction is scaled, and how its magnitude is distributed across rows or columns.

The NewtonSchulz iteration introduces several matrix multiplications for each Muon update, which can become costly in large scale training. The first line of work focuses on reducing the computational cost of orthogonalization. Existing approaches reduce this overhead through NewtonSchulz implementations optimized for modern hardware [72], more efficient approximation schemes for the polar factor [25, 3], or low-rank parametrization [55, 27].

The second line of work focuses on controlling the scale of Muon updates. Since orthogonalization flattens the singular spectrum, the choice of update magnitude is particularly important for Muon. Some recent studies interpret Muon as a steepest descent method under a spectral norm constraint and suggest that the stable step size depends on the nuclear norm of the momentum [34, 49]. In addition, several variants combine the orthogonalization used in Muon with adaptive scaling based on RMSProp, AdaGrad, Adam, or trust regions to improve training efficiency and reduce sensitivity to stochastic gradient noise [62, 63, 35, 73, 40, 11].

Another line of work exploits structure across the rows and columns of Muon updates. Several studies observe that Muon updates can exhibit substantial norm imbalance across rows and columns [36, 74], which may cause some neurons to receive persistently small updates and eventually contribute little to the network output [15]. These methods normalize individual rows or columns after Newton-Schulz orthogonalization to improve the performance of Muon. Other methods either decompose each weight matrix into row magnitudes and directions [37], or replace Newton-Schulz orthogonalization with normalization applied separately to each row [14, 71]. MuonEq [10] is most closely related to our method. It equilibrates the momentum before orthogonalization, thereby reducing its condition number and improving the numerical accuracy of Newton-Schulz. However, MuonEq focuses on improving the conditioning of the momentum matrix and does not explicitly account for curvature anisotropy in the loss landscape.

Preconditioned methods for mitigating curvature anisotropy. The classical Newton method uses the Hessian matrix of the loss to precondition gradients and achieves faster convergence by alleviating the second order curvature anisotropy [48]. However, for large scale problems, directly using the Hessian matrix is infeasible due to the prohibitive cost of computing, storing, and inverting this matrix [34]. This bottleneck has motivated the development of a broad range of practical alternatives that approximate the curvature information at reduced costs. For example, adaptive gradient methods such as AdaGrad [18], RMSProp [65], and Adam [33] use elementwise gradient second moments to construct inexpensive diagonal preconditioners to rescale the gradients element-wisely. Memory-efficient variants of adaptive gradient methods such as Adafactor [60], SM3 [5], and Adam-mini [77] further reduce the cost of storing optimizer states by factorizing, compressing, or block-sharing these second moment of gradient. Other optimizers construct more direct approximations of curvature. For example, AdaHessian [69] and Sophia [38] use estimates of the Hessian diagonal as preconditioners, whereas K-FAC [43] approximates the Fisher information matrix of each layer using Kronecker products. Matrix aware optimizers such as Shampoo [26], CASPR [19], and SOAP [66] exploit the matrix or tensor structure of parameters by constructing structured preconditioners along rows and columns. Nevertheless, anisotropy in matrix gradients [34] remains underexplored in these methods.

Most relevant work. Concurrent works FISMO [68] and Mousse [75] also proposed curvature-aware Muon variants. In particular, FISMO incorporates anisotropic geometry through a Fisher metric with a Kronecker factorization and formulates the orthogonalized update as a trust region problem under this Fisher induced metric. Mousse instead uses gradient statistics with a Kronecker structure, as in Shampoo, to construct a whitened space in which Muon style polar updates are performed. NewtonMuon [17] is also closely related to our work, as it derives a curvature-aware Muon update from a Newton type surrogate and introduces a right preconditioner based on the second moment of the layer inputs.

Unlike these methods, MALT uses diagonal preconditioners on both sides with low computational and memory overhead and updates them at every optimization step. This preconditioner preserves the row and column structure of matrix parameters while avoiding the storage of dense curvature factors and costly matrix operations such as eigendecomposition and matrix inversion.

Algorithm 1 MALT Update

Input: learning rate η , momentum $\mu_1, \mu_2 \in [0, 1)$, batch size B and damping constant ϵ .

Initialize: $\mathbf{W}_0 \in \mathbb{R}^{m \times n}$, $\mathbf{M}_0 = \mathbf{0}_{m \times n}$, $\mathbf{l}_0 = \mathbf{0}_m$, $\mathbf{r}_0 = \mathbf{0}_n$.

```
1: for  $t = 1, \dots, T$  do
2:   Sample a minibatch  $|\mathcal{B}_t| = B$  and calculate stochastic gradient  $\mathbf{G}_t = \frac{1}{B} \sum_{i \in \mathcal{B}_t} \nabla f(\mathbf{W}_{t-1}; \xi_i)$ 
3:    $\mathbf{M}_t \leftarrow \mu_1 \mathbf{M}_{t-1} + (1 - \mu_1) \mathbf{G}_t$ 
4:    $\mathbf{l}_t \leftarrow \mu_2 \mathbf{l}_{t-1} + (1 - \mu_2) [\|\mathbf{G}_t[1, :]\|_F^2; \dots; \|\mathbf{G}_t[m, :]\|_F^2]$ 
5:
6:    $\mathbf{r}_t \leftarrow \mu_2 \mathbf{r}_{t-1} + (1 - \mu_2) [\|\mathbf{G}_t[:, 1]\|_F^2; \dots; \|\mathbf{G}_t[:, n]\|_F^2]$ 
7:    $\mathbf{L}_t \leftarrow \text{Diag}((\mathbf{l}_t + \epsilon)^{-1/8})$ ,  $\mathbf{R}_t \leftarrow \text{Diag}((\mathbf{r}_t + \epsilon)^{-1/8})$ 
8:    $\widetilde{\mathbf{M}}_t \leftarrow \mathbf{L}_t \mathbf{M}_t \mathbf{R}_t$ 
9:    $\mathbf{O}_t \leftarrow \text{Orth}(\widetilde{\mathbf{M}}_t)$ 
10:   $\mathbf{D}_t \leftarrow \mathbf{L}_t \mathbf{O}_t \mathbf{R}_t$ 
11:   $\mathbf{W}_t \leftarrow \mathbf{W}_{t-1} - \eta \frac{\|\mathbf{O}_t\|_F}{\|\mathbf{D}_t\|_F + \epsilon} \mathbf{D}_t$ 
12: end for
13: return  $\mathbf{W}_T$ 
```

3 Diagonally Preconditioned Muon

3.1 Motivation

We consider minimizing the following unconstrained optimization problem:

$$\min_{\mathbf{X} \in \mathbb{R}^{m \times n}} f(\mathbf{X}), \quad (1)$$

where $f : \mathbb{R}^{m \times n} \rightarrow \mathbb{R}$ is a differentiable training loss function and $\mathbf{X} \in \mathbb{R}^{m \times n}$ is a matrix parameter. Muon [30] without momentum with exact orthogonalization updates $\mathbf{X}$ as

$$\mathbf{X}_t = \mathbf{X}_{t-1} - \eta_t \text{Orth}(\nabla f(\mathbf{X}_{t-1})), \quad (2)$$

where $\text{Orth}(\mathbf{X}) := \mathbf{U}\mathbf{V}^\top$ denotes the orthogonalization of $\mathbf{X} \in \mathbb{R}^{m \times n}$ with $\mathbf{X} = \mathbf{U}\mathbf{S}\mathbf{V}^\top$ being its reduced singular value decomposition (SVD). This orthogonalization flattens the singular spectrum of the gradient $\nabla f(\mathbf{X}_{t-1})$ by replacing its nonzero singular values with ones, thereby reducing gradient anisotropy. To reduce the cost in training large models, it is often approximately computed using the Newton–Schulz iterations.

The Muon update (2) does not explicitly incorporate curvature information of the loss landscape, which can make Muon sensitive to curvature anisotropy as demonstrated in Figure 1(a). Nevertheless, the ill-conditioned Hessian that captures curvature anisotropy is widely observed in training neural networks [56, 57, 6] and language models [61, 76, 64].

3.2 Muon in Preconditioned Space

This motivates us to consider a local quadratic approximation of the loss function to encode curvature anisotropy. Unlike the use of the Hessian to capture second order information for strongly convex functions in the classical optimization literature, the Hessian of a nonconvex loss in deep learning or language models is not guaranteed to be positive semidefinite and may even be

indefinite [12, 23]. Consequently, directly minimizing a Hessian-based quadratic model may not yield a descent direction.

Moreover, explicitly forming, storing, or inverting the Hessian is prohibitively expensive in large-scale training [34]. Therefore, instead of using the exact Hessian, practical curvature-aware optimizers [18, 2, 43, 59, 42, 26] often rely on tractable surrogates to approximately capture the curvature geometry of loss and have achieved effective empirical performance in training large scale models.

Therefore, it is reasonable to introduce a curvature-aware preconditioner $\mathcal{B}_t : \mathbb{R}^{m \times n} \rightarrow \mathbb{R}^{m \times n}$, which serves as a tractable surrogate for the local curvature geometry around the current iterate $\mathbf{X}_t$. With this curvature-aware surrogate, the local quadratic approximation of the training loss $f : \mathbb{R}^{m \times n} \rightarrow \mathbb{R}$ at $\mathbf{X}_t$ can be formulated as

$$f(\mathbf{X}_t + \eta_t \mathbf{\Delta}) \approx f(\mathbf{X}_t) + \eta_t \langle \nabla f(\mathbf{X}_t), \mathbf{\Delta} \rangle + \frac{\eta_t^2}{2} \langle \mathbf{\Delta}, \mathcal{B}_t(\mathbf{\Delta}) \rangle. \quad (3)$$

Here, η_t is the step size and $\mathbf{\Delta} \in \mathbb{R}^{m \times n}$ is the update direction. The corresponding curvature-aware update direction can be obtained by minimizing (3) with respect to $\mathbf{\Delta}$:

$$\mathbf{\Delta}_t := \arg \min_{\mathbf{\Delta} \in \mathbb{R}^{m \times n}} \langle \nabla f(\mathbf{X}_t), \mathbf{\Delta} \rangle + \frac{\eta_t}{2} \langle \mathbf{\Delta}, \mathcal{B}_t(\mathbf{\Delta}) \rangle. \quad (4)$$

To understand the curvature-aware geometry characterized by $\mathcal{B}_t$, we define the preconditioned update direction as

$$\tilde{\mathbf{\Delta}} := \mathcal{B}_t^{1/2}(\mathbf{\Delta}), \quad (5)$$

where $\mathcal{B}_t^{1/2}$ denotes the positive definite square root of $\mathcal{B}_t$. Substituting the preconditioned variable into the quadratic term of (4) yields

$$\langle \mathbf{\Delta}, \mathcal{B}_t(\mathbf{\Delta}) \rangle = \|\tilde{\mathbf{\Delta}}\|_F^2.$$

Therefore, in the preconditioned space induced by $\mathcal{B}_t^{1/2}$, the quadratic term in above becomes isotropic. Equivalently, the anisotropic geometry in the original Euclidean space is transformed into an approximately isotropic geometry in the preconditioned space. Thus, the local model in (3) can be regarded as solving an optimization problem in the preconditioned space as

$$\hat{\mathbf{\Delta}}_t := \arg \min_{\tilde{\mathbf{\Delta}} \in \mathbb{R}^{m \times n}} \left\langle \mathcal{B}_t^{-1/2}(\nabla f(\mathbf{X}_t)), \tilde{\mathbf{\Delta}} \right\rangle + \frac{\eta_t}{2} \|\tilde{\mathbf{\Delta}}\|_F^2, \quad (6)$$

where the preconditioned gradient $\mathcal{B}_t^{-1/2}(\nabla f(\mathbf{X}_t))$ is the gradient in the preconditioned space. The closed form solution of (6) is $\hat{\mathbf{\Delta}}_t := -\frac{1}{\eta_t} \mathcal{B}_t^{-1/2}(\nabla f(\mathbf{X}_t))$, which can be regarded as the gradient descent step in preconditioned space with step size η_t .

Although preconditioning can alleviate the curvature anisotropy, the direct gradient descent in preconditioned space has not explicitly considered the gradient anisotropy of $\mathcal{B}_t^{-1/2}(\nabla f(\mathbf{X}_t))$. To further reduce gradient anisotropy in the preconditioned space, we apply idea of orthogonalization in Muon to the preconditioned gradient as

$$\tilde{\mathbf{\Delta}}_t := \text{Orth} \left(\mathcal{B}_t^{-1/2}(\nabla f(\mathbf{X}_t)) \right). \quad (7)$$

Finally, we can map the above updated direction in preconditioned space back to the original space based on (5) to obtain the final update direction as

$$\Delta_t = \mathcal{B}_t^{-1/2} \left(\tilde{\Delta}_t \right) = \mathcal{B}_t^{-1/2} \left(\text{Orth} \left(\mathcal{B}_t^{-1/2} (\nabla f(\mathbf{X}_t)) \right) \right). \quad (8)$$

In summary, preconditioned Muon first applies curvature-aware preconditioning to reduce curvature anisotropy, then orthogonalizes the preconditioned gradient in the preconditioned space to reduce gradient anisotropy, and finally maps the resulting direction back to the original parameter space to obtain the final update direction.

3.3 Lightweight Diagonal Preconditioner

Many existing optimizers can be viewed as using a preconditioning operator $\mathcal{B} : \mathbb{R}^{m \times n} \rightarrow \mathbb{R}^{m \times n}$ to incorporate curvature information. Examples include diagonal preconditioners built from elementwise gradient second moments [33, 41], preconditioners based on Fisher information [2, 43], preconditioners based on GaussNewton matrices [42, 9], and structured preconditioners built from Kronecker factors approximation [26, 66]. These methods differ in the trade-off between curvature expressiveness, computational and memory efficiency. Elementwise adaptive methods have low computational costs, but they rescale each parameter entry independently and do not explicitly use the row and column structure of matrix parameters [26]. In contrast, Fisher, GaussNewton, and Shampoo methods capture richer curvature or matrix structure, but usually require dense blocks, Kronecker factors, or separate preconditioners for different tensor modes, together with matrix operations such as inversion or eigendecomposition.

We therefore use a pair of diagonal preconditioners, one on each side of the matrix. This choice preserves the row and column structure of matrix parameters without storing dense curvature factors or performing expensive matrix operations. Given the gradient $\mathbf{G}_t \in \mathbb{R}^{m \times n}$, we maintain exponential moving averages of the squared norms of its rows and columns:

$$\begin{aligned} (\mathbf{l}_t)_i &= \mu_2 (\mathbf{l}_{t-1})_i + (1 - \mu_2) \|(\mathbf{G}_t)_{i:}\|_2^2, \quad \forall i \in [m], \\ (\mathbf{r}_t)_j &= \mu_2 (\mathbf{r}_{t-1})_j + (1 - \mu_2) \|(\mathbf{G}_t)_{:j}\|_2^2, \quad \forall j \in [n], \\ \mathbf{P}_t &= \text{Diag} \left((\mathbf{l}_t + \epsilon)^{-1/8} \right), \quad \mathbf{Q}_t = \text{Diag} \left((\mathbf{r}_t + \epsilon)^{-1/8} \right), \end{aligned} \quad (9)$$

where $\epsilon > 0$ is a small damping constant for numerical stability. We then define the preconditioning operator by applying $\mathbf{P}_t$ and $\mathbf{Q}_t$ on the left and right as

$$\mathcal{B}_t(\mathbf{G}) := \mathbf{P}_t \mathbf{G} \mathbf{Q}_t, \quad \forall \mathbf{G} \in \mathbb{R}^{m \times n}. \quad (10)$$

Integrating the above preconditioner into Muon as (8) will obtain complete MALT update in Algorithm 1. The motivation for this preconditioner is fourfold.

- **Curvature-aware adaptive scaling.** The vectors $\mathbf{l}_t$ and $\mathbf{r}_t$ track EMAs of squared gradient norms across rows and columns, i.e., the diagonal parts of $\mathbf{G}_t \mathbf{G}_t^\top$ and $\mathbf{G}_t^\top \mathbf{G}_t$ over time. Although they do not estimate the Hessian, they provide a lightweight approximation for curvature geometry along row and column directions of loss. The intuition is that large entries in $\mathbf{l}_t$ or $\mathbf{r}_t$ suggest stronger local sensitivity or variation of the loss along the corresponding rows or column directions. $\mathbf{P}_t$ and $\mathbf{Q}_t$ then suppress updates along such rows or columns and allow relatively larger updates along rows or columns with smaller accumulated squared gradient norm, yielding a lightweight curvature-aware scaling mechanism.

- **Matrix structure awareness.** Elementwise adaptive methods assign a separate scaling factor to every parameter entry. In contrast, MALT scales a matrix $\mathbf{Z} \in \mathbb{R}^{m \times n}$ according to $(\mathbf{P}_t \mathbf{Z} \mathbf{Q}_t)_{ij} = (\mathbf{P}_t)_{ii} \mathbf{Z}_{ij} (\mathbf{Q}_t)_{jj}$. Thus, all entries in the same row share the factor $(\mathbf{P}_t)_{ii}$, while all entries in the same column share the factor $(\mathbf{Q}_t)_{jj}$. Each entry is therefore scaled using information from both its row and its column, rather than from that entry alone.
- **Memory efficiency.** For each matrix parameter in $\mathbb{R}^{m \times n}$, MALT only stores two vectors, $\mathbf{l}_t \in \mathbb{R}^m$ and $\mathbf{r}_t \in \mathbb{R}^n$, resulting in $\mathcal{O}(m+n)$ additional optimizer state memory. This overhead is negligible compared with the $\mathcal{O}(mn)$ memory required for the first order momentum and is substantially lower than storing dense matrix preconditioning factors.
- **Structured curvature approximation.** Existing studies [76, 77, 16] have shown that the Hessian of neural networks and Transformers often has a near block diagonal structure. This suggests that useful curvature information can be captured without forming a full dense Hessian. Motivated by this, MALT uses separable row and column gradient norms as a lightweight structured approximation to local curvature, reasonably providing a middle ground between the elementwise scaling of Adam and expensive dense matrix preconditioning.

3.4 Relation to Existing Optimizers

This section discusses the relation between the proposed MALT and existing optimizers.

Relation to Adafactor. Adafactor [60] reduces memory usage by storing only the row and column sums of the moving average of squared gradients. It uses their normalized outer product to approximate the full elementwise second moment estimate. MALT shares a similar idea but uses the row and column sums for a different purpose. It constructs diagonal preconditioners on the left and right of the momentum matrix before orthogonalization, rather than using them to approximate the full elementwise second moment estimate.

Relation to Shampoo. Given the gradient $\mathbf{G}_t \in \mathbb{R}^{m \times n}$, Shampoo [26] maintains dense accumulators for its rows and columns and defines the corresponding preconditioners as

$$\begin{aligned}
\mathbf{L}_t &= \mu_2 \mathbf{L}_{t-1} + (1 - \mu_2) \mathbf{G}_t \mathbf{G}_t^\top \\
\mathbf{R}_t &= \mu_2 \mathbf{R}_{t-1} + (1 - \mu_2) \mathbf{G}_t^\top \mathbf{G}_t \\
\mathbf{P}_t &= (\mathbf{L}_t + \epsilon \mathbf{I}_m)^{-1/8}, \quad \mathbf{Q}_t = (\mathbf{R}_t + \epsilon \mathbf{I}_n)^{-1/8} \\
\mathbf{W}_{t+1} &= \mathbf{W}_t - \eta_t \mathbf{P}_t (\mathbf{P}_t \mathbf{G}_t \mathbf{Q}_t) \mathbf{Q}_t.
\end{aligned} \tag{11}$$

Thus, Shampoo essentially firstly takes the gradient descent step in preconditioned space under full dense matrix preconditioners $\mathbf{P}_t, \mathbf{Q}_t$ and then maps the update direction back to the original space. The preconditioners in (9) retain this left and right structure but replace the dense matrices of Shampoo with diagonal matrices. The inverse eighth power in (9) is adopted from the corresponding Shampoo factors in (11).

Relation to SOAP. SOAP [66] combines Shampoo preconditioning with Adam in the eigenbasis of the Shampoo preconditioners. Let

$$\mathbf{L}_t = \mathbf{U}_t \mathbf{\Lambda}_t \mathbf{U}_t^\top, \quad \mathbf{R}_t = \mathbf{V}_t \mathbf{\Gamma}_t \mathbf{V}_t^\top, \quad \widehat{\mathbf{G}}_t = \mathbf{U}_t^\top \mathbf{G}_t \mathbf{V}_t, \tag{12}$$

where $\mathbf{U}_t \in \mathbb{O}^{m \times m}$ and $\mathbf{V}_t \in \mathbb{O}^{n \times n}$ contain the eigenvectors of $\mathbf{L}_t$ and $\mathbf{R}_t$. SOAP applies Adam to the rotated gradient $\widehat{\mathbf{G}}_t$ and maps the resulting direction back to the original parameter space:

$$\begin{aligned}\widehat{\mathbf{m}}_t &= \beta_1 \widehat{\mathbf{m}}_{t-1} + (1 - \beta_1) \widehat{\mathbf{G}}_t, \\ \widehat{\mathbf{v}}_t &= \beta_2 \widehat{\mathbf{v}}_{t-1} + (1 - \beta_2) \widehat{\mathbf{G}}_t \odot \widehat{\mathbf{G}}_t, \\ \widehat{\Delta}_t &= \frac{\widehat{\mathbf{m}}_t}{\sqrt{\widehat{\mathbf{v}}_t} + \epsilon}, \quad \mathbf{W}_{t+1} = \mathbf{W}_t - \eta_t \mathbf{U}_t \widehat{\Delta}_t \mathbf{V}_t^\top.\end{aligned}\tag{13}$$

Hence, SOAP can be viewed as applying Adam in the eigenspace induced by the Shampoo preconditioners.

One may try to combine SOAP with Muon by applying orthogonalization in the same eigenspace:

$$\widehat{\mathbf{G}}_t = \mathbf{U}_t^\top \mathbf{G}_t \mathbf{V}_t, \quad \widehat{\mathbf{O}}_t = \text{Orth}(\widehat{\mathbf{G}}_t), \quad \Delta_t = \mathbf{U}_t \widehat{\mathbf{O}}_t \mathbf{V}_t^\top.\tag{14}$$

This construction, however, gives exactly the same direction as applying Muon in the original parameter space. The polar factor is equivariant under orthogonal transformations:

$$\text{Orth}(\mathbf{U}_t^\top \mathbf{G}_t \mathbf{V}_t) = \mathbf{U}_t^\top \text{Orth}(\mathbf{G}_t) \mathbf{V}_t.\tag{15}$$

It follows that

$$\begin{aligned}\Delta_t &= \mathbf{U}_t \text{Orth}(\mathbf{U}_t^\top \mathbf{G}_t \mathbf{V}_t) \mathbf{V}_t^\top \\ &= \text{Orth}(\mathbf{G}_t).\end{aligned}\tag{16}$$

Thus, rotating the gradient into the Shampoo eigenbasis before orthogonalization does not change the Muon direction. SOAP behaves differently because Adam is not invariant under orthogonal transformation: its elementwise second moment depends on the basis in which it is computed.

Relation to Mousse and FISMO. Independent works Mousse [75] and FISMO [68] are the most closely related curvature-aware Muon variants. They share the same goal as MALT: introducing preconditioning to address curvature anisotropy issue of vanilla Muon. There are three main key differences between these two works and ours.

1. FISMO and Mousse use denser representations of curvature. FISMO describes the local geometry using a Fisher metric with a Kronecker structure, whereas Mousse uses dense Shampoo factors to construct a preconditioned space. For a matrix parameter in $\mathbb{R}^{m \times n}$, both methods maintain matrices on the left and right, requiring $\mathcal{O}(m^2 + n^2)$ additional optimizer state.
2. These dense factors also require additionally expensive matrix computations. FISMO computes matrix inverses or inverse roots to obtain its left and right preconditioners, while Mousse periodically performs eigendecompositions of the Shampoo factors.
3. Mousse updates the eigenspaces of its preconditioner periodically rather than at every step. Between two consecutive updates, the same preconditioner are reused. The preconditioner may therefore respond with a delay when the local curvature changes rapidly during training, which can result in unstable training as found in existing work [21].

In contrast, MALT uses diagonal preconditioners on the left and right and updates them at every step. This design may capture less curvature information than dense preconditioning, but requires substantially less memory and computation. MALT therefore remains close to Muon in cost while still adapting the update to curvature.

3.5 Norm Grafting in MALT and Adaptive MALT

In MALT, we obtain the update as $\mathbf{D}_t = \mathbf{L}_t \mathbf{O}_t \mathbf{R}_t$ in the 10th line of Algorithm 1. The eighth square root of $\mathbf{l}_t, \mathbf{r}_t$ can make the update too aggressive if some rows or columns have very small norms and the damping parameter ϵ is too small. Thus, when we try to use $\mathbf{D}_t$ as an update directly, we find that we have to use a very small learning rate to prevent divergence, which results in slow convergence. Thus, we use the idea of grafting [1, 4] to decouple the update direction and update magnitude.

Algorithm 2 Adaptive MALT (MALTER) Update

Input: learning rate η , momentum $\mu_1, \mu_2 \in [0, 1)$, batch size B and damping constant ϵ .

Initialize: $\mathbf{W}_0 \in \mathbb{R}^{m \times n}$, $\mathbf{M}_0 = \mathbf{0}_{m \times n}$, $\mathbf{l}_0 = \mathbf{0}_m$, $\mathbf{r}_0 = \mathbf{0}_n$, and $\nu_0 = 0$.

```

1: for  $t = 1, \dots, T$  do
2:   Sample a minibatch  $\mathcal{B}_t$  with  $|\mathcal{B}_t| = B$  and compute the stochastic gradient  $\mathbf{G}_t = \frac{1}{B} \sum_{i \in \mathcal{B}_t} \nabla f_i(\mathbf{W}_{t-1}; \xi_i)$ .
3:    $\mathbf{M}_t \leftarrow \mu_1 \mathbf{M}_{t-1} + (1 - \mu_1) \mathbf{G}_t$ .
4:    $\mathbf{l}_t \leftarrow \mu_2 \mathbf{l}_{t-1} + (1 - \mu_2) [|\mathbf{G}_t[1, :]|_2^2; \dots; |\mathbf{G}_t[m, :]|_2^2]$ .
5:    $\mathbf{r}_t \leftarrow \mu_2 \mathbf{r}_{t-1} + (1 - \mu_2) [|\mathbf{G}_t[:, 1]|_2^2; \dots; |\mathbf{G}_t[:, n]|_2^2]$ .
6:    $\mathbf{L}_t \leftarrow \text{Diag}((\mathbf{l}_t + \epsilon)^{-1/8})$  and  $\mathbf{R}_t \leftarrow \text{Diag}((\mathbf{r}_t + \epsilon)^{-1/8})$ .
7:    $\widetilde{\mathbf{M}}_t \leftarrow \mathbf{L}_t \mathbf{M}_t \mathbf{R}_t$ 
8:    $\mathbf{O}_t \leftarrow \text{Orth}(\widetilde{\mathbf{M}}_t)$ 
9:    $\mathbf{D}_t \leftarrow \mathbf{L}_t \mathbf{O}_t \mathbf{R}_t$ 
10:   $v_t \leftarrow \mu_2 v_{t-1} + (1 - \mu_2) \|\mathbf{L}_t \mathbf{G}_t \mathbf{R}_t\|_F^2$ .
11:   $\alpha_t \leftarrow \eta \frac{\sqrt{1 - \mu_2^t} \|\widetilde{\mathbf{M}}_t\|_F}{1 - \mu_1^t + \epsilon \sqrt{\nu_t + \epsilon}}$ .
12:   $\mathbf{W}_t \leftarrow \mathbf{W}_{t-1} - \eta \alpha_t \frac{\|\mathbf{O}_t\|_F}{\|\mathbf{D}_t\|_F + \epsilon} \mathbf{D}_t$ 
13: end for
14: return  $\mathbf{W}_T$ .
```

We normalize the preconditioned update $\mathbf{D}_t$ to obtain the update direction with unit Frobenius norm. For the updating magnitude we utilize the Frobenius norm of the orthogonal update $\mathbf{O}_t$ as the grafting norm. This grafting aims to make the update magnitude match that of the orthogonal update in the preconditioned space.

But the update magnitude obtained by grafting in the 11th line of Algorithm 1 cannot make the update magnitude adapt to the stochastic gradient noise. Motivated by existing work [20], which has shown that noise adaptation is as important as the update direction for the optimizers. The optimizers with noise adaptation consistently outperform their counterparts without noise adaptation. For example, Adam is better than Signum [7], SOAP is better than SPlus [21], and AdaMuon [62] is better than Muon. We propose the noise-adaptive version of MALT to enhance the performance of MALT as Algorithm 2.

The noise-adaptive stepsize in MALTER follows the same norm-based Adam-type principle as NAMO [73], but it is applied in the preconditioned space induced by MALT. The key idea of NAMO is to keep orthogonal update direction of Muon, while using an Adam-type scalar to adjust its magnitude according to the noise level of stochastic gradients. MALTER adopts the same idea after diagonal precondition. Specifically, it forms the preconditioned momentum $\widetilde{\mathbf{M}}_t = \mathbf{L}_t \mathbf{M}_t \mathbf{R}_t$

and maintains a scalar estimate $\nu_t = \mu_2 \nu_{t-1} + (1 - \mu_2) \|\mathbf{L}_t \mathbf{G}_t \mathbf{R}_t\|_F^2$. The adaptive factor

$$\alpha_t = \frac{\sqrt{1 - \mu_2^t} \|\widetilde{\mathbf{M}}_t\|_F}{1 - \mu_1^t + \epsilon \sqrt{\nu_t} + \epsilon} \quad (17)$$

therefore approximately measures the signal-to-noise ratio of stochastic preconditioned gradient. Thus, MALTER preserves Adam-style noise adaptation in NAMO, while adapting it to the curvature-aware precondition of MALT. This makes the update scale responsive to stochastic gradient fluctuations without discarding the preconditioned orthogonalization mechanism used to address curvature and gradient anisotropy. In addition, we can observe that the memory and computational overhead of MALTER is negligible compared with MALT and Muon.

4 Convergence Analysis of MALT

This section gives the convergence guarantee of MALT. Before providing the convergence result of MALT, we need the following standard assumptions for the loss function (1).

Assumption 1. (*Lower boundedness*). Loss function f admits a finite lower bound, i.e.

$$\inf_{\mathbf{W} \in \mathbb{R}^{m \times n}} f(\mathbf{W}) := f^* > -\infty. \quad (18)$$

Assumption 2. (*L-smoothness*) The loss function $f : \mathbb{R}^{m \times n} \rightarrow \mathbb{R}$ is differentiable and there exists a constant $L > 0$ such that

$$f(\mathbf{W}_2) \leq f(\mathbf{W}_1) + \langle \nabla f(\mathbf{W}_1), \mathbf{W}_2 - \mathbf{W}_1 \rangle + \frac{L}{2} \|\mathbf{W}_2 - \mathbf{W}_1\|_F^2. \quad (19)$$

Assumption 3. (*Bounded variance*). Let ξ be a random variable that is independent of $\mathbf{W} \in \mathbb{R}^{m \times n}$, we assume $\nabla f(\mathbf{W}; \xi)$ is an unbiased stochastic estimator of true gradient $\nabla f(\mathbf{W})$ and have a bounded variance, i.e.

$$\mathbb{E}[\nabla f(\mathbf{W}; \xi)] = \nabla f(\mathbf{W}), \quad \mathbb{E}[\|\nabla f(\mathbf{W}; \xi) - \nabla f(\mathbf{W})\|_F^2] \leq \sigma^2. \quad (20)$$

Based on the above assumptions, we have the convergence guarantee for the proposed MALT in the following theorem.

Theorem 1. Without loss of generality, we assume $m \geq n$, if Assumptions 1-3 and following conditions

$$\eta = \frac{\epsilon^{\frac{5}{8}}}{n^{\frac{3}{4}}} \sqrt{\frac{2\Delta_{0,1}(1 - \mu_1)}{5LT}}, \quad 1 - \mu_1 = \min \left\{ \epsilon^{\frac{5}{8}} \sqrt{\frac{5LB\Delta_{0,1}}{2Tn^{\frac{1}{2}}\sigma^2}}, 1 \right\} \quad (21)$$

are satisfied, then $\forall \epsilon \in (0, 1)$ the proposed MALT in Algorithm 1 has

$$\begin{aligned} \min_{t=1, \dots, T} \min \left\{ \mathbb{E} \left[\|\nabla f(\mathbf{W}_{t-1})\|_F^{\frac{1}{2}} \right], \frac{\mathbb{E}^2 \left[\|\nabla f(\mathbf{W}_{t-1})\|_F^{\frac{1}{2}} \right]}{1 + 2n^{\frac{1}{4}} \sqrt{\frac{\eta L}{1 - \mu_2}} + \frac{\sqrt{\sigma}}{B^{\frac{1}{4}}}} \right\} &\leq 16\epsilon^{-\frac{19}{16}} n^{\frac{7}{8}} \sqrt{\frac{L\Delta_{0,1}\sigma^2}{TB}} + 8\epsilon^{-\frac{17}{8}} n^{\frac{5}{4}} \frac{\Delta_{0,2}\sigma}{\sqrt{TLB\Delta_{0,1}}} \\ &\quad + 31\epsilon^{-\frac{7}{8}} n^{\frac{3}{4}} \sqrt{\frac{L\Delta_{0,1}}{T}} + \frac{8\epsilon^{-\frac{3}{2}} n \Delta_{0,2}}{T}, \end{aligned} \quad (22)$$

where $\Delta_{0,1} := f(\mathbf{W}_0) - f^*$, $\Delta_{0,2} := \|\nabla f(\mathbf{W}_0)\|_F$.

Compared with standard Muon convergence bounds, the stationarity measure in Theorem 1 is different from the usual Euclidean gradient norm $\mathbb{E} [\|\nabla f(\mathbf{W}_t)\|_F]$ [46, 73] or nuclear-norm measure $\mathbb{E} [\|\nabla f(\mathbf{W}_t)\|_*]$ [61]. This difference comes from the stochastic diagonal preconditioners $\mathbf{L}_t$ and $\mathbf{R}_t$. In the proof, the descent lemma involves controlling the preconditioned gradient norm $\|\mathbf{L}_t \nabla f(\mathbf{W}_{t-1}) \mathbf{R}_t\|_F$, rather than directly through $\|\nabla f(\mathbf{W}_{t-1})\|_F$, which introduces a random denominator in the lower bound of the preconditioned gradient norm as in (24).

When we seek a high-accuracy solution such that $\mathbb{E} [\|\nabla f(\mathbf{W}_{t-1})\|_F^{1/2}]$ is sufficiently small, the convergence metric is dominated by $\mathbb{E}^2 [\|\nabla f(\mathbf{W}_{t-1})\|_F^{1/2}]$. This implies that the complexity of finding a point satisfying $\mathbb{E}^2 [\|\nabla f(\mathbf{W}_{t-1})\|_F^{1/2}] \leq \delta$ is $\mathcal{O}\left(\frac{n^{7/2} L \Delta_{0,1} \sigma^2}{B} \delta^{-4}\right)$. This matches the δ^{-4} accuracy dependence of existing stochastic non-convex analyses of Muon [61, 46], while incurring a worse polynomial dependence on the matrix dimension n . However, since $\mathbb{E}^2 [\|\nabla f(\mathbf{W}_{t-1})\|_F^{1/2}] \leq \mathbb{E} [\|\nabla f(\mathbf{W}_{t-1})\|_F]$, this convergence metric indicates that our convergence guarantee is weaker than those in existing results.

5 Experiments

This section presents the performance of our proposed optimizers on large language model (LLM) pretraining tasks

5.1 Settings

Models and Dataset. We evaluate MALT and the baselines on GPT-2 pretraining. The model implementation is based on NanoGPT [32]. In order to validate the scalability of our proposed optimizers, we consider three model sizes: GPT-2 Small (124M), GPT-2 Medium (355M), and GPT-2 Large (774M). All experiments are conducted on the OpenWebText dataset [24], which contains approximately 9B training tokens and 4.4M validation tokens.

Baselines and Parameter Grouping. We compare our proposed MALT and MALTER with Muon [30] and AdamW [33]. Since Muon-style updates are designed for matrix-valued parameters, we apply Muon, MALT, and MALTER to matrix parameters only, and use AdamW to optimize the vectors, scalars, embedding layers, and output head layers. For a fair comparison, this parameter grouping remains the same among Muon-style optimizers.

Training Protocols. All experiments use a global batch size of 480 and a block size of 1024, corresponding to 491,520 tokens per optimizer step. We evaluate training and validation losses every 500 steps by averaging over 200 mini-batches.

For a fair comparison, we first perform an extensive grid search over learning rates, as is shown in Table 2. For each optimizer, we train the model for 10K steps and select the best learning rate according to the minimum validation loss. The optimal learning rates are reported in Table 1. We use a linear warmup schedule for the first 10% of training steps to reach the stable learning rate.

In order to further find out the final convergent performance, we continue to train the models using the checkpoint of each model under the optimal learning rate. GPT-2 Small, Medium, and Large are trained for 50K, 10K, and 20K steps in total, respectively.

Hardware. All pretraining experiments are conducted on a cloud GPU cluster with 4 H100 GPUs, and a workstation with 2 PRO6000 GPUs. A subset of the learning-rate sweep experiments for GPT-2 Small and Medium is conducted on PRO6000 GPUs. Since these runs are used only for

loss comparison under the same training protocol, hardware differences do not affect the reported validation-loss values. All wall-clock time and memory measurements are conducted on a single H100 GPU.

Model Size	Optimal Learning Rate			
	AdamW	Muon	MALT	MALTER
Small (124M)	0.0013	0.0013	0.0013	0.012
Medium (355M)	0.0009	0.0009	0.0009	0.009
Large (774M)	0.0009	0.0007	0.0007	0.006

Table 1: Optimal learning rates found via grid search for each model scale and optimizer. (See Table 6 for the configuration of other hyperparameters.)

Model Size	Optimizer	Learning Rate Grid
Small (124M)	AdamW, Muon, MALT MALTER	{0.0005, 0.0009, 0.0013, 0.0018, 0.0025, 0.0032} {0.007, 0.009, 0.012, 0.015, 0.018, 0.025}
Medium (355M)	AdamW, Muon, MALT MALTER	{0.0005, 0.0009, 0.0013, 0.0018, 0.0025, 0.0032} {0.005, 0.006, 0.007, 0.009, 0.013, 0.015}
Large (774M)	AdamW, Muon, MALT MALTER	{0.0003, 0.0005, 0.0006, 0.0007, 0.0009, 0.0013} {0.003, 0.005, 0.006, 0.007, 0.009, 0.013}

Table 2: Full learning rate search grids for all model scales. AdamW, Muon, and MALT share the same search space, while MALTER is tuned on a distinct grid.

5.2 Results of GPT-2 Pretraining

MALT and MALTER improve GPT-2 pretraining. Table 3 reports the final training and validation losses under the selected learning rates. Muon already improves over AdamW on validation loss, reducing the loss by 0.0068, 0.0252, and 0.4857 on GPT-2 Small, Medium, and Large, respectively. MALT further improves over Muon, with additional validation-loss reductions of 0.0114, 0.0108, and 0.0125 across the three model scales. MALTER achieves the largest improvement, further reducing the validation loss over Muon by 0.0241, 0.0277, and 0.0164, and obtains the best validation loss in all settings. These results show that the proposed methods consistently strengthen Muon on GPT-2 pretraining while preserving the advantage of Muon over AdamW.

Figures 2, 3 and 4 show that MALT and MALTER outperform Muon and AdamW throughout the pretraining process. On all three models, their training and validation loss curves remain below AdamW and Muon. This indicates that the proposed MALT and MALTER improve not only the final loss but also the iteration efficiency. In particular, MALT and MALTER reach lower loss values with fewer optimization steps. Among the compared methods, MALTER achieves the best overall performance.

Model Size	Metric	Optimizers			
		AdamW	Muon	MALT	MALTER
Small (124M)	Train Loss	3.0467	3.0298	3.0193	3.0063
	Val Loss	3.0540	3.0472	3.0358	3.0231
Medium (355M)	Train Loss	2.9851	2.9599	2.9490	2.9282
	Val Loss	2.9971	2.9719	2.9611	2.9442
Large (774M)	Train Loss	3.2404	2.7604	2.7480	2.7442
	Val Loss	3.2705	2.7848	2.7723	2.7684

Table 3: Final training and validation loss achieved by different optimizers across varying model scales. The maximum steps of small, medium and large models are 50K, 10K and 20K, respectively.



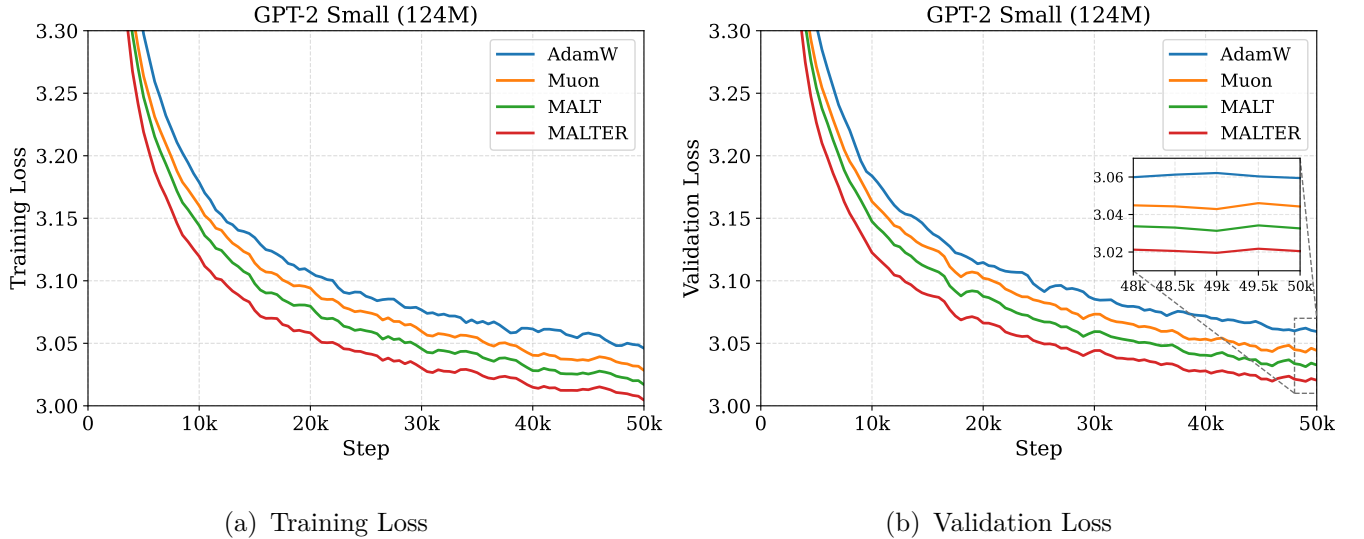


Figure 2: GPT-2 small (124M) pretraining. The small model is trained under learning rates reported in Table 1 for 50K steps.

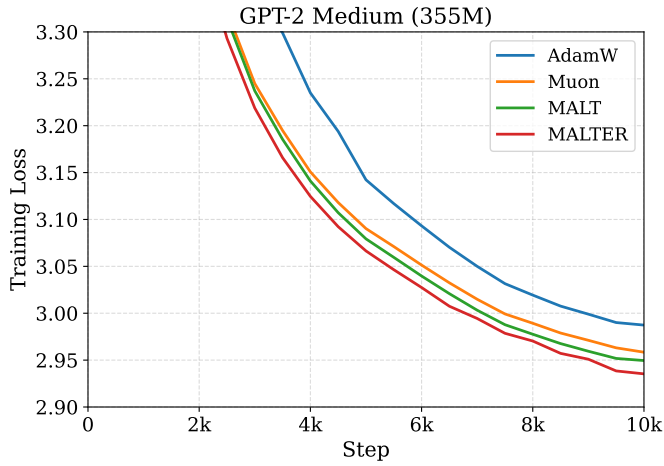


(a) Training Loss

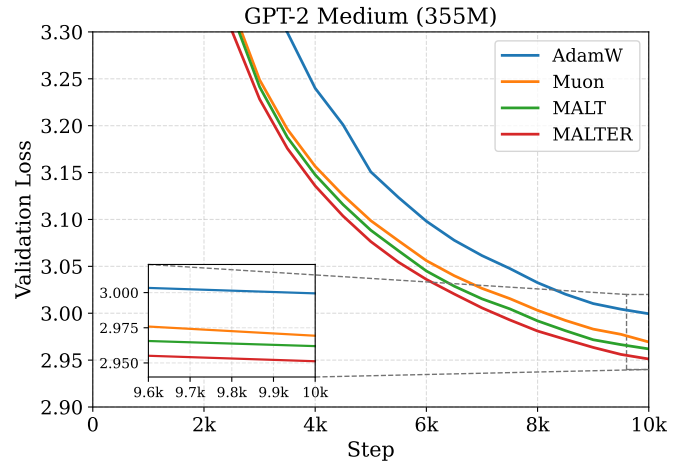


(b) Validation Loss

Figure 3: GPT-2 medium (355 M) pretraining. The medium model is trained under learning rates reported in Table 1 for 10K steps.

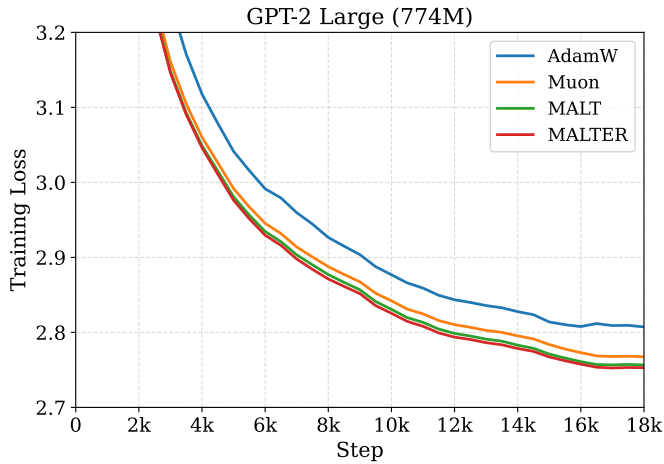

(a) Training Loss

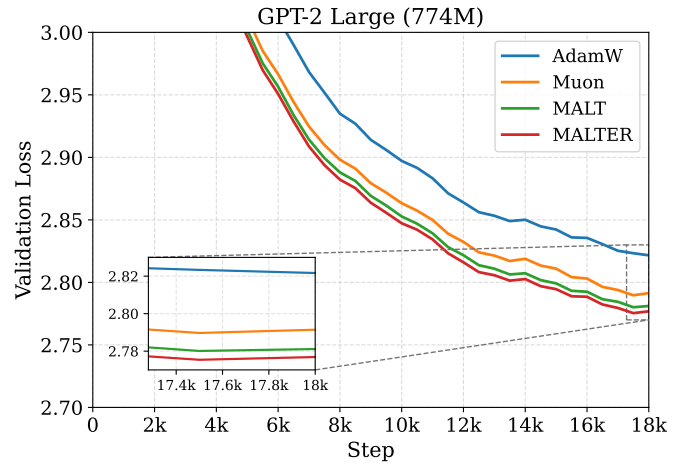

(b) Validation Loss

Figure 4: GPT-2 large (774 M) pretraining. The large model is trained at learning rates reported in Table 1 for 20K steps, we plot the first 18K steps. (*Remark: AdamW diverges in the last 500 steps, with final validation loss 3.2705.*)

5.3 Performance Under Different Learning Rates

In this section, we report the results of the 10K-step learning-rate sweep described in Section 5.1. Figure 5 shows the final validation loss across the learning-rate grids for training GPT-2 Small, Medium, and Large for 10K steps. These sweep experiments not only find the optimal learning rate of each optimizer, but also reflect the consistent performance gain of MALT and MALTER under different learning rates. As presented in Figure 5, on each learning rate grid, MALT achieves a lower validation loss than Muon and AdamW. In particular, MALTER attains the best performance across all model scales. These results suggest that the gains of MALT and MALTER are not merely due to a favorable learning-rate choice.

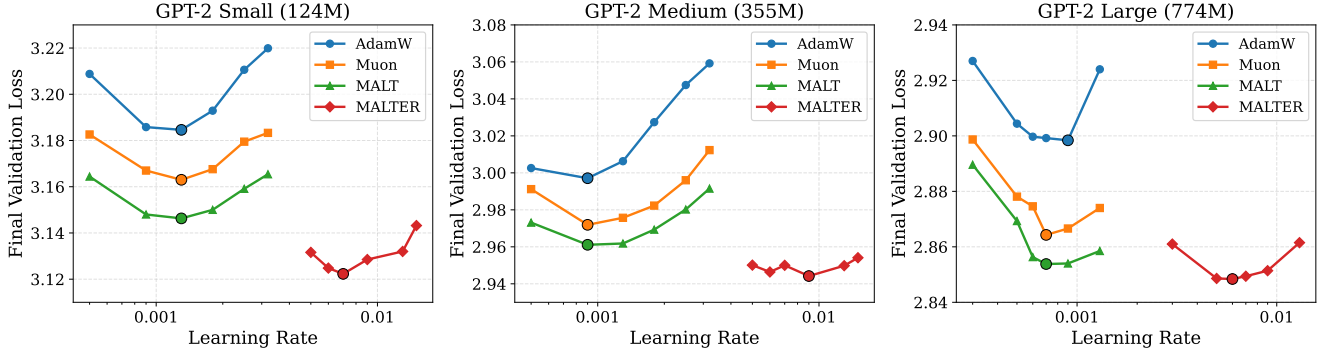


Figure 5: Final validation loss of pretraining GPT-2 Small, Medium and Large for 10K steps. The learning-rate grids are shown in Table 2. The best point for each optimizer is marked by a dot.

5.4 Analysis of Diagonal Preconditioners

In this section, we further analyze the left and right diagonal preconditioners of MALT. To verify that these preconditioners are not trivial scalings, we train a GPT-2 medium model for 3500 steps using MALT, with a learning rate 0.0009, and collect the $\mathbf{l}_t$ and $\mathbf{r}_t$ every 50 steps.

In Figure 6, we visualize the condition numbers of the left and right diagonal preconditioners for representative Transformer blocks. Here, `attn.c_attn` denotes the fused query-key-value projection, `attn.c_proj` denotes the output projection of the self-attention module, `mlp.c_fc` denotes the expansion layer in the feed-forward network, and `mlp.c_proj` denotes the corresponding down-projection layer. It can be seen that the condition numbers of preconditioners are often much larger than one across different layers and modules. This indicates that the diagonal preconditioners are non-trivial and capture substantial row- and column-wise anisotropy of the gradient during training.

5.5 Time and Memory Overhead Analysis

In this section, we demonstrate the memory and computation efficiency of MALT and MALTER. We conducted concrete experiments to compare the optimizer state memory and per-iteration wall-clock time of our proposed MALT and MALTER with AdamW and Muon.

For a matrix parameter $W \in \mathbb{R}^{m \times n}$, AdamW stores two momentum matrices of size mn , while Muon stores one momentum matrix of size mn . Compared to Muon, MALT and APDMuon introduce mild additional memory overheads. Specifically, MALT introduces two additional vectors

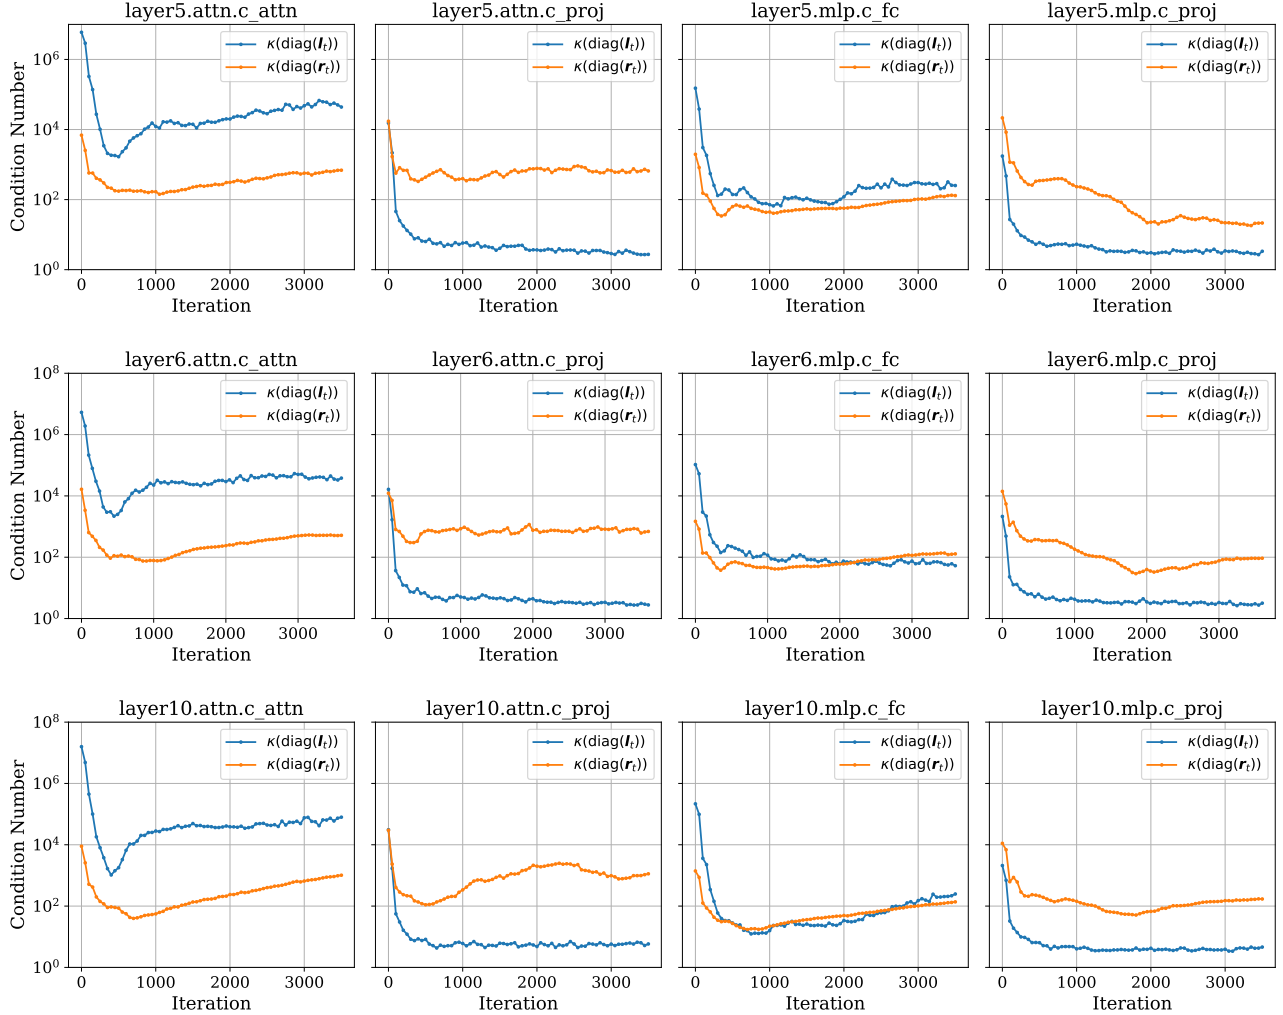


Figure 6: Condition numbers of the diagonal preconditioners in MALT for representative transformer layers. From top to bottom, we show Layer 0, Layer 5, and Layer 10. For each layer, we report the condition number of $\text{diag}(\mathbf{l}_t)$ and $\text{diag}(\mathbf{r}_t)$ for attention and MLP matrices.

of sizes m and n for each matrix parameter. Except for two vectors, MALTER further introduces only one scalar state per matrix parameter.

Apart from the memory efficiency, MALT and MALTER enjoy high computational efficiency. We measure the per-iteration wall-clock time and optimizer state memory of AdamW, Muon, MALT and MALTER. As shown in Table 5, MALT and MALTER achieve comparable per-iteration wall-clock time and optimizer state memory to Muon. All time and memory measurements are conducted on the same single H100 GPU. The settings remain the same as previously stated, on a GPT-2 Medium (355M) model.

6 Conclusion

We proposed MALT, a lightweight curvature-aware Muon variant that performs orthogonalization in a row-column diagonally preconditioned space. By combining two-sided diagonal preconditioning, preconditioned orthogonalization, and norm grafting, MALT addresses curvature anisotropy

Optimizer	Optimizer State Complexity
AdamW	$2mn$
Muon	mn
MALT	$mn + m + n$
MALTER	$mn + m + n + 1$

Table 4: Optimizer-state memory complexity of AdamW, Muon, MALT, and MALTER.

Optimizer	Optimizer State Memory (MB)	Time per Iteration (ms)
AdamW	2705.38	2605.16
Muon	1553.38	2637.62
MALT	1554.88	2652.55
MALTER	1554.88	2666.22

Table 5: Optimizer-state memory and per-iteration wall-clock time during the pretraining of GPT-2 Medium (355M) tested on a single H100 GPU.

and gradient anisotropy while preserving nearly the same memory and computational cost as Muon. We further introduced MALTER, which incorporates a norm-based noise-adaptive scalar stepsize in the preconditioned space. We established a stochastic non-convex convergence guarantee for MALT and demonstrated on GPT-2 pretraining that MALT and MALTER consistently outperform Muon, with MALTER achieving the best overall validation performance. These results indicate that curvature-aware preconditioning and noise-adaptive scale control are useful and complementary ingredients for designing efficient matrix-aware optimizers.

References

- [1] Naman Agarwal, Rohan Anil, Elad Hazan, Tomer Koren, and Cyril Zhang. Disentangling adaptive gradient methods from learning rates. *arXiv preprint arXiv:2002.11803*, 2020.
- [2] Shun-ichi Amari. Natural gradient works efficiently in learning. *Neural Computation*, 10(2):251–276, 1998.
- [3] Noah Amsel, David Persson, Christopher Musco, and Robert M. Gower. The polar express: Optimal matrix sign methods and their application to the muon algorithm. *arXiv preprint arXiv:2505.16932*, 2025.
- [4] Rohan Anil, Vineet Gupta, Tomer Koren, Kevin Regan, and Yoram Singer. Scalable second order optimization for deep learning. *arXiv preprint arXiv:2002.09018*, 2020.
- [5] Rohan Anil, Vineet Gupta, Tomer Koren, and Yoram Singer. Memory efficient adaptive optimization. In *Advances in Neural Information Processing Systems*, 2019.
- [6] Gerard Ben Arous, Reza Gheissari, Jiaoyang Huang, and Aukosh Jagannath. High-dimensional sgd aligns with emerging outlier eigenspaces. In *International Conference on Learning Representations*, volume 2024, pages 47732–47778, 2024.

- [7] Jeremy Bernstein, Yu-Xiang Wang, Kamyar Azizzadenesheli, and Anima Anandkumar. signsgd: Compressed optimisation for non-convex problems. In *International Conference on Machine Learning*, pages 560–569. PMLR, 2018.
- [8] Rishi Bommasani, Drew A. Hudson, Ehsan Adeli, Russ Altman, Simran Arora, Sydney von Arx, Michael S. Bernstein, Jeannette Bohg, Antoine Bosselut, Emma Brunskill, et al. On the opportunities and risks of foundation models. *arXiv preprint arXiv:2108.07258*, 2021.
- [9] Aleksandar Botev, Hippolyt Ritter, and David Barber. Practical gauss-newton optimisation for deep learning. In *International Conference on Machine Learning*, pages 557–565. PMLR, 2017.
- [10] Da Chang, Qiankun Shi, Lvgang Zhang, Yu Li, Ruijie Zhang, Yao Lu, Yongxiang Liu, and Ganzhao Yuan. Muoneq: Balancing before orthogonalization with lightweight equilibration. *arXiv preprint arXiv:2603.28254*, 2026.
- [11] Peng Cheng, Jiucheng Zang, Qingnan Li, Liheng Ma, Yufei Cui, Yingxue Zhang, Boxing Chen, Ming Jian, and Wen Tong. Trasmuon: Trust-region adaptive scaling for orthogonalized momentum optimizers. *arXiv preprint arXiv:2602.13498*, 2026.
- [12] Yann N. Dauphin, Razvan Pascanu, Caglar Gulcehre, Kyunghyun Cho, Surya Ganguli, and Yoshua Bengio. Identifying and attacking the saddle point problem in high-dimensional non-convex optimization. In *Advances in Neural Information Processing Systems*, volume 27, 2014.
- [13] DeepSeek-AI. DeepSeek-V3.2: Pushing the frontier of open large language models. *arXiv preprint arXiv:2512.02556*, 2025.
- [14] Shenyang Deng, Zhuoli Ouyang, Tianyu Pang, Zihang Liu, Ruochen Jin, Shuhua Yu, and Yaoqing Yang. Rmnp: Row-momentum normalized preconditioning for scalable matrix-based optimization. *arXiv preprint arXiv:2603.20527*, 2026.
- [15] Alec Dewulf, Dhruv Pai, Li Yang, Ashley Zhang, and Ben Keigwin. Aurora: A leverage-aware optimizer for rectangular matrices, 2026. URL <https://blog.tilderresearch.com/blog/aurora>, 2026.
- [16] Zhaorui Dong, Yushun Zhang, Jianfeng Yao, and Ruoyu Sun. Towards quantifying the hessian structure of neural networks. *arXiv preprint arXiv:2505.02809*, 2025.
- [17] Zhehang Du and Weijie Su. The newton-muon optimizer. *arXiv preprint arXiv:2604.01472*, 2026.
- [18] John Duchi, Elad Hazan, and Yoram Singer. Adaptive subgradient methods for online learning and stochastic optimization. *Journal of Machine Learning Research*, 12(61):2121–2159, 2011.
- [19] Sai Surya Duvvuri, Fnu Devvrit, Rohan Anil, Cho-Jui Hsieh, and Inderjit S. Dhillon. Combining axes preconditioners through kronecker approximation for deep learning. In *International Conference on Learning Representations*, 2024.
- [20] Kevin Frans, Pieter Abbeel, and Sergey Levine. What really matters in matrix-whitening optimizers? *arXiv preprint arXiv:2510.25000*, 2025.

- [21] Kevin Frans, Sergey Levine, and Pieter Abbeel. A stable whitening optimizer for efficient neural network training. *Advances in Neural Information Processing Systems*, 38:174086–174110, 2026.
- [22] Gemini Team, Google. Gemini 2.5: Pushing the frontier with advanced reasoning, multimodality, long context, and next generation agentic capabilities. *arXiv preprint arXiv:2507.06261*, 2025.
- [23] Behrooz Ghorbani, Shankar Krishnan, and Ying Xiao. An investigation into neural net optimization via hessian eigenvalue density. In *Proceedings of the 36th International Conference on Machine Learning*, volume 97 of *Proceedings of Machine Learning Research*, pages 2232–2241. PMLR, 2019.
- [24] Aaron Gokaslan, Vanya Cohen, Ellie Pavlick, and Stefanie Tellex. Openwebtext corpus, 2019.
- [25] Ekaterina Grishina, Matvey Smirnov, and Maxim Rakhuba. Accelerating newton-schulz iteration for orthogonalization via chebyshev-type polynomials. *arXiv preprint arXiv:2506.10935*, 2025.
- [26] Vineet Gupta, Tomer Koren, and Yoram Singer. Shampoo: Preconditioned stochastic tensor optimization. In *Proceedings of the 35th International Conference on Machine Learning*, volume 80 of *Proceedings of Machine Learning Research*, pages 1842–1850. PMLR, 2018.
- [27] Chuan He, Zhanwang Deng, and Zhaosong Lu. Low-rank orthogonalization for large-scale matrix optimization with applications to foundation model training. *arXiv preprint arXiv:2509.11983*, 2025.
- [28] Zhendong Huang, Hengjie Cao, Fang Dong, Ruijun Huang, Mengyi Chen, Yifeng Yang, Xin Zhang, Anrui Chen, Mingzhi Dong, Yujiang Wang, et al. Spectra: Rethinking optimizers for llms under spectral anisotropy. *arXiv preprint arXiv:2602.11185*, 2026.
- [29] Adam Ibrahim, Benjamin Thérien, Kshitij Gupta, Mats L. Richter, Quentin Anthony, Timothée Lesort, Eugene Belilovsky, and Irina Rish. Simple and scalable strategies to continually pre-train large language models. In *International Conference on Learning Representations*, 2024.
- [30] Keller Jordan, Yuchen Jin, Vlado Boza, You Jiacheng, Franz Cesista, Laker Newhouse, and Jeremy Bernstein. Muon: An optimizer for hidden layers in neural networks, 2024. *URL* <https://kellerjordan.github.io/posts/muon>, 6(3):4, 2024.
- [31] Jared Kaplan, Sam McCandlish, Tom Henighan, Tom B. Brown, Benjamin Chess, Rewon Child, Scott Gray, Alec Radford, Jeffrey Wu, and Dario Amodei. Scaling laws for neural language models. *arXiv preprint arXiv:2001.08361*, 2020.
- [32] Andrej Karpathy. nanogpt. <https://github.com/karpathy/nanoGPT>, 2022. GitHub repository.
- [33] Diederik P. Kingma and Jimmy Ba. Adam: A method for stochastic optimization. In *International Conference on Learning Representations*, 2015.

- [34] Tim Tsz-Kit Lau, Qi Long, and Weijie Su. Polargrad: A class of matrix-gradient optimizers from a unifying preconditioning perspective. *arXiv preprint arXiv:2505.21799*, 2025.
- [35] Jingru Li, Yibo Fan, and Huan Li. Variance-adaptive muon: Accelerating llm pretraining with nsr-modulated and variance-scaled momentum. *arXiv preprint arXiv:2601.14603*, 2026.
- [36] Zichong Li, Liming Liu, Chen Liang, Weizhu Chen, and Tuo Zhao. Normuon: Making muon more efficient and scalable. *arXiv preprint arXiv:2510.05491*, 2025.
- [37] Kai Lion, Florian Hübner, Bingcong Li, Antonio Orvieto, and Niao He. Muown: Row-norm control for muon optimization. *arXiv preprint arXiv:2605.10797*, 2026.
- [38] Hong Liu, Zhiyuan Li, David Hall, Percy Liang, and Tengyu Ma. Sophia: A scalable stochastic second-order optimizer for language model pre-training. In *International Conference on Learning Representations*, 2024.
- [39] Jingyuan Liu, Jianlin Su, Xingcheng Yao, Zhejun Jiang, Guokun Lai, Yulun Du, Yidao Qin, Weixin Xu, Enzhe Lu, Junjie Yan, et al. Muon is scalable for llm training. *arXiv preprint arXiv:2502.16982*, 2025.
- [40] Ziyue Liu, Ruijie Zhang, Zhengyang Wang, Yequan Zhao, Yupeng Su, Zi Yang, and Zheng Zhang. Muon ²: Boosting muon via adaptive second-moment preconditioning. *arXiv preprint arXiv:2604.09967*, 2026.
- [41] Ilya Loshchilov and Frank Hutter. Decoupled weight decay regularization. In *International Conference on Learning Representations*, 2019.
- [42] James Martens. Deep learning via hessian-free optimization. In *Proceedings of the 27th International Conference on Machine Learning*, pages 735–742, 2010.
- [43] James Martens and Roger Grosse. Optimizing neural networks with kronecker-factored approximate curvature. In *Proceedings of the 32nd International Conference on Machine Learning*, volume 37 of *Proceedings of Machine Learning Research*, pages 2408–2417. PMLR, 2015.
- [44] Meta AI. The Llama 4 herd: The beginning of a new era of natively multimodal ai innovation. <https://ai.meta.com/blog/llama-4-multimodal-intelligence/>, 2025. Accessed: 2026-06-07.
- [45] Shervin Minaee, Tomas Mikolov, Narjes Nikzad, Meysam Chenaghlu, Richard Socher, Xavier Amatriain, and Jianfeng Gao. Large language models: A survey. *arXiv preprint arXiv:2402.06196*, 2024.
- [46] Shuntaro Nagashima and Hideaki Iiduka. Improved convergence rates of muon optimizer for nonconvex optimization. *arXiv preprint arXiv:2601.19400*, 2026.
- [47] Deepak Narayanan, Mohammad Shoeybi, Jared Casper, Patrick LeGresley, Mostofa Patwary, Vijay Anand Korthikanti, Dmitri Vainbrand, Prethvi Kashinkunti, Julie Bernauer, Bryan Catanzaro, Amar Phanishayee, and Matei Zaharia. Efficient large-scale language model training on GPU clusters using Megatron-LM. *arXiv preprint arXiv:2104.04473*, 2021.
- [48] Yurii Nesterov. *Lectures on Convex Optimization*. Springer, 2018.

- [49] Tien-Phat Nguyen, Truong Nguyen, Minh-Phuc Truong, Tuc Nguyen, James Bailey, and Trung Le. Spectral flattening is all muon needs: How orthogonalization controls learning rate and convergence. *arXiv preprint arXiv:2605.13079*, 2026.
- [50] Jorge Nocedal and Stephen J. Wright. *Numerical Optimization*. Springer, 2 edition, 2006.
- [51] OpenAI. GPT-5.5 System Card. <https://openai.com/index/gpt-5-5-system-card/>, 2026. Accessed: 2026-06-07.
- [52] David Patterson, Joseph Gonzalez, Quoc Le, Chen Liang, Lluís-Miquel Munguia, Daniel Rothchild, David So, Maud Texier, and Jeff Dean. Carbon emissions and large neural network training. *arXiv preprint arXiv:2104.10350*, 2021.
- [53] Samyam Rajbhandari, Jeff Rasley, Olatunji Ruwase, and Yuxiong He. ZeRO: Memory optimizations toward training trillion parameter models. In *Proceedings of the International Conference for High Performance Computing, Networking, Storage and Analysis*, 2020.
- [54] Aditya Ranganath. Navigating LLM valley: From AdamW to memory-efficient and matrix-based optimizers. *arXiv preprint arXiv:2605.09176*, 2026.
- [55] Yehonathan Refael, Guy Smorodinsky, Tom Tirer, and Ofir Lindenbaum. Sumo: Subspace-aware moment-orthogonalization for accelerating memory-efficient llm training. *Advances in Neural Information Processing Systems*, 38:147250–147281, 2026.
- [56] Levent Sagun, Leon Bottou, and Yann LeCun. Eigenvalues of the hessian in deep learning: Singularity and beyond. *arXiv preprint arXiv:1611.07476*, 2016.
- [57] Levent Sagun, Utku Evci, V. Ugur Guney, Yann Dauphin, and Leon Bottou. Empirical analysis of the hessian of over-parametrized neural networks. *arXiv preprint arXiv:1706.04454*, 2017.
- [58] Levent Sagun, Utku Evci, V. Uğur Güney, Yann Dauphin, and Léon Bottou. Empirical analysis of the hessian of over-parametrized neural networks. In *International Conference on Learning Representations Workshop*, 2018.
- [59] Nicol N. Schraudolph. Fast curvature matrix-vector products for second-order gradient descent. *Neural Computation*, 14(7):1723–1738, 2002.
- [60] Noam Shazeer and Mitchell Stern. Adafactor: Adaptive learning rates with sublinear memory cost. In *International conference on machine learning*, pages 4596–4604. PMLR, 2018.
- [61] Wei Shen, Ruichuan Huang, Minhui Huang, Cong Shen, and Jiawei Zhang. On the convergence analysis of muon. *arXiv preprint arXiv:2505.23737*, 2025.
- [62] Chongjie Si, Debing Zhang, and Wei Shen. Adamuon: Adaptive muon optimizer. *arXiv preprint arXiv:2507.11005*, 2025.
- [63] Zitao Song, Cedar Site Bai, Zhe Zhang, Brian Bullins, and David F Gleich. Decoupling variance and scale-invariant updates in adaptive gradient descent for unified vector and matrix optimization. *arXiv preprint arXiv:2602.06880*, 2026.

- [64] Q. Y. Tang et al. Investigating the overlooked hessian structure. In *International Conference on Machine Learning*, 2025.
- [65] Tijmen Tieleman and Geoffrey Hinton. Lecture 6.5—rmsprop: Divide the gradient by a running average of its recent magnitude. COURSERA: Neural Networks for Machine Learning, 2012.
- [66] Nikhil Vyas, Depen Morwani, Rosie Zhao, Mujin Kwun, Itai Shapira, David Brandfonbrener, Lucas Janson, and Sham M. Kakade. Soap: Improving and stabilizing shampoo using adam for language modeling. In *International Conference on Learning Representations*, 2025.
- [67] Kaiyue Wen, Zhiyuan Li, Jason Wang, David Hall, Percy Liang, and Tengyu Ma. Understanding warmup-stable-decay learning rates: A river valley loss landscape perspective. In *International Conference on Learning Representations*, 2025.
- [68] Chenrui Xu, Wenjing Yan, and Ying-Jun Angela Zhang. Fismo: Fisher-structured momentum-orthogonalized optimizer. *arXiv preprint arXiv:2601.21750*, 2026.
- [69] Zhewei Yao, Amir Gholami, Sheng Shen, Mustafa Mustafa, Kurt Keutzer, and Michael W. Mahoney. Adahessian: An adaptive second order optimizer for machine learning. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 35, pages 10665–10673, 2021.
- [70] Qiang Ye. Preconditioning for accelerated gradient descent optimization and regularization. *arXiv preprint arXiv:2410.00232*, 2024.
- [71] Jinghui Yuan, Jiaxuan Zou, Shuo Wang, Yong Liu, and Feiping Nie. Nora: Normalized orthogonal row alignment for scalable matrix optimizer. *arXiv preprint arXiv:2605.03769*, 2026.
- [72] Jack Zhang, Noah Amsel, Berlin Chen, and Tri Dao. Gram newton–schulz: A fast, hardware-aware newton–schulz algorithm for muon. <https://tridao.me/blog/2026/gram-newton-schulz/>, 2026.
- [73] Minxin Zhang, Yuxuan Liu, and Hayden Schaeffer. Adam improves muon: Adaptive moment estimation with orthogonalized momentum. *arXiv preprint arXiv:2602.17080*, 2026.
- [74] Ruijie Zhang, Yequan Zhao, Ziyue Liu, Zhengyang Wang, and Zheng Zhang. Muon+: Towards better muon via one additional normalization step. *arXiv preprint arXiv:2602.21545*, 2026.
- [75] Yechen Zhang, Shuhao Xing, Junhao Huang, Kai Lv, Yunhua Zhou, Xipeng Qiu, Qipeng Guo, and Kai Chen. Mousse: Rectifying the geometry of muon with curvature-aware preconditioning. *arXiv preprint arXiv:2603.09697*, 2026.
- [76] Yushun Zhang, Congliang Chen, Tian Ding, Ziniu Li, Ruoyu Sun, and Zhi-Quan Luo. Why transformers need adam: A hessian perspective. *Advances in neural information processing systems*, 37:131786–131823, 2024.
- [77] Yushun Zhang, Congliang Chen, Ziniu Li, Tian Ding, Chenwei Wu, Diederik P. Kingma, Yinyu Ye, Zhi-Quan Luo, and Ruoyu Sun. Adam-mini: Use fewer learning rates to gain more. In *International Conference on Learning Representations*, 2025.

- [78] Wayne Xin Zhao, Kun Zhou, Junyi Li, Tianyi Tang, Xiaolei Wang, Yupeng Hou, Yingqian Min, Beichen Zhang, Junjie Zhang, Zican Dong, et al. A survey of large language models. *arXiv preprint arXiv:2303.18223*, 2023.

A Proof of Theorem 1

Based on Assumption 2, there is

$$\begin{aligned}
\mathbb{E}[f(\mathbf{W}_t)] &\leq \mathbb{E}[f(\mathbf{W}_{t-1})] + \mathbb{E}[\langle \nabla f(\mathbf{W}_{t-1}), \mathbf{W}_t - \mathbf{W}_{t-1} \rangle] + \frac{L}{2} \mathbb{E}[\|\mathbf{W}_t - \mathbf{W}_{t-1}\|_F^2] \\
&\leq \mathbb{E}[f(\mathbf{W}_{t-1})] - \mathbb{E}\left[\frac{\sqrt{n}\eta}{\|\mathbf{D}_t\|_F + \epsilon} \langle \nabla f(\mathbf{W}_{t-1}), \mathbf{L}_t \mathbf{O}_t \mathbf{R}_t \rangle\right] + \frac{L}{2} n\eta^2 \\
&= \mathbb{E}[f(\mathbf{W}_{t-1})] - \mathbb{E}\left[\frac{\sqrt{n}\eta}{\|\mathbf{L}_t \mathbf{O}_t \mathbf{R}_t\|_F + \epsilon} \langle \mathbf{L}_t (\nabla f(\mathbf{W}_{t-1}) - \mathbf{M}_t) \mathbf{R}_t, \mathbf{O}_t \rangle\right] \\
&\quad - \mathbb{E}\left[\frac{\sqrt{n}\eta}{\|\mathbf{L}_t \mathbf{O}_t \mathbf{R}_t\|_F + \epsilon} \langle \mathbf{L}_t \mathbf{M}_t \mathbf{R}_t, \text{Orth}(\mathbf{L}_t \mathbf{M}_t \mathbf{R}_t) \rangle + \frac{L}{2} n\eta^2\right] \\
&\stackrel{(i)}{\leq} \mathbb{E}[f(\mathbf{W}_{t-1})] + \mathbb{E}\left[\frac{n\eta}{\|\mathbf{L}_t \mathbf{O}_t \mathbf{R}_t\|_F + \epsilon} \|\mathbf{L}_t (\nabla f(\mathbf{W}_{t-1}) - \mathbf{M}_t) \mathbf{R}_t\|_F\right] + \frac{L}{2} n\eta^2 \\
&\quad - \mathbb{E}\left[\frac{\sqrt{n}\eta}{\|\mathbf{L}_t \mathbf{O}_t \mathbf{R}_t\|_F + \epsilon} \|\mathbf{L}_t \mathbf{M}_t \mathbf{R}_t\|_*\right] \\
&\stackrel{(ii)}{\leq} \mathbb{E}[f(\mathbf{W}_{t-1})] + \mathbb{E}\left[\frac{n\eta}{\|\mathbf{L}_t \mathbf{O}_t \mathbf{R}_t\|_F + \epsilon} \|\mathbf{L}_t (\nabla f(\mathbf{W}_{t-1}) - \mathbf{M}_t) \mathbf{R}_t\|_F\right] + \frac{L}{2} n\eta^2 \\
&\quad - \mathbb{E}\left[\frac{\sqrt{n}\eta}{\|\mathbf{L}_t \mathbf{O}_t \mathbf{R}_t\|_F + \epsilon} (\|\mathbf{L}_t \nabla f(\mathbf{W}_{t-1}) \mathbf{R}_t\|_* - \|\mathbf{L}_t (\nabla f(\mathbf{W}_{t-1}) - \mathbf{M}_t) \mathbf{R}_t\|_*)\right] \\
&\stackrel{(iii)}{\leq} \mathbb{E}[f(\mathbf{W}_{t-1})] + 2n\epsilon^{-1}\eta \mathbb{E}[\|\mathbf{L}_t (\nabla f(\mathbf{W}_{t-1}) - \mathbf{M}_t) \mathbf{R}_t\|_F] + \frac{L}{2} n\eta^2 \\
&\quad - \mathbb{E}\left[\frac{\sqrt{n}\eta}{\|\mathbf{L}_t \mathbf{O}_t \mathbf{R}_t\|_F + \epsilon} \|\mathbf{L}_t \nabla f(\mathbf{W}_{t-1}) \mathbf{R}_t\|_F\right] \\
&\stackrel{(iv)}{\leq} \mathbb{E}[f(\mathbf{W}_{t-1})] + 2n\epsilon^{-5/4}\eta \mathbb{E}[\|\nabla f(\mathbf{W}_{t-1}) - \mathbf{M}_t\|_F] + \frac{L}{2} n\eta^2 \\
&\quad - \frac{\sqrt{n}\eta}{\epsilon^{-1/4}\sqrt{n} + \epsilon} \mathbb{E}[\|\mathbf{L}_t \nabla f(\mathbf{W}_{t-1}) \mathbf{R}_t\|_F] \\
&\leq \mathbb{E}[f(\mathbf{W}_{t-1})] + 2n\epsilon^{-5/4}\eta \mathbb{E}[\|\nabla f(\mathbf{W}_{t-1}) - \mathbf{M}_t\|_F] - \frac{\epsilon^{1/4}}{2} \eta \mathbb{E}[\|\mathbf{L}_t \nabla f(\mathbf{W}_{t-1}) \mathbf{R}_t\|_F] + \frac{L}{2} n\eta^2,
\end{aligned} \tag{23}$$

where (i) and (ii) are due to Cauchy-Schwarz and triangle inequalities, respectively. (iii) is because norm inequality $\|\mathbf{X}\|_F \leq \|\mathbf{X}\|_* \leq \sqrt{\text{rank}(\mathbf{X})} \|\mathbf{X}\|_F$. (iv) and last inequality are due to $\|\mathbf{L}_t\| \leq \epsilon^{-1/8}$, $\|\mathbf{R}_t\| \leq \epsilon^{-1/8}$, $\epsilon \in (0, 1)$.

Now we come to lower bound the term $\mathbb{E}[\|\mathbf{L}_t \nabla f(\mathbf{W}_{t-1}) \mathbf{R}_t\|_F]$ as

$$\begin{aligned}
\mathbb{E}[\|\mathbf{L}_t \nabla f(\mathbf{W}_{t-1}) \mathbf{R}_t\|_F] &\geq \mathbb{E}[\sigma_{\min}(\mathbf{L}_t) \sigma_{\min}(\mathbf{R}_t) \|\nabla f(\mathbf{W}_{t-1})\|_F] \\
&\geq \mathbb{E}\left[\frac{1}{(\|\mathbf{l}_t\|_1 + \epsilon)^{\frac{1}{8}}} \frac{1}{(\|\mathbf{r}_t\|_1 + \epsilon)^{\frac{1}{8}}} \|\nabla f(\mathbf{W}_{t-1})\|_F\right] \\
&\stackrel{(a)}{\geq} \frac{\mathbb{E}^2[\|\nabla f(\mathbf{W}_{t-1})\|_F^{\frac{1}{2}}]}{\mathbb{E}[(\|\mathbf{l}_t\|_1 + \epsilon)^{\frac{1}{4}}]}
\end{aligned}$$

$$\begin{aligned}
& \stackrel{(b)}{\geq} \frac{\mathbb{E}^2 \left[\|\nabla f(\mathbf{W}_{t-1})\|_F^{\frac{1}{2}} \right]}{\mathbb{E} \left[\|\mathbf{l}_t\|_1^{\frac{1}{4}} \right] + \epsilon^{\frac{1}{4}}} \\
& = \frac{\mathbb{E}^2 \left[\|\nabla f(\mathbf{W}_{t-1})\|_F^{\frac{1}{2}} \right]}{(1 - \mu_2^t)^{\frac{1}{4}} \mathbb{E} \left[\sqrt[4]{\sum_{\tau=1}^t \frac{1-\mu_2}{1-\mu_2^t} \mu_2^{t-\tau} \|\mathbf{G}_\tau\|_F^2} \right] + \epsilon^{\frac{1}{4}}} \\
& \stackrel{(c)}{\geq} \frac{\mathbb{E}^2 \left[\|\nabla f(\mathbf{W}_{t-1})\|_F^{\frac{1}{2}} \right]}{(1 - \mu_2^t)^{\frac{1}{4}} \mathbb{E} \left[\sqrt{\sqrt{\sum_{\tau=1}^t \frac{1-\mu_2}{1-\mu_2^t} \mu_2^{t-\tau} \|\mathbf{G}_\tau - \nabla f(\mathbf{W}_{\tau-1})\|_F^2} + \sqrt{\sum_{\tau=1}^t \frac{1-\mu_2}{1-\mu_2^t} \mu_2^{t-\tau} \|\nabla f(\mathbf{W}_{\tau-1})\|_F^2}} \right] + \epsilon^{\frac{1}{4}}} \\
& \stackrel{(d)}{\geq} \frac{\mathbb{E}^2 \left[\|\nabla f(\mathbf{W}_{t-1})\|_F^{\frac{1}{2}} \right]}{(1 - \mu_2^t)^{\frac{1}{4}} \left(\mathbb{E} \left[\sqrt[4]{\sum_{\tau=1}^t \frac{1-\mu_2}{1-\mu_2^t} \mu_2^{t-\tau} \|\mathbf{G}_\tau - \nabla f(\mathbf{W}_{\tau-1})\|_F^2} \right] + \mathbb{E} \left[\sqrt[4]{\sum_{\tau=1}^t \frac{1-\mu_2}{1-\mu_2^t} \mu_2^{t-\tau} \|\nabla f(\mathbf{W}_{\tau-1})\|_F^2} \right] \right) + \epsilon^{\frac{1}{4}}} \\
& \stackrel{(e)}{\geq} \frac{\mathbb{E}^2 \left[\|\nabla f(\mathbf{W}_{t-1})\|_F^{\frac{1}{2}} \right]}{(1 - \mu_2^t)^{\frac{1}{4}} \left(\mathbb{E}^{\frac{1}{4}} \left[\sum_{\tau=1}^t \frac{1-\mu_2}{1-\mu_2^t} \mu_2^{t-\tau} \|\mathbf{G}_\tau - \nabla f(\mathbf{W}_{\tau-1})\|_F^2 \right] + \mathbb{E}^{\frac{1}{4}} \left[\sum_{\tau=1}^t \frac{1-\mu_2}{1-\mu_2^t} \mu_2^{t-\tau} \|\nabla f(\mathbf{W}_{\tau-1})\|_F^2 \right] \right) + \epsilon^{\frac{1}{4}}} \\
& \stackrel{(f)}{\geq} \frac{(1 - \mu_2^t)^{-\frac{1}{4}} \mathbb{E}^2 \left[\|\nabla f(\mathbf{W}_{t-1})\|_F^{\frac{1}{2}} \right]}{\frac{\sqrt{\sigma}}{B^{\frac{1}{4}}} + \mathbb{E} \left[\sqrt{\sqrt{\sum_{\tau=1}^t \frac{1-\mu_2}{1-\mu_2^t} \mu_2^{t-\tau} \|\nabla f(\mathbf{W}_{t-1})\|_F^2} + \sqrt{\sum_{\tau=1}^t \frac{1-\mu_2}{1-\mu_2^t} \mu_2^{t-\tau} \|\nabla f(\mathbf{W}_{\tau-1}) - \nabla f(\mathbf{W}_{t-1})\|_F^2}} \right] + \frac{\epsilon^{\frac{1}{4}}}{(1 - \mu_2^t)^{\frac{1}{4}}}} \\
& \stackrel{(g)}{\geq} \frac{(1 - \mu_2^t)^{-\frac{1}{4}} \mathbb{E}^2 \left[\|\nabla f(\mathbf{W}_{t-1})\|_F^{\frac{1}{2}} \right]}{\frac{\sqrt{\sigma}}{B^{\frac{1}{4}}} + \mathbb{E} \left[\|\nabla f(\mathbf{W}_{t-1})\|_F^{\frac{1}{2}} \right] + \mathbb{E}^{\frac{1}{4}} \left[\sum_{\tau=1}^t \frac{1-\mu_2}{1-\mu_2^t} \mu_2^{t-\tau} (t - \tau)^2 L^2 \eta^2 n \right] + \frac{\epsilon^{\frac{1}{4}}}{(1 - \mu_2^t)^{\frac{1}{4}}}} \\
& \stackrel{(h)}{\geq} \frac{\mathbb{E}^2 \left[\|\nabla f(\mathbf{W}_{t-1})\|_F^{\frac{1}{2}} \right]}{\frac{\sqrt{\sigma}}{B^{\frac{1}{4}}} + \mathbb{E} \left[\|\nabla f(\mathbf{W}_{t-1})\|_F^{\frac{1}{2}} \right] + (1 - \mu_2^t)^{\frac{1}{4}} \cdot \sqrt{\eta L} n^{\frac{1}{4}} \left(\frac{1-\mu_2}{1-\mu_2^t} \right)^{\frac{1}{4}} \left(\frac{2}{(1-\mu_2)^3} \right)^{\frac{1}{4}} + \epsilon^{\frac{1}{4}}} \\
& \geq \frac{\mathbb{E}^2 \left[\|\nabla f(\mathbf{W}_{t-1})\|_F^{\frac{1}{2}} \right]}{\mathbb{E} \left[\|\nabla f(\mathbf{W}_{t-1})\|_F^{\frac{1}{2}} \right] + 1 + 2n^{\frac{1}{4}} \sqrt{\frac{\eta L}{1-\mu_2}} + \frac{\sqrt{\sigma}}{B^{\frac{1}{4}}}}, \\
& \geq \frac{1}{2} \min \left\{ \mathbb{E} \left[\|\nabla f(\mathbf{W}_{t-1})\|_F^{\frac{1}{2}} \right], \frac{\mathbb{E}^2 \left[\|\nabla f(\mathbf{W}_{t-1})\|_F^{\frac{1}{2}} \right]}{1 + 2n^{\frac{1}{4}} \sqrt{\frac{\eta L}{1-\mu_2}} + \frac{\sqrt{\sigma}}{B^{\frac{1}{4}}}} \right\}, \tag{24}
\end{aligned}$$

where (a) is because $\|\mathbf{l}_t\|_1 = \|\mathbf{r}_t\|_1$ and CauchySchwarz inequality $\mathbb{E}^2[XY] \leq \mathbb{E}[X^2] \mathbb{E}[Y^2]$. (b) is due to $(a+b)^p \leq a^p + b^p, \forall a, b \geq 0, p \in (0, 1)$. (c) is based on $\sum_{\tau=1}^t \frac{1-\mu_2}{1-\mu_2^t} \mu_2^{t-\tau}$ and Minkowski inequality. (d) is due to $\sqrt{a+b} \leq \sqrt{a} + \sqrt{b}$. (e) is because Jensen inequality $\mathbb{E} \left[X^{\frac{1}{4}} \right] \leq \mathbb{E}^{\frac{1}{4}}[X], \forall X \geq 0$. (f) uses the Assumption 3 and Minkowski inequality again. (g) uses the Assumption 2, 11th line of Algorithm 1, $\sum_{\tau=1}^t \frac{1-\mu_2}{1-\mu_2^t} \mu_2^{t-\tau}$ and $\sqrt{a+b} \leq \sqrt{a} + \sqrt{b}$ again. (h) is due to $\sum_{\tau=1}^{\infty} \mu_2^\tau \tau^2 \leq \frac{2}{(1-\mu_2)^3}$. The last two inequalities are due to $\epsilon \in (0, 1)$ and inequality

$$\frac{x^2}{ax+b} \geq \frac{x^2}{2\max\{ax,b\}} = \frac{1}{2} \min\left\{\frac{x}{a}, \frac{x^2}{b}\right\}, \forall a, b > 0, \forall x \geq 0.$$

Substituting (24) into (23) has

$$\begin{aligned} \mathbb{E}[f(\mathbf{W}_t)] &\leq \mathbb{E}[f(\mathbf{W}_{t-1})] + 2n\epsilon^{-5/4}\eta\mathbb{E}[\|\nabla f(\mathbf{W}_{t-1}) - \mathbf{M}_t\|_F] + \frac{L}{2}n\eta^2 \\ &\quad - \frac{\epsilon^{1/4}\eta}{4} \min\left\{\mathbb{E}\left[\|\nabla f(\mathbf{W}_{t-1})\|_F^{\frac{1}{2}}\right], \frac{\mathbb{E}^2\left[\|\nabla f(\mathbf{W}_{t-1})\|_F^{\frac{1}{2}}\right]}{1 + 2n^{\frac{1}{4}}\sqrt{\frac{\eta L}{1-\mu_2}} + \frac{\sqrt{\sigma}}{B^{\frac{1}{4}}}}\right\}. \end{aligned} \quad (25)$$

Further substituting the result in Lemma 1 into (25) and summing over $t = 1, \dots, T$ yield

$$\begin{aligned} &\frac{\epsilon^{1/4}\eta}{4} \sum_{t=1}^T \min\left\{\mathbb{E}\left[\|\nabla f(\mathbf{W}_{t-1})\|_F^{\frac{1}{2}}\right], \frac{\mathbb{E}^2\left[\|\nabla f(\mathbf{W}_{t-1})\|_F^{\frac{1}{2}}\right]}{1 + 2n^{\frac{1}{4}}\sqrt{\frac{\eta L}{1-\mu_2}} + \frac{\sqrt{\sigma}}{B^{\frac{1}{4}}}}\right\} \\ &\leq f(\mathbf{W}_0) - f^* + 2n\epsilon^{-5/4}\eta \sum_{t=1}^T \mathbb{E}[\|\nabla f(\mathbf{W}_{t-1}) - \mathbf{M}_t\|_F] + \frac{L}{2}n\eta^2 T \\ &\leq f(\mathbf{W}_0) - f^* + 2n\epsilon^{-5/4}\eta \sum_{t=1}^T \left(\sqrt{\frac{1-\mu_1}{1+\mu_1}} \frac{\sigma}{\sqrt{B}} + \mu_1^t \|\nabla f(\mathbf{W}_0)\|_F + \frac{\mu_1 L \eta \sqrt{n}}{1-\mu_1}\right) + \frac{L}{2}n\eta^2 T \\ &\leq f(\mathbf{W}_0) - f^* + 2n\epsilon^{-5/4}\eta T \sqrt{\frac{1-\mu_1}{1+\mu_1}} \frac{\sigma}{\sqrt{B}} + \frac{2n\epsilon^{-5/4}\eta}{1-\mu_1} \|\nabla f(\mathbf{W}_0)\|_F + \frac{2\epsilon^{-5/4}\mu_1 L n^{\frac{3}{2}} \eta^2 T}{1-\mu_1} + \frac{L}{2}n\eta^2 T \end{aligned} \quad (26)$$

Thus, we can obtain

$$\begin{aligned} \min_{t=1, \dots, T} \min\left\{\mathbb{E}\left[\|\nabla f(\mathbf{W}_{t-1})\|_F^{\frac{1}{2}}\right], \frac{\mathbb{E}^2\left[\|\nabla f(\mathbf{W}_{t-1})\|_F^{\frac{1}{2}}\right]}{1 + 2n^{\frac{1}{4}}\sqrt{\frac{\eta L}{1-\mu_2}} + \frac{\sqrt{\sigma}}{B^{\frac{1}{4}}}}\right\} &\leq \frac{4\epsilon^{-1/4}\Delta_{0,1}}{T\eta} + 2\epsilon^{-1/4}Ln\eta \\ &\quad + 8\epsilon^{-3/2}n\sqrt{\frac{1-\mu_1}{1+\mu_1}} \frac{\sigma}{\sqrt{B}} + \frac{8\epsilon^{-3/2}n\Delta_{0,2}}{(1-\mu_1)T} + \frac{8\epsilon^{-3/2}\mu_1 L n^{3/2}\eta}{1-\mu_1}, \end{aligned} \quad (27)$$

where $\Delta_{0,1} := f(\mathbf{W}_0) - f^*$, $\Delta_{0,2} := \|\nabla f(\mathbf{W}_0)\|_F$.

For the right hand side of the above result, there is

$$\begin{aligned} \frac{4\epsilon^{-1/4}\Delta_{0,1}}{T\eta} + 2\epsilon^{-1/4}Ln\eta + \frac{8\epsilon^{-3/2}\mu_1 L n^{3/2}\eta}{1-\mu_1} &\leq \frac{4\epsilon^{-1/4}\Delta_{0,1}}{T\eta} + \frac{10\epsilon^{-3/2}L n^{3/2}\eta}{1-\mu_1} \\ &= 4\epsilon^{-\frac{7}{8}} \sqrt{\frac{10n^{\frac{3}{2}}L\Delta_{0,1}}{T(1-\mu_1)}}, \end{aligned} \quad (28)$$

where the equality is due to the step size condition $\eta = \frac{\epsilon^{\frac{5}{8}}}{n^{\frac{3}{4}}} \sqrt{\frac{2\Delta_{0,1}(1-\mu_1)}{5LT}}$. Then the (27) becomes

$$\min_{t=1, \dots, T} \min\left\{\mathbb{E}\left[\|\nabla f(\mathbf{W}_{t-1})\|_F^{\frac{1}{2}}\right], \frac{\mathbb{E}^2\left[\|\nabla f(\mathbf{W}_{t-1})\|_F^{\frac{1}{2}}\right]}{1 + 2n^{\frac{1}{4}}\sqrt{\frac{\eta L}{1-\mu_2}} + \frac{\sqrt{\sigma}}{B^{\frac{1}{4}}}}\right\} \leq 4\epsilon^{-\frac{7}{8}} \sqrt{\frac{10n^{\frac{3}{2}}L\Delta_{0,1}}{T(1-\mu_1)}} + 8\epsilon^{-3/2}n\sqrt{1-\mu_1} \frac{\sigma}{\sqrt{B}}$$

$$+ \frac{8\epsilon^{-3/2}n\Delta_{0,2}}{(1-\mu_1)T}. \quad (29)$$

Now set $1 - \mu_1 = \min \left\{ \epsilon^{\frac{5}{8}} \sqrt{\frac{5LB\Delta_{0,1}}{2Tn^{\frac{1}{2}}\sigma^2}}, 1 \right\}$. If $\epsilon^{\frac{5}{8}} \sqrt{\frac{5LB\Delta_{0,1}}{2Tn^{\frac{1}{2}}\sigma^2}} \leq 1$, then the right hand side of above upper bound becomes

$$4\epsilon^{-\frac{7}{8}} \sqrt{\frac{10n^{\frac{3}{2}}L\Delta_{0,1}}{T(1-\mu_1)}} + 8\epsilon^{-3/2}n\sqrt{1-\mu_1}\frac{\sigma}{\sqrt{B}} + \frac{8\epsilon^{-3/2}n\Delta_{0,2}}{(1-\mu_1)T} \leq 16\epsilon^{-\frac{19}{16}}n^{\frac{7}{8}}\sqrt{\frac{L\Delta_{0,1}\sigma^2}{TB}} + 8\epsilon^{-\frac{17}{8}}n^{\frac{5}{4}}\sqrt{\frac{\Delta_{0,2}^2\sigma^2}{TLB\Delta_{0,1}}}. \quad (30)$$

If $\epsilon^{\frac{5}{8}} \sqrt{\frac{5LB\Delta_{0,1}}{2Tn^{\frac{1}{2}}\sigma^2}} \geq 1$, (27) becomes

$$\begin{aligned} \min_{t=1,\dots,T} \min \left\{ \mathbb{E} \left[\|\nabla f(\mathbf{W}_{t-1})\|_F^{\frac{1}{2}} \right], \frac{\mathbb{E}^2 \left[\|\nabla f(\mathbf{W}_{t-1})\|_F^{\frac{1}{2}} \right]}{1 + 2n^{\frac{1}{4}}\sqrt{\frac{\eta L}{1-\mu_2}} + \frac{\sqrt{\sigma}}{B^{\frac{1}{4}}}} \right\} &\leq 16\epsilon^{-\frac{7}{8}}n^{\frac{3}{4}}\sqrt{\frac{L\Delta_{0,1}}{T}} + 8\epsilon^{-\frac{3}{2}}n\frac{\sigma}{\sqrt{B}} + \frac{8\epsilon^{-\frac{3}{2}}n\Delta_{0,2}}{T} \\ &\leq 31\epsilon^{-\frac{7}{8}}n^{\frac{3}{4}}\sqrt{\frac{L\Delta_{0,1}}{T}} + \frac{8\epsilon^{-\frac{3}{2}}n\Delta_{0,2}}{T}, \end{aligned} \quad (31)$$

where the last inequality is due to $\sigma \leq \epsilon^{\frac{5}{8}} \sqrt{\frac{5LB\Delta_{0,1}}{2Tn^{\frac{1}{2}}}}$.

Finally, combining the results in the above two cases can obtain the (22).

Lemma 1. *If the loss function satisfies Assumption 2, then there is*

$$\mathbb{E} [\|\nabla f(\mathbf{W}_{t-1}) - \mathbf{M}_t\|_F] \leq \sqrt{\frac{1-\mu_1}{1+\mu_1}} \frac{\sigma}{\sqrt{B}} + \mu_1^t \|\nabla f(\mathbf{W}_0)\|_F + \frac{\mu_1 L \eta \sqrt{n}}{1-\mu_1}. \quad (32)$$

Proof. The proof idea follows that of [61] and the difference is that we consider the zero initialization. We construct $\mathbf{C}_t = \mu_1 \mathbf{C}_{t-1} + (1-\mu_1) \nabla f(\mathbf{W}_{t-1})$, $\forall t \geq 1$ and $\mathbf{C}_0 = \mathbf{0}_{m \times n}$.

$$\begin{aligned} \mathbb{E} [\|\nabla f(\mathbf{W}_{t-1}) - \mathbf{M}_t\|_F] &\leq \mathbb{E} [\|\mathbf{C}_t - \mathbf{M}_t\|_F] + \mathbb{E} [\|\nabla f(\mathbf{W}_{t-1}) - \mathbf{C}_t\|_F] \\ &= \mathbb{E} \left[\left\| (1-\mu_1) \sum_{\tau=1}^t \mu_1^{t-\tau} (\nabla f(\mathbf{W}_{\tau-1}) - \mathbf{G}_\tau) \right\|_F \right] \\ &\quad + \mathbb{E} [\|\nabla f(\mathbf{W}_{t-1}) - \mu_1 \mathbf{C}_{t-1} - (1-\mu_1) \nabla f(\mathbf{W}_{t-1})\|_F] \\ &\leq \sqrt{\frac{1-\mu_1}{1+\mu_1}} \frac{\sigma}{\sqrt{B}} + \mu_1 \mathbb{E} [\|\nabla f(\mathbf{W}_{t-2}) - \mathbf{C}_{t-1}\|_F] \\ &\quad + \mu_1 \mathbb{E} [\|\nabla f(\mathbf{W}_{t-1}) - \nabla f(\mathbf{W}_{t-2})\|_F] \\ &\leq \sqrt{\frac{1-\mu_1}{1+\mu_1}} \frac{\sigma}{\sqrt{B}} + \mu_1^{t-1} \mathbb{E} [\|\nabla f(\mathbf{W}_0) - \mathbf{C}_1\|_F] + \frac{\mu_1 L \eta \sqrt{n}}{1-\mu_1} \\ &= \sqrt{\frac{1-\mu_1}{1+\mu_1}} \frac{\sigma}{\sqrt{B}} + \mu_1^t \|\nabla f(\mathbf{W}_0)\|_F + \frac{\mu_1 L \eta \sqrt{n}}{1-\mu_1}, \end{aligned} \quad (33)$$

where the second inequality follows the proof of Lemma A.4 of [61], and the last equality uses the $\mathbf{C}_1 = (1-\mu_1) \nabla f(\mathbf{W}_0)$ due to $\mathbf{C}_0 = \mathbf{0}_{m \times n}$. $\square$

B Simulation Setting

We use a matrix quadratic regression problem to illustrate the effect of curvature anisotropy on Muon and the benefit of preconditioning. Specifically, we consider


$$\min_{\mathbf{X} \in \mathbb{R}^{r \times r}} f(\mathbf{G}) := \frac{1}{2} \|\mathbf{A}\mathbf{X}\mathbf{B}^\top - \mathbf{C}\|_F^2, \quad (34)$$

where $n = 50, r = 5, \mathbf{A}, \mathbf{B} \in \mathbb{R}^{n \times r}$. In vectorized form, the Hessian with respect to $\text{vec}(\mathbf{X})$ is $\mathbf{H}_X = (\mathbf{B}^\top \mathbf{B}) \otimes (\mathbf{A}^\top \mathbf{A})$, and therefore its condition number satisfies $\kappa_X = \text{cond}(\mathbf{H}_X) = \text{cond}(\mathbf{B})^2 \text{cond}(\mathbf{A})^2$. To generate controlled-condition problems, we first construct a rank- r matrix $\mathbf{C} = \mathbf{U}^* \mathbf{S}^* \mathbf{V}^{*\top}$, where $\mathbf{U}_*$ and $\mathbf{V}_*$ are orthonormal factors and $\mathbf{S}^*$ is a normalized random core matrix. We then set $\mathbf{A} = \mathbf{U}^* \mathbf{R}_1, \mathbf{B} = \mathbf{V}^* \mathbf{R}_2$, where $\mathbf{R}_1, \mathbf{R}_2 \in \mathbb{R}^{r \times r}$ are random matrices with prescribed condition number. We test four condition numbers $\kappa_X \in \{10^1, 10^2, 10^3, 10^4\}$.


For Figure 1(a), we use the exact polar version of Muon without nuclear-norm scaling. The optimizer used in Figure 1(b) is the exact-Hessian preconditioned Muon update. For the quadratic objective above, the exact whitening preconditioners are chosen as $\mathbf{P} = (\mathbf{A}^\top \mathbf{A})^{-1/2}, \mathbf{Q} = (\mathbf{B}^\top \mathbf{B})^{-1/2}$. Thus, the update is

$$\mathbf{X}_{t+1} = \mathbf{X}_t - \eta_t (\mathbf{A}^\top \mathbf{A})^{-1/2} \text{Orth} \left((\mathbf{A}^\top \mathbf{A})^{-1/2} \nabla f(\mathbf{X}_t) (\mathbf{B}^\top \mathbf{B})^{-1/2} \right) (\mathbf{B}^\top \mathbf{B})^{-1/2}. \quad (35)$$

Both simulations use the same initialization $\mathbf{X}_0 = \mathbf{0}$, the same maximum number of iterations $T = 5000$, and the same warmup-stable-decay learning rate schedule. The learning rate linearly warms up to $\eta_{\max} = 10^{-3}$ during the first 500 iterations, remains constant for 3500 iterations, and then linearly decays to $\eta_{\min} = 0$ during the last 1000 iterations. For each setting, we report the optimality gap $f(\mathbf{X}_t) - f^*$, where f^* is computed using the closed-form least-squares solution.

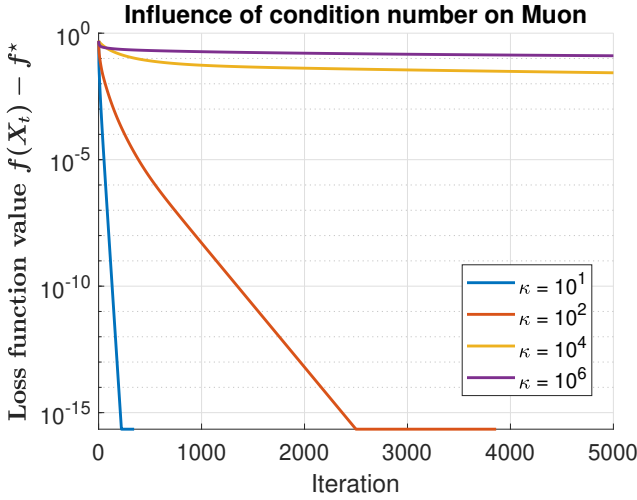

(a) Muon

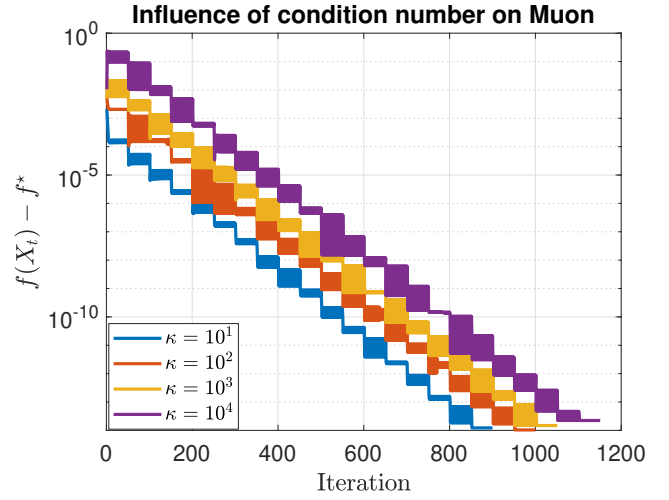

(b) Preconditioned Muon

Figure 7: Additional step size settings for Muon-style updates. (a) Nuclear-norm scaled polar update. (b) Exact polar Muon with geometric step size decay.

To further examine whether the observed sensitivity of Muon is caused by a particular learning rate schedule, we also test two additional learning rate schedules for Muon-style updates on the

same matrix quadratic regression problem (34). The first setting uses a nuclear-norm scaled polar update [34] as

$$\mathbf{G}_{t+1} = \mathbf{G}_t - \eta_t \|\nabla f(\mathbf{G}_t)\|_* \mathbf{O}_t, \quad (36)$$

which uses constant base step size $\eta_t = \eta_0 = \frac{C_\eta}{L_G r}$, where L_G is the largest eigenvalue of the Hessian with respect to $\text{vec}(\mathbf{G})$ and $C_\eta = 2$.

The second setting uses an exact polar Muon direction with a periodically decayed geometric learning rate schedule, where the step size is periodically decayed as $\eta_t = \eta_0 \rho^{\lfloor (t-1)/p \rfloor}$, where p is the decay period and ρ is the decay factor. In our implementation, we set $p = 50$ and $\rho = 0.5$. The initial stepsize is chosen according to the natural scale of the least-squares solution: $\eta_0 = C_\eta \frac{\|\mathbf{G}_{\text{lsq}}\|_F}{\sqrt{r}}$, where $C_\eta = 0.5$ and $\mathbf{G}_{\text{lsq}}$ is the closed-form least-squares solution.

Figure 7 further reports Muon-style updates under these two learning rate schedules. In Figure 7(a), we can observe that the nuclear-norm scaled polar update is still clearly sensitive to the Hessian condition number: as κ increases, the convergence becomes much slower. This observation is consistent with Theorem 3.2 in [34], which predicts a slower convergence rate when the Hessian condition number becomes larger. In contrast, Figure 7(b) shows that Muon with geometric stepsize decay is much less sensitive to κ , as the curves exhibit similar staircase-like decreasing trends across different condition numbers.

These results suggest that the sensitivity of Muon to ill-conditioned curvature of loss (34) depends on the learning rate schedule. We use the WSD schedule in Figure 1 because WSD is commonly used and studied in modern language-model training. Therefore, the main WSD-based comparison is more aligned with the training protocol used in deep learning and large-scale language-model pretraining.

C LLM Pretraining Hyperparameter Settings

Hyperparameters	Optimizers			
	AdamW	Muon	MALT	MALTER
Small (124M)				
Batchsize and Accumulation	(60, 8)			
Weight Decay	0.1			
Momentum ($\beta_1/\mu_1, \beta_2/\mu_2$)	(0.9, 0.95)	(0.95, —)	(0.95, 0.99)	(0.95, 0.99)
Damping Constant (ϵ)	—	—	10^{-8}	10^{-8}
Medium (355M)				
Batchsize and Accumulation	(40, 12)			
Weight Decay	0.1			
Momentum ($\beta_1/\mu_1, \beta_2/\mu_2$)	(0.9, 0.95)	(0.95, —)	(0.95, 0.99)	(0.95, 0.99)
Damping Constant (ϵ)	—	—	10^{-8}	10^{-8}
Large (774M)				
Batchsize and Accumulation	(20, 24)			
Weight Decay	0.1			
Momentum ($\beta_1/\mu_1, \beta_2/\mu_2$)	(0.9, 0.95)	(0.95, —)	(0.95, 0.99)	(0.95, 0.99)
Damping Constant (ϵ)	—	—	10^{-8}	10^{-8}

Table 6: Hyperparameter configurations for GPT-2 models across different optimizers.