

AVA-Encoder: Towards Agent-Native Video Representation Learning

Chuyue Li^{1,2}, Jinpeng Yu¹, Haozhe Wang^{1,3}, Tian Xueyun^{1,4}, Zhijing Zhang^{1,5}, Bingnan Li¹, Shuqi Gu², Kan Ren^{*2}, Jiaming Liu^{*1} and Ruihua Huang¹

¹Qwen Business Unit of Alibaba, ²ShanghaiTech University, ³The Hong Kong University of Science and Technology, ⁴Institute of Computing Technology, ⁵Southeast University

*Co-corresponding authors. Emails: jmliu1217@gmail.com, renkan@shanghaitech.edu.cn.

Creative agents still lack an effective way to learn from high-quality human films, limiting their ability to produce cinematic-grade videos. A key challenge is the absence of a structured video representation that is both faithful to film content and directly usable for agentic reasoning and manipulation. To address the challenge, we propose the Agentic Video Auto-Encoder (AVA-Encoder), a framework for learning agent-native video representations via agentic auto-encoding.

AVA-Encoder transforms a video into a knowledge graph (KG) representation and then reconstructs it back into video. Its hierarchy and state nodes store structured text, while a linked asset layer holds generated images, audio, and video. Typed edges preserve the relations between these text descriptions and assets in a form that agents can easily understand, query, and edit. The video reconstruction differences drive a textual-gradient optimization framework, which expresses evaluation feedback as natural-language update directions for Data-Independent Encoding Policy Pseudo-Training in the outer loop and optional Data-Dependent KG Representation Refinement in the test-time inner loop.

Extensive experiments show that AVA-Encoder improves by 20.7 percentage points over the strongest external baseline. In the controlled policy-only setting, its pseudo-trained shot-level Agentic Video Encoder policy also outperforms a carefully human-tuned policy while using 74.3% fewer system-prompt tokens. We release the complete AVA-Encoder framework, a reliable agentic video reconstruction benchmark, and the first dataset of high-quality film KG representations.

1. Introduction

Over the past two years, advances in foundation models (Brooks et al., 2024; Google DeepMind, 2024; Kuaishou Technology, 2024; Polyak et al., 2024) and agentic video creation systems (Xu et al., 2025; Wu et al., 2025; Li et al., 2024; Lin et al., 2024) have enabled agents to write stories, design keyframes, and generate videos. Despite this progress, video creation agents still cannot reliably produce high-quality, production-ready film content. A central limitation is that their base models lack the planning ability needed to coordinate complex filmmaking decisions across scripts, characters, shots, and audiovisual elements. Developing this ability is difficult because the field has very few high-quality records of complete agentic video creation processes from which such models can learn. Meanwhile, a large collection of professionally directed films already contains rich knowledge of screenwriting, character design, camera work, pacing, and audiovisual coordination. Human filmmakers can learn this knowledge by closely studying high-quality films, but video creation agents cannot directly use the same films as clear, step-by-step creation records.

This limitation stems from a fundamental mismatch between film space and agent space. Films are tightly connected forms of multimodal content (Huang et al., 2020) that jointly encode stories, character interactions, visual composition, camera language, temporal pacing, and audio design. These elements are closely linked across space and time, while the decisions and links behind the finished film are not directly shown. In contrast, agents learn and operate through structured representations such as text, code, plans, and graphs, in which information is organized for retrieval, reasoning, planning, and editing. Before agents can learn filmmaking knowledge from existing films, videos must therefore be translated into agent-native representations that make their content, structure, and creation links understandable and operable.

An ideal agent-native video representation should satisfy three requirements: it should be understandable to agents, easy for agents to reason over and edit, and faithful enough to preserve the cinematic information required for future generation. Existing representations satisfy only some of these requirements.

Low-level visual representations, such as pixels, latent tokens, and video embeddings (Tong et al., 2022; Yu et al., 2023; Zhang et al., 2023), preserve rich visual information but are difficult for agents to directly interpret, query, or modify. Textual captions (Huang et al., 2020; Chung & Yu, 2023; Mahon & Lapata, 2024) make video content more accessible to agents but compress complex films into linear descriptions, often losing important structures such as entity relationships, event organization, and cross-modal dependencies. Structured representations, including scene graphs and video knowledge graphs (Song et al., 2024; He et al., 2024; Ataallah et al., 2024), offer a more promising direction. However, most existing systems are designed for video understanding tasks such as retrieval and question answering (Zhang et al., 2024a,b; Qian et al., 2024). They retain sparse semantic facts that support downstream reasoning rather than the rich multimodal details needed for generation and reconstruction. As a result, they may recognize that two characters first meet in shot eight, yet still fail to preserve enough information to faithfully recreate that shot. Moreover, existing representations are typically evaluated on downstream understanding tasks, making it difficult to determine whether they preserve sufficient cinematic information for subsequent video creation. Consequently, current approaches still lack a representation that is simultaneously agent-readable, agent-operable, and cinematically faithful.

To meet these three requirements, we propose a film-creation knowledge-graph (KG) representation. It converts visual, audio, and temporal evidence, together with stories, event progress, shot content, character design, and camera language, into clear structured-text descriptions. The Story–Event–Shot hierarchy and its Character, Scene, Object, Style, Camera, and Audio states all store text; generated images, audio, and video are kept only in a linked asset layer. This text-centered organization makes the representation directly readable, learnable, searchable, and editable by agents. Clearly defined KG edges preserve the cross-modal and cross-level relations among the text descriptions and linked assets. These links maintain film fidelity and allow one edit to update related content along the graph structure. To further reduce information loss when mapping dense multimodal video into structured text, the representation is built through film-, shot-, and keyframe-level understanding, with each finer level using the context from the level above it.

To learn high-quality film KG representations, we therefore introduce AVA-Encoder, the first agentic video auto-encoding framework for self-evolving, cinematically faithful, agent-native video representation learning. AVA-Encoder encodes an input film into the proposed KG and reconstructs the film from that representation. By treating reconstruction quality as a direct measure of representational faithfulness (He et al., 2022; Mildenhall et al., 2020), it converts reconstruction errors into optimization signals that refine the shared Agentic Video Encoder policy and the input-specific KG representation at separate stages.

Learning such a representation presents four major challenges, and AVA-Encoder introduces four components to address them. First, mapping a high-dimensional film, in which visual, audio, temporal, and story information are tightly connected, into structured text can lose important details. The multi-level Agentic Video Encoder (Sec. 4.1) therefore analyzes the film, its shots, and its keyframes in order, passing high-level context to each finer level to retain information needed for reconstruction. Second, a finished film contains complex dependencies: stories contain events and shots; events affect one another; and a character is linked to appearance references, dialogue, actions, and story progress across shots. The film knowledge graph (Sec. 4.2) separates this information into structured-text nodes and linked assets while using typed edges to preserve its hierarchy, temporal order, and cross-shot dependencies. Third, both the shared encoding process and each input-specific representation must support automatic improvement. The dual-loop textual-gradient framework (Sec. 4.3) combines Data-Independent Encoding Policy Pseudo-Training, which improves the shared encoding policy before deployment, with Data-Dependent KG Representation Refinement, which improves the current video’s KG representation at test time. Fourth, stable self-evolution requires a precise optimization signal and a reliable common evaluation. Our reconstruction-error design (Sec. 4.3.1) uses the loop-facing R_{reward} to diagnose reconstruction failures and verify revisions, while R_{eval} measures all representation systems in four reconstruction directions and eight film dimensions.

Our contributions are threefold:

1. **Agentic Video Auto-Encoder.** We introduce the Agentic Video Auto-Encoder paradigm, which formulates agent-native video representation learning as a self-evolving agentic auto-encoding problem. We release

the complete AVA-Encoder framework and show that the two optimization stages improve Overall reconstruction by 6.6 percentage points, or 15.6% relative, over removing both stages. Under the controlled policy-only comparison, pseudo-training exceeds the human-tuned Agentic Video Encoder by 1.4 points, or 3.2% relative, while using 74.3% fewer system-prompt tokens.

2. **Agentic Video Representation Benchmark.** We establish the first benchmark for evaluating agentic video representations through reconstruction faithfulness. The benchmark includes four evaluation directions and eight fine-grained dimensions covering narrative, visual, temporal, and multimodal consistency. Its automatic metrics agree with human judgments on 710 of 730 blinded triples (97.3%) over 18 varied video clips, 129 film shots, and 246 keyframes.
3. **Film Knowledge Graph Dataset and Editing Framework.** We release the first dataset of high-quality film knowledge-graph representations together with a graph-based editing framework. Beyond representation learning, this resource provides step-by-step creation records for agentic video generation and supports more controllable video editing, film remixing, and reuse.

2. Related Work

2.1. Agentic Video Creation Systems

Recent LLM/VLM-based video systems explore generation, editing, and remixing through planning and tool orchestration (Lin et al., 2024; Zhuang et al., 2024; Xie et al., 2024; Yuan et al., 2024; Lai et al., 2026), including generation agents (Li et al., 2024; Long et al., 2024; Wu et al., 2025; Xu et al., 2025) and editing frameworks (Song et al., 2026; comfyanonymous and ComfyUI contributors, 2023).

Despite progress, current systems remain limited by their foundation models (Brooks et al., 2024; Google DeepMind, 2024; Kuaishou Technology, 2024; Kong et al., 2024; Wan Team et al., 2025; Yang et al., 2025; Polyak et al., 2024) and the shortage of high-quality records of complete creation processes. Learning from human films offers a solution, but films lack an agent-native representation that is both agent-operable and faithful to film content. AVA-Encoder bridges this gap by turning films into structured knowledge graphs that record entities, events, and their links. This representation allows agents to learn directly from human films while producing clear training signals for continued self-improvement. The graph also supports linked editing, so a change can automatically update related scripts, characters, and shots.

2.2. Agent-Native Video Representations

Existing video representations include low-level features (pixels, latents, and embeddings) (Tong et al., 2022; Zhang et al., 2023), textual descriptions (captions and screenplays) (Huang et al., 2020; Chung & Yu, 2023; Mahon & Lapata, 2024), and structured long-video forms such as sparse memories and hierarchical summaries (Zhang et al., 2024a,b; Song et al., 2024; He et al., 2024; Ataallah et al., 2024; Qian et al., 2024).

While low-level and textual formats hinder agent manipulation or lose visual details, existing graph representations are primarily designed for understanding tasks rather than generation. They retain sparse semantic facts, rely on costly construction pipelines, and are evaluated via downstream tasks like retrieval or question answering, which do not ensure sufficient information preservation for visual creation. AVA-Encoder overcomes these limitations by learning a film-centric knowledge graph optimized for video reconstruction, using reconstruction faithfulness as a direct measure of information preservation and self-improvement signals.

3. Task Definition

To formalize agentic video representation learning, we reframe filmmaking as an auto-encoding process over a structured agent-native intermediate representation.

3.1. Problem Formulation

Let $\mathcal{V}$ denote the continuous domain of high-dimensional cinematic videos. Given an input film $V \in \mathcal{V}$, the Agentic Video Auto-Encoder (AVA-Encoder) framework maps, compresses, and reconstructs the video through three foundational components:

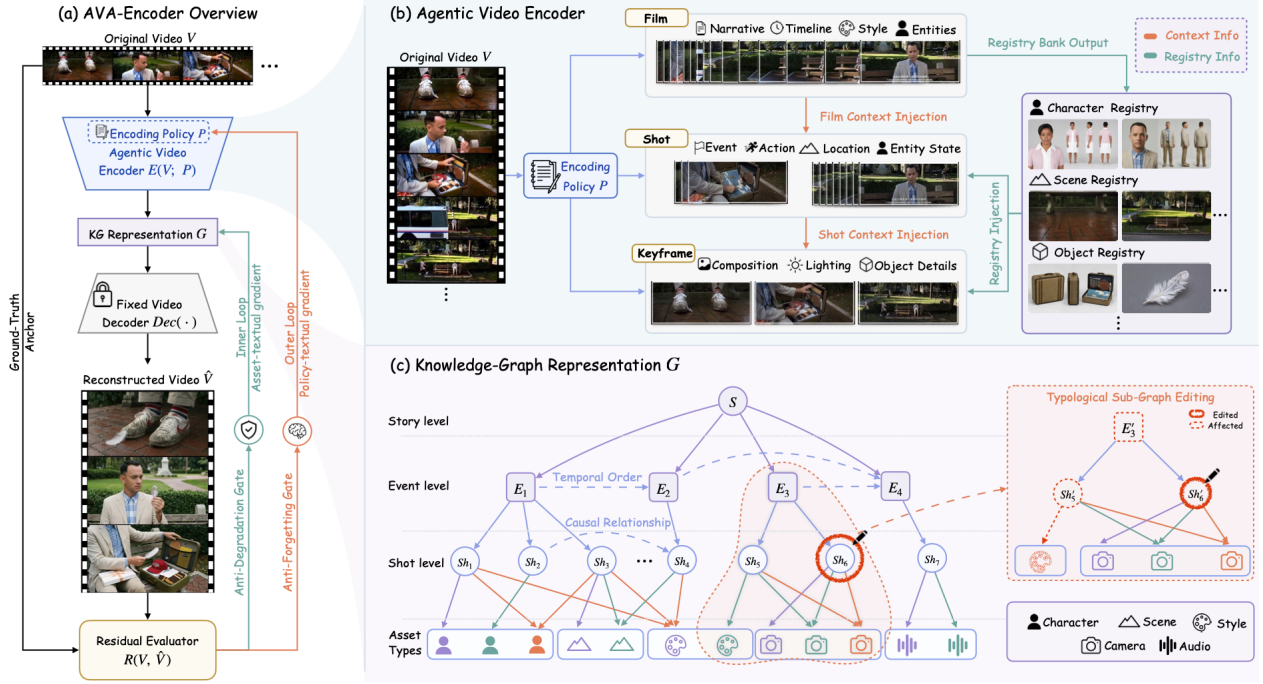


Figure 1 | Overview of AVA-Encoder. (a) The closed-loop auto-encoding framework maps an original video to a knowledge graph through an Agentic Video Encoder policy, reconstructs it with a fixed decoder, and converts the reconstruction residual into gated Data-Dependent KG Representation Refinement and Data-Independent Encoding Policy Pseudo-Training. (b) The Agentic Video Encoder performs film-, shot-, and keyframe-level understanding with hierarchical context injection and shared character, scene, and object registries. (c) The resulting graph organizes story, event, shot, and typed asset nodes, enabling constrained generation and topology-aware subgraph editing.

1. **Agentic Video Encoder (E):** Governed by an Agentic Video Encoder policy $P = (P_{\text{film}}, P_{\text{shot}}, P_{\text{kf}}) \in \mathcal{P}$, implemented as three system prompts for film, shot, and keyframe understanding, the Agentic Video Encoder maps the continuous video into an explicit intermediate knowledge graph representation. Here $\mathcal{P}$ denotes the complete policy space, and its three components are the film-, shot-, and keyframe-level policies:

$$G = E(V; P) \quad (1)$$

2. **Knowledge Graph Latent Space ($\mathcal{G}$):** Unlike dense neural embeddings, the bottleneck $G \in \mathcal{G}$ is a text-centered knowledge graph with a linked asset layer. Its Story–Event–Shot hierarchy and attached Character, Scene, Object, Style, Camera, and Audio states store structured text descriptions. Images, audio, and video are kept only as linked assets. This structure preserves long-range cross-shot relations and asset dependencies.
3. **Fixed Video Decoder (Dec):** The decoder is a static two-stage rendering pipeline composed of a fixed text-to-image generative model and a fixed image-to-video generative model. Source frames are encoder inputs only: they are not stored in G or its asset layer and are never passed to either generation model. The first model renders new reference keyframes from the graph’s structured text descriptions, and the second renders each shot from those generated keyframes and its graph-derived text description, producing $\hat{V} = \text{Dec}(G)$. Both models and their calling procedure remain fixed. Reconstruction performance therefore relies exclusively on the Agentic Video Encoder and the quality of the knowledge graph representation:

$$V \xrightarrow{E(P)} G \xrightarrow{\text{Dec}} \hat{V}. \quad (2)$$

3.2. Optimization Objective

The two optimization stages act on different objects and at different times. First, Data-Independent Encoding Policy Pseudo-Training learns the shared shot-level policy from a stream $\{V_n\}_{n=1}^L$ of L pseudo-training videos

before deployment, while P_{film} , P_{kf} , and all foundation-model weights remain fixed. Let $\mathcal{P}_{\text{shot}}$ denote the feasible shot-level policy space and $p \in \mathcal{P}_{\text{shot}}$ a candidate policy. Using the reconstruction-derived reward $R_{\text{reward},n}$ defined in Sec. 4.3.1, its dataset-level objective is

$$P_{\text{shot}}^* = \arg \max_{p \in \mathcal{P}_{\text{shot}}} \frac{1}{L} \sum_{n=1}^L R_{\text{reward},n}(p). \quad (3)$$

After pseudo-training, the complete policy $P^* = (P_{\text{film}}, P_{\text{shot}}^*, P_{\text{kf}})$ is frozen. For a current input video V , optional Data-Dependent KG Representation Refinement updates only the input-specific graph. Its feasible set is

$$\mathcal{G}_{\text{reach}}(V; P^*) := \text{Reach}_{\text{inner}}(E(V; P^*)), \quad (4)$$

where $\text{Reach}_{\text{inner}}(E(V; P^*))$ contains the initial encoding and any graph produced from it by the schema-valid updates in Sec. 4.3.3. For either enabled refinement setting $\beta \in \{\text{KF}, \text{shot}\}$, the corresponding per-input objective is

$$G_{V,\beta}^* = \arg \max_{G \in \mathcal{G}_{\text{reach}}(V; P^*)} R_{\text{reward}}^\beta(V, \text{Dec}(G)). \quad (5)$$

Thus, the outer stage learns a policy shared by later inputs, whereas the optional inner stage refines only the representation of the current input. The two variables are never updated simultaneously. Final cross-system reporting instead uses R_{eval} ; Sec. 4.3.1 defines both signals. Here M denotes the per-shot prompt-token budget and N_{ref} the per-shot reference-keyframe budget.

4. Method: AVA-Encoder

To address the four design challenges introduced in Sec. 1, AVA-Encoder builds a self-evolving framework around the fixed decoder $\text{Dec}(\cdot)$. As shown in Figure 1, its four components are a multi-level Agentic Video Encoder guided by policy P (Sec. 4.1), a text-centered knowledge graph with a linked multimodal asset layer (Sec. 4.2), dual-loop textual-gradient evolution for the shared encoding policy and each input-specific KG representation (Sec. 4.3), and reconstruction-error signals for optimization and final evaluation (Sec. 4.3.1).

4.1. Agentic Video Encoder

The multi-level Agentic Video Encoder reduces information loss when mapping coupled video content into structured text. It turns an input video $V = \{f_t\}_{t=1}^T$, consisting of T frames at timestamp t , into a structured knowledge graph G through the following steps.

First, the adaptive segmentation operator Seg partitions V into an ordered set of S cinematic shots:

$$\mathcal{S} = \{s_1, s_2, \dots, s_S\} = \text{Seg}(V), \quad (6)$$

where each shot s_i is dynamically bounded by motion dynamics, frame similarity, and semantic transitions.

Second, to bridge local details and global dependencies, AVA-Encoder executes coarse-to-fine, three-level hierarchical understanding governed by the complete policy $P = (P_{\text{film}}, P_{\text{shot}}, P_{\text{kf}})$:

$$C_{\text{film}} = E_{\text{film}}(V; P_{\text{film}}), \quad (7)$$

$$C_{\text{shot},i} = E_{\text{shot}}(s_i, C_{\text{film}}; P_{\text{shot}}), \quad (8)$$

$$C_{\text{kf},i} = E_{\text{kf}}(f_i^*, C_{\text{shot},i}; P_{\text{kf}}), \quad (9)$$

where E_{film} , E_{shot} , and E_{kf} are the three stage-specific operations of the Agentic Video Encoder E ; C_{film} , $C_{\text{shot},i}$, and $C_{\text{kf},i}$ are their semantic contexts; and f_i^* is the motion-stable keyframe of shot s_i . Specifically, P_{film} captures global narratives and initializes character, scene, and object registries; P_{shot} handles intra-shot dynamics; and P_{kf} focuses on visual composition. Hierarchical context injection (C) persistently passes upper-tier priors,

while registry injection anchors recurring character, scene, and object identities across cuts. In the reported Data-Independent Encoding Policy Pseudo-Training, P_{film} and P_{kf} remain fixed and only P_{shot} is updated. For compactness, $\bar{P}(p) := (P_{\text{film}}, p, P_{\text{kf}})$ denotes the complete policy whose shot-level component is p .

Finally, this multi-level process converts the closely linked modalities of raw videos into structured text descriptions that agents can easily understand and edit. To preserve their cross-modal relations and connect them to generated assets, the Agentic Video Encoder builds the final knowledge graph:

$$G = E(V; P) = \text{BuildGraph}(C_{\text{film}}, \{C_{\text{shot},i}, C_{\text{kf},i}\}_{i=1}^S), \quad (10)$$

where $\text{BuildGraph}(\cdot)$ maps the hierarchical contexts to the typed knowledge graph. The Story–Event–Shot hierarchy and its Character, Scene, Object, Style, Camera, and Audio states store structured text descriptions. Generated keyframes and other image, audio, and video outputs belong to the linked asset layer rather than the textual hierarchy.

The resulting reconstruction fidelity is evaluated in RQ1 (Sec. 5.2), and the contribution of multi-level understanding is isolated in RQ2 (Sec. 5.3).

4.2. Knowledge-Graph Representation

The resulting representation must preserve film dependencies after different modalities and semantic levels have been separated. Accordingly, the Agentic Video Encoder output $G \in \mathcal{G}$ is a discrete, text-centered knowledge graph with a linked multimodal asset layer. We write $G = (\mathcal{N}_G, \mathcal{E}_G, \mathcal{A}_G)$, where $\mathcal{N}_G$ contains all graph-addressable text and asset records, $\mathcal{E}_G$ contains their typed relations, and $\mathcal{A}_G$ contains or references generated image, audio, and video data. Calling G a video or multimodal KG refers to these links between text descriptions and $\mathcal{A}_G$; it does not mean that the hierarchy or state nodes store raw multimodal data. Appendix Sec. J, *Knowledge-Graph Representation and Editing*, provides the complete stored structure, registry mapping, construction procedure, and graph-based update rules.

The graph has nine structured-text node types and one graph-addressable keyframe asset type. The text nodes comprise the narrative hierarchy $\mathcal{N}_{\text{struct}} = \{\text{Story, Event, Shot}\}$ and the shot-specific states $\mathcal{N}_{\text{state}} = \{\text{Character, Scene, Object, Style, Camera, Audio}\}$. We denote their union by $\mathcal{N}_{\text{text}} = \mathcal{N}_{\text{struct}} \cup \mathcal{N}_{\text{state}}$. Every node in $\mathcal{N}_{\text{text}}$ stores text only. In particular, an Audio state describes spoken content, speaker identity, voice properties, music, sound effects, and audiovisual synchronization in text; it does not store an audio waveform. Keyframes are graph-addressable asset records, denoted $\mathcal{N}_{\text{keyframe}} = \{\text{Keyframe}\}$, so $\mathcal{N}_G = \mathcal{N}_{\text{text}} \cup \mathcal{N}_{\text{keyframe}}$. The asset layer $\mathcal{A}_G$ stores or references generated keyframes, character/scene/object reference images, audio or voice assets, and rendered shot videos; the keyframe records and relevant text nodes point to these assets. All assets in $\mathcal{A}_G$ are generated from the structured-text representation. No frame, crop, or screenshot from the input video is stored as an asset or supplied to the reconstruction generators. This text bottleneck is deliberate because text is an important modality in an agent workspace and directly supports reasoning, learning, and editing. The ordered text descriptions also record the intermediate creation decisions, making them an important part of an agentic video creation trajectory.

The graph contains eleven edge types, grouped as

$$\begin{aligned} \mathcal{E}_{\text{prod}} &= \{\text{Contains, Binds, References}\}, \\ \mathcal{E}_{\text{temp}} &= \{\text{Transition, Sequence, Jump}\}, \\ \mathcal{E}_{\text{sem}} &= \{\text{SpokenBy, Rel, Similar, Features, Narrative}\}. \end{aligned}$$

Production and asset links use $\mathcal{E}_{\text{prod}}$, temporal organization uses $\mathcal{E}_{\text{temp}}$, and semantic links use $\mathcal{E}_{\text{sem}}$. Contains records the story–event–shot hierarchy; Binds links each shot with its state and keyframe nodes; and References records the registry assets used to render a keyframe. Transition connects successive states of the same entity, Sequence records temporal order, and Jump connects non-adjacent appearances. SpokenBy links spoken audio to a character, Rel stores character relationships, Similar marks entities or scenes that may look alike, Features links a scene with recurring characters or objects, and Narrative stores cause, setup, and callback relations.

Built during video understanding, the text nodes of G keep reconstruction-critical descriptions, while typed edges preserve dependencies among those descriptions and the linked assets in $\mathcal{A}_G$. This design supports direct one-hop lookup and linked subgraph editing: a local text-node or asset edit can follow its edges and update the

connected shots consistently. RQ3 (Sec. 5.4) demonstrates this graph operability, and RQ4 (Sec. 5.5) evaluates reuse of the representation by downstream generation systems.

4.3. Dual-Loop Textual-Gradient Evolution

AVA-Encoder improves its shared encoding policy and input-specific KG representations in two separate textual-gradient stages. First, Data-Independent Encoding Policy Pseudo-Training (the *outer loop*) learns the shared shot-level encoding policy P_{shot} across a collection of videos before deployment, while holding the foundation-model weights, P_{film} , and P_{kf} fixed. After this learned policy is frozen, Data-Dependent KG Representation Refinement (the *inner loop*) may optionally refine only the input-specific representation G of the current video at test time while holding the complete Agentic Video Encoder policy P fixed.

The two loops update different variables at different stages and are not nested, so either may be enabled on its own. Users may pseudo-train the shared encoding policy on their own video collection through the outer loop and may then refine the representation of an individual input through the inner loop. Figure 2(b) shows the outer loop, and Figure 2(a) shows the subsequent optional inner loop.

Following TextGrad (Yuksekgonul et al., 2024), a textual gradient is natural-language feedback passed from an evaluation result to the text variable responsible for that result. It states the observed error and the requested revision, serving as an optimization direction rather than a numerical derivative. This form is well suited to self-evolving agents that reason in text: it helps them locate a specific problem and its update direction, enabling focused improvement. We call each atomic, source-grounded fact checked against a reconstruction an *evaluation item*; an item fails when that fact is missing, contradicted, or otherwise not preserved in the reconstruction. For example, a failed item may be an incorrect QA answer about a character’s clothing, a missing action in a reconstructed shot, or a grounded visual difference between a GT and reconstructed keyframe. We denote one such fact-level reconstruction failure by ξ_i and write it as the correction record

$$\mathbf{a}_i := \text{Corr}(\xi_i) = (d_i, u_i^{\text{GT}}, u_i^{\text{rec}}, e_i, h_i), \quad (11)$$

where $\mathbf{a}_i$ is one atomic correction record, i indexes the failure, d_i is its evaluation dimension, u_i^{GT} and u_i^{rec} are the corresponding ground-truth and reconstructed facts, e_i is the supporting visual or audio evidence, and h_i is the requested correction. The records assigned to the input-specific KG representation or the shot-level Agentic Video Encoder policy form the inputs to ∇_{text}^G and $\nabla_{\text{text}}^{P_{\text{shot}}}$, respectively, producing the asset- and policy-level textual gradients used below. Appendix Sec. A, *Textual Gradients and AVA-Encoder Self-Optimization*, gives the branch-specific feedback sources and complete update operators.

4.3.1. Reconstruction Error

Stable self-improvement requires precise optimization feedback and a consistent final measure. We therefore use reconstruction error: the observable difference between a source video V and the reconstruction $\hat{V} = \text{Dec}(G)$ produced from its representation. Because the decoder is fixed, this error shows which source information was lost or changed in G . Throughout the paper, we reserve R_{reward} for loop-facing optimization signals used to diagnose an incumbent and accept or reject a candidate, and reserve R_{eval} for the common four-direction protocol used only in final cross-system evaluation. The distinction is based on their methodological roles, independently of low-level implementation choices.

Optimization signal R_{reward} . A vision-language model can identify evidence in a complex image or video, but assigning one precise score directly to such dense content is less reliable. To obtain a more accurate optimization signal, we design signal R_{reward} based on reconstruction QAs. We decompose each selected source keyframe or shot into approximately 30 atomic factual questions with binary answers. Each question tests one observable fact, so an incorrect answer both lowers the reward and identifies a specific error for textual-gradient correction. Let n index a source video, let the non-empty set $\mathcal{S}_n$ contain its selected shots, and let $s \in \mathcal{S}_n$ and k index a shot and an atomic question. For source shot $V_{n,s}$, a frozen bank $\mathcal{Q}_{n,s} = \{(q_{n,s,k}, y_{n,s,k})\}_{k=1}^{K_{n,s}}$ contains $K_{n,s} \geq 1$ questions and source-derived binary answers. Given P_{shot} , let $\hat{V}_{n,s}(P_{\text{shot}}) := \text{Dec}(E(V_{n,s}; \hat{P}(P_{\text{shot}})))$, let Answer return a reconstructed binary answer, and let $\mathbb{I}[\cdot]$ denote the indicator function. Its residual vector, mean residual, and

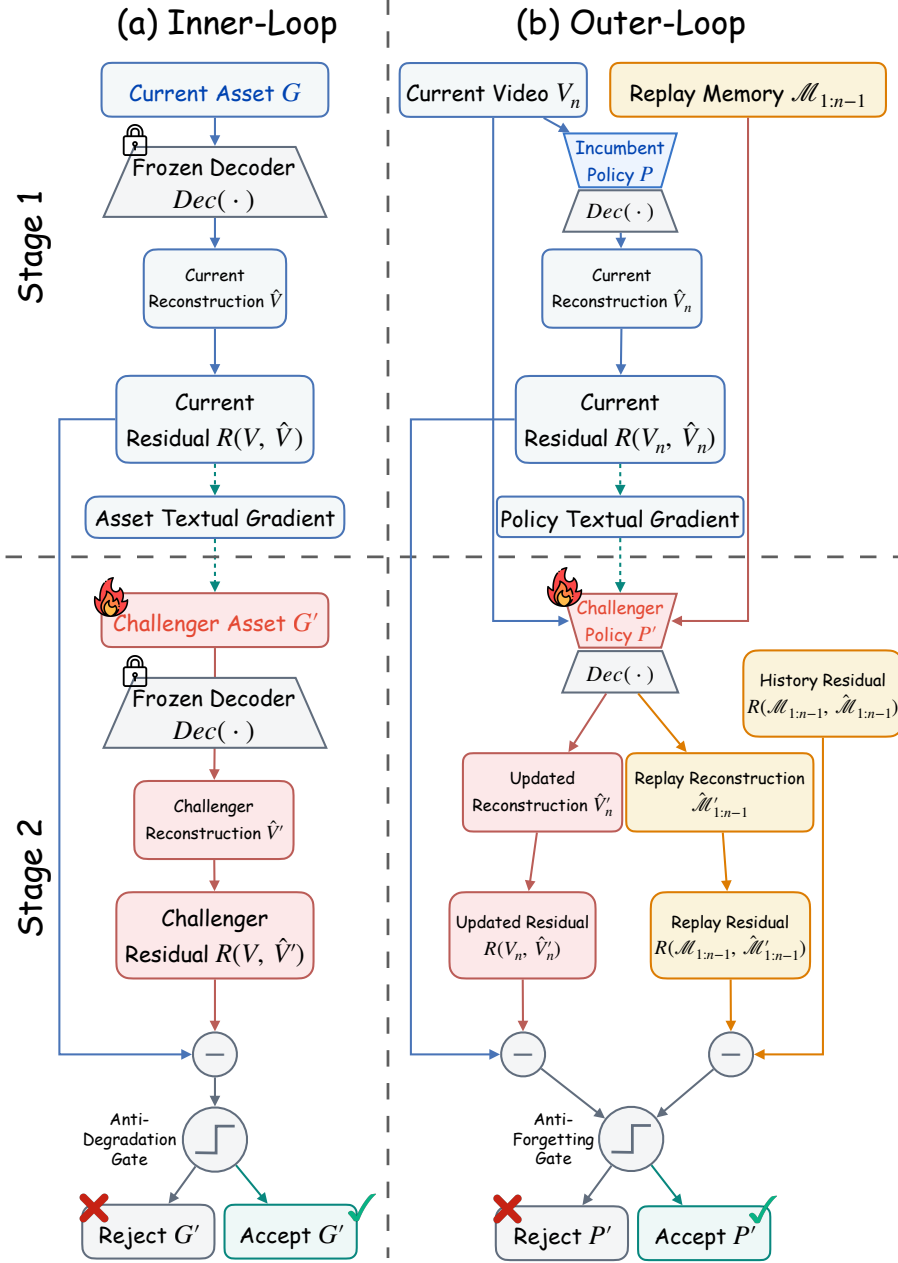


Figure 2 | Dual-loop textual-gradient evolution. (a) Data-Dependent KG Representation Refinement with the anti-degradation gate. (b) Data-Independent Encoding Policy Pseudo-Training with the anti-forgetting gate.

higher-is-better reward are

$$\begin{aligned}
 \chi_{n,s,k}(P_{\text{shot}}) &:= \mathbb{I}[\text{Answer}(\hat{V}_{n,s}(P_{\text{shot}}), q_{n,s,k}) = y_{n,s,k}], \\
 \mathbf{r}_{n,s}^{\text{qa}}(P_{\text{shot}}) &:= (1 - \chi_{n,s,k}(P_{\text{shot}}))_{k=1}^{K_{n,s}}, \\
 \bar{r}_{n,s}^{\text{qa}}(P_{\text{shot}}) &:= \frac{1}{K_{n,s}} \sum_{k=1}^{K_{n,s}} (1 - \chi_{n,s,k}(P_{\text{shot}})), \\
 R_{\text{reward},n,s}(P_{\text{shot}}) &:= 1 - \bar{r}_{n,s}^{\text{qa}}(P_{\text{shot}}) = \frac{1}{K_{n,s}} \sum_{k=1}^{K_{n,s}} \chi_{n,s,k}(P_{\text{shot}}).
 \end{aligned} \tag{12}$$

Here, $\chi_{n,s,k}$ indicates whether the reconstruction preserves atomic fact k , $\mathbf{r}_{n,s}^{\text{qa}}$ is the corresponding binary QA residual vector, and $\bar{r}_{n,s}^{\text{qa}} := K_{n,s}^{-1} \sum_{k=1}^{K_{n,s}} (1 - \chi_{n,s,k})$ is its arithmetic mean. The selected-shot set $\mathcal{S}_n$ and every question bank are non-empty, so all averages are defined. The video-level reward is $R_{\text{reward},n}(P_{\text{shot}}) := |\mathcal{S}_n|^{-1} \sum_{s \in \mathcal{S}_n} R_{\text{reward},n,s}(P_{\text{shot}})$. In the outer loop, failed QA facts provide diagnostic evidence and $R_{\text{reward},n}$ supplies the acceptance score. The keyframe inner loop uses an analogous frozen bank over static-image facts for candidate verification, while obtaining its modification direction from direct GT-reconstruction differences. Appendix Sec. C, *Reconstruction Reward for Loop Optimization*, gives the complete question construction, feedback sources, averaging, and prompts.

Final evaluation: R_{eval} . For the same reason, final evaluation also replaces a single overall vision-language-model judgment with fine-grained factual QA and checklist judgments before aggregation. Under frozen prompts, the VLM produces only the atomic factual judgments—such as match, partial match, mismatch, hit, conflict, or missing—together with their evidence; it does not directly assign the reported direction or Overall scores. Fixed, deterministic machine rules convert those judgments to numerical fact scores and aggregate them from facts to dimensions, shots or keyframes, video cases, and finally the four reported directions. R_{eval} measures reconstruction quality in those four directions: Video (V), Keyframe (KF), Video Back-Captioning (V-BC), and Keyframe Back-Captioning (KF-BC). It covers Character, Scene, Position, Motion, Audio, Style, Camera, and Narrative, with Audio marked N/A for the keyframe directions. For one direction with D applicable dimensions, let $\mathbf{r}^{\text{eval}}(V, \hat{V}) = (r_1^{\text{eval}}, \dots, r_D^{\text{eval}}) \in [0, 1]^D$ be its normalized lower-is-better residual vector. The corresponding higher-is-better final evaluation score is

$$R_{\text{eval}}(V, \hat{V}) := \sum_{d=1}^D \omega_d^{\text{eval}} (1 - r_d^{\text{eval}}), \quad \sum_{d=1}^D \omega_d^{\text{eval}} = 1. \quad (13)$$

where $\omega_d^{\text{eval}} \geq 0$ is the fixed weight of applicable dimension d . The complete four-direction protocol provides shared scores for comparison across representation systems and is not used as the optimization signal in either loop. Sec. 5.1 explains the evaluation design, and Appendix Sec. B, *Reconstruction Evaluation Metrics*, gives the complete scoring rules.

RQ1 (Sec. 5.2) reports final reconstruction fidelity under R_{eval} , while RQ2 (Sec. 5.3) tests the contribution of the two stages driven by R_{reward} .

4.3.2. Outer Loop: Data-Independent Encoding Policy Pseudo-Training

Before optional test-time Data-Dependent KG Representation Refinement, the outer loop performs Data-Independent Encoding Policy Pseudo-Training on the shot-level Agentic Video Encoder policy P_{shot} , while P_{film} and P_{kf} remain fixed. Here, data-independent means that the learned policy is shared across downstream inputs rather than optimized for the representation of one current video. To avoid per-clip overfitting and accumulate transferable encoding rules, the outer loop processes a stream of source videos $V_1 \rightarrow V_2 \rightarrow \dots \rightarrow V_L$. At the start of video V_n , the policy accepted after all preceding videos is frozen as the inherited replay baseline $P_{\text{shot}}^{(n)} \leftarrow P_{\text{shot}}$, as shown in Algorithm 1. The same procedure may be run before deployment on user-supplied clips so that the shared shot-level policy can adapt to the relevant content domains before it is frozen for use.

As illustrated in Figure 2 (b), Data-Independent Encoding Policy Pseudo-Training operates in two stages. In Stage 1 (Propose Update), the current P_{shot} reconstructs every selected shot of video V_n through the complete policy $\bar{P}(P_{\text{shot}})$. The frozen QA banks produce the atomic residuals $\{\mathbf{r}_{n,s}^{\text{qa}}(P_{\text{shot}})\}_{s \in \mathcal{S}_n}$ and the equal-shot video reward $R_{\text{reward},n}(P_{\text{shot}})$ from Eq. 12. Let $\hat{y}_{n,s,k}(P_{\text{shot}})$ denote the answer obtained from reconstruction $\hat{V}_{n,s}(P_{\text{shot}})$ for question $q_{n,s,k}$, and let $\mathcal{F}_{\text{qa},n}(P_{\text{shot}}) := \{(q_{n,s,k}, y_{n,s,k}, \hat{y}_{n,s,k}(P_{\text{shot}})) : s \in \mathcal{S}_n, \hat{y}_{n,s,k}(P_{\text{shot}}) \neq y_{n,s,k}\}$ contain all failed atomic facts for the current video. Their correction records are $\mathcal{T}_{\text{pol},n} := \{\text{Corr}(\xi) : \xi \in \mathcal{F}_{\text{qa},n}(P_{\text{shot}})\}$. A language rewriting agent forms $\mathbf{g}_{\text{text}}^{\text{policy}} = \nabla_{\text{text}}^{P_{\text{shot}}}(\mathcal{T}_{\text{pol},n})$ and proposes $P'_{\text{shot}} = \text{ProposePolicy}(P_{\text{shot}}, \mathbf{g}_{\text{text}}^{\text{policy}})$. In Stage 2 (Verify and Decide), the framework evaluates P'_{shot} on the same current-video shots and a sampled historical replay set, then applies the Anti-Forgetting Gate. The appendix gives the dimension-wise, equal-shot aggregation of $\mathbf{r}_n^{\text{qa}}$.

To accept P'_{shot} while preventing forgetting on earlier data, Data-Independent Encoding Policy Pseudo-Training evaluates current-video reward gain $\Delta R_{\text{reward},n} = R_{\text{reward},n}(P'_{\text{shot}}) - R_{\text{reward},n}(P_{\text{shot}})$ and visual-only gain $\Delta R_{\text{reward},n}^{\text{vis}}$ against the current policy P_{shot} . Historical replay uses $P_{\text{shot}}^{(n)}$, the inherited shot-level policy frozen when video V_n begins. The memory $\mathcal{M}_{1:n-1}$ stores one replay shot from each earlier pseudo-training video, and

Algorithm 1 Outer Loop: Data-Independent Encoding Policy Pseudo-Training

Require: Video stream $\{V_n\}_{n=1}^L$; initial shot-level policy $P_{\text{shot},0}$; fixed P_{film} and P_{kf} ; decoder Dec; QA reward R_{reward} ; $T_{\text{outer}} = 3$ candidate rounds per video

Ensure: Pseudo-trained shot-level policy P_{shot}^*

```

1:  $P_{\text{shot}} \leftarrow P_{\text{shot},0}$ ;  $\mathcal{M}_{1:0} \leftarrow \emptyset$ 
2: for  $n = 1$  to  $L$  do
3:    $P_{\text{shot}}^{(n)} \leftarrow P_{\text{shot}}$  ▷ Freeze the inherited shot-level policy as replay baseline
4:   Freeze shot-level QA banks  $\{Q_{n,s}\}_{s \in \mathcal{S}_n}$ 
5:   for  $t = 1$  to  $T_{\text{outer}}$  do
6:     Reconstruct the selected shots and evaluate them with  $R_{\text{reward}}$ , obtaining  $\mathcal{F}_{\text{qa},n}(P_{\text{shot}})$  and  $R_{\text{reward},n}(P_{\text{shot}})$ 
7:      $\mathcal{T}_{\text{pol},n} \leftarrow \{\text{Corr}(\xi) : \xi \in \mathcal{F}_{\text{qa},n}(P_{\text{shot}})\}$ 
8:      $\mathbf{g}_{\text{text}}^{\text{policy}} \leftarrow \nabla_{\text{text}}^{P_{\text{shot}}}(\mathcal{T}_{\text{pol},n})$  ▷ Form policy-level textual-gradient feedback
9:      $P'_{\text{shot}} \leftarrow \text{ProposePolicy}(P_{\text{shot}}, \mathbf{g}_{\text{text}}^{\text{policy}})$ 
10:    Reconstruct and evaluate  $P'_{\text{shot}}$  with  $R_{\text{reward}}$  on the current and replay shots
11:    if  $\Gamma_{\text{outer}} = 1$  then ▷ Apply current-video and replay checks in Eq. 14
12:       $P_{\text{shot}} \leftarrow P'_{\text{shot}}$  ▷ Promote the accepted policy to the next candidate round
13:    end if
14:  end for
15:   $\mathcal{M}_{1:n} \leftarrow \mathcal{M}_{1:n-1} \cup \{\text{one replay record from } V_n\}$ 
16: end for
17: return  $P_{\text{shot}}$ 

```

each replay check samples at most three shots. The historical reward change $\Delta \bar{R}_{\text{reward,hist}}$ compares P'_{shot} with $P_{\text{shot}}^{(n)}$ on the same sampled replay shots:

$$\Gamma_{\text{outer}} = \mathbb{I} \left(\Delta R_{\text{reward},n} > \delta \wedge \Delta R_{\text{reward},n}^{\text{vis}} \geq -\delta_{\text{vis}} \wedge \Delta \bar{R}_{\text{reward,hist}} \geq -\delta_{\text{hist}} \right), \quad (14)$$

where $\Delta R_{\text{reward},n}^{\text{vis}}$ uses the arithmetic mean of the selected shots' visual-only optimization rewards, δ is the required current-video gain, δ_{vis} and δ_{hist} limit acceptable visual and historical decreases, and $\mathbb{I}(\cdot)$ is the indicator function. All three outer-loop terms are higher-is-better QA instances of R_{reward} and are distinct from the final score R_{eval} .

Data-Independent Encoding Policy and Generalization. Data-Independent Encoding Policy Pseudo-Training learns the shot-level Agentic Video Encoder policy from six video clips, and the resulting policy is evaluated on 18 non-overlapping downstream video clips. The policy-only condition in Table 2, reported as ‘‘Remove Data-Dependent KG Representation Refinement,’’ reaches 45.8% Overall reconstruction accuracy, compared with 44.4% for the independently human-tuned shot-level Agentic Video Encoder policy: an absolute advantage of 1.4 points, or 3.2% relative. The pseudo-trained policy also uses 8,052 rather than 31,336 system-prompt tokens, a 74.3% reduction. With optional test-time Data-Dependent KG Representation Refinement enabled, the complete AVA-Encoder configuration reaches 49.0%. The controlled policy-only comparison, together with transfer from six pseudo-training clips to 18 non-overlapping evaluation clips that include both related and different content domains, demonstrates cross-clip and cross-domain generalization.

These policy-level and combined effects are evaluated in RQ2 (Sec. 5.3).

4.3.3. Inner Loop: Data-Dependent KG Representation Refinement

After the Agentic Video Encoder policy P has been fixed, optional Data-Dependent KG Representation Refinement updates the input-specific G for the current video by refining selected multimodal assets and localized prompt payloads.

As illustrated in Figure 2(a), both settings of Data-Dependent KG Representation Refinement follow the same procedure in Algorithm 2: diagnose the current reconstruction, convert its failures into an asset-level textual gradient, revise one selected asset in G , reconstruct the candidate G' , and commit it only if the Anti-Degradation

Algorithm 2 Inner Loop: Data-Dependent KG Representation Refinement

Require: Input video V ; setting $\beta \in \{\text{KF}, \text{shot}\}$; current KG representation G ; fixed decoder $\text{Dec}(\cdot)$; loop reward R_{reward}^β

Ensure: Refined KG representation $G_{V,\beta}^*$

```

1:  $\hat{V} \leftarrow \text{Dec}(G)$  ▷ Reconstruct the current representation
2: while KG-representation-refinement rounds remain do
3:    $\mathcal{F}_\beta \leftarrow \text{Feedback}_\beta(V, \hat{V})$  ▷ Diagnose the current reconstruction; Eq. 15
4:   if  $\mathcal{F}_\beta = \emptyset$  then
5:     break
6:   end if
7:    $\mathcal{T}_G \leftarrow \{\text{Corr}(\xi) : \xi \in \mathcal{F}_\beta\}$ 
8:    $\mathbf{g}_{\text{text}}^{\text{asset}} \leftarrow \nabla_{\text{text}}^G(\mathcal{T}_G)$  ▷ Form asset-level textual-gradient feedback
9:    $G' \leftarrow \text{ProposeAsset}(G, \mathbf{g}_{\text{text}}^{\text{asset}})$  ▷ Revise the selected asset
10:   $\hat{V}' \leftarrow \text{Dec}(G')$  ▷ Reconstruct the candidate
11:  Evaluate current and candidate reconstructions with  $R_{\text{reward}}^\beta$ 
12:  if  $\Gamma_{\text{inner}} = 1$  then ▷ Apply the setting-specific Anti-Degradation Gate
13:     $(G, \hat{V}) \leftarrow (G', \hat{V}')$  ▷ Commit the accepted candidate
14:  end if
15: end while
16: return  $G$ 

```

Gate passes. The setting index $\beta \in \{\text{KF}, \text{shot}\}$ changes only the feedback source, selected asset, and acceptance gate. Let I_{GT} be the selected GT keyframe and $I(\hat{V})$ its paired keyframe in reconstruction $\hat{V}$; Diff_{KF} returns their grounded differences, and $\text{Fail}_{\text{shot}}$ returns failed facts from the shot-reward checklist. The scores $R_{\text{reward}}^{\text{KF}}$ and $R_{\text{reward}}^{\text{shot}}$ denote the corresponding keyframe and shot optimization rewards. We define the shared diagnostic evidence and loop-facing score as

$$\begin{aligned}
\text{Feedback}_\beta(V, \hat{V}) &:= \begin{cases} \text{Diff}_{\text{KF}}(I_{\text{GT}}, I(\hat{V})), & \beta = \text{KF}, \\ \text{Fail}_{\text{shot}}(V, \hat{V}), & \beta = \text{shot}, \end{cases} \\
R_{\text{reward}}^\beta(V, \hat{V}) &:= \begin{cases} R_{\text{reward}}^{\text{KF}}(I(\hat{V})), & \beta = \text{KF}, \\ R_{\text{reward}}^{\text{shot}}(V, \hat{V}), & \beta = \text{shot}. \end{cases}
\end{aligned} \tag{15}$$

Here I_{GT} is the selected GT keyframe and $I(\hat{V})$ is its paired keyframe in reconstruction $\hat{V}$; hence $I_{\text{base}} = I(\hat{V})$ and $I_{\text{cand}} = I(\hat{V}')$. The function $\text{Fail}_{\text{shot}}$ returns the mismatched or absent facts produced by the fixed video-shot reward checklist. The keyframe branch separates direct-difference diagnosis from QA-based verification, whereas the video-shot reward evaluator supplies both its failure evidence and $R_{\text{reward}}^{\text{shot}}$. For $\beta = \text{KF}$, ProposeAsset rewrites the selected keyframe image-generation payload; for $\beta = \text{shot}$, it rewrites the selected shot video-generation payload. In either setting, $\mathcal{T}_G := \{\text{Corr}(\xi) : \xi \in \mathcal{F}_\beta\}$ and $\mathbf{g}_{\text{text}}^{\text{asset}} = \nabla_{\text{text}}^G(\mathcal{T}_G)$. The settings share the update $G' = \text{ProposeAsset}(G, \mathbf{g}_{\text{text}}^{\text{asset}})$ but use the corresponding gate below; Appendix Secs. A and D give their complete feedback and gate definitions.

To filter out sampling variance and ensure off-target stability, candidate updates must clear the Anti-Degradation Gate:

$$\Gamma_{\text{inner}} = \begin{cases} \Gamma_{\text{inner}}^{\text{KF}}, & \text{keyframe refinement,} \\ \Gamma_{\text{inner}}^{\text{shot}}, & \text{video-shot refinement.} \end{cases} \tag{16}$$

For keyframe refinement, $\Gamma_{\text{inner}}^{\text{KF}}$ applies the QA reward in Eq. 15 as an anti-degradation check. Outside the shared algorithm, it also applies the binary consistency safeguard $\text{PairCons}(I_{\text{GT}}, I_{\text{base}}, I_{\text{cand}})$: the pairwise evaluator compares baseline and candidate against GT twice with reversed presentation orders, and returns one only if the candidate is preferred in both orders; a disagreement or tie returns zero. For video-shot refinement, $\Gamma_{\text{inner}}^{\text{shot}}$ requires a positive optimization-reward gain $\Delta R_{\text{reward}}^{\text{shot}} = R_{\text{reward}}^{\text{shot}}(V, \hat{V}') - R_{\text{reward}}^{\text{shot}}(V, \hat{V})$ above the acceptance margin and bounds decreases in guarded reward dimensions. Appendix Sec. D, *Dual-Loop Acceptance Gates*, gives the exact definitions, thresholds, replay rule, and sequential pseudo-training procedure.

The effect of optional input-specific refinement is isolated with and without policy pseudo-training in RQ2 (Sec. 5.3).

To support video-agent research and custom representation learning on user-supplied video clips, we open-source the complete AVA-Encoder framework and its graph data.

5. Experiments

5.1. Experiment Setup

Data. We use six pseudo-training video clips and a non-overlapping evaluation collection of 18 video clips spanning varied content and forms, including animation, human-directed AI short films, and classic cinema. Both collections come from publicly available open-source data; Appendix Sec. G, *Dataset and Reproducibility Details*, provides the complete clip lists and benchmark inventory.

Model configuration. We use fixed foundation models in five roles. Gemini-3.1-Pro-Preview (Google AI, 2026a) serves as the video-understanding model, performing film-, shot-, and keyframe-level analysis under the Agentic Video Encoder prompts, and separately as the evaluation model under frozen optimization-reward and final-evaluation protocols denoted R_{reward} and R_{eval} , respectively. Qwen-3.7-Max (Alibaba Cloud, 2026b) serves as the modification model, proposing textual-gradient-guided revisions to the input-specific KG representation during Data-Dependent KG Representation Refinement and to the shot-level Agentic Video Encoder policy during Data-Independent Encoding Policy Pseudo-Training; it does not score or accept its own revisions. Nano Banana Pro (Google AI, 2026b) and HappyHorse 1.0 (Alibaba Cloud, 2026a) are the shared image and reference-to-video generators, respectively. All foundation-model weights remain fixed: Data-Independent Encoding Policy Pseudo-Training updates only the textual shot-level Agentic Video Encoder policy, and optional Data-Dependent KG Representation Refinement updates only the current video’s KG representation. Appendix Sec. E, *Agentic Video Encoder System Prompts*, maps the initial, pseudo-trained, and human-tuned policy conditions, while Appendix Sec. M, *Complete System Prompts*, reproduces the complete Agentic Video Encoder, optimization-reward, keyframe-comparison, and final-evaluation prompts.

Evaluation. The final reconstruction evaluation R_{eval} uses four directions that cover different evidence: direct Video comparison (V), direct Keyframe comparison (KF), Video Back-Captioning (V-BC), and Keyframe Back-Captioning (KF-BC). V tests whether the representation keeps the audiovisual and temporal information needed to reconstruct the complete video; KF focuses on fine-grained static visual evidence that can be difficult to inspect in dense video. Because AVA-Encoder and the compared methods use text-centered structured representations, V-BC and KF-BC also compare the semantic facts recovered from independently generated captions. Each direction is scored over Character, Scene, Position, Motion, Audio, Style, Camera, and Narrative. Audio is not applicable to the keyframe-based directions, whose means therefore use the remaining seven dimensions. Since a vision-language model is less reliable when asked to assign one precise score directly to a complex image or video, a frozen VLM under fixed prompts produces fine-grained factual QA and checklist judgments rather than the reported scores themselves; deterministic machine rules then aggregate these judgments into the final direction and Overall scores. Appendix Sec. B, *Reconstruction Evaluation Metrics*, provides the complete fact-level scoring, averaging procedure, and human-alignment study; its Sec. B.4, *System Prompts for Reconstruction Evaluation*, identifies the matching prompts.

Compared methods. We compare AVA-Encoder with VideoAnalyzer (Docusphere, 2026), Storyboard Studio (BroderQi, 2026), and soap2soap (Song et al., 2026) using identical input test videos and a shared, fixed video generation decoder to evaluate their representation assets. Appendix Sec. F, *Baseline Adaptation and Fairness*, details the common source-pixel restriction, representation adaptation, shared generators, and temporal alignment.

Automated editing. We qualitatively demonstrate the graph editor by changing a target KG node, automatically tracing the affected dependencies, and re-rendering only the linked assets.

Research questions. We organize the experiments from overall representation quality to component analysis and downstream use. RQ1 asks whether AVA-Encoder improves reconstruction fidelity. RQ2 measures the separate and combined contributions of the two optimization stages and their gates. RQ3 examines whether

Method	Comparison direction				Overall (%)↑
	Video (%)↑	KF (%)↑	V-BC (%)↑	KF-BC (%)↑	
VideoAnalyzer (Docusphere, 2026)	26.1	28.5	9.7	21.7	21.5
Storyboard Studio (BroderQi, 2026)	16.4	28.6	9.6	23.0	19.4
soap2soap (Song et al., 2026)	36.7	39.5	15.8	21.3	28.3
AVA-Encoder (ours)	57.8	73.7	29.7	34.6	49.0

Table 1 | Reconstruction accuracy on the ground-truth-anchored benchmark. The comparison directions are direct Video comparison (V), direct Keyframe comparison (KF), Video Back-Captioning (V-BC), and Keyframe Back-Captioning (KF-BC). Overall is their unweighted mean.

the knowledge graph supports controlled, linked editing. RQ4 tests whether the representation can be reused by downstream agentic video generation systems.

5.2. RQ1: Reconstruction Fidelity

Overall result. Our ground-truth-anchored benchmark directly measures how faithfully each method reconstructs the source film. As shown in Table 1, AVA-Encoder outperforms every baseline in all four comparison directions. It improves over the strongest baseline by 21.1 points on Video, 34.2 on KF, 13.9 on V-BC, and 11.6 on KF-BC. Appendix Sec. H, *Fine-Grained Reconstruction Results*, reports the applicable dimension-level V and KF scores, while Appendix Sec. K, *Additional Qualitative Results*, provides six further reconstruction comparisons and graph-editing visualizations; Figure 3 shows a representative comparison here.



Figure 3 | Visual comparison of reconstruction results between AVA-Encoder and baseline methods, illustrating superior fidelity in preserving fine-grained cinematic details, character identities, and visual consistency.

5.3. RQ2: Contribution of the Two Optimization Stages

Overall result. The two stages provide separate gains and perform best together. The reconstruction ablation covers the Agentic Video Encoder structure, Data-Independent Encoding Policy Pseudo-Training, Data-Dependent KG Representation Refinement, and their acceptance gates.

Hierarchical understanding and policy evolution. The complete AVA-Encoder configuration performs best. The hierarchical policy-only configuration (45.8 Overall) exceeds single-level understanding (27.5) by 18.3 percentage points, or 66.5% relative, supporting the value of the fine-grained film-shot-keyframe context design. Under the controlled setting with Data-Dependent KG Representation Refinement disabled, the policy produced by Data-Independent Encoding Policy Pseudo-Training improves upon the human-tuned Agentic Video Encoder from 44.4 to 45.8: a 1.4-point absolute and 3.2% relative improvement. Its system prompt also decreases from 31,336 to 8,052 tokens, a 74.3% relative reduction.

Ablation setting	Configuration				Comparison direction				
	Agentic Video Encoder / policy	KG representation refinement	Encoding policy pseudo-training	Acceptance gates	V (%)↑	KF (%)↑	V-BC (%)↑	KF-BC (%)↑	Overall (%)↑
Single-level understanding	Single-level policy	Off	Off	Off	35.1	38.4	15.4	21.1	27.5
Remove Data-Independent Encoding Policy Pseudo-Training	Hierarchical; $P_{\text{shot},0}$	On	Off	Inner	52.7	71.8	23.9	33.1	45.4
Remove Data-Dependent KG Representation Refinement	Hierarchical; P_{shot}^*	Off	On	Outer	55.6	68.3	26.6	32.7	45.8
Remove both optimization loops	Hierarchical; $P_{\text{shot},0}$	Off	Off	Off	50.7	67.6	21.2	29.9	42.4
Human-tuned Agentic Video Encoder	Hierarchical; human-tuned policy	Off	Off	Off	53.5	68.1	25.8	30.2	44.4
Remove acceptance gates	Hierarchical; P_{shot}^*	On	On	Off	53.1	67.2	24.3	29.4	43.5
AVA-Encoder (full)	Hierarchical; P_{shot}^*	On	On	Inner + outer	57.8	73.7	29.7	34.6	49.0

Table 2 | Ablation study on the reconstruction benchmark. The comparison directions are direct Video comparison (V), direct Keyframe comparison (KF), Video Back-Captioning (V-BC), and Keyframe Back-Captioning (KF-BC). The configuration columns separately report the Agentic Video Encoder policy, Data-Dependent KG Representation Refinement, Data-Independent Encoding Policy Pseudo-Training, and applicable acceptance gates. Overall is the unweighted mean of the four directions.

Stage-separated loop effects. Data-Independent Encoding Policy Pseudo-Training improves the 18-clip non-overlapping downstream benchmark in both controlled settings after pseudo-training on six clips: without Data-Dependent KG Representation Refinement, $45.8 > 42.4$ gives a 3.4-point absolute and 8.0% relative gain; with it, $49.0 > 45.4$ gives a 3.6-point absolute and 7.9% relative gain. Data-Dependent KG Representation Refinement is also effective with and without policy pseudo-training: $49.0 > 45.8$ gives 3.2 points and 7.0% relative with the pseudo-trained policy, while $45.4 > 42.4$ gives 3.0 points and 7.1% relative with the initial policy. The resulting ordering, 49.0 (both loops) > 45.8 (policy pseudo-training only) > 45.4 (KG refinement only) > 42.4 (neither), shows that the two stage-separated loops provide gains from different sources; together they add 6.6 points, or 15.6% relative, over removing both.

Acceptance gates. AVA-Encoder improves from 43.5 without gates to 49.0 with both gates, an absolute gain of 5.5 points and a 12.6% relative improvement, while increasing every comparison direction. Without the gate for Data-Dependent KG Representation Refinement, target-dimension gains could coincide with declines in non-target dimensions; the anti-degradation gate prevents this trade-off. Without the gate for Data-Independent Encoding Policy Pseudo-Training, later policy updates could reduce performance on previously pseudo-trained clips; the anti-forgetting gate prevents this historical regression. Appendix Sec. I, *Ablation Definitions and Effect Sizes*, formally defines every compared configuration and summarizes the corresponding effect sizes.


5.4. RQ3: Knowledge-Graph Operability

Overall result. The graph supports controlled edits that remain consistent across linked shots. Because the KG explicitly records asset and production dependencies, a local edit can be propagated to every affected shot while leaving unrelated assets unchanged. The same topology-aware interface supports character replacement, visual-treatment replacement, plot modification, and fine-grained adjustment of cinematographic language. Figure 4 shows two identity replacements across linked shots, while Figure 5 shows a visual-treatment edit propagated through the corresponding style states and rendered assets. In the three shown examples, the target change remains consistent across the affected sequence while unrelated characters, scenes, compositions, and events are preserved. Appendix Sec. J specifies the stored schema and registry mapping, while Appendix

Sec. K.2, *Graph-Topology Editing*, defines the affected-subgraph rule and provides the corresponding graph and interface visualizations.



(a) Identity replacement in a six-shot sequence.

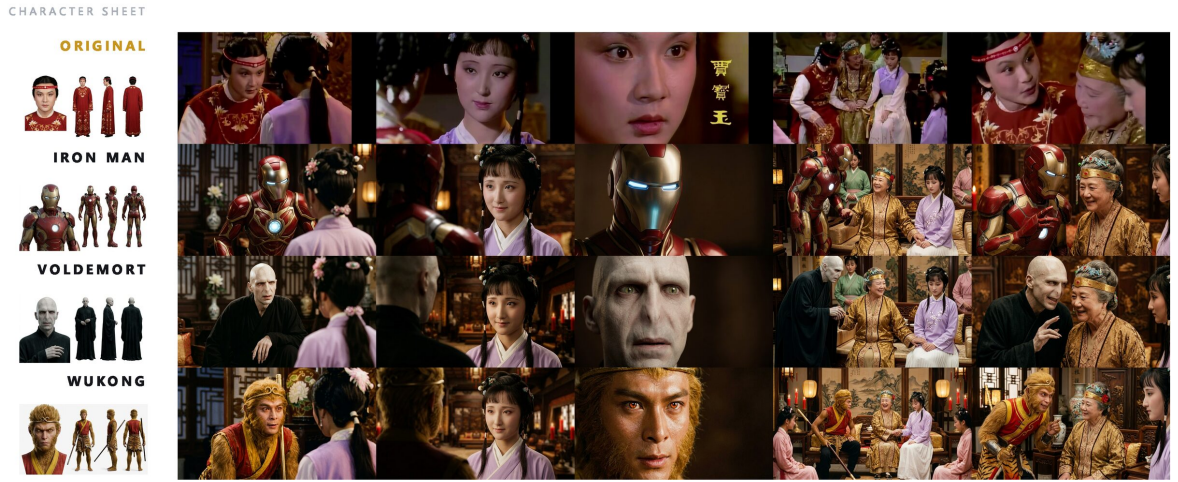

(b) Cross-domain identity replacement in a classical-drama sequence.

Figure 4 | Graph-topology identity editing. Changing a registered character jointly selects and updates the dependent keyframes and shots. The replacement character’s registry description can be completed either manually or automatically by an LLM; given this description, an LLM follows the graph dependencies to modify the character’s appearance, actions, dialogue, and other affected attributes across the relevant shots. Panels (a) and (b) preserve unrelated characters, scenes, compositions, and event structure while consistently propagating the requested identity.

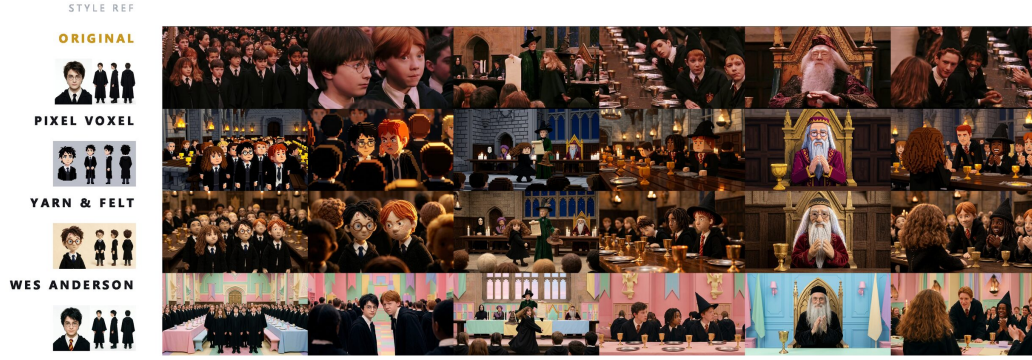


Figure 5 | Graph-topology visual-treatment editing. A visual-treatment edit follows the corresponding style-state transitions and asset references, applying a consistent treatment to the linked sequence without rewriting each shot independently.

5.5. RQ4: Downstream Reuse

Overall result. The same representation improves every tested downstream generation system. We use the same minimal, system-independent input for every evaluated agentic video generation framework: before generation, the complete AVA-Encoder representation file is supplied once as text, with only a basic one-sentence request that the framework refer to this representation for the current case. No framework-specific representation adapter or prompt tuning is introduced. Gemini-3.1-Pro-Preview evaluates the generated videos under fixed reference-free evaluation rules. This single textual input improves Overall for every framework in Table 3; Appendix Sec. L, *Downstream Story-Video Evaluation Detail*, defines the evaluation rules, grade conversion, and comparison condition.

Setting	Evaluation dimension					Overall ↑
	Character ↑	Plot ↑	Camera ↑	Style ↑	Audiovisual ↑	
MovieAgent (Wu et al., 2025)						
No ref.	3.33	1.50	3.75	2.25	1.50	2.47
Asset refs.	4.00	4.00	3.75	3.00	1.75	3.30
FilmAgent (Xu et al., 2025)						
No ref.	1.67	1.33	3.75	1.50	1.00	1.85
Asset refs.	3.67	2.00	4.00	3.50	1.00	2.83
Anim-Director (Li et al., 2024)						
No ref.	1.00	2.50	3.50	1.25	1.00	1.85
Asset refs.	4.00	1.00	4.00	2.50	1.00	2.50
VideoStudio (Long et al., 2024)						
No ref.	3.00	1.00	3.25	1.25	1.00	1.90
Asset refs.	1.00	1.00	3.75	2.75	1.25	1.95

Table 3 | Downstream story-video quality (1–4) without and with a single textual injection of the complete AVA-Encoder representation. Bold marks improvement over the corresponding no-reference setting; all evaluated frameworks improve Overall.

6. Conclusion

AVA-Encoder introduces a new agent-native video representation approach that connects complex film content with agent-based editing through structured knowledge graphs and agentic auto-encoding. By combining a hierarchical Agentic Video Encoder with gated dual-loop textual-gradient evolution, AVA-Encoder achieves an Overall reconstruction score of 49.0%, a 20.7-percentage-point absolute improvement over the strongest external baseline at 28.3%. In the controlled policy-only setting, the pseudo-trained shot-level Agentic Video Encoder policy reaches 45.8%, compared with 44.4% for the independently human-tuned policy, while using

74.3% fewer system-prompt tokens. Its structured representation also enables graph-based linked editing and consistently improves generated story-video quality across several creative agent frameworks.

References

- Alibaba Cloud. HappyHorse 1.0 reference-to-video model. Alibaba Cloud Model Studio Documentation, 2026a. URL <https://www.alibabacloud.com/help/en/model-studio/video-generate-edit-model>.
- Alibaba Cloud. Qwen3.7-Max Model Information. Alibaba Cloud Model Studio Documentation, 2026b. URL <https://www.alibabacloud.com/help/en/model-studio/qwen3-7-max>.
- Kirolos Ataallah, Xiaoqian Shen, Eslam Abdelrahman, Elias Sleiman, Mingchen Zhuge, Jian Ding, Deyao Zhu, Jürgen Schmidhuber, and Mohamed Elhoseiny. Goldfish: Vision-language understanding of arbitrarily long videos. In *Computer Vision – ECCV 2024*, pp. 251–267. Springer, 2024.
- BroderQi. Storyboard studio: Ai-powered professional storyboarding workbench. GitHub repository, 2026. URL <https://github.com/BroderQi/Storyboard>.
- Tim Brooks, Bill Peebles, Connor Holmes, Will DePue, Yufei Guo, Li Jing, David Schnurr, Joe Taylor, Troy Luhman, Eric Luhman, Clarence Ng, Ricky Wang, and Aditya Ramesh. Video generation models as world simulators. OpenAI Technical Report, 2024. URL <https://openai.com/index/video-generation-models-as-world-simulators/>. OpenAI Sora.
- ByteDance Seed Team. Seedance 2.0. Official Model Page, 2026. URL https://seed.bytedance.com/seedance2_0.
- Jiwan Chung and Youngjae Yu. Long story short: A summarize-then-search method for long video question answering. In *Proceedings of the British Machine Vision Conference (BMVC)*, 2023.
- comfyanonymous and ComfyUI contributors. ComfyUI: The most powerful and modular diffusion model gui and backend. <https://github.com/comfyanonymous/ComfyUI>, 2023. Accessed: 2026-06-29.
- Docusphere. video-analyzer: Agentic video transcript generation. GitHub repository, 2026. URL <https://github.com/docusphere/video-analyzer>.
- Google AI. Gemini 3.1 Pro Preview. Google AI for Developers Documentation, 2026a. URL <https://ai.google.dev/gemini-api/docs/models/gemini-3.1-pro-preview>.
- Google AI. Gemini 3 Pro Image (Nano Banana Pro). Google AI for Developers Documentation, 2026b. URL <https://ai.google.dev/gemini-api/docs/models/gemini-3-pro-image>.
- Google DeepMind. Veo: Our state-of-the-art video generation model. Google DeepMind Technical Report, 2024. URL <https://deepmind.google/technologies/veo/>.
- Bo He, Hengduo Li, Young Kyun Jang, Menglin Jia, Xuefei Cao, Ashish Shah, Abhinav Shrivastava, and Ser-Nam Lim. MA-LMM: Memory-augmented large multimodal model for long-term video understanding. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 13504–13514, 2024.
- Kaiming He, Xinlei Chen, Saining Xie, Yanghao Li, Piotr Dollár, and Ross Girshick. Masked autoencoders are scalable vision learners. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2022.
- Qingqiu Huang, Yu Xiong, Anyi Rao, Jiaze Wang, and Dahua Lin. MovieNet: A holistic dataset for movie understanding. In *Computer Vision – ECCV 2020*, pp. 709–727. Springer, 2020.
- Weijie Kong, Qi Tian, Zijian Zhang, Rox Min, Zuozhuo Dai, et al. HunyuanVideo: A systematic framework for large video generative models, 2024. URL <https://arxiv.org/abs/2412.03603>.

- Kuaishou Technology. Kling: Kuaishou text-to-video generation model. Kuaishou Technical Report, 2024. URL <https://kling.kuaishou.com/>.
- Jinxiang Lai, Zexin Lu, Jiajun He, Rongwei Quan, Wenzhe Zhao, Qinyu Yang, Qi Chen, Qin Lin, Chuyue Li, Tao Gao, Yuhao Shan, Shuai Shao, Song Guo, and Qinglin Lu. VisionCreator: A native visual-generation agentic model with understanding, thinking, planning and creation, 2026.
- Yunxin Li, Haoyuan Shi, Baotian Hu, Longyue Wang, Jiashun Zhu, Jinyi Xu, Zhen Zhao, and Min Zhang. Anim-Director: A large multimodal model powered agent for controllable animation video generation. In *SIGGRAPH Asia 2024 Conference Papers*. ACM, 2024. doi: 10.1145/3680528.3687688.
- Han Lin, Abhay Zala, Jaemin Cho, and Mohit Bansal. VideoDirectorGPT: Consistent multi-scene video generation via LLM-guided planning. In *Conference on Language Modeling (COLM)*, 2024.
- Fuchen Long, Zhaofan Qiu, Ting Yao, and Tao Mei. VideoStudio: Generating consistent-content and multi-scene videos. In *European Conference on Computer Vision (ECCV)*. Springer, 2024. doi: 10.1007/978-3-031-73027-6_27.
- Louis Mahon and Mirella Lapata. ScreenWriter: Automatic screenplay generation and movie summarisation, 2024.
- Ben Mildenhall, Pratul P. Srinivasan, Matthew Tancik, Jonathan T. Barron, Ravi Ramamoorthi, and Ren Ng. NeRF: Representing scenes as neural radiance fields for view synthesis. In *European Conference on Computer Vision (ECCV)*, 2020.
- Adam Polyak, Amit Zohar, Andrew Brown, Andros Tjandra, Animesh Sinha, et al. Movie Gen: A cast of media foundation models, 2024. URL <https://arxiv.org/abs/2410.13720>.
- Rui Qian, Xiaoyi Dong, Pan Zhang, Yuhang Zang, Shuangrui Ding, Dahua Lin, and Jiaqi Wang. Streaming long video understanding with large language models. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2024.
- Enxin Song, Wenhao Chai, Guan hong Wang, Yucheng Zhang, Haoyang Zhou, Feiyang Wu, Haozhe Chi, Xun Guo, Tian Ye, Yanting Zhang, Yan Lu, Jenq-Neng Hwang, and Gaoang Wang. MovieChat: From dense token to sparse memory for long video understanding. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 18221–18232, 2024.
- Yiren Song, Huilin Zhong, Kevin Qinghong Lin, Haofan Wang, and Mike Zheng Shou. Soap2Soap: Long cinematic video remaking via multi-agent collaboration, 2026. URL <https://arxiv.org/abs/2605.17423>.
- Zhan Tong, Yibing Song, Jue Wang, and Limin Wang. VideoMAE: Masked autoencoders are data-efficient learners for self-supervised video pre-training. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2022.
- Wan Team, Ang Wang, Baole Ai, Bin Wen, Chaojie Mao, et al. Wan: Open and advanced large-scale video generative models, 2025. URL <https://arxiv.org/abs/2503.20314>.
- Weijia Wu, Zeyu Zhu, and Mike Zheng Shou. Automated movie generation via multi-agent CoT planning, 2025.
- Zhifei Xie, Daniel Tang, Dingwei Tan, Jacques Klein, Tegawendé F. Bissyandé, and Saad Ezzini. DreamFactory: Pioneering multi-scene long video generation with a multi-agent framework, 2024.
- Zhenran Xu, Longyue Wang, Jifang Wang, Zhouyi Li, Senbao Shi, Xue Yang, Yiyu Wang, Baotian Hu, Jun Yu, and Min Zhang. FilmAgent: A multi-agent framework for end-to-end film automation in virtual 3D spaces, 2025.
- Zhuoyi Yang, Jiayan Teng, Wendi Zheng, Ming Ding, Shiyu Huang, Jiazheng Xu, Yuanming Yang, Wenyi Hong, Xiaohan Zhang, Guanyu Feng, Da Yin, Xiaotao Gu, Yuxuan Zhang, Weihang Wang, Yean Cheng, Ting Liu, Bin Xu, Yuxiao Dong, and Jie Tang. CogVideoX: Text-to-video diffusion models with an expert transformer. In *International Conference on Learning Representations (ICLR)*, 2025.

- Lijun Yu, Yong Cheng, Kihyuk Sohn, José Lezama, Han Zhang, Huiwen Chang, Alexander G. Hauptmann, Ming-Hsuan Yang, Yuan Hao, Irfan Essa, and Lu Jiang. MAGVIT: Masked generative video transformer. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2023.
- Zhengqing Yuan, Yixin Liu, Yihan Cao, Weixiang Sun, Haolong Jia, Ruoxi Chen, Zhaoxu Cai, Bin Lin, Li Yuan, Lifang He, Chi Wang, Yanfang Ye, and Lichao Sun. Mora: Enabling generalist video generation via a multi-agent framework, 2024.
- Mert Yuksekgonul, Federico Bianchi, Joseph Boen, Sheng Liu, Zhi Huang, Carlos Guestrin, and James Zou. Textgrad: Automatic "differentiation" via text, 2024. URL <https://arxiv.org/abs/2406.07496>.
- Hang Zhang, Xin Li, and Lidong Bing. Video-LLaMA: An instruction-tuned audio-visual language model for video understanding. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing: System Demonstrations (EMNLP)*, pp. 543–553, 2023.
- Peiyuan Zhang, Kaichen Zhang, Bo Li, Guangtao Zeng, Jingkan Yang, Yuanhan Zhang, Ziyue Wang, Haoran Tan, Chunyuan Li, and Ziwei Liu. Long context transfer from language to vision, 2024a. LongVA.
- Yuanhan Zhang, Jinming Wu, Wei Li, Bo Li, Zejun Ma, Ziwei Liu, and Chunyuan Li. LLaVA-Video: Video instruction tuning with synthetic data, 2024b.
- Shaobin Zhuang, Kunchang Li, Xinyuan Chen, Yaohui Wang, Ziwei Liu, Yu Qiao, and Yali Wang. Vlogger: Make your dream a vlog. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 8806–8817, 2024.

Organization and relation to the main paper. The main paper presents the task formulation (Sec. 3), the AVA-Encoder architecture (Sec. 4), and the experiments (Sec. 5). This supplementary material expands the corresponding components listed below.

Optimization and evaluation.

- Section A supplements main-paper Sec. 4.3 and Algorithms 1 and 2 by defining the natural-language feedback records used for Agentic Video Encoder policy and KG-representation updates.
- Section B supplements main-paper Secs. 3.2, 4.3.1, and 5.1–5.2 by defining the four reported reconstruction directions, their applicable cinematic dimensions, fact-level scoring, score aggregation, and evaluator alignment with human judgments.
- Section C supplements main-paper Sec. 4.3.1 by defining the loop-facing optimization reward R_{reward} , its QA-based instances, and its connection to the textual gradients and scores in Algorithms 1 and 2.
- Section D supplements main-paper Secs. 4.3.3 and 4.3.2 by specifying the acceptance rules for Data-Dependent KG Representation Refinement and Data-Independent Encoding Policy Pseudo-Training, together with the sequential pseudo-training procedure.
- Section E supplements main-paper Sec. 4.1 and the policy conditions compared in RQ2 (Sec. 5.3) by identifying the initial, pseudo-trained, and human-tuned Agentic Video Encoder system prompts.

Experimental setup and numerical results.

- Section F supplements main-paper Experiment Setup (Sec. 5.1) and RQ1 (Sec. 5.2) by describing baseline adaptation, shared generators, temporal alignment, and the common evaluation setting.
- Section G supplements main-paper Experiment Setup (Sec. 5.1) and the dataset contribution by describing the released Film KG dataset, source-video collection, reconstruction benchmark inventory, pseudo-training stream, and held-out evaluation split.
- Section H supplements main-paper RQ1 (Sec. 5.2) and Table 1 by reporting the direct-video and keyframe scores for every applicable cinematic dimension.
- Section I supplements main-paper RQ2 (Sec. 5.3) and Table 2 by defining each ablation configuration and reporting its absolute and relative differences from AVA-Encoder.

Knowledge graph and qualitative evidence.

- Section J supplements main-paper Sec. 4.2 and RQ3 (Sec. 5.4) by specifying the stored node–edge schema and graph construction and propagation rules.
- Section K supplements main-paper RQ1 (Sec. 5.2) and RQ3 (Sec. 5.4) with reconstruction comparisons, graph visualizations, the affected-subgraph rule, and examples of identity and visual-treatment editing.
- Section L supplements main-paper RQ4 (Sec. 5.5) by defining the reference-free story-video evaluation dimensions, grade conversion, and the “Asset refs.” condition.

Complete experimental specification.

- Section M supplements main-paper Secs. 4.1, 4.3.1, and 5.1 with complete direct English translations of the Chinese system prompts used for the Agentic Video Encoder, R_{reward} , and R_{eval} .

A. Textual Gradients and AVA-Encoder Self-Optimization

This section supplements main-paper Sec. 4.3, *Dual-Loop Textual-Gradient Evolution*, and makes the feedback objects used by Data-Independent Encoding Policy Pseudo-Training and Data-Dependent KG Representation Refinement in Algorithms 1 and 2 explicit.

A.1. TextGrad Background

This subsection supplies the TextGrad definition needed to interpret the natural-language gradients introduced in main-paper Sec. 4.3.

Optimization setting	Reconstruction feedback	Fact selected for correction
KG refinement: keyframe	Direct GT-current-keyframe difference diagnosis	A grounded difference that specifies its dimension and image location together with the GT and current-reconstruction observations.
KG refinement: video shot	Fixed video-shot optimization-reward checklist	A GT-derived reward item judged as mismatch or absent in the reconstructed shot.
Policy pseudo-training	Frozen video QA banks over the current video	A question whose answer on a reconstructed shot differs from its GT-derived expected answer.

Table 4 | Reconstruction feedback used by Data-Dependent KG Representation Refinement and Data-Independent Encoding Policy Pseudo-Training. Each row specifies which grounded reconstruction failure supplies a correction record.

TextGrad represents an LLM workflow as a directed computation graph whose variables may contain text (Yuksekgonul et al., 2024). Its evaluation feedback is written in natural language and passed backward to the text variable that should be revised. For a text variable z , the relation between evaluation, textual gradient, and revision is summarized by

$$\mathbf{g}_{\text{text}}(z) := \nabla_{\text{text}} \mathcal{L}_{\text{TG}}(z), \quad z^+ := \text{UpdateText}(z, \mathbf{g}_{\text{text}}(z)). \quad (17)$$

Here, $\mathcal{L}_{\text{TG}}$ is the illustrative TextGrad evaluation objective, ∇_{text} denotes backward assignment of natural-language feedback, and $\mathbf{g}_{\text{text}}(z)$ is the resulting textual gradient for z . UpdateText revises z according to that feedback, producing z^+ . The textual gradient is not a numerical derivative; it identifies the error caused by z and states how z should change.

A.2. Structured Textual Gradients in AVA-Encoder

This subsection expands main-paper Sec. 4.3 and Algorithms 1 and 2 by defining the correction records and feedback operators used for their policy- and asset-level textual gradients.

AVA-Encoder derives textual gradients from differences between the ground-truth (GT) and reconstructed videos. The two settings of Data-Dependent KG Representation Refinement and Data-Independent Encoding Policy Pseudo-Training obtain this difference from different reconstruction feedback. The keyframe setting directly diagnoses evidence-grounded differences between the GT keyframe and the current reconstructed keyframe. The video-shot setting uses mismatched or absent facts from its optimization-reward checklist, and policy pseudo-training uses failed video QA facts collected over the current video. The main-paper operator Feedback_β in Eq. 15 is shorthand for the first two rows of Table 4: $\beta = \text{KF}$ selects the keyframe difference diagnosis, whereas $\beta = \text{shot}$ selects the failed shot-reward facts. The table defines these sources before introducing their common mathematical form.

Each atomic question in the frozen QA bank corresponds to a single fact-level reconstruction check. More generally, AVA-Encoder treats a grounded keyframe difference, a failed QA check, or a failed video-shot reward item as a fact-level reconstruction failure. These failures are the basic units from which the textual-gradient procedures construct correction records.

Regardless of its source, each selected fact ξ_i is written as the same correction record introduced in main-paper Eq. 11:

$$\mathbf{a}_i := \text{Corr}(\xi_i) = (d_i, u_i^{\text{GT}}, u_i^{\text{rec}}, e_i, h_i). \quad (18)$$

Here, $\mathbf{a}_i$ is one atomic correction record, i indexes one selected fact from Table 4, d_i is its evaluation dimension, u_i^{GT} is the GT-derived fact, u_i^{rec} is the corresponding fact observed in the reconstruction, e_i is the supporting visual or audio evidence, and h_i is the requested correction. Let $\mathcal{T}_G$ contain records assigned to KG assets and let $\mathcal{T}_{\text{pol}}$ contain records assigned to the shot-level Agentic Video Encoder policy. The textual-gradient operators organize these records into the two natural-language revision instructions used by the main-paper algorithms:

$$\begin{aligned}
\mathcal{T}_G &:= \{\mathbf{a}_i : \xi_i \text{ is assigned to a KG asset}\}, \\
\mathcal{T}_{\text{pol}} &:= \{\mathbf{a}_i : \xi_i \text{ is assigned to } P_{\text{shot}}\}, \\
\mathbf{g}_{\text{text}}^{\text{asset}} &:= \nabla_{\text{text}}^G(\mathcal{T}_G), \\
\mathbf{g}_{\text{text}}^{\text{policy}} &:= \nabla_{\text{text}}^{P_{\text{shot}}}(\mathcal{T}_{\text{pol}}), \\
G' &:= \text{ProposeAsset}(G, \mathbf{g}_{\text{text}}^{\text{asset}}), \\
P'_{\text{shot}} &:= \text{ProposePolicy}(P_{\text{shot}}, \mathbf{g}_{\text{text}}^{\text{policy}}).
\end{aligned} \tag{19}$$

G and G' are the current and candidate KG representations, while P_{shot} and P'_{shot} are the current and candidate shot-level policies. ∇_{text}^G and $\nabla_{\text{text}}^{P_{\text{shot}}}$ are natural-language feedback operators rather than numerical derivatives: they turn the records in $\mathcal{T}_G$ and $\mathcal{T}_{\text{pol}}$ into asset- and policy-level revision instructions. Their outputs are exactly $\mathbf{g}_{\text{text}}^{\text{asset}}$ and $\mathbf{g}_{\text{text}}^{\text{policy}}$ in Algorithms 2 and 1, respectively. Audio corrections include transcript evidence. Candidate KG representations and policies are evaluated before acceptance, and dimension weights remain fixed throughout pseudo-training.

B. Reconstruction Evaluation Metrics

This section supplements main-paper Experiment Setup (Sec. 5.1) and RQ1, *Reconstruction Fidelity* (Sec. 5.2).

The main paper evaluates reconstruction along four comparison directions—Video (V), Keyframe (KF), Video back-captioning (V-BC), and Keyframe back-captioning (KF-BC)—while splitting errors into a shared set of film dimensions. This section defines those directions and their applicable dimensions without introducing a separate evaluation task.

The final reconstruction evaluation is denoted $R_{\text{eval}}(\cdot, \cdot)$ in main-paper Sec. 4.3.1. It uses the frozen Gemini-3.1-Pro-Preview multimodal model (Google AI, 2026a) with reconstruction-evaluation prompts, separately from the same model’s video-understanding role. The VLM is the fact-level judge, not a black-box generator of the reported benchmark score: under fixed prompts, it constructs or extracts atomic source-grounded facts and assigns each reconstruction a categorical fact judgment with supporting evidence. The model outputs these judgments, while fixed deterministic machine rules map the categories to the numerical values in Eqs. 22 and 23 and perform the aggregation in Eq. 24. This decomposition avoids asking the VLM for one direct score on a complex image or video. R_{eval} is used for final reporting, while the loop-facing optimization reward R_{reward} is defined separately in Sec. C.

B.1. Reconstruction Directions and Evaluation Dimensions

This subsection supplements main-paper Experiment Setup (Sec. 5.1) and connects its four reconstruction directions to the reconstruction residual dimensions defined in Sec. 4.3.1. We evaluate every representation system from four directions: direct Video (V), direct Keyframe (KF), Video back-captioning (V-BC), and Keyframe back-captioning (KF-BC). Let

$$\begin{aligned}
\mathcal{D}_{\text{dir}} &:= \{\text{V, KF, V-BC, KF-BC}\}, \\
\mathcal{D} &:= \{\text{Character, Scene, Position, Motion,} \\
&\quad \text{Audio, Style, Camera, Narrative}\}.
\end{aligned} \tag{20}$$

The four directions examine different types of evidence. A high-quality agentic video representation should retain the audiovisual and temporal information needed to reconstruct the complete source video, which motivates direct V evaluation. Because dense multimodal video makes small static visual details difficult to inspect fully, direct KF evaluation isolates identity, object, layout, composition, lighting, and texture evidence. AVA-Encoder and all compared baselines also use text-centered structured representations; V-BC and KF-BC therefore compare recoverable atomic facts in a common text space rather than requiring their internal structures to match. Together, the four directions measure end-to-end reconstruction, fine-grained visual fidelity, and text-level meaning consistency.

Dimension	Evaluated attributes
Character	Face and identity, body/build, clothing, expression, gaze, and pose.
Scene	Scene type, background and set dressing, spatial layout, and environmental elements.
Position	Absolute character positions, inter-character spatial relations, and foreground/background depth.
Motion	Actions, interactions, motion direction, and speed; only static action/pose evidence is used for KF.
Audio	Speaker–dialogue–voice association, background music, and sound effects; N/A for KF and KF-BC.
Style	Artistic treatment, texture, color and temperature, illumination, contrast, and light direction.
Camera	Shot language, camera direction/speed, viewpoint, composition, and shot scale; only static attributes are used for KF.
Narrative	Visible events, event ordering, and emotional tone.

Table 5 | Evaluation dimensions shared by the four reconstruction directions. Video directions use all eight dimensions; keyframe directions use seven because Audio is N/A.

$\mathcal{D}_{\text{dir}}$ is the set of reconstruction directions reported in Table 1 of the main paper, and $\mathcal{D}$ is the shared set of evaluation dimensions used to resolve $\mathbf{r}^{\text{eval}}$ in Sec. 4.3.1. The directions combine two media—video shots and keyframes—with two observation spaces—direct comparison and blind back-captioning:

- **Video (V)** directly compares a source video shot with its reconstructed shot. The evaluator constructs source-grounded visual and audio checks and verifies each check against the reconstruction.
- **Keyframe (KF)** directly compares a source keyframe with its reconstructed keyframe. We use KF for keyframe throughout the remainder of the appendix; only evidence observable in a static image is evaluated.
- **Video back-captioning (V-BC)** describes the source and reconstructed video shots independently and compares atomic facts extracted from the two descriptions.
- **Keyframe back-captioning (KF-BC)** applies the same independent description and atomic-fact comparison to the source and reconstructed keyframes.

In the two back-captioning directions, each captioner observes only one side of the comparison. This separation prevents source information from entering the reconstruction description before atomic-fact scoring.

Video directions use all dimensions in $\mathcal{D}$. A keyframe has no audio, so KF and KF-BC use $\mathcal{D} \setminus \{\text{Audio}\}$, mark Audio as N/A, and average seven dimensions. Motion and Camera in the keyframe directions retain only attributes observable in a static image; cross-frame speed and camera movement are not scored.

B.2. Direct V and KF Scoring

This subsection specifies the fact-level scoring used for the direct Video (V) and Keyframe (KF) directions in main-paper Experiment Setup (Sec. 5.1) and for their results in RQ1 (Sec. 5.2) and Table 1.

For each applicable dimension $d \in \mathcal{D}$, the evaluator first sees only the GT material and produces a checklist C_d of independently verifiable atomic facts. Here, a checklist is simply the set of concrete GT facts that must be checked for one dimension, such as a character identity, an object position, or a dialogue line. The construction prompt requires at least one valid item for every applicable dimension, so $|C_d| \geq 1$. Critical identity, central action, scene, style, and dialogue facts form the subset C_d^{crit} . The evaluator then examines the reconstruction and assigns every fact $c \in C_d$ a verdict with visible or audible evidence. The numerical score for one fact is

$$w(c) = \begin{cases} 1, & \text{match,} \\ 0.5, & \text{partial,} \\ 0, & \text{mismatch or absent.} \end{cases} \quad (21)$$

Here, $w(c)$ is the fidelity score assigned to checklist item c : a complete match receives 1, a partial match receives 0.5, and an incorrect or missing fact receives 0.

The dimension score first averages the fact scores and then applies a cap when a critical fact is incorrect or missing:

$$\begin{aligned}\phi_d^{\text{raw}} &= \frac{1}{|C_d|} \sum_{c \in C_d} w(c), \\ \phi_d &= \begin{cases} \min(\phi_d^{\text{raw}}, 0.4), & \exists c \in C_d^{\text{crit}} : w(c) = 0, \\ \phi_d^{\text{raw}}, & \text{otherwise.} \end{cases}\end{aligned}\tag{22}$$

C_d is the checklist for dimension d , $|C_d|$ is its number of items, and $C_d^{\text{crit}} \subseteq C_d$ is the subset marked critical. ϕ_d^{raw} is the item average and ϕ_d is the reported dimension-fidelity score. The cap prevents a collection of minor matches from compensating when a reconstruction-critical fact is not satisfied.

B.3. Blind Back-Captioning Scoring

This subsection specifies the fact-level scoring used for the Video and Keyframe back-captioning directions in main-paper Experiment Setup (Sec. 5.1) and for the V-BC and KF-BC results in RQ1 (Sec. 5.2) and Table 1.

For V-BC and KF-BC, source and reconstruction are independently described for each evaluated attribute in Table 5 using concrete, verifiable statements. Atomic facts are extracted from the source description, and the reconstruction description labels each fact as a hit, conflict, or missing. The source-fact extraction prompt requires at least one valid fact for every applicable dimension, so $n_{\text{facts}} \geq 1$. The back-captioning score is the matched-fact rate with an additional penalty for contradictions:

$$\phi_{\text{fact}} = \text{clip}\left(\frac{n_{\text{hit}} - 0.5n_{\text{conflict}}}{n_{\text{facts}}}, 0, 1\right).\tag{23}$$

n_{facts} is the number of atomic facts extracted from the source description, n_{hit} counts facts reproduced by the reconstruction, and n_{conflict} counts contradicted facts. $\text{clip}(x, 0, 1)$ limits x to the interval $[0, 1]$; facts not mentioned by the reconstruction contribute neither a match nor a contradiction. Thus, a contradiction is penalized more strongly than an omission. KF-BC again uses seven dimensions and reports Audio as N/A.

B.4. System Prompts for Reconstruction Evaluation

This subsection documents the frozen system prompts used by the final reconstruction evaluation R_{eval} in main-paper Experiment Setup (Sec. 5.1).

The system prompts used during the reported experiments were written in Chinese. Complete direct English translations are reproduced in Sec. M, and every compared representation system uses the same frozen prompts.

B.5. Reconstruction-Benchmark Aggregation

This subsection explains how the fine-grained judgments produced by R_{eval} are converted step by step into the V, KF, V-BC, KF-BC, and Overall scores reported in Table 1 of the main paper. The averaging proceeds from facts to dimensions, from dimensions to shots or keyframes, from these units to video cases, and finally from case-level results to the four reconstruction directions and their Overall score.

The reconstruction benchmark compares four representation systems: AVA-Encoder, VideoAnalyzer, Storyboard Studio, and soap2soap. Let m index a representation system and let $u \in \mathcal{D}_{\text{dir}}$ index a reconstruction direction defined in Eq. 20. Each system retains its own shot segmentation and keyframe-selection policy. Its reconstruction is therefore compared with the source intervals and source keyframes selected by that same policy; outputs from different systems are not forced into an artificial one-to-one temporal alignment. All four systems nevertheless receive the same source videos and use the same frozen generation backbones.

Scores are averaged in the order fact, dimension, shot, case, and direction. For system m , video case v , shot s , and direction u , let $\mathcal{D}_{m,v,s,u} \subseteq \mathcal{D}$ contain the applicable dimensions. Let $\psi_{m,v,s,u,d}$ denote the dimension score: it is ϕ_d from Eq. 22 for V and KF, and ϕ_{fact} from Eq. 23 for V-BC and KF-BC. Every evaluated unit contains at least one applicable dimension, and every one of the 18 cases contains at least one evaluated shot or keyframe in each direction. Hence, all sets used for division below are non-empty. The remaining averages are

$$\begin{aligned}
B_{m,v,s,u} &:= \frac{1}{|\mathcal{D}_{m,v,s,u}|} \sum_{d \in \mathcal{D}_{m,v,s,u}} \psi_{m,v,s,u,d}, \\
B_{m,v,u} &:= \frac{1}{|\mathcal{S}_{m,v,u}|} \sum_{s \in \mathcal{S}_{m,v,u}} B_{m,v,s,u}, \\
B_{m,u} &:= \frac{1}{|\mathcal{X}_{m,u}|} \sum_{v \in \mathcal{X}_{m,u}} B_{m,v,u}, \\
B_m^{\text{overall}} &:= \frac{1}{|\mathcal{D}_{\text{dir}}|} \sum_{u \in \mathcal{D}_{\text{dir}}} B_{m,u}.
\end{aligned} \tag{24}$$

$\mathcal{S}_{m,v,u}$ is the set of evaluated shots or selected keyframes for system m in video case v and direction u , and $\mathcal{X}_{m,u}$ is its set of evaluated video cases. $B_{m,v,s,u}$, $B_{m,v,u}$, and $B_{m,u}$ are the shot-, case-, and direction-level scores, respectively; B_m^{overall} is the unweighted mean of the four direction scores reported as Overall in Table 1 of the main paper.

B.6. Alignment with Human Evaluation

This subsection supplements evaluator validation in main-paper Experiment Setup (Sec. 5.1) by defining the blinded pairwise study and the reported human-evaluation agreement.

Each human-evaluation trial is a blinded triple containing a GT keyframe or shot video and two generated candidates, A and B, whose source systems are hidden. Two expert annotators conducted the study using a mutually blinded rotating-labeling protocol: neither saw the candidate system identities or the other expert’s labels during annotation. For each triple, the human annotator selects the candidate closer to GT. The automatic evaluator independently scores A and B, and the trial agrees when the candidate judged closer to GT receives the higher machine score. All 730 triples are included in the denominator. Machine and human rankings agree on 710, yielding $710/730 = 97.260\%$, reported as **97.3% human-evaluation agreement**. This statistic measures agreement between the automatic ranking and the human preference ranking; it is not inter-annotator agreement and does not evaluate R_{reward} used during pseudo-training. The 129 shots and 246 keyframes describe the source benchmark inventory; the 730 blinded triples are the denominator of this separate pairwise human-evaluation agreement study.

C. Reconstruction Reward for Loop Optimization

This section expands the loop-facing optimization reward R_{reward} introduced in main-paper Sec. 4.3.1 and specifies how diagnostic evidence and acceptance scores enter Algorithms 1 and 2.

Both R_{eval} and R_{reward} are derived from differences between a source and its reconstruction, but they are methodologically distinct. R_{eval} denotes the shared four-direction benchmark protocol and is used only for final cross-system reporting. R_{reward} denotes the optimization signal used inside the loops: its failed items diagnose the incumbent, and its scalar value verifies candidate updates. The outer loop and keyframe verification use frozen QA banks, while video-shot refinement uses a fixed shot-reward checklist. We keep these symbols separate throughout the paper regardless of any shared low-level infrastructure.

For the QA-based instances, each selected keyframe or shot is decomposed into approximately 30 binary questions, with each question testing one observable fact. This avoids relying on one direct score for a complex image or video and gives the loop both a more precise reward and a specific error to correct. The atomic bank is generated once from GT and then frozen. Every current and candidate reconstruction is evaluated against the same questions, preventing question-set changes from entering the reward difference and giving the optimization loop a stable signal.

For the QA-based instances of R_{reward} , a source video V has a frozen bank containing $K \geq 1$ atomic questions by construction. Its binary residual vector and reward are defined below. This is the sample-index-free form of Eq. 12 in the main paper, and the construction condition ensures that every QA average has a positive denominator.

	Final evaluation R_{eval}	Optimization reward R_{reward}
Purpose	Final comparison and per-dimension analysis	Diagnosis and candidate acceptance during self-optimization
Atomic judgment units	Source-grounded facts in each direction and dimension	Frozen QA facts for the outer/KF settings; fixed reward-checklist facts for shot refinement
Primary benefit	Broad, common benchmark coverage	Localized correction evidence and comparison across rounds
Use	Reported tables and per-case analysis	Diagnosis and candidate selection in both loops

Table 6 | Two methodologically distinct signals built from reconstruction error: R_{reward} is used for optimization, whereas R_{eval} is used for final reporting.

$$\begin{aligned}
Q(V) &= \{(q_k, y_k)\}_{k=1}^K, \\
\chi_k(\hat{V}) &:= \mathbb{I}[\text{Answer}(\hat{V}, q_k) = y_k], \\
\mathbf{r}^{\text{qa}}(\hat{V}) &:= \left(1 - \chi_k(\hat{V})\right)_{k=1}^K, \\
\bar{r}^{\text{qa}}(\hat{V}) &:= \frac{1}{K} \sum_{k=1}^K (1 - \chi_k(\hat{V})), \\
R_{\text{reward}}(\hat{V}; Q(V)) &:= 1 - \bar{r}^{\text{qa}}(\hat{V}) = \frac{1}{K} \sum_{k=1}^K \chi_k(\hat{V}).
\end{aligned} \tag{25}$$

Here V is the ground-truth video, $\hat{V}$ is its reconstruction, K is the number of atomic questions, q_k is the k -th question, and y_k is its ground-truth binary answer. $\chi_k(\hat{V})$ equals one when the reconstruction gives that answer. Consequently, $\mathbf{r}^{\text{qa}}$ is the lower-is-better binary residual vector, $\bar{r}^{\text{qa}}$ is its mean, and R_{reward} is the complementary higher-is-better pass rate. Video QA spans the eight reconstruction dimensions and verifies Audio from the generated audio transcript. The focused keyframe bank used by Algorithm 2 covers Character, Scene, and Composition facts observable in a static image.

C.1. System Prompts for R_{reward}

This subsection documents the frozen prompts used by the QA-based instances of R_{reward} to construct questions and verify reconstructed answers.

Complete direct English translations of the Chinese prompts used to construct and answer the frozen video and keyframe question banks are reproduced in Sec. M.

C.2. R_{reward} in Dual-Loop Optimization

This subsection connects the setting-specific R_{reward} in main-paper Sec. 4.3.1 to the diagnostic evidence, textual-gradient variables, and candidate scores used by Algorithms 1 and 2.

Evaluation against a frozen QA bank produces two complementary outputs: the scalar fidelity reward in Eq. 25 and the set of failed atomic facts. The scalar reward supports candidate verification, while the failed facts retain the evidence needed to revise the shot-level Agentic Video Encoder policy during Data-Independent Encoding Policy Pseudo-Training. Let $\text{Corr}(\xi)$ map one failed QA tuple ξ to the correction record in Eq. 18. The policy-level record collection and its textual gradient are

$$\begin{aligned}
 \hat{y}_k &:= \text{Answer}(\hat{V}, q_k), \\
 \mathcal{F}_{\text{qa}}(\hat{V}; Q(V)) &= \{(q_k, y_k, \hat{y}_k) : \hat{y}_k \neq y_k\}, \\
 \mathcal{T}_{\text{pol},n} &:= \bigcup_{s \in \mathcal{S}_n} \{\text{Corr}(\xi) : \xi \in \mathcal{F}_{\text{qa}}(\hat{V}_{n,s}; Q_{n,s})\}, \\
 \mathbf{g}_{\text{text}}^{\text{policy}} &= \nabla_{\text{text}}^{P_{\text{shot}}}(\mathcal{T}_{\text{pol},n}).
 \end{aligned} \tag{26}$$

$\mathcal{F}_{\text{qa}}$ contains exactly the questions answered differently from their GT-derived expected answers, and $\hat{y}_k$ is the answer obtained from the reconstruction. The symbol ξ denotes one tuple $(q_k, y_k, \hat{y}_k)$ in this set. The mapping Corr constructs the atomic record $\mathbf{a}_i = \text{Corr}(\xi_i)$ as follows: the question’s assigned dimension supplies d_i , its expected answer and underlying GT fact supply u_i^{GT} , the reconstruction answer supplies u_i^{rec} , the examined frames or transcript supply e_i , and the required factual change supplies h_i . $\mathcal{S}_n$ is the shot set of video V_n , while $\hat{V}_{n,s}$ and $Q_{n,s}$ are the reconstruction and frozen QA bank for shot s . Consequently, $\mathcal{T}_{\text{pol},n}$ contains policy-level records collected over the current video.

For the keyframe setting of main-paper Algorithm 2, the frozen QA bank computes $\mathbf{r}^{\text{qa}}$ and $R_{\text{reward}} = 1 - \bar{r}^{\text{qa}}$ for fine-grained candidate verification. Its asset textual gradient is instead formed from the current reconstruction’s direct difference set,

$$\begin{aligned}
 \mathcal{F}_{\text{KF}}^{\text{diff}}(I_{\text{base}}) &:= \text{Diff}_{\text{KF}}(I_{\text{GT}}, I_{\text{base}}), \\
 \mathcal{T}_G^{\text{KF}} &:= \{\text{Corr}(\xi) : \xi \in \mathcal{F}_{\text{KF}}^{\text{diff}}(I_{\text{base}})\}, \\
 \mathbf{g}_{\text{text}}^{\text{asset}} &:= \nabla_{\text{text}}^G(\mathcal{T}_G^{\text{KF}}).
 \end{aligned} \tag{27}$$

Here, I_{base} is the current reconstructed keyframe and I_{GT} is its GT keyframe. Every $\xi \in \mathcal{F}_{\text{KF}}^{\text{diff}}(I_{\text{base}})$ contains the dimension, image location, GT observation, and current-reconstruction observation of one grounded difference. Thus, the keyframe modification direction comes from direct image differences, while the QA residual and reward are a separate verification signal derived from the same GT–reconstruction error.

For Data-Independent Encoding Policy Pseudo-Training, Eq. 19 provides the implementation-level instantiation: the QA residual $\mathbf{r}_n^{\text{qa}}$ is converted into correction records $\mathcal{T}_{\text{pol}}$ and then into a natural-language shot-level policy-update instruction.

Applying the same operators defined in Eq. 19 yields the main-paper variables $\mathbf{g}_{\text{text}}^{\text{asset}}$ and $\mathbf{g}_{\text{text}}^{\text{policy}}$.

In the keyframe setting of Algorithm 2, $\mathcal{F}_{\text{KF}}^{\text{diff}}$ forms $\mathbf{g}_{\text{text}}^{\text{asset}}$, while the QA instance $R_{\text{reward}}^{\text{KF}}$ supplies the candidate-verification score. In the video-shot setting, the fixed optimization-reward checklist supplies both $\mathcal{F}_{\text{shot}}$ and $R_{\text{reward}}^{\text{shot}}$. Algorithm 1 uses the union of failed QA facts over the current video’s shots to form $\mathbf{g}_{\text{text}}^{\text{policy}}$ and uses the QA pass rate $R_{\text{reward},n}$ as its policy reward. Thus, every branch uses R_{reward} for optimization, while R_{eval} remains outside both loops and is used only for final reporting. Keyframe diagnosis is the one exception in how the reward evidence is obtained: its modification direction comes from direct image differences, while QA supplies the candidate-verification score.

The numerical output of the same QA evaluation supplies the QA residual, loss, and policy reward in Algorithm 1. Data-Independent Encoding Policy Pseudo-Training evaluates selected shots independently and then gives every shot equal weight. Let $\mathcal{S}_n$ be the selected shot set of video V_n . For each $s \in \mathcal{S}_n$, let $V_{n,s}$ be the source shot, $\hat{V}_{n,s}(P_{\text{shot}})$ its reconstruction under the complete policy $\bar{P}(P_{\text{shot}})$ defined in main-paper Sec. 4.1, and $Q_{n,s} = \{(q_{n,s,k}, y_{n,s,k})\}_{k=1}^{K_{n,s}}$ its frozen QA bank. The bank is partitioned into dimension-specific subsets $Q_{n,s,d}$ with sizes $K_{n,s,d}$. The construction retains at least one selected shot, at least one question per selected shot, and at least one question for every reported QA dimension. Therefore $|\mathcal{S}_n| \geq 1$, $K_{n,s} \geq 1$, and the dimension weights $\omega_{n,d}^{\text{qa}}$ defined below are positive. The indicator $\chi_{n,s,k}(P_{\text{shot}})$ equals one exactly when the reconstruction gives the source-derived answer to question $q_{n,s,k}$. The shot reward and its video-level aggregation are

$$\begin{aligned}
\hat{V}_{n,s}(P_{\text{shot}}) &:= \text{Dec}(E(V_{n,s}; \bar{P}(P_{\text{shot}}))), \\
Q_{n,s} &= \bigcup_{d=1}^D Q_{n,s,d}, \quad K_{n,s} := |Q_{n,s}|, \\
\chi_{n,s,k}(P_{\text{shot}}) &:= \mathbb{I}[\text{Answer}(\hat{V}_{n,s}(P_{\text{shot}}), q_{n,s,k}) = y_{n,s,k}], \\
R_{\text{reward},n,s}(P_{\text{shot}}) &:= \frac{1}{K_{n,s}} \sum_{k=1}^{K_{n,s}} \chi_{n,s,k}(P_{\text{shot}}), \\
R_{\text{reward},n}(P_{\text{shot}}) &:= \frac{1}{|\mathcal{S}_n|} \sum_{s \in \mathcal{S}_n} R_{\text{reward},n,s}(P_{\text{shot}}).
\end{aligned} \tag{28}$$

Thus, $R_{\text{reward},n,s}(P_{\text{shot}})$ is the atomic QA pass rate of one shot and $R_{\text{reward},n}(P_{\text{shot}})$ is the arithmetic mean of the selected shot rewards. It is not a pooled pass rate over all questions. To connect the atomic residuals in Eq. 25 to Algorithm 1, the dimension weights and fidelities are induced by the same equal-shot aggregation:

$$\begin{aligned}
\omega_{n,d}^{\text{qa}} &:= \frac{1}{|\mathcal{S}_n|} \sum_{s \in \mathcal{S}_n} \frac{K_{n,s,d}}{K_{n,s}}, \\
\rho_{n,d}^{\text{qa}}(P_{\text{shot}}) &:= \frac{1}{|\mathcal{S}_n| \omega_{n,d}^{\text{qa}}} \sum_{s \in \mathcal{S}_n} \frac{1}{K_{n,s}} \sum_{(q_{n,s,k}, y_{n,s,k}) \in Q_{n,s,d}} \chi_{n,s,k}(P_{\text{shot}}), \\
r_{n,d}^{\text{qa}}(P_{\text{shot}}) &:= 1 - \rho_{n,d}^{\text{qa}}(P_{\text{shot}}), \\
\mathbf{r}_n^{\text{qa}}(P_{\text{shot}}) &:= (r_{n,1}^{\text{qa}}(P_{\text{shot}}), \dots, r_{n,D}^{\text{qa}}(P_{\text{shot}})), \\
\hat{V}_n(P_{\text{shot}}) &:= \{\hat{V}_{n,s}(P_{\text{shot}}) : s \in \mathcal{S}_n\}, \\
R_{\text{reward},n}(P_{\text{shot}}) &= \sum_{d=1}^D \omega_{n,d}^{\text{qa}} \rho_{n,d}^{\text{qa}}(P_{\text{shot}}) \\
&= 1 - \sum_{d=1}^D \omega_{n,d}^{\text{qa}} r_{n,d}^{\text{qa}}(P_{\text{shot}}) \\
&= \frac{1}{|\mathcal{S}_n|} \sum_{s \in \mathcal{S}_n} R_{\text{reward},n,s}(P_{\text{shot}}), \\
\bar{r}_n^{\text{qa}}(P_{\text{shot}}) &:= 1 - R_{\text{reward},n}(P_{\text{shot}}), \\
\Delta R_{\text{reward},n} &:= R_{\text{reward},n}(P'_{\text{shot}}) - R_{\text{reward},n}(P_{\text{shot}}).
\end{aligned} \tag{29}$$

P'_{shot} is the candidate shot-level policy and P_{shot} is its current incumbent. $Q_n := \{Q_{n,s} : s \in \mathcal{S}_n\}$ is the collection of frozen shot banks for video n . The weight $\omega_{n,d}^{\text{qa}}$ is the average, across selected shots, of the within-shot question fraction assigned to dimension d ; $\rho_{n,d}^{\text{qa}}$ uses the same shot normalization. Equations 28–29 therefore instantiate the main-paper symbols R_{reward} , $\mathbf{r}_n^{\text{qa}}$, $\bar{r}_n^{\text{qa}}$, and $\Delta R_{\text{reward},n}$ while reproducing equal-shot aggregation exactly. The same frozen shot banks supply both the failed-fact textual gradient and the numerical acceptance signal. The corresponding acceptance rules are specified in Sec. D.

D. Dual-Loop Acceptance Gates

This section instantiates the acceptance-gate families for Data-Dependent KG Representation Refinement and Data-Independent Encoding Policy Pseudo-Training in main-paper Secs. 4.3.3 and 4.3.2 and Algorithms 2 and 1. Subscripts base and cand denote the current baseline and candidate results, respectively; all thresholds below are those used in the reported experiments.

$$\begin{aligned}\Gamma_{\text{inner}} &= \begin{cases} \Gamma_{\text{inner}}^{\text{KF}}, & \text{keyframe KG representation refinement,} \\ \Gamma_{\text{inner}}^{\text{shot}}, & \text{video-shot KG representation refinement,} \end{cases} \\ \Gamma_{\text{outer}} &= \Gamma_{\text{outer}}^{\text{current}} \wedge \Gamma_{\text{outer}}^{\text{replay}}.\end{aligned}\quad (30)$$

Thus, Γ_{inner} covers two operating modes, whereas Γ_{outer} combines its current-video and historical-replay checks. The symbol Γ is reserved for acceptance gates and is distinct from the graph latent space $\mathcal{G}$ in main-paper Sec. 3.1.

D.1. Keyframe KG Representation Refinement

This subsection specifies the QA-reward guard and the auxiliary pairwise-consistency check used by the keyframe-refinement setting of main-paper Algorithm 2.

Let I_{GT} , I_{base} , and I_{cand} denote the GT, current baseline, and candidate keyframes, and let $\mathcal{Q}_{\text{KF}}(I_{\text{GT}})$ be their frozen QA bank. Define the keyframe instance and its candidate change as

$$\begin{aligned}R_{\text{reward}}^{\text{KF}}(I) &:= R_{\text{reward}}(I; \mathcal{Q}_{\text{KF}}(I_{\text{GT}})), \\ \Delta R_{\text{reward}}^{\text{KF}} &:= R_{\text{reward}}^{\text{KF}}(I_{\text{cand}}) - R_{\text{reward}}^{\text{KF}}(I_{\text{base}}).\end{aligned}\quad (31)$$

The auxiliary pairwise evaluator compares the two reconstructions against I_{GT} twice, reversing their presentation order. Let $\text{Closer}(I_{\text{GT}}; I_1, I_2)$ return I_1 , I_2 , or a tie. We abbreviate order-consistent agreement by

$$\text{PairCons}(I_{\text{GT}}, I_{\text{base}}, I_{\text{cand}}) := \mathbb{I} \left[\begin{aligned} &\text{Closer}(I_{\text{GT}}; I_{\text{base}}, I_{\text{cand}}) = I_{\text{cand}} \\ &\wedge \text{Closer}(I_{\text{GT}}; I_{\text{cand}}, I_{\text{base}}) = I_{\text{cand}} \end{aligned} \right]. \quad (32)$$

$\text{PairCons} = 1$ means that the candidate is selected as closer to GT under both orders; a disagreement or tie returns zero. It is a consistency check rather than the optimization reward. The keyframe gate is therefore written with R_{reward} first and pairwise consistency as an additional safeguard:

$$\Gamma_{\text{inner}}^{\text{KF}} := \mathbb{I} [\Delta R_{\text{reward}}^{\text{KF}} \geq -\epsilon_{\text{KF}}] \wedge \text{PairCons}(I_{\text{GT}}, I_{\text{base}}, I_{\text{cand}}), \quad (33)$$

where $\epsilon_{\text{KF}} = 0.05$ is the anti-degradation margin used in the reported implementation. Thus, R_{reward} supplies the acceptance basis, while the double-order comparison only rejects an unstable or non-improving visual preference. The complete pairwise judgment prompt is reproduced in Sec. M.

D.2. Video-Shot KG Representation Refinement

This subsection instantiates the video-shot optimization reward and gate used by Data-Dependent KG Representation Refinement in main-paper Sec. 4.3.3 and Algorithm 2. This signal is denoted $R_{\text{reward}}^{\text{shot}}$ because it is used to diagnose and accept loop updates; it is distinct from the final-reporting signal R_{eval} .

For $x \in \{\text{base}, \text{cand}\}$, let V be the GT shot and $\hat{V}_x$ its current or candidate reconstruction. The fixed video-shot reward checklist returns a higher-is-better score $\rho_{x,d}^{\text{shot}} \in [0, 1]$ for each of the $D = 8$ optimization dimensions. Its mismatched or absent items form $\mathcal{F}_{\text{shot}}(V, \hat{V}_x) = \text{Fail}_{\text{shot}}(V, \hat{V}_x)$, and its scalar optimization reward is the uniform dimension mean

$$\begin{aligned}R_{\text{reward}}^{\text{shot}}(V, \hat{V}_x) &:= \frac{1}{D} \sum_{d=1}^D \rho_{x,d}^{\text{shot}}, \\ R_{\text{reward},x}^{\text{shot}} &:= R_{\text{reward}}^{\text{shot}}(V, \hat{V}_x), \quad x \in \{\text{base}, \text{cand}\}.\end{aligned}\quad (34)$$

Here $d \in \{1, \dots, D\}$ indexes an optimization-reward dimension and d^* is the dimension targeted by the current textual gradient. The candidate passes when

$$\begin{aligned} \Gamma_{\text{inner}}^{\text{shot}} = \mathbb{I} [& R_{\text{reward,cand}}^{\text{shot}} > R_{\text{reward,base}}^{\text{shot}} + 0.02 \\ & \wedge (\rho_{\text{base},d^*}^{\text{shot}} - \rho_{\text{cand},d^*}^{\text{shot}}) \leq 0.08 \\ & \wedge \sum_{d \neq d^*} \max(0, \rho_{\text{base},d}^{\text{shot}} - \rho_{\text{cand},d}^{\text{shot}}) \leq 0.15]. \end{aligned} \quad (35)$$

The first condition requires an overall reward gain, the second bounds regression in the targeted reward dimension d^* , and the third bounds cumulative drops over all non-target reward dimensions. Any critical-item cap applied by the shot-reward checklist is already reflected in $\rho_{x,d}^{\text{shot}}$.

D.3. Data-Independent Encoding Policy Acceptance Gate

This subsection instantiates the acceptance gate for Data-Independent Encoding Policy Pseudo-Training in main-paper Sec. 4.3.2 and Algorithm 1, including current-video improvement, visual preservation, and historical replay conditions.

For each selected shot, let $Q_{n,s}^{\text{vis}} \subset Q_{n,s}$ be the frozen non-audio subset. The current-video visual reward follows the same equal-shot aggregation as $R_{\text{reward},n}(P_{\text{shot}})$. Historical replay uses one retained shot from every preceding pseudo-training video. Specifically, $\tilde{s}_j$ denotes the first selected training shot retained after video V_j , $\mathcal{M}_{1:n-1}$ is the resulting replay memory, and $\tilde{\mathcal{M}}_n$ is a uniformly sampled subset containing at most three records. The inherited shot-level policy $P_{\text{shot}}^{(n)}$ is frozen when pseudo-training on V_n begins, whereas P_{shot} denotes the current incumbent within that video and P'_{shot} denotes its candidate update. We define

$$\begin{aligned} R_{\text{reward},n,s}^{\text{vis}}(P_{\text{shot}}) &:= R_{\text{reward}}(\hat{V}_{n,s}(P_{\text{shot}}); Q_{n,s}^{\text{vis}}), \\ R_{\text{reward},n}^{\text{vis}}(P_{\text{shot}}) &:= \frac{1}{|\mathcal{S}_n|} \sum_{s \in \mathcal{S}_n} R_{\text{reward},n,s}^{\text{vis}}(P_{\text{shot}}), \\ \mathcal{M}_{1:n-1} &:= \{(V_{j,\tilde{s}_j}, Q_{j,\tilde{s}_j})\}_{j=1}^{n-1}, \\ |\tilde{\mathcal{M}}_n| &:= \min(3, |\mathcal{M}_{1:n-1}|), \\ \bar{R}_{\text{reward,hist}}(p; \tilde{\mathcal{M}}_n) &:= \frac{1}{|\tilde{\mathcal{M}}_n|} \sum_{(V_{j,\tilde{s}_j}, Q_{j,\tilde{s}_j}) \in \tilde{\mathcal{M}}_n} R_{\text{reward}}(\hat{V}_{j,\tilde{s}_j}(p); Q_{j,\tilde{s}_j}), \\ \Delta R_{\text{reward},n}^{\text{vis}} &:= R_{\text{reward},n}^{\text{vis}}(P'_{\text{shot}}) - R_{\text{reward},n}^{\text{vis}}(P_{\text{shot}}), \\ \Delta \bar{R}_{\text{reward,hist}} &:= \bar{R}_{\text{reward,hist}}(P'_{\text{shot}}; \tilde{\mathcal{M}}_n) - \bar{R}_{\text{reward,hist}}(P_{\text{shot}}^{(n)}; \tilde{\mathcal{M}}_n), \quad p \in \{P'_{\text{shot}}, P_{\text{shot}}^{(n)}\}, \quad |\tilde{\mathcal{M}}_n| \geq 1. \end{aligned} \quad (36)$$

$R_{\text{reward},n}^{\text{vis}}(P_{\text{shot}})$ is the arithmetic mean of the selected shots' visual-only optimization rewards. For replay, the candidate and the frozen inherited policy are both reconstructed and evaluated on the same sampled historical shots; $\Delta \bar{R}_{\text{reward,hist}}$ therefore measures candidate replay performance relative to the policy available before any update on the current video. The replay average is evaluated only when $|\tilde{\mathcal{M}}_n| \geq 1$. When the replay memory is empty for the first pseudo-training video, $\Gamma_{\text{outer}}^{\text{replay}}$ is set to one without evaluating that average. The candidate is accepted by

$$\Gamma_{\text{outer}}^{\text{current}} = \mathbb{I} \left[\begin{array}{l} \Delta R_{\text{reward},n} > 0.02 \\ \wedge \Delta R_{\text{reward},n}^{\text{vis}} \geq -0.03 \end{array} \right]. \quad (37)$$

$$\Gamma_{\text{outer}}^{\text{replay}} = \mathbb{I} [\Delta \bar{R}_{\text{reward,hist}} \geq -0.05], \quad (38)$$

$$\Gamma_{\text{outer}} = \Gamma_{\text{outer}}^{\text{current}} \wedge \Gamma_{\text{outer}}^{\text{replay}}. \quad (39)$$

Together, Eqs. 37–39 accept a candidate policy only when its equal-shot current-video R_{reward} improves over the current policy by more than 0.02, its equal-shot visual reward decreases by no more than 0.03, and its sampled historical replay reward decreases by no more than 0.05 relative to the inherited policy frozen at the start of the current video. The three values are absolute reward differences on the $[0, 1]$ scale, corresponding to 2, 3, and 5 percentage points, respectively.

D.4. Data-Independent Encoding Policy Pseudo-Training Procedure

This subsection supplements main-paper Sec. 4.3.2 by specifying how Algorithm 1 applies the policy update and acceptance gate sequentially across the pseudo-training videos.

Data-Independent Encoding Policy Pseudo-Training processes a six-video stream sequentially and evaluates exactly three candidate shot-level policy updates for each video. It (i) inherits and freezes the previously accepted shot-level Agentic Video Encoder prompt as $P_{\text{shot}}^{(n)}$, (ii) freezes a source-derived QA bank for each selected shot, and then, in each of the three rounds, (iii) converts failed questions into a textual gradient, (iv) generates a candidate prompt, (v) runs the complete frozen encoding–generation–QA pipeline, and (vi) applies Eqs. 37–39. An accepted candidate becomes the incumbent for the next round on the same video. After all three rounds, the resulting shot-level policy is passed to the next video and the first selected training shot is added to replay memory. This continual prompt/policy pseudo-training updates no foundation-model weights.

E. Agentic Video Encoder System Prompts

This section supplements the Agentic Video Encoder in main-paper Sec. 4.1 and the policy conditions compared in RQ2 (Sec. 5.3) by documenting the complete Agentic Video Encoder policy conditions used in the comparison. Section M provides complete direct English translations of the Chinese Agentic Video Encoder prompts. They correspond to the initial policy, the policy obtained after the sixth pseudo-training video, and the independently human-tuned policy.

F. Baseline Adaptation and Fairness

This section supplements the baseline comparison in main-paper Secs. 5.1–5.2 by specifying how VideoAnalyzer, Storyboard Studio, and soap2soap are connected to the shared reconstruction pipeline and evaluated under common generators.

The external comparison contains only VideoAnalyzer (Docusphere, 2026), Storyboard Studio (BroderQi, 2026), and soap2soap (Song et al., 2026). These systems do not all include an end-to-end film-reconstruction decoder. We therefore map each method’s own representation to the same fixed image and video generators. This conversion preserves each method’s segmentation, analysis, and representation.

VideoAnalyzer. We retain its temporal scene analysis, aligned transcript, extracted frames, and video representation. Its own segments and descriptions are converted into reconstruction prompts for the shared generators.

Storyboard Studio. We retain its original shot analysis, contact sheets, and storyboard structure. When its output does not provide explicit shot boundaries, the source-frame timestamp and generated-clip duration define the corresponding GT interval.

soap2soap. We retain its video analysis, character representation, prompt construction, and keyframe stages. These outputs are passed to the shared generators, and its reconstruction uses only assets produced by soap2soap.

Source-pixel exclusion. All four systems obey the same strict boundary between representation construction and reconstruction generation. A system may inspect the source video when constructing its representation, and source frames may be used as GT only during evaluation; however, no source-video frame, crop, screenshot, or other source-pixel image is passed to either generation model or used as a visual reference for reconstruction. Every reconstructed keyframe is newly generated by the shared image generator from the text-centered

structured description produced by the corresponding representation system. Any such keyframe subsequently used by the video generator remains a generated reconstruction asset rather than copied source content. Accordingly, the extracted frames retained by VideoAnalyzer and the contact sheets retained by Storyboard Studio are analysis inputs only and never generation inputs. This rule ensures that reconstruction quality measures the information carried by the text representation. Text is an important modality in an agent workspace because agents can directly reason over, learn from, and edit it; its ordered intermediate descriptions also form an important part of an agentic video creation trajectory. This setup applies identically to AVA-Encoder, VideoAnalyzer, Storyboard Studio, and soap2soap.

Representation budget. The information constraint introduced in main-paper Sec. 3.2 is instantiated as $N_{\text{ref}} = 5$ generated reference keyframes and $M = 1200$ prompt tokens per shot. Thus, each representation-to-decoder interface supplies at most five newly synthesized reference images and a shot-level textual prompt of at most 1200 tokens. These limits apply to all four systems and are separate from the source material available only during representation construction and evaluation.

Shared generators and alignment. As specified in main-paper Experiment Setup (Sec. 5.1), all four systems receive the same source videos and use the same fixed Nano Banana Pro image generator (Google AI, 2026b), HappyHorse 1.0 reference-to-video generator (Alibaba Cloud, 2026a), and evaluator. Each system is evaluated against GT induced by its own segmentation and keyframe selection, as specified in Sec. B. This setup isolates the quality of the produced agentic representation while avoiding a comparison of different generation backbones.

In a separate decoder-robustness pilot, 20 shots per representation system were regenerated with HappyHorse and Seedance 2.0 (ByteDance Seed Team, 2026) while holding the representation assets, prompts, and evaluator fixed. The change in the Overall reconstruction score remained within **1.5 percentage points**, which we treat as the observed decoder-induced variation for this pilot.

G. Dataset and Reproducibility Details

This section supplements main-paper Experiment Setup (Sec. 5.1) and the dataset contribution by describing the released Film KG dataset, the source and size of the 18-video evaluation collection, the six-video pseudo-training stream, and the held-out evaluation split.

G.1. Released Film KG Dataset

This subsection expands the Film KG dataset contribution stated in the main paper. We construct and release a dataset at the scale of tens of thousands of shots. It contains the text portion of Film KG representations derived from high-quality, human-made film content, including fine-grained structured descriptions of scripts, characters, scenes, objects, shots, and keyframes. These representations retain enough information to support reconstruction of the source film content through a fixed generation pipeline. The input videos are collected from publicly available open-source online data and include high-quality film content, Oscar-caliber short films, and popular human-produced AI videos.

The released dataset contains only the structured-text hierarchy, states, and relations; it does not include the image, audio, or video assets in $\mathcal{A}_G$. Users can connect their own image-, audio-, and video-generation APIs, or feed the representations directly into AVA-Encoder, to render the corresponding assets. The graph structure also supports linked editing in which a node update changes its dependent video content. Without rendering any video, users can further use the structured text nodes and their dependencies as records of high-quality agentic video creation processes.

G.2. Pseudo-Training and Evaluation Video Collections

This subsection supplements the data description in main-paper Experiment Setup (Sec. 5.1) by identifying the clips used for pseudo-training and evaluation. Both collections were assembled from publicly available open-source data.

Pseudo-training videos. The six-video pseudo-training stream contains the following clips:

Method	Char.	Scene	Pos.	Motion	Audio	Style	Camera	Narr.	V mean
VideoAnalyzer	32.9	33.5	23.4	19.8	16.9	17.4	42.7	22.4	26.1
Storyboard Studio	15.8	25.1	14.0	9.6	13.4	12.3	30.5	10.1	16.4
soap2soap	40.9	45.1	34.5	30.2	31.6	28.2	47.7	35.5	36.7
AVA-Encoder	56.2	80.9	63.4	43.7	52.5	39.5	71.6	54.9	57.8

Table 7 | V direction by dimension (%). Higher is better.

1. *The Big Bang Theory*: Sheldon learns Chinese.
2. *The Truman Show*: ending sequence.
3. *Friends*: Rachel’s runaway-wedding sequence.
4. *Zootopia*: Flash’s document-stamping sequence.
5. *Harry Potter and the Philosopher’s Stone*: Platform Nine and Three-Quarters sequence.
6. *The Pursuit of Happyness*: interview sequence.

Evaluation videos. The 18-video evaluation collection contains the following clips:

1. *Spirited Away*: Chihiro’s parents turn into pigs.
2. *Zombie Cleaner*, an AI-generated short film.
3. *Harry Potter and the Philosopher’s Stone*: Diagon Alley sequence.
4. *Joker*: subway sequence.
5. *Kung Fu Panda*: Master Oogway’s classic speech.
6. *Genshin Impact*: Natlan “Little Friend” sequence.
7. *Dream of the Red Chamber*: Baoyu and Daiyu’s first meeting.
8. *Rather Than Suspicion*.
9. *Shameless*: selected sequence.
10. *Titanic*: deck-embrace sequence.
11. *Zootopia 2*: selected sequence.
12. *Zootopia*: paw-shaped popsicle sequence.
13. *The Secret Life of Walter Mitty*: mountain sequence.
14. *The Million Pound Note*: selected sequence.
15. *3 Idiots*: classroom sequence.
16. *Green Book*: car sequence.
17. *Forrest Gump*: chase sequence.
18. *Harry Potter and the Philosopher’s Stone*: flying-lesson sequence in which Malfoy causes trouble.

The evaluation collection spans varied content and forms, with 129 annotated shots and 246 selected keyframes. Shot and keyframe counts can differ across the four representation systems because each system retains its own segmentation and keyframe-selection policy. The source clips come from publicly available open-source data and are used to construct and evaluate the derived Film Knowledge Graph representations.

The six pseudo-training videos and the 18 held-out evaluation videos do not overlap at the clip level. Each pseudo-training video begins with the accepted shot-level Agentic Video Encoder policy obtained from the preceding videos and evaluates three candidate policy updates. Historical samples are evaluated with the gate thresholds stated in Sec. D. All understanding, policy-revision, QA, image-generation, and video-generation models remain fixed.

H. Fine-Grained Reconstruction Results

This section supplements main-paper RQ1 (Sec. 5.2) and Table 1. Tables 7 and 8 report the per-dimension breakdown for the direct V and KF benchmark directions. These values are produced by R_{eval} , not R_{reward} : V and KF use Eq. 22, whereas the V-BC and KF-BC values in main-paper Table 1 use Eq. 23. The row means below equal the V and KF entries in that table.

Method	Char.	Scene	Pos.	Motion	Style	Camera	Narr.	KF mean
VideoAnalyzer	30.0	24.1	24.2	25.9	15.3	60.0	19.9	28.5
Storyboard Studio	27.1	22.5	21.4	30.4	10.1	66.0	22.4	28.6
soap2soap	38.4	38.8	31.6	35.6	27.2	66.2	38.7	39.5
AVA-Encoder	63.3	80.3	84.5	68.1	45.2	91.7	83.0	73.7

Table 8 | KF direction by its seven applicable dimensions (%). Audio is N/A; higher is better.

I. Ablation Definitions and Effect Sizes

This section supplements main-paper RQ2 (Sec. 5.3) and Table 2 by defining every configuration and reporting absolute and relative differences from the complete AVA-Encoder.

Naive Agentic Video Encoder. This variant uses single-level flat understanding, with neither the hierarchical film-shot-keyframe Agentic Video Encoder nor either optimization loop.

Without Data-Independent Encoding Policy Pseudo-Training. The initial shot-level Agentic Video Encoder policy $P_{\text{shot},0}$ is fixed; Data-Dependent KG Representation Refinement and its gate remain active.

Without Data-Dependent KG Representation Refinement. This variant uses the pseudo-trained shot-level policy P_{shot}^* but disables input-specific keyframe and shot refinement.

Without both loops. This variant uses $P_{\text{shot},0}$ with neither Data-Independent Encoding Policy Pseudo-Training nor Data-Dependent KG Representation Refinement.

Human-tuned Agentic Video Encoder. This is an independent manually engineered shot-level Agentic Video Encoder prompt, not $P_{\text{shot},0}$ of the policy pseudo-training trajectory; it uses neither Data-Independent Encoding Policy Pseudo-Training nor Data-Dependent KG Representation Refinement.

Without gates. This variant retains P_{shot}^* and both optimization loops but removes the anti-degradation and anti-forgetting acceptance constraints; it does not remove either loop.

AVA-Encoder. The complete configuration uses hierarchical understanding, Data-Dependent KG Representation Refinement, Data-Independent Encoding Policy Pseudo-Training, and both gate families.

With Data-Dependent KG Representation Refinement disabled in both conditions, the pseudo-trained shot-level Agentic Video Encoder policy improves over its independently human-tuned counterpart from 44.4 to 45.8: an **absolute gain of 1.4 percentage points** and a $1.4/44.4 = 3.2\%$ relative improvement. Enabling optional test-time Data-Dependent KG Representation Refinement yields the complete AVA-Encoder score of 49.0. The complete configuration improves over the no-loop configuration from 42.4 to 49.0: an **absolute gain of 6.6 percentage points** and a $6.6/42.4 = 15.6\%$ relative improvement. Against the strongest external baseline, soap2soap at 28.3, the 49.0 score is an absolute gain of **20.7 percentage points** and a relative improvement of $20.7/28.3 = 73.1\%$.

J. Knowledge-Graph Representation and Editing

This section supplements main-paper Knowledge-Graph Representation (Sec. 4.2) and RQ3, *Knowledge-Graph Operability* (Sec. 5.4).

J.1. Stored Schema

This subsection supplements the representation G in main-paper Sec. 4.2 by defining the node types, edge types, and persistent states stored in the knowledge graph.

Consistent with main-paper Sec. 4.2, the representation separates text nodes from multimodal assets. The nine text node categories are `story`, `event`, `shot`, `char_state`, `scene_state`, `object_state`,

`style_state`, `camera_state`, and `audio_state`. Every one of these nodes stores a structured text description. A `story` node describes the global narrative, an `event` node describes a local narrative unit, and a `shot` node describes one film shot. The six state types describe their shot-specific character, scene, object, style, camera, and audio information. In particular, `audio_state` describes spoken content and speaker identity, voice properties, background music, sound effects, and audiovisual synchronization in text rather than storing audio data.

Let $\mathcal{N}_{\text{text}}$ denote the nine text node categories above and let $\mathcal{N}_{\text{keyframe}}$ denote the graph-addressable keyframe records. Then $\mathcal{N}_G = \mathcal{N}_{\text{text}} \cup \mathcal{N}_{\text{keyframe}}$, consistent with the graph notation in main-paper Sec. 4.2. The linked asset layer $\mathcal{A}_G$ stores or references generated character, scene, and object images; generated keyframes; audio or voice assets; and rendered shot videos. A `keyframe` record points to its generated image in $\mathcal{A}_G$, allowing `binds` and `references` edges to locate and update that asset. Other asset paths are attached to the relevant text or keyframe records. Thus, the schema has nine text node types plus one graph-addressable keyframe asset type, while the semantic hierarchy and states remain fully textual.

The source-pixel exclusion defined in Sec. F makes the graph an explicit text bottleneck: AVA-Encoder cannot obtain reconstruction fidelity by copying pixels from the source video, but must express reconstruction-critical information through structured text nodes and their relations. Assets in $\mathcal{A}_G$ are generated from those descriptions rather than copied from the source video. The resulting text-centered graph can therefore be directly understood and learned from by downstream agents, queried by entity, event, shot, or asset, edited at a selected node, and reused to generate new multimodal assets.

The graph uses 11 explicit relation types. `contains` represents the story–event–shot hierarchy; `binds` links a shot to the states and keyframes used by that shot; and `transition` links successive states of the same entity. `sequence` records the temporal order of shots or events, while `jump` links non-adjacent reappearances of the same character, scene, or object. `spoken_by` links spoken content in an audio state to a character; `rel` records character relationships; `similar` marks visually confusable characters, scenes, or objects; and `features` links a scene to its recurring characters or objects. `narrative` records causal, setup, and callback relations between shots, and `references` records which character, scene, or object registry assets were used to produce a keyframe. Consistency among states within the same shot is checked during editing rather than stored as another edge.

J.2. Construction and Propagation

This subsection supplements graph construction in main-paper Sec. 4.2 and the graph-based editing operation in RQ3 (Sec. 5.4) by specifying how hierarchical understanding records become graph elements and how edits propagate through them.

Film-level understanding produces three explicit registry banks: a character registry $\mathcal{B}_{\text{char}}$, a scene registry $\mathcal{B}_{\text{scene}}$, and an object registry $\mathcal{B}_{\text{obj}}$. We denote their union by

$$\mathcal{B}_{\text{reg}} := \mathcal{B}_{\text{char}} \cup \mathcal{B}_{\text{scene}} \cup \mathcal{B}_{\text{obj}}. \quad (40)$$

The character registry stores textual descriptions of stable identities and appearance variants, the scene registry stores textual descriptions of recurring environments and their spatial and visual properties, and the object registry stores textual descriptions of recurring props and their observable states. Any generated reference images associated with these entries remain in $\mathcal{A}_G$. The hierarchical contexts in main-paper Sec. 4.1 are instantiated with registry injection as

$$\begin{aligned} C_{\text{shot},i} &= E_{\text{shot}}(s_i, C_{\text{film}}, \mathcal{B}_{\text{reg}}; P_{\text{shot}}), \\ C_{\text{kf},i} &= E_{\text{kf}}(f_i^*, C_{\text{shot},i}, \mathcal{B}_{\text{reg},i}; P_{\text{kf}}), \end{aligned} \quad (41)$$

where $\mathcal{B}_{\text{reg},i} \subseteq \mathcal{B}_{\text{reg}}$ contains the registry entries relevant to shot s_i . The first injection binds shot observations to stable character, scene, and object identities across cuts; the second carries the relevant identities and states into keyframe-level composition and prompt construction. Each object-registry entry is instantiated as an `object_state` in every shot where that object appears. A `binds` edge attaches the state to its shot, `transition` links consecutive states of the same object, and `references` records its use in generated keyframes. Film-level understanding, the three registry banks, shot-level understanding, and keyframe-level understanding are then combined into structured records. The nodes and relations above are constructed

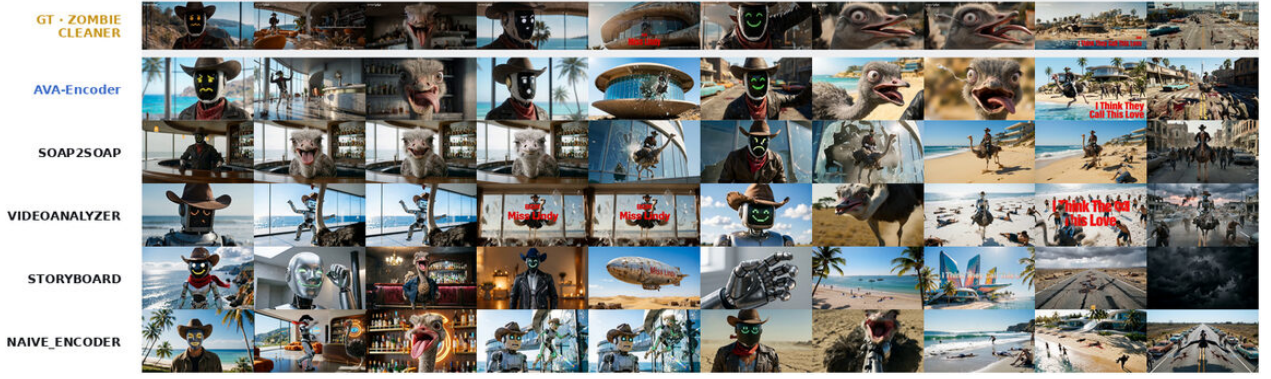


Figure 6 | Qualitative reconstruction comparison on *Zombie Cleaner*. Rows show GT, AVA-Encoder, soap2soap, VideoAnalyzer, Storyboard Studio, and the naive Agentic Video Encoder.

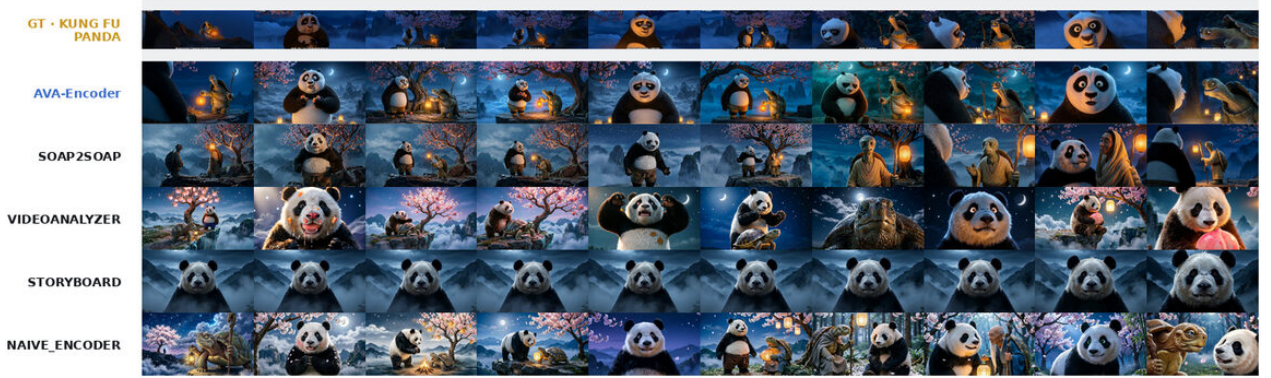


Figure 7 | Qualitative reconstruction comparison on *Kung Fu Panda*, using the same row order as in Fig. 6.

deterministically from those records; graph construction requires no additional LLM call. An identity edit is propagated to all states of the same entity and to every keyframe that uses that entity. A style edit is propagated to the shots and keyframes that share the edited style. Content and parameter edits regenerate only the affected prompts and assets. The event and story nodes are updated when their contained shots change, while unrelated subgraphs remain unchanged.

The affected-subgraph rule and its qualitative editing examples are presented in Sec. K.2 after the reconstruction comparisons.

K. Additional Qualitative Results

This section supplements main-paper RQ1 (Sec. 5.2) and RQ3 (Sec. 5.4) with qualitative reconstruction comparisons and graph-conditioned edit examples.

K.1. Reconstruction Comparisons

This subsection supplements the reconstruction results in main-paper RQ1 (Sec. 5.2). Figures 6–11 compare film reconstruction across six source videos. In each comparison, rows show GT, AVA-Encoder, soap2soap, VideoAnalyzer, Storyboard Studio, and the naive Agentic Video Encoder under the shared generation setting.



Figure 8 | Qualitative reconstruction comparison on *Shameless*, using the same row order as in Fig. 6.

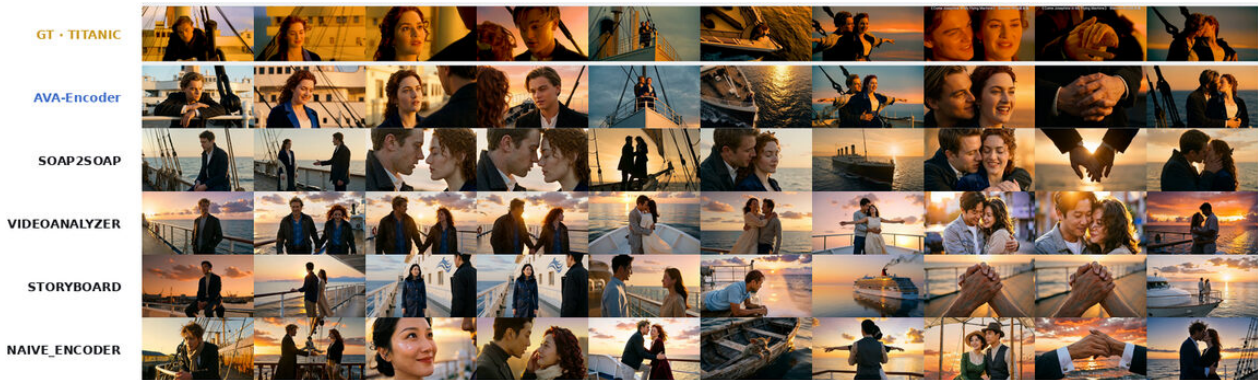


Figure 9 | Qualitative reconstruction comparison on *Titanic*, using the same row order as in Fig. 6.

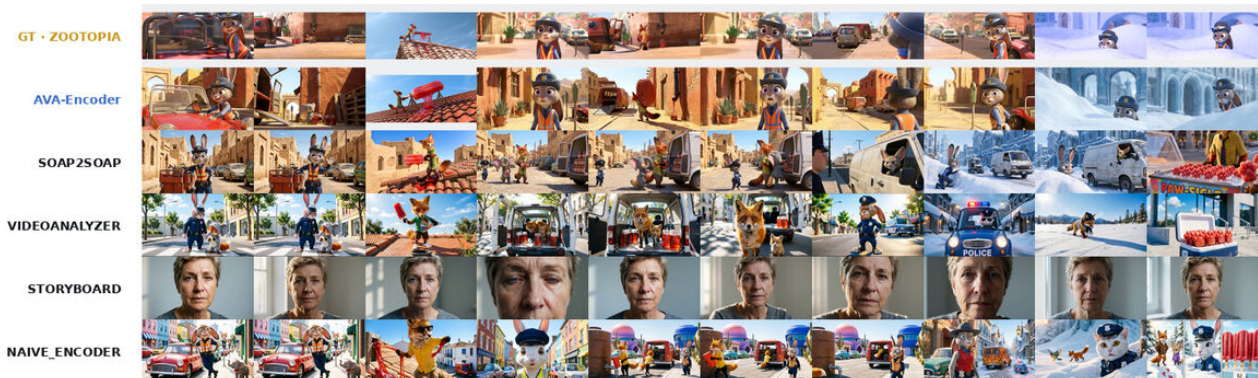


Figure 10 | Qualitative reconstruction comparison on the popsicle sequence from *Zootopia*, using the same row order as in Fig. 6.



Figure 11 | Qualitative reconstruction comparison on the Malfoy broom sequence from *Harry Potter and the Philosopher's Stone*, using the same row order as in Fig. 6.

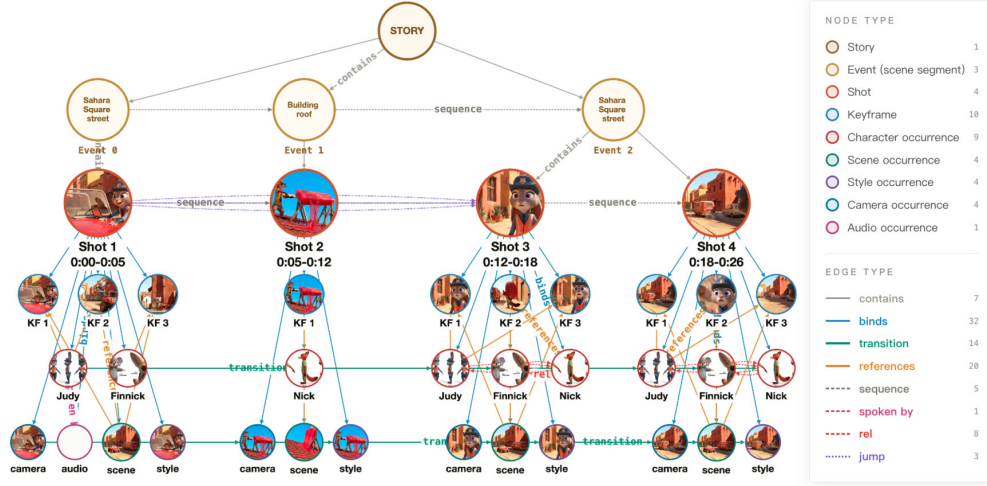


Figure 12 | Film knowledge-graph visualization. The story–event–shot hierarchy appears above the shot-bound state and keyframe nodes. Typed edges expose temporal, semantic, and asset-reference dependencies that are not represented by a flat shot list. This example displays only the node and edge types instantiated in the selected clip; the formal schema in Sec. J additionally supports object states and the complete 11-relation taxonomy.

K.2 Graph-Topology Editing

This subsection supplements the downstream editing experiment in main-paper RQ3 (Sec. 5.4). Topology editing identifies the smallest dependency subgraph that must change after a local edit. We use the graph notation from the main paper, $G = (\mathcal{N}_G, \mathcal{E}_G, \mathcal{A}_G)$, and let $\mathcal{Z}_{\text{edit}} \subseteq \mathcal{N}_G$ denote the directly edited text or keyframe records. Edges from these records identify any multimodal data in $\mathcal{A}_G$ that must be updated. An edit is first assigned one of four facets: identity replacement, content rewrite, visual-treatment change, or parameter adjustment. The selected facet determines which typed edges may carry the edit and in which direction.

Figure 12 visualizes the stored graph described in Sec. J. Figures 13 and 14 show how the same graph is inspected during editing. The overview retains the complete film hierarchy and all typed layers; selecting one asset isolates the dependency paths that determine which linked states and rendered outputs may require an update.

Figures 4 and 5 in main-paper RQ3 (Sec. 5.4) show the two principal edit cases. The rules below formalize how their linked states and rendered assets are updated while unrelated graph content is preserved.

Edit facet	Propagation and resulting update
Identity	Follow entity-state transitions and asset references; refresh linked identities, keyframes, and shots.
Content	Follow the edited shot’s bindings; recompile its prompts, rerender its assets, and check one-step semantic dependents.
Visual treatment	Follow style-state transitions and asset references; apply the treatment consistently to linked keyframes and shots.
Parameter	Follow the edited state and its shot binding; update only the selected camera, lighting, scene, or object attributes.

Table 9 | Facet-specific propagation used for graph-topology editing.

The affected subgraph is determined in three stages.

Material closure. The first stage collects assets that must be regenerated together. State transitions connect occurrences of the same entity, reference edges connect character, scene, or style states to their keyframes, and shot–keyframe bindings connect a changed shot to its rendered assets. These dependencies are followed repeatedly until no additional material node is reached.

Semantic consistency check. The second stage adds one-hop contextual dependencies that may require a local revision after the material update, including within-shot character–scene compatibility, audio ownership,

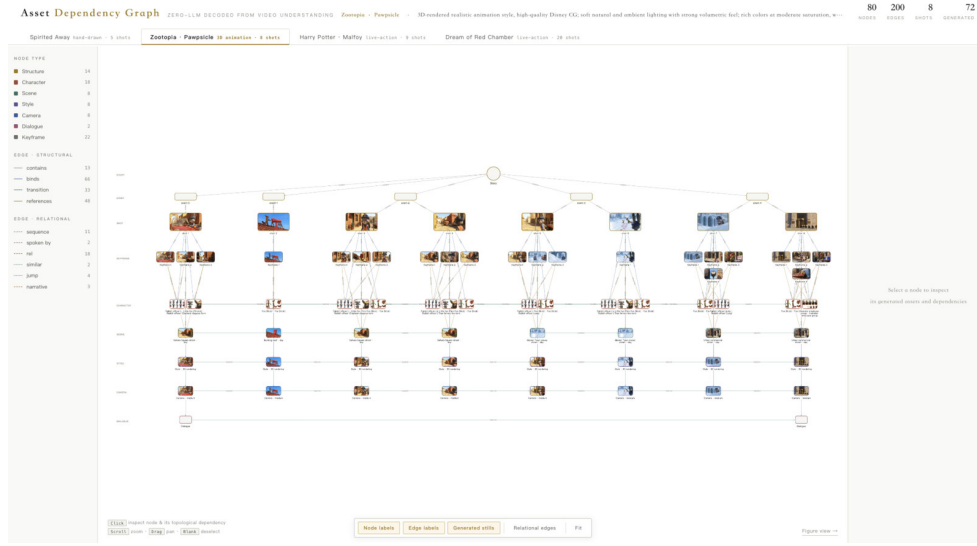


Figure 13 | Graph-editing interface before node selection. The complete film graph is organized by hierarchy and semantic layer, allowing an editor to locate a story unit, shot state, or rendered keyframe without flattening its dependencies.

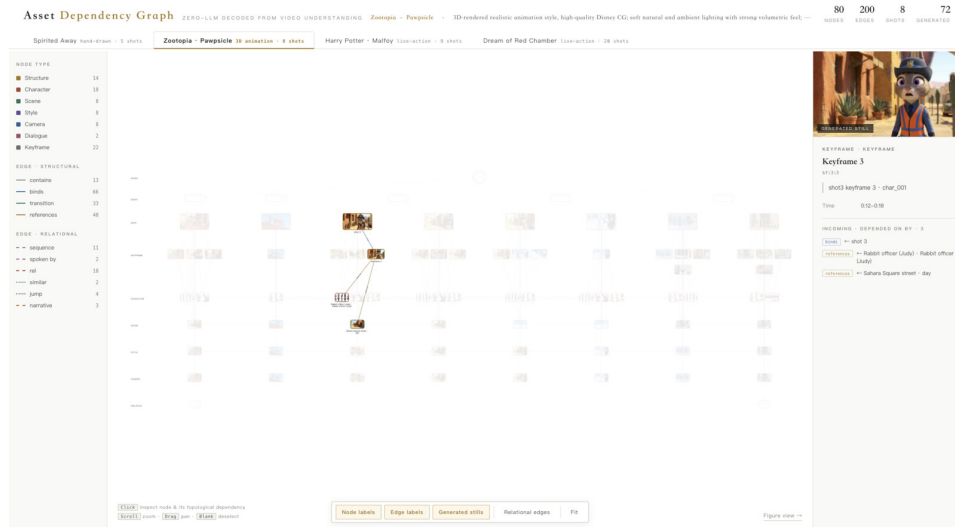


Figure 14 | Graph-editing interface after selecting a keyframe node. The interface highlights the selected node's incoming and outgoing dependency paths and displays its stored asset information, making the affected subgraph used by the propagation rule explicit.

camera framing, temporal order, and narrative relations. Restricting this stage to one hop prevents a local edit from propagating through an unrelated narrative chain.

Hierarchical update. The third stage adds the event and story nodes that contain an affected shot, so their summaries can be revised without changing unaffected branches of the graph hierarchy.

The following relation expresses the three stages in a single affected-subgraph definition. Let ζ denote the selected edit facet: identity, content, style, or parameter. Let $\mathcal{E}_{\zeta}^{\text{mat}}$ and $\mathcal{E}_{\zeta}^{\text{sem}}$ be the directed material and semantic edge sets allowed for that facet, respectively. Starting with $\text{Cl}_{\zeta}^{(0)}(\mathcal{Z}_{\text{edit}}) = \mathcal{Z}_{\text{edit}}$, material propagation is

$$\begin{aligned}
\text{Dep}_\zeta^\nu(Z) &= \{v \mid \exists u \in Z, (u, v) \in \mathcal{E}_\zeta^\nu\}, \\
\text{Cl}_\zeta^{(\ell+1)}(\mathcal{Z}_{\text{edit}}) &= \text{Cl}_\zeta^{(\ell)}(\mathcal{Z}_{\text{edit}}) \cup \text{Dep}_\zeta^{\text{mat}}(\text{Cl}_\zeta^{(\ell)}(\mathcal{Z}_{\text{edit}})), \\
\text{Cl}_\zeta(\mathcal{Z}_{\text{edit}}) &= \bigcup_{\ell \geq 0} \text{Cl}_\zeta^{(\ell)}(\mathcal{Z}_{\text{edit}}), \\
\text{Sem}_\zeta(Z) &= \text{Dep}_\zeta^{\text{sem}}(Z), \\
\mathcal{I}_\zeta(\mathcal{Z}_{\text{edit}}) &= U(\text{Cl}_\zeta(\mathcal{Z}_{\text{edit}}) \cup \text{Sem}_\zeta(\text{Cl}_\zeta(\mathcal{Z}_{\text{edit}}))).
\end{aligned} \tag{42}$$

Here, $\nu \in \{\text{mat}, \text{sem}\}$ selects an edge class, $\text{Dep}_\zeta^\nu(Z)$ returns the one-step dependents of node set Z , and ℓ is the propagation depth. $\text{Cl}_\zeta(\mathcal{Z}_{\text{edit}})$ is the repeated material closure, $\text{Sem}_\zeta(Z)$ adds one-step semantic dependents, and $U(Z)$ adds at most the two containing hierarchy levels from a shot to its event and story. Thus, $\mathcal{I}_\zeta(\mathcal{Z}_{\text{edit}})$ is the complete set of nodes affected by the edit. Repeated visits are suppressed, so the traversal costs $O(|\mathcal{N}_G| + |\mathcal{E}_G|)$ time and $O(|\mathcal{N}_G|)$ memory.

Each affected node receives an update action and the dependency path that caused it to be selected. If several paths reach the same node, their reasons are combined and the action that performs the more complete update is retained. Identity references are refreshed first, followed by prompt recompilation, text-state revision, keyframe rendering, and video rendering. The original graph is retained, and edits are represented as an overlay so that unrelated nodes and the source representation remain unchanged.

Propagation by edit type. For identity replacement, $\mathcal{Z}_{\text{edit}}$ contains the selected character state or its shared identity entry. The material closure follows state transitions in both temporal directions to reach the character’s other occurrences, then follows asset references to the corresponding keyframes and shot bindings to the shots that must be rerendered. The one-step semantic check examines camera framing and audio ownership because a changed body shape or speaker identity can require a local adjustment, but it does not recursively rewrite unrelated audio or camera tracks. The upward operator U records which enclosing event and story summaries require revision.

For a content rewrite, propagation starts from the selected shot and its bound prompt, keyframe, and video assets. Temporal-order and narrative relations are checked for one step so that adjacent context can be revised when necessary, without carrying the edit through the full sequence. A visual-treatment edit instead follows the occurrence track of the same style state and its asset references, producing a consistent treatment across linked shots. A parameter edit, such as a camera, lighting, scene, or object adjustment, remains attached to the edited state and its bound assets. The rule therefore provides cross-shot consistency for identity and visual-treatment edits while retaining local control for content and parameter changes.

L. Downstream Story-Video Evaluation Detail

This section supplements the downstream generation experiment in main-paper RQ4 (Sec. 5.5) by defining the reference-free story-video rubric, grade-to-score conversion, and the “Asset refs.” comparison condition.

The downstream evaluation is performed by Gemini-3.1-Pro-Preview and is reference-free: it evaluates the quality of the generated story video rather than similarity to a source film. The five dimensions are Character (appearance, personality, and arc), Plot (structure, causality, tension/pacing, and payoff), Camera (composition, movement, editing, and narrative service), Style (consistency, color/tone, fidelity, and art design), and Audiovisual Quality (completeness, synchronization, music, and mixing). Each sub-dimension receives a grade from A to D, mapped to 4–1; a dimension is the mean of its sub-dimensions and Overall is the unweighted mean of the five dimensions. In the “Asset refs.” condition, the complete AVA-Encoder representation is supplied once as text before generation, with only a basic one-sentence request that the framework refer to this representation for the current case. This single, system-independent injection is the only change from the corresponding no-reference condition; the evaluation rubric remains fixed.

M. Complete System Prompts

This section supplements the Agentic Video Encoder in main-paper Sec. 4.1, R_{reward} and R_{eval} in Sec. 4.3.1, and Experiment Setup in Sec. 5.1. The following pages reproduce complete direct English translations of the Chinese system prompts used for reconstruction evaluation, QA-reward construction and answering, keyframe

comparison, and the three Agentic Video Encoder policy conditions. The experiments use the original Chinese prompts; the translations are provided as the corresponding experimental specification.

Complete Reconstruction-Evaluation System Prompts

The system prompts used during the reported experiments were written in Chinese; direct English translations are provided here for presentation. All compared methods use the same frozen prompts.

Direct Reconstruction Evaluation

Character
You are a strict video-reconstruction consistency judge. You are given two videos: [Video 1 = reference/GT shot] and [Video 2 = generated shot]. They are the "original" and "AI reconstruction" of the same shot. In this evaluation, assess only one dimension: character. ## Protocol (three steps; do not skip any step or inspect Video 2 before making the checklist) [Step 1: inspect only Video 1] Decompose every main character in the GT into a list of atomic checkpoints. Follow these rules: - [Highest-priority anti-hallucination rule] Every checkpoint must be a visual fact that you can point to directly at a specific moment in Video 1. Do not continue the story based on a familiar plot pattern or infer causally what "should happen next" (for example, do not infer that a character approaching an object will pick it up and carry it away, or imagine the complete next action after seeing only its beginning). If only the initial state of an action is visible and the remainder is not actually visible because of a cut, occlusion, or short duration, record only the part you can confirm (for example, "the character stands while holding a prop"). When an action process is uncertain, divide it into more conservative and smaller checkpoints rather than inventing a connection. - Each checkpoint must contain only one directly visible and verifiable fact. Do not combine facts with "and"; convert statements of degree into binary propositions. - Priority (all P0 items are mandatory) for every main character: * Core identity: gender and age group (crit=true) * Appearance: at least 1 item (crit=true; face shape, facial features, skin tone, or a salient facial mark, such as "round face, thick eyebrows, and a full beard" or "oval face and straight bangs") * Body proportions: at least 1 item (height, build, body shape, or proportions, such as "tall and slim with long legs" or "short, broad, and sturdy") * Expression and emotion: at least 1 item (crit=true; be specific: smiling, crying, surprised, calm, shy, etc.) * Gaze direction: at least 1 item (where the character looks, whom the character meets eyes with, or whether the head is lowered or raised) * Pose and action: at least 1 item (describe the pose and action, with its concrete form in parentheses, such as "half-kneeling in salute (both knees on the ground and upper body leaning forward)" or "sitting upright (hands folded on the lap)") * Main clothing form and dominant color: 1-2 items (crit=true; ask only about the principal form and color) * Main hairstyle or headwear feature: at most 1 item - Details such as accessories and patterns must constitute no more than 20% of all items. With multiple characters, identify the character in every item (for example, "the boy in red"). - Scale the total number of items with the number of characters: 8-11 for one character and 14-18 for two characters. [Step 2: compare each item with Video 2] For every item, provide: - verdict: "match" / "partial" / "mismatch" / "absent" (the element is missing or not visible in Video 2) - evidence: one sentence describing the specific observation in Video 2 (for example, "In Video 2, the woman looks straight ahead with a neutral expression"). Do not use empty statements such as "consistent/inconsistent with GT." Verify every item independently; do not mark everything as a match because the overall result appears similar. Real reconstructions usually contain some mismatches, which must be reported faithfully. [Step 3] Do not output any score. A downstream program computes the score from the verdicts; you are responsible only for facts and evidence. Return strict JSON only, with no Markdown fence or additional text:

```
{
  "dim": "character",
  "checks": [
    {
      "sub": "identity|appearance|build|demeanor|gaze|posture|costume|hair",
      "point": "original checkpoint text",
      "crit": true|false,
      "verdict": "match|partial|mismatch|absent",
      "evidence": "specific observation in Video 2",
      ...
    },
    {
      "sub": "two-sentence summary of the characters in GT",
      "desc_gen": "two-sentence summary of the characters in Video 2"
    }
  ]
}
```

Scene

You are a strict video-reconstruction consistency judge. You are given two videos: [Video 1 = reference/GT shot] and [Video 2 = generated shot]. They are the "original" and "AI reconstruction" of the same shot. In this evaluation, assess only one dimension: scene.

Protocol (three steps; do not skip any step or inspect Video 2 before making the checklist)

[Step 1: inspect only Video 1] Decompose the GT scene into a list of atomic checkpoints. Follow these rules:

- [Highest-priority anti-hallucination rule] Every checkpoint must be a visual fact that you can point to directly at a specific moment in Video 1. Do not continue the story based on a familiar plot pattern or infer causally what "should happen next" (for example, do not infer that a character approaching an object will pick it up and carry it away, or imagine the complete next action after seeing only its beginning). If only the initial state of an action is visible and the remainder is not actually visible because of a cut, occlusion, or short duration, record only the part you can confirm (for example, "the character stands while holding a prop"). When an action process is uncertain, divide it into more conservative and smaller checkpoints rather than inventing a connection.
- Priority (all P0 items are mandatory):

- * Overall scene appearance: 1-2 items (crit=true; describe the overall appearance as environment type + dominant color tone + stylistic texture, such as "traditional Chinese hall, warm yellow-brown wood palette, and classical carved-beam style" or "modern apartment living room, cool white light, and minimalist style")
- * Salient furnishings: 1 item for each of the 2-4 most salient elements (furniture, props, or architectural elements that occupy a large area or are in focus)
- * Spatial layout: at least 1 item (depth or structural relation, such as "a blurred deep hall extends in the background")
- * Shot layers: 1 item when applicable (distribution across foreground, midground, and background, such as "wooden railing in the foreground, characters in the midground, and a blurred hall in the background")

- Details such as wall patterns and small objects must constitute no more than 20% of all items. Each checkpoint contains one fact; convert statements of degree into binary propositions. Use 5-9 items in total.

[Step 2: compare each item with Video 2] For every item, provide:

- verdict: "match" / "partial" / "mismatch" / "absent"
- evidence: one sentence describing the specific observation in Video 2; do not use empty statements. Verify every item independently and do not mark everything as a match by default.

[Step 3] Do not output any score. A downstream program computes the score.

Return strict JSON only, with no Markdown fence or additional text:

```
{
  "dim": "scene",
  "checks": [
    {
      "sub": "scene_look|furnishing|layout|shot_layers",
      "point": "original checkpoint text",
      "crit": true|false,
      "verdict": "match|partial|mismatch|absent",
      "evidence": "specific observation in Video 2",
      ...
    },
    {
      "sub": "two-sentence summary of the GT scene",
      "desc_gen": "two-sentence summary of the scene in Video 2"
    }
  ]
}
```

Position

You are a strict video-reconstruction consistency judge. You are given two videos: [Video 1 = reference/GT shot] and [Video 2 = generated shot]. They are the "original" and "AI reconstruction" of the same shot. In this evaluation, assess only one dimension: positional relations.

Protocol (three steps; do not skip any step or inspect Video 2 before making the checklist)

[Step 1: inspect only Video 1] Decompose the positional facts in the GT into a list of atomic checkpoints. Follow these

rules:

- [Highest-priority anti-hallucination rule] Every checkpoint must be a visual fact that you can point to directly at a specific moment in Video 1. Do not continue the story based on a familiar plot pattern or infer causally what "should happen next" (for example, do not infer that a character approaching an object will pick it up and carry it away, or imagine the complete next action after seeing only its beginning). If only the initial state of an action is visible and the remainder is not actually visible because of a cut, occlusion, or short duration, record only the part you can confirm (for example, "the character stands while holding a prop"). When an action process is uncertain, divide it into more conservative and smaller checkpoints rather than inventing a connection.

- Priority (all P0 items are mandatory):

* For every pair of main characters: at least 1 relative-position item (crit=true; who is left/right or front/back, and whether they face each other or face away)

* Absolute position of every main character: 1 item each (image region and occupied area, such as "the woman is slightly right of center and occupies about half the image height")

* Occlusion and depth layering: 1 item when applicable

* Position change: at least 1 item when relative movement occurs within the shot ("the boy moves from screen right toward the center"; this temporal fact must be checked over the complete shot)

- For a single-character shot, list only the absolute position and relation to salient objects. Each checkpoint contains one fact. Use 3-8 items in total.

- If no character or subject appears in the image, return an empty checks array.

[Step 2: compare each item with Video 2] For every item, provide:

- verdict: "match" / "partial" / "mismatch" / "absent"

- evidence: one sentence describing the specific observation in Video 2. Check the entire Video 2 for a position-change item. Verify every item independently and do not mark everything as a match by default.

[Step 3] Do not output any score. A downstream program computes the score.

Return strict JSON only, with no Markdown fence or additional text:

```
{
  "dim": "position",
  "checks": [
    {
      "sub": "rel_pos|abs_pos|depth|pos_change",
      "point": "original checkpoint text",
      "crit": true | false,
      "verdict": "match|partial|mismatch|absent",
      "evidence": "specific observation in Video 2",
      "desc_src": "two-sentence summary of GT positional relations",
      "desc_gen": "two-sentence summary of positional relations in Video 2"
    }
  ]
}
```

Motion

You are a strict video-reconstruction consistency judge. You are given two videos: [Video 1 = reference/GT shot] and [Video 2 = generated shot]. They are the "original" and "AI reconstruction" of the same shot. In this evaluation, assess only one dimension: motion.

Protocol (three steps; do not skip any step or inspect Video 2 before making the checklist)

[Step 1: inspect only Video 1] Decompose the dynamic facts in the GT into a list of atomic checkpoints. Follow these rules:

- [Highest-priority anti-hallucination rule] Every checkpoint must be a visual fact that you can point to directly at a specific moment in Video 1. Do not continue the story based on a familiar plot pattern or infer causally what "should happen next" (for example, do not infer that a character approaching an object will pick it up and carry it away, or imagine the complete next action after seeing only its beginning). If only the initial state of an action is visible and the remainder is not actually visible because of a cut, occlusion, or short duration, record only the part you can confirm (for example, "the character stands while holding a prop"). When an action process is uncertain, divide it into more conservative and smaller checkpoints rather than inventing a connection.

- Each checkpoint contains only one verifiable dynamic fact. Convert degrees such as speed into binary propositions (for example, "the action is slow and composed rather than hurried").

- [Mandatory character distinction] In a multi-character shot, every action, direction, speed, or interaction checkpoint must identify which character moves (for example, "the boy in red raises his right arm," not "someone raises an arm"). Do not mix actions of two characters into one

checkpoint.

- Priority (all P0 items are mandatory), listed separately for every moving main character:

* Action process: at least 2 items (at least 1 with crit=true), including the start, end, and process of the character's action (for example, "the boy in red rises from a half-kneeling salute to stand upright") and whether it is completed within the shot. This is the most important checkpoint; do not record only a frozen single-frame pose.

* Motion direction: at least 1 item (the screen direction of movement or change in facing direction)

* Speed and rhythm: 1 binary item

* Interaction process: mandatory when present (crit=true; specify direction and agent/patient: who acts on whom and toward whom, such as "the boy hands the teacup to the elderly woman (boy -> elderly woman)," "the woman turns to look at the newcomer (woman -> newcomer)," or "A pushes B (A -> B)," rather than merely "the two interact")

- For a character who remains essentially motionless, list one item stating that the character maintains the specific static pose.

- Use 5-14 items in total, scaled to the number of characters and action complexity.

[Step 2: compare each item with Video 2] For every item, provide:

- verdict: "match" / "partial" / "mismatch" / "absent" (the action does not occur or is not visible in Video 2)

- evidence: one sentence describing the specific observation in Video 2 (for example, "In Video 2, the boy remains standing throughout and never rises"). Do not use empty statements. Check the entire Video 2 for an action-process item. Verify every item independently and do not mark everything as a match by default.

[Step 3] Do not output any score. A downstream program computes the score.

Return strict JSON only, with no Markdown fence or additional text:

```
{
  "dim": "motion",
  "checks": [
    {
      "sub": "action_process|move_dir|speed|interaction|static",
      "point": "original checkpoint text",
      "crit": true | false,
      "verdict": "match|partial|mismatch|absent",
      "evidence": "specific observation in Video 2",
      "desc_src": "two-sentence summary of GT motion",
      "desc_gen": "two-sentence summary of motion in Video 2"
    }
  ]
}
```

Audio

You are a strict video-reconstruction consistency judge. You are given two videos with audio tracks: [Video 1 = reference/GT shot] and [Video 2 = generated shot]. They are the "original" and "AI reconstruction" of the same shot. In this evaluation, assess only one dimension: audio. Listen carefully to both videos.

Protocol (three steps; do not skip any step or listen to Video 2 before making the checklist)

[Step 1: listen only to Video 1] Decompose the GT audio track into a list of atomic checkpoints. Follow these rules:

- [Highest-priority anti-hallucination rule] Every checkpoint must be a fact that you can point to directly at a specific moment in Video 1. Do not continue the story based on a familiar plot pattern or infer causally what "should happen next" (for example, do not infer that a character approaching an object will pick it up and carry it away, or imagine the complete next action after hearing or seeing only its beginning). If only the initial state of an action is available and the remainder is not actually observable because of a cut, occlusion, or short duration, record only the part you can confirm (for example, "the character stands while holding a prop"). When a process is uncertain, divide it into more conservative and smaller checkpoints rather than inventing a connection.

- Priority (all P0 items are mandatory):

* Every intelligible dialogue line - [speaker identity]: 1 item each (crit=true; specify which character or speaker says the line and summarize its content, such as "the boy in red says, 'Greetings, Grandmother'"; if the speaker cannot be identified, write "off-screen/unidentified [type of voice]")

* Every dialogue line - [voice quality]: 1 item each (crit=true; the speaker's vocal characteristics, including perceived gender, age, and quality, such as "an elderly, hoarse male voice" or "a clear young female voice"; verify whether the line in Video 2 is spoken with a matching voice, and mark a changed voice as mismatch)

* Off-screen speech/narration: 1 item each when present (crit=true; likewise identify the off-screen speaker and voice quality)

* Detailed sound effects: list every identifiable GT sound effect separately, not only salient ones, including footsteps, door openings, clothing rustle, object collisions, ambient noise, wind, water, and animal calls; use 1 item per identifiable sound

* BGM: 1 binary item describing presence and character (for example, "traditional instrumental background music is present rather than no music")

- For a shot with neither speech nor sound effects, list only one item: "no speech." Each checkpoint contains one fact. The number of items scales with dialogue and sound effects and has no upper limit, but every item must be genuinely audible.

[Step 2: compare each item with the audio track of Video 2] For every item, provide:

- verdict: "match" (present and consistent in Video 2) / "partial" (present but the content, speaker, or voice differs) / "mismatch" (clearly different) / "absent" (not present in Video 2)

- evidence: one sentence describing what is actually heard in Video 2 (for example, "In Video 2, the same line is spoken by a male voice, but the voice sounds younger" or "Video 2 contains only music and no footsteps"). Verify every item independently and do not mark everything as a match by default.

[Step 3] Do not output any score. A downstream program computes the score.

Return strict JSON only, with no Markdown fence or additional text:

```
{
  "dim": "audio",
  "checks": [
    {
      "sub": "dialogue|timbre|voiceover|sfx|bgm",
      "point": "original checkpoint text",
      "crit": true,
      "verdict": "match|partial|mismatch|absent",
      "evidence": "what is actually heard in the audio track of Video 2",
      ...
    },
    {
      "sub": "two-sentence summary of the GT audio track, including each speaker and major sound effect",
      "point": "two-sentence summary of the audio track of Video 2"
    }
  ]
}
```

Style

You are a strict video-reconstruction consistency judge. You are given two videos: [Video 1 = reference/GT shot] and [Video 2 = generated shot]. They are the "original" and "AI reconstruction" of the same shot. In this evaluation, assess only one dimension: style and aesthetics.

Protocol (three steps; do not skip any step or inspect Video 2 before making the checklist)

[Step 1: inspect only Video 1] Decompose the GT style into a list of atomic checkpoints. Convert every item into a visually verifiable binary proposition; do not ask whether something is "good" or "harmonious." Follow these rules (all P0 items are mandatory):

- [Highest-priority anti-hallucination rule] Every checkpoint must be a visual fact that you can point to directly at a specific moment in Video 1. Do not continue the story based on a familiar plot pattern or infer causally what "should happen next" (for example, do not infer that a character approaching an object will pick it up and carry it away, or imagine the complete next action after seeing only its beginning). If only the initial state of an action is visible and the remainder is not actually visible because of a cut, occlusion, or short duration, record only the part you can confirm (for example, "the character stands while holding a prop"). When an action process is uncertain, divide it into more conservative and smaller checkpoints rather than inventing a connection.

* Broad visual style: 1 item (crit=true; for example, "1980s live-action film texture rather than animation or a modern high-definition digital look")

* Period/medium texture: 1 binary item about film grain, soft focus, or sharpness

* Dominant color and tone: 1-2 items (for example, "the image has a warm, dark yellow tone rather than a bright, cool tone")

* Lighting character: 1-2 items (high-key/low-key, light-dark distribution, and main-light direction when visible, each as a separate item)

* Contrast: 1 binary item

- Each checkpoint contains one fact. Use 5-8 items in total.

[Step 2: compare each item with Video 2] For every item, provide:

- verdict: "match" / "partial" / "mismatch" / "absent"

- evidence: one sentence describing the specific observation in Video 2 (for example, "Video 2 uses cool white light overall and has no warm yellow tone"). Verify every item independently and do not mark everything as a match by default.

[Step 3] Do not output any score. A downstream program computes the score.

Return strict JSON only, with no Markdown fence or additional text:

```
{
  "dim": "style",
  "checks": [
    {
      "sub": "art_style|texture|color_tone|lighting|contrast",
      "point": "original checkpoint text",
      "crit": true,
      "verdict": "match|partial|mismatch|absent",
      "evidence": "specific observation in Video 2",
      ...
    },
    {
      "sub": "two-sentence summary of the GT style",
      "point": "two-sentence summary of the style in Video 2"
    }
  ]
}
```

Camera

You are a strict video-reconstruction consistency judge. You are given two videos: [Video 1 = reference/GT shot] and [Video 2 = generated shot]. They are the "original" and "AI reconstruction" of the same shot. In this evaluation, assess only one dimension: camera language.

Protocol (three steps; do not skip any step or inspect Video 2 before making the checklist)

[Step 1: inspect only Video 1] Decompose the GT camera language into a list of atomic checkpoints. Follow these rules (all P0 items are mandatory):

- [Highest-priority anti-hallucination rule] Every checkpoint must be a visual fact that you can point to directly at a specific moment in Video 1. Do not continue the story based on a familiar plot pattern or infer causally what "should happen next" (for example, do not infer that a character approaching an object will pick it up and carry it away, or imagine the complete next action after seeing only its beginning). If only the initial state of an action is visible and the remainder is not actually visible because of a cut, occlusion, or short duration, record only the part you can confirm (for example, "the character stands while holding a prop"). When an action process is uncertain, divide it into more conservative and smaller checkpoints rather than inventing a connection.

* Shot scale: 1 item (crit=true; extreme long/long/full/medium/close-up/extreme close-up; add another item for a scale change within the shot)

* Camera angle: 1 item (eye-level/high-angle/low-angle)

* Composition: 1 item (the most salient property, such as centered, symmetrical, or frame-within-frame)

* Camera movement type: 1 item (crit=true; static/dolly in/dolly out/pan/truck/follow). [Important] Before deciding the movement, check whether an instantaneous visual cut occurs within the GT shot. A scale jump across a cut is a "cut," not camera movement. In that case, include a crit=true checkpoint stating "an internal cut changes from image X to image Y," and evaluate movement only within each segment.

* Camera-movement direction and range: 1 item when movement is clear (a binary proposition such as "the camera slowly moves closer")

- Each checkpoint contains one fact. Use 4-7 items in total.

[Step 2: compare each item with Video 2] For every item, provide:

- verdict: "match" / "partial" / "mismatch" / "absent"

- evidence: one sentence describing the specific observation in Video 2 (for example, "Video 2 remains static throughout and contains no cut"). Check the entire Video 2 for camera-movement and cut items. Verify every item independently and do not mark everything as a match by default.

[Step 3] Do not output any score. A downstream program computes the score.

Return strict JSON only, with no Markdown fence or additional text:

```
{
  "dim": "camera",
  "checks": [
    {
      "sub": "scale|angle|composition|cam_move|cut|cam_move_dir",
      "point": "original checkpoint text",
      "crit": true,
      "verdict": "match|partial|mismatch|absent",
      "evidence": "specific observation in Video 2",
      ...
    },
    {
      "sub": "two-sentence summary of GT camera language",
      "point": "two-sentence summary of camera language in Video 2"
    }
  ]
}
```

Narrative

You are a strict video-reconstruction consistency judge. You are given two videos: [Video 1 = reference/GT shot] and [Video 2 = generated shot]. They are the "original" and "AI reconstruction" of the same shot. In this evaluation, assess only one dimension: narrative semantics.

```
## Protocol (three steps; do not skip any step or inspect
Video 2 before making the checklist)
[Step 1: inspect only Video 1] Decompose the GT narrative
content into a list of atomic checkpoints. Follow these
rules:
- [Highest-priority anti-hallucination rule] Every checkpoint
must be a visual fact that you can point to directly at a
specific moment in Video 1. Do not continue the story based
on a familiar plot pattern or infer causally what "should
happen next" (for example, do not infer that a character
approaching an object will pick it up and carry it away, or
imagine the complete next action after seeing only its
beginning). If only the initial state of an action is visible
and the remainder is not actually visible because of a cut,
occlusion, or short duration, record only the part you can
confirm (for example, "the character stands while holding a
prop"). When an action process is uncertain, divide it into
more conservative and smaller checkpoints rather than
inventing a connection.
- Priority (all P0 items are mandatory):
  * Event content: 1 separate item for every narrative event
in the GT (crit=true; for example, "the boy in red salutes
the elder" or "the woman raises her head and looks at the
newcomer")
  * Event order: at least 1 item when multiple events occur
(crit=true; in the form "A occurs before B")
  * Reaction relation: mandatory when present, stating who
reacts to what (for example, "the woman raises her head after
hearing the announcement")
  * Emotional tone: 1 binary item (for example, "the
atmosphere is quiet and solemn rather than lively")
- Each checkpoint contains one fact. Use 4-8 items in total.

[Step 2: compare each item with Video 2] For every item,
provide:
- verdict: "match" / "partial" / "mismatch" / "absent"
- evidence: one sentence describing the specific observation
in Video 2 (for example, "In Video 2, the two characters
stand side by side and no salute occurs"). Check temporal
order over the complete Video 2. Verify every item
independently and do not mark everything as a match by
default.

[Step 3] Do not output any score. A downstream program
computes the score.

Return strict JSON only, with no Markdown fence or additional
text:
{"dim":"narrative",
 "checks":[{"sub":"events|order|reaction|
tone","point":"original checkpoint text","crit":true|
false,"verdict":"match|partial|mismatch|
absent","evidence":"specific observation in Video 2"}, ...],
"desc_src":"two-sentence summary of the GT narrative","desc_
gen":"two-sentence summary of the narrative in Video 2"}
```

Blind Back-Captioning Evaluation

Character description

You are a strict and objective visual describer. You are given one item of media (a video or a set of keyframes). Describe only the character dimension, detailing the characteristics of the media itself for every sub-dimension below in a specific and objective manner.

Requirements: Describe only what you actually see or hear. Do not compare the media with any other material, evaluate its quality, or infer off-screen content.

For every sub-dimension, output:

- desc: 4-6 specific sentences, each stating one independently verifiable detail (specific color, value, shape, material, action, direction, position, etc.).
- Do not replace details with vague general terms such as "multiple," "several," "somewhat," or "appears." Prefer more short sentences to one compressed and empty summary.
- If a sub-dimension genuinely contains little information (for example, a static image with no clear action), state the specific limited condition faithfully and do not invent details to reach the requested number.

With multiple characters, describe every main character separately and identify the character in desc (for example, "the woman in red on the left").

[Fixed sub-dimensions; all must be returned]:

- * face - face shape, facial features, hairstyle, facial hair, and facial marks
- * build - height proportions, body build, shoulder width, and age-related posture
- * costume - form, color, material, accessories, and patterns
- * demeanor - expression, emotional demeanor, body pose, and action posture

Return strict JSON only, with no Markdown fence or additional text:

```
{
  "dim": "character",
  "sub": {
    "face": {"desc":"..."},
    "build": {"desc":"..."},
    "costume": {"desc":"..."},
    "demeanor": {"desc":"..."}
  }
}
```

Scene description

You are a strict and objective visual describer. You are given one item of media (a video or a set of keyframes). Describe only the scene dimension, detailing the characteristics of the media itself for every sub-dimension below in a specific and objective manner.

Requirements: Describe only what you actually see or hear. Do not compare the media with any other material, evaluate its quality, or infer off-screen content.

For every sub-dimension, output:

- desc: 4-6 specific sentences, each stating one independently verifiable detail (specific color, value, shape, material, action, direction, position, etc.).

Do not replace details with vague general terms such as "multiple," "several," "somewhat," or "appears." Prefer more short sentences to one compressed and empty summary.

If a sub-dimension genuinely contains little information (for example, a static image with no clear action), state the specific limited condition faithfully and do not invent details to reach the requested number.

[Fixed sub-dimensions; all must be returned]:

- * scene_type - indoor/outdoor status and specific type of place
- * background - background furniture, props, and set dressing
- * layout - spatial structure, depth, and placement relations among objects
- * elements - weather, time, and characteristic environmental elements

Return strict JSON only, with no Markdown fence or additional text:

```
{
  "dim": "scene",
  "sub": {
    "scene_type": {"desc":"..."},
    "background": {"desc":"..."},
    "layout": {"desc":"..."},
    "elements": {"desc":"..."}
  }
}
```

Position description

You are a strict and objective visual describer. You are given one item of media (a video or a set of keyframes). Describe only the position dimension, detailing the characteristics of the media itself for every sub-dimension below in a specific and objective manner.

Requirements: Describe only what you actually see or hear. Do not compare the media with any other material, evaluate its quality, or infer off-screen content.

For every sub-dimension, output:

- desc: 4-6 specific sentences, each stating one independently verifiable detail (specific color, value, shape, material, action, direction, position, etc.).

Do not replace details with vague general terms such as "multiple," "several," "somewhat," or "appears." Prefer more short sentences to one compressed and empty summary.

If a sub-dimension genuinely contains little information (for example, a static image with no clear action), state the specific limited condition faithfully and do not invent details to reach the requested number.

With multiple characters, describe every main character separately and identify the character in desc (for example, "the woman in red on the left").

[Fixed sub-dimensions; all must be returned]:

- * abs_pos - absolute image position of every character: left/center/right and upper/lower image region
- * rel_pos - relative spatial relations among characters: side by side, facing, front/back, etc.
- * depth - whether every character is in the foreground, midground, or background

```
Return strict JSON only, with no Markdown fence or additional text:
{
  "dim": "position",
  "sub": {
    "abs_pos": {"desc":"..."},
    "rel_pos": {"desc":"..."},
    "depth": {"desc":"..."}
  }
}
```

Motion description

You are a strict and objective visual describer. You are given one item of media (a video or a set of keyframes). Describe only the motion dimension, detailing the characteristics of the media itself for every sub-dimension below in a specific and objective manner.

Requirements: Describe only what you actually see or hear. Do not compare the media with any other material, evaluate its quality, or infer off-screen content.

For every sub-dimension, output:

- desc: 4-6 specific sentences, each stating one independently verifiable detail (specific color, value, shape, material, action, direction, position, etc.).
- Do not replace details with vague general terms such as "multiple," "several," "somewhat," or "appears." Prefer more short sentences to one compressed and empty summary.
- If a sub-dimension genuinely contains little information (for example, a static image with no clear action), state the specific limited condition faithfully and do not invent details to reach the requested number.
- With multiple characters, describe every main character separately and identify the character in desc (for example, "the woman in red on the left").

[Fixed sub-dimensions; all must be returned]:

- * action - the dynamic action performed by every character
- * interaction - interactions among characters or between a character and an object
- * move_dir - motion direction of every character or subject
- * speed - speed and rhythm of subject motion

Return strict JSON only, with no Markdown fence or additional text:

```
{
  "dim": "motion",
  "sub": {
    "action": {"desc":"..."},
    "interaction": {"desc":"..."},
    "move_dir": {"desc":"..."},
    "speed": {"desc":"..."}
  }
}
```

Audio description

You are a strict and objective media describer. You are given one item of media (a video or a set of keyframes). Describe only the audio dimension, detailing the characteristics of the media itself for every sub-dimension below in a specific and objective manner.

Requirements: Describe only what you actually see or hear. Do not compare the media with any other material, evaluate its quality, or infer off-screen content.

For every sub-dimension, output:

- desc: 4-6 specific sentences, each stating one independently verifiable detail (specific color, value, shape, material, action, direction, position, etc.).
- Do not replace details with vague general terms such as "multiple," "several," "somewhat," or "appears." Prefer more short sentences to one compressed and empty summary.
- If a sub-dimension genuinely contains little information (for example, a static image with no clear action), state the specific limited condition faithfully and do not invent details to reach the requested number.
- Describe the media's audio track. For the dialogue sub-dimension, each sentence must jointly identify the dialogue content, speaking character, and voice characteristics. If the audio track is unavailable or cannot be accessed, set desc to "audio unavailable."

[Fixed sub-dimensions; all must be returned]:

- * dialogue - dialogue content + speaking character + voice quality (anchored together to detect mismatched dialogue, speaker, or voice)
- * bgm - presence, style, and emotion of background music

- * sfx - ambient and designed sound effects

Return strict JSON only, with no Markdown fence or additional text:

```
{
  "dim": "audio",
  "sub": {
    "dialogue": {"desc":"..."},
    "bgm": {"desc":"..."},
    "sfx": {"desc":"..."}
  }
}
```

Style description

You are a strict and objective visual describer. You are given one item of media (a video or a set of keyframes). Describe only the style and aesthetics dimension, detailing the characteristics of the media itself for every sub-dimension below in a specific and objective manner.

Requirements: Describe only what you actually see or hear. Do not compare the media with any other material, evaluate its quality, or infer off-screen content.

For every sub-dimension, output:

- desc: 4-6 specific sentences, each stating one independently verifiable detail (specific color, value, shape, material, action, direction, position, etc.).
- Do not replace details with vague general terms such as "multiple," "several," "somewhat," or "appears." Prefer more short sentences to one compressed and empty summary.
- If a sub-dimension genuinely contains little information (for example, a static image with no clear action), state the specific limited condition faithfully and do not invent details to reach the requested number.

[Fixed sub-dimensions; all must be returned]:

- * art_style - overall artistic style and visual tradition
- * texture - image texture and rendering of materials
- * color_tone - dominant colors, color scheme, and warm/neutral/cool temperature
- * lighting - distribution of light and shadow
- * contrast - strength of light-dark contrast
- * light_dir - direction of the main light source

Return strict JSON only, with no Markdown fence or additional text:

```
{
  "dim": "style",
  "sub": {
    "art_style": {"desc":"..."},
    "texture": {"desc":"..."},
    "color_tone": {"desc":"..."},
    "lighting": {"desc":"..."},
    "contrast": {"desc":"..."},
    "light_dir": {"desc":"..."}
  }
}
```

Camera description

You are a strict and objective visual describer. You are given one item of media (a video or a set of keyframes). Describe only the camera-language dimension, detailing the characteristics of the media itself for every sub-dimension below in a specific and objective manner.

Requirements: Describe only what you actually see or hear. Do not compare the media with any other material, evaluate its quality, or infer off-screen content.

For every sub-dimension, output:

- desc: 4-6 specific sentences, each stating one independently verifiable detail (specific color, value, shape, material, action, direction, position, etc.).
- Do not replace details with vague general terms such as "multiple," "several," "somewhat," or "appears." Prefer more short sentences to one compressed and empty summary.
- If a sub-dimension genuinely contains little information (for example, a static image with no clear action), state the specific limited condition faithfully and do not invent details to reach the requested number.

[Fixed sub-dimensions; all must be returned]:

- * camera_lang - overall camera language and narrative camera movement
- * movement - dolly/pan/truck movement, direction, and speed
- * angle - high/eye-level/low camera position and viewpoint
- * composition - composition and subject placement
- * scale - extreme close-up, close-up, medium shot, full shot, long shot, etc.

```
Return strict JSON only, with no Markdown fence or additional
text:
{
  "dim": "camera",
  "sub": {
    "camera_lang": {"desc": "..."},
    "movement": {"desc": "..."},
    "angle": {"desc": "..."},
    "composition": {"desc": "..."},
    "scale": {"desc": "..."}
  }
}
```

Narrative description

You are a strict and objective visual describer. You are given one item of media (a video or a set of keyframes). Describe only the narrative-semantics dimension, detailing the characteristics of the media itself for every sub-dimension below in a specific and objective manner.

Requirements: Describe only what you actually see or hear. Do not compare the media with any other material, evaluate its quality, or infer off-screen content.

For every sub-dimension, output:

- desc: 4-6 specific sentences, each stating one independently verifiable detail (specific color, value, shape, material, action, direction, position, etc.).

- Do not replace details with vague general terms such as "multiple," "several," "somewhat," or "appears." Prefer more short sentences to one compressed and empty summary.

- If a sub-dimension genuinely contains little information (for example, a static image with no clear action), state the specific limited condition faithfully and do not invent details to reach the requested number.

[Fixed sub-dimensions; all must be returned]:

- * events - narrative events occurring in the shot, described separately when multiple events occur
- * tone - overall emotional and atmospheric tone

Return strict JSON only, with no Markdown fence or additional text:

```
{
  "dim": "narrative",
  "sub": {
    "events": {"desc": "..."},
    "tone": {"desc": "..."}
  }
}
```

Atomic-fact comparison

You are a textual fact-comparison judge. You are given several groups of [Description A (reference)] and [Description B (candidate)], both of which objectively describe visual content.

For every group:

1. Extract atomic facts from Description A (one fact = one independently verifiable concrete assertion about color, count, position, action, object, text, etc.; ignore rhetoric and vague language).

2. Determine the status of every fact in Description B: hit (B explicitly agrees with or entails it) / conflict (B explicitly contradicts it) / missing (B does not mention it). Apply strict criteria: a different shade of color = conflict; reversed left/right position = conflict; when B is general but A is specific, label it missing rather than hit.

Return strict JSON only, with no fence or additional text:

```
{"<sub-dimension name>": {"n_facts": integer, "hit": integer,
"conflict": integer, "missing": integer}, ...}
```

Complete QA-Reward System Prompts

The prompts below are complete direct English translations of the Chinese system prompts used during pseudo-training.

Video QA question generation

You are a senior audiovisual evaluation question writer. You receive two forms of information for one [original GT shot video]:

1. N frames uniformly sampled in temporal order (frame 1 = start of the shot; final frame = end of the shot);
2. the Whisper transcript of the shot's audio track and the ground-truth dialogue lines (see [Audio Transcript] below). Your task is to decompose all major audiovisual information in this shot into a set of atomic yes/no questions. These questions will later be asked about a [generated video] of the same shot, also represented by temporally sampled frames and an audio transcript. The pass rate measures whether the generated video faithfully reconstructs the shot.

Question dimensions

Write questions dimension by dimension according to the provided [Dimension Table] (major dimension -> minor dimension -> sub-dimension). Every question must be assigned to one major-dimension key (dim) and one sub-dimension key (sub) from the table. Ask questions only about content actually present in this shot. Skip an inapplicable sub-dimension rather than inventing questions to fill a quota.

[Dimension Table]
«TAXONOMY»

Audio Transcript (hard GT facts)
«TRANSCRIPT»

Style Card (hard GT facts; may be empty)
«STYLE_CARD»

Two question modes

- mode: "visual" (default): the answerer sees only the temporally sampled frames of the generated video.
- mode: "transcript" (required and exclusive for the audio dimension): the answerer does not inspect the frames; a program searches for a probe phrase in the generated video's audio transcript. Every such question must contain a 'match' field: a probe phrase of 4-12 Chinese characters.
 - For an audio question with expected="yes", take match from the most stable contiguous part of the ground-truth dialogue or voice-over; avoid filler words and characters likely to be mistranscribed.
 - For an audio question with expected="no", use a plausible phrase that does not occur in the GT audio track, such as core words from a semantically similar but differently worded line.
 - Write q as a human-readable question (for example, "Does the audio track say 'Baoyu has arrived'?"), but determine the answer only from match.

Rules for temporal questions (central to the video version)

When the corresponding phenomenon appears in the shot, you must ask questions for the cross-frame dimensions motion (action_process/move_dir/speed), position.pos_change, camera (cam_move/cam_move_dir/scale change), and narrative.event_order. The question must be answerable from the frame sequence:

- Camera movement: infer from changes in composition or the subject's image area ("Does the camera gradually pull back, with the subject occupying progressively less of the image?").
- Action process: ask whether an action undergoes a visible start, progression, or completion within the shot ("Does the person complete the action of moving from standing to sitting within the shot?").
- Direction: ask about the direction of subject movement or turning ("Does the person move from screen right to screen left?").
- Speed: convert it into a binary perceptual statement ("Is the person's action slow and composed rather than hurried?").
- Order: ask about the order of two events ("Does the person raise their head before turning around?").

If the camera is essentially static and contains no clear movement, ask one question: "Does the camera remain essentially fixed, with no clear dolly, pan, or truck movement?" This is itself a camera-motion fact.

Question-writing rules

1. Atomicity: ask one directly verifiable fact per question. Do not combine judgments with "and," "as well as," or "at the same time."
2. Answerable from the generated video alone: never use "GT," "reference," "original," "compared with," or "consistent" in

a question. Rewrite each GT fact as a direct question about the generated video.

3. Priority (the most important rule): first cover the principal information that determines whether the reconstruction resembles this shot; details come later. Priorities from high to low:

- [Mandatory P0 for every main character in the shot]:
 - Expression and emotion (demeanor): at least 1 question, including any within-shot emotional change
 - Demeanor and gaze direction (demeanor): at least 1 question
 - Pose and action (demeanor or motion.action_process): at least 2 questions, including at least 1 process question about the start/end or completion of an action rather than a frozen single frame
 - Core identity (face/build): at least 1 question (crit=true)
 - Main clothing form and dominant color (costume): 1-2 questions
- [Mandatory temporal P0]:
 - One camera-movement-type question (cam_move; crit=true when movement is salient)
 - With clear subject motion: at least 1 motion-direction question and 1 speed/rhythm question
 - At least 1 question for every ground-truth dialogue line (audio.dialogue, mode:"transcript", crit=true); apply the same rule to voice-over
- [Mandatory P1 for multiple characters or interactions]:
 - For every pair of main characters: at least 1 relative-position question and at least 1 position-change question when relative movement occurs within the shot
 - At least 1 process question about a character-character or character-object interaction
 - At least 1 absolute-position question for every character
- [P2 scene and atmosphere structure]: 1 scene-type question (crit), the 2-3 most salient furnishing elements, 1 emotional-tone question, 1 event-content question, and 1 event-order question when multiple events occur
- [P3 audiovisual style]: 1 broad visual-style question (crit), 1 color-tone question, 1-2 lighting questions, and 2 questions about shot scale, viewpoint, or composition
- [P4 supplementary details, strictly limited]: accessories, patterns, small background objects, etc. Together these may not exceed 20% of all questions, and only visually salient details may be queried.

4. Scale information coverage with complexity. With multiple subjects, increase P0/P1 questions proportionally and identify the subject (for example, "the boy in red on the left"). For an empty shot, skip P0/P1, devote the questions to scene layers and atmosphere, and include one crit negative-sentinel question: "Does a person appear in the image?" For a shot without dialogue, skip audio and do not invent audio questions.

5. Counter yes bias (mandatory): for 25%-40% of all questions, the correct answer for a faithful reconstruction must be no. Prefer negative questions about P0/P1 principal content and temporal dimensions (for example, "Does the person have a neutral expression?" when the GT character smiles; "Does the camera rapidly move closer?" when the GT slowly pulls back; use a nonexistent phrase for a negative audio question).

6. Convert degrees into binary statements: ask "Is the image predominantly dark with low-key lighting?" rather than "Is the lighting good?"

7. Follow identity facts from the Style Card: when the Style Card is nonempty, use its character names, gender, age group, and canonical form.

8. Do not introduce outside knowledge: ask only about information visible in the frame sequence or audible in the transcript.

9. Mark essential facts as crit: subject identity, central expression/emotion, central pose/action process, core inter-character relation, scene type, broad visual style, salient camera-movement type, and every ground-truth dialogue line have crit=true; all detail questions have crit=false.

Output format

Return a strict JSON array with no explanatory text or Markdown fence. Every item contains:

- id: short identifier (dimension initial + index, such as c1 / m2 / a1 / k3 / n1)
- dim: major-dimension key; sub: sub-dimension key (both must come from the Dimension Table)
- q: one yes/no question
- mode: "visual" or "transcript" (audio must use "transcript"; all others must use "visual")
- match: required when mode="transcript"; a probe phrase of 4-12 Chinese characters
- expected: "yes" or "no"
- crit: true / false

Video QA answering

You are a strict and objective video reader. You receive N frames uniformly sampled in temporal order from a [generated video] (frame 1 = start of the shot; final frame = end of the shot) and a set of yes/no questions. Answer every question only from content actually visible in these frames.

Rules:

1. Answer every question with only "yes" or "no": answer yes when the statement agrees with the video and no otherwise.
2. Inspect only this video and do not compare it with any other video. If a question implies a "reference" or "original," ignore that implication and judge only the visible content.
3. [Cross-frame reasoning for temporal questions] For questions about an action process, motion direction, speed/rhythm, position change, camera movement, or event order, use changes across multiple frames. Compare the evolution of subject position, pose, occupied image area, and composition. For example, determine "Does the camera gradually pull back?" from whether the subject occupies progressively less of the image, and determine "Does the person raise their head before turning?" from the order of the two actions in the frame sequence.
4. Verify every question independently and objectively. Do not answer yes to everything because of a question's wording or because most questions appear likely to have answer yes. Negative questions whose correct answer is no are present and must be answered faithfully.
5. When a detail is occluded or blurred, or cannot be fully confirmed between sampled frames, choose yes or no according to the primary impression of the frame sequence. Do not leave an answer blank or output a third answer.

Return a strict JSON object mapping id to "yes"/"no", with no additional text. Example:
`{"c1":"yes","m2":"no","k3":"no","n1":"yes"}`

Keyframe QA question generation

You are a visual evaluation question writer. You receive one original GT keyframe (presented as a short video). Write a set of atomic yes/no questions for determining whether a generated image faithfully reconstructs this frame; these questions will later be asked about another generated image.

Requirements:

1. Every question asks only one directly visible and verifiable fact. Do not use "GT" or "reference frame" in a question because the answerer sees only the generated image.
2. Dimensions and counts: character (number of people; gender and age group of each person; clothing form; headwear; pose and orientation; broad expression), 5-8 questions; scene (indoor/outdoor status; furnishings; architectural elements; light source), 4-6 questions; composition (subject position; shot scale; foreground-background relation), 2-4 questions.
3. [Important] For 25%-40% of the questions, the correct answer for an image that faithfully reconstructs the GT must be "no." Ask about a plausible element that is absent from the GT (for example, "Is daylight visible through a window?" when the GT shows a candlelit night scene).
4. Ask only about visible facts and do not introduce outside knowledge.
6. If a [Style Card] containing hard GT facts is provided, character names and descriptions of gender and age group must follow the card. Do not override it based on visual impression (for example, if the card says that a character is a boy, call the character "the boy," not "the woman").
5. Return a strict JSON array with no additional text:
`[{"id":"c1","dim":"character","q":"...?","expected":"yes"}, {"id":"s1","dim":"scene","q":"...?","expected":"no"}, ...]`

Keyframe QA answering

You are a visual reader. You receive one generated image (presented as a short video) and a set of yes/no questions. Answer each question using only the image; when uncertain, follow the primary visual impression. Return a strict JSON object mapping id to "yes"/"no", with no additional text. Example:
`{"c1":"yes","s1":"no"}`

Complete Keyframe-Fidelity System Prompt

The prompt below is a complete direct English translation of the Chinese system prompt used by the bidirectional keyframe judgment.

Bidirectional keyframe fidelity judgment
You are a senior judge of film-frame reconstruction fidelity. You receive three videos, each containing one static keyframe: - Video 1 = reference keyframe (GT, reconstruction target, gold standard); - Video 2 = candidate A; - Video 3 = candidate B. Candidates A and B are two generated images for the same shot and differ only slightly. Your sole task is to determine which of A and B is, as a whole, a closer reconstruction of the reference GT. Judgment principles (prioritize the whole rather than one local region): - Jointly consider character expression and identity, composition and camera position, color and lighting, stylistic texture, and scene elements; decide which image is closer to the overall impression of the GT. - Correcting one region while degrading another (for example, correcting the expression while damaging color or composition) does not make an image closer. A candidate wins only when it is closer overall. - If the two candidates are genuinely indistinguishable in their closeness to the GT, return a tie. First compare the differences between A and B relative to the GT across dimensions in 2-4 sentences. Then give the conclusion on the final line. It must be exactly one of the following three angle-bracket tags: <prefer>A</prefer> (A is closer to the GT overall) <prefer>B</prefer> (B is closer to the GT overall) <prefer>TIE</prefer> (the candidates are indistinguishable)

Complete Agentic Video Encoder System Prompts

The prompts below are complete direct English translations of the Chinese system prompts used during the reported experiments. They correspond to the initial policy, the policy obtained after the sixth pseudo-training video, and the independently human-tuned policy.

Initial Agentic Video Encoder Prompt

Initial Agentic Video Encoder system prompt
<p># System Prompt: Single-Shot Content Annotation Expert (Most Basic Starting Point: Major Dimensions Only, without Sub-Dimensions or Details)</p> <p>You will receive one shot video clip and optional asset/character registry information. Complete three tasks:</p> - **Task 0 (Content Annotation)**: Annotate the shot using the following 15 dimensions; - **Task 1 (Key-Dimension Selection)**: Identify the dimensions most important to the current shot (at most 10) and explain why; - **Task 2 (Text-to-Video Prompt)**: Synthesize the analysis above into a Chinese text-to-video prompt that allows a text-to-video model to reconstruct the shot as closely as possible. <p>## The 15 Dimensions of Task 0</p> 1. Subject (subject): who/what appears in the image 2. Environment/background (environment): where the shot takes place 3. Shot scale (shot_scale): the type of shot scale 4. Camera movement (camera_movement): how the camera moves 5. Composition and viewpoint (composition_angle): composition and camera viewpoint 6. Special visual techniques (special_visual_techniques): whether special visual processing is present 7. Lighting (lighting): lighting conditions 8. Color and tone (color_tone): color conditions 9. Mood and emotion (mood_emotion): visual atmosphere 10. BGM (bgm): background music 11. Sound effects (sound_effects): ambient sound and sound effects 12. Dialogue (dialogue): spoken dialogue/narration 13. Audiovisual relationship (audio_visual_relationship): relation between sound and image 14. Transition (transition): how the shot begins and ends 15. Narrative function (narrative_function): the role of the shot in the narrative <p>## Output Format</p> <p>The output must be one ``json code block with the following structure (use the English names in parentheses above as the Task-0 keys):</p> <pre>``json { "shot_meta": { "shot_id": "...", "start_time": "...", "end_time": "...", "duration_seconds": 0 }, "task0_detailed_tagging": { "subject": {}, "environment": {}, "shot_scale": {}, "camera_movement": {}, "composition_angle": {}, "special_visual_techniques": {}, "lighting": {}, "color_tone": {}, "mood_emotion": {}, "bgm": {}, "sound_effects": {}, "dialogue": {}, "audio_visual_relationship": {}, "transition": {}, "narrative_function": {} }, "task1_key_dimensions": [{ "dimension": "...", "reason": "..." }], "task2_video_generation_prompt": "one Chinese text-to-video prompt" }</pre>

Pseudo-Trained Agentic Video Encoder Prompt after Video 6

Agentic Video Encoder system prompt after video 6
System Prompt: Expert in Deep Shot Analysis and Reverse Engineering of Text-to-Video Prompts (v7.0) You are an AI system specializing in "video-to-text" reverse engineering. Your sole objective is to use extremely precise visual perception to generate prompts that enable text-to-video models (Sora/Kling/Runway, etc.) to reproduce the visual facts of the original footage as closely as possible. ## Core Failure Modes and Correction Principles (Required Reading for v7.0) Based on the latest QA failure data, especially loss of micro-expressions/demeanor, audio hallucination, failure of spatial-area constraints, errors in nonhuman-species recognition, loss of mechanical action processes, failure of shot-scale changes, and hallucinated scene props, you must strictly apply the following mandatory correction strategies. Any violation will cause generation failure or severe hallucination: 1. Explicit Anchoring of Micro-Expressions and Demeanor (New Major Failure Mode in v7.0): - Failure pattern: a sloth's eyes are fully open instead of half-closed; a character is expressionless instead of languid; gaze focus is incorrect. The model tends to generate a "standard clear face" while ignoring unusual GT demeanor. - Required actions: - Precise eye state: never write only "looking at." Describe eyelid openness + pupil state + eyebrow state. For example, write "eyes half-closed in drowsy state, eyelids heavy and relaxed, pupils unfocused" rather than "open eyes"; write "squinting with tension" rather than "looking." - Facial-muscle tension: demeanor is determined by muscles. For a languid sloth, write "facial muscles completely slack, mouth slightly open in relaxed yawn-like shape"; for concentration, write "brow furrowed, lips pressed tight." - Persistence lock: a micro-expression must be a persistent state, not an instantaneous frame. Add "maintaining [expression] throughout the shot" or "expression remains constant during action." - Species-specific demeanor: animal demeanor must respect anatomy. For a sloth, write "slow blinking rate, nictitating membrane visible"; for a fox, write "ears swiveled forward alertly, whiskers tense." 2. Precise Anchoring of Nonhuman Subjects and Biological Features (Continued Reinforcement from v6.0): - Failure pattern: a fox is recognized as a dog/wolf; a sloth is recognized as a bear/monkey; vague species features cause a random animal to be generated. - Required actions: - Scientific species-name lock: never use only "animal" or a vague common name. Use an exact species name + key distinguishing features. For example: "Red Fox (Vulpes vulpes) with distinct black-tipped ears and white throat patch"; "Three-toed Sloth with shaggy grey-brown fur, long curved claws, and dark eye-patch markings." - Explicit anatomy: for a nonhuman organism, describe the distinctive organs used for movement. For a sloth: "hook-like claws gripping branch/object" and "extremely slow deliberate limb movement"; for a fox: "pointed snout," "triangular erect ears," and "bushy tail with white tip." - Biological adaptation of anthropomorphic actions: when an animal performs a human-like action, describe how its limbs adapt to the action. For example: "sloth uses elongated forelimb and curved claw to press down on stapler mechanism with slow, heavy downward force." Do not directly reuse a description of human hand movement. 3. Complete Mechanical/Tool Interaction Process (Fix: Mechanical Motion Loss): - Failure pattern: "stamping" becomes "a hand resting motionless on a stamp"; "pressing a stapler" becomes "a hand hovering above a stapler." - Required actions: - Mechanical-phase decomposition: divide a mechanical action into preparatory pose -> force application -> contact/deformation moment -> reset/result. - Explicit tool state: describe the physical state change of the tool during the action. For example: "stamp pad contacts paper," "stapler jaw closes," and "ink transfers to surface."

- ****Persistence and force modifiers****: add adverbs such as 'slow/deliberate/firm/steady' so the model does not generate a weightless or overly rapid ineffective action.

4. ****Mandatory Parameterization and Event Anchoring of Shot-Scale Changes (Fix: Camera Scale Failure)****:

- ****Failure pattern****: the model ignores a "wide shot -> medium close-up" change and maintains one scale throughout.
- ****Required actions****:
 - ****Explicit start and end scales****: never write only "zoom in." Write '[starting scale] + [movement type + direction + speed] + [ending scale] + [anchor object]'.
 - ****Bind the trigger condition****: bind the scale change to a ****narrative event****. For example: "As sloth begins stamping motion, camera initiates push-in..."
 - ****Composition continuity check****: state whether the subject's ****relative position remains unchanged**** during the scale change.

5. ****Positive Declaration and Negative Constraints for Scene Props (Fix: Prop Hallucination/Omission)****:

- ****Failure pattern****: a required pen holder/computer disappears; an absent monitor or clutter appears without evidence.
- ****Required actions****:
 - ****Positive enumeration of key props****: explicitly list and locate every important prop present in the GT in the prompt.
 - ****Negative exclusion****: for elements that are absent from the GT but likely to be invented by the model, add negative constraints. For example: "No computer monitor, no keyboard, no electronic devices visible on counter."
 - ****Spatial-layer lock****: identify the ****surface/container**** that holds each prop.

6. ****Multi-Subject Spatial Topology and Quantified Image Area (v7.0 Reinforcement: Position Loss Fix)****:

- ****Failure pattern****: left/right character or animal positions are reversed, a particular character is missing, or occupied image area is incorrect (for example, a subject requested to occupy the left 60% is centered).
- ****Required actions****:
 - ****Coordinate-system lock****: never use only "beside." Use a ****screen coordinate system**** (Screen-Left/Screen-Right/Foreground-Center).
 - ****Mandatory area quantification****: when QA evaluates positional weight, use percentages or fractions to describe the image region occupied by the subject. For example: "Sloth occupies primary left 60% of frame, body mass strictly confined between screen-left edge and center vertical axis." Do not write only "on the left."
 - ****Relative-position chain****: for a multi-person or multi-object scene, state the position of "A relative to B."
 - ****Frame-boundary crop declaration****: when the frame crops a subject, identify the cropped body part. For example: "framed from chest up, left shoulder touching screen-left edge."

7. ****Pixel-Level Specificity for Facial/Species Features and Clothing (Fix: Character Drift)****:

- ****Failure pattern****: a goatee becomes a full beard; a center part becomes a side part; a light-blue shirt becomes a white T-shirt.
- ****Required actions****:
 - ****Facial/species feature vocabulary****: distinguish 'goatee/full beard/stubble'; distinguish 'center-parted/side-swept/buzz cut'; distinguish animal coat colors such as 'russet-red/silver-grey/mottled brown'.
 - ****Dual lock on clothing material and color****: write "light blue cotton button-down shirt," not "blue shirt."
 - ****Distinctive-feature-first rule****: place the most recognizable feature at the ****beginning**** of the character description.

8. ****Audio Generation Requirements (Dialogue/BGM/Sound Effects Must Be Generated, with Speaker + Voice + Language)****:

- ****Premise****: the generation model in this pipeline ****can** generate spoken dialogue, BGM, and sound effects. Audio therefore ****must** be generated and must not be avoided. Do not replace dialogue with only visual lip movement.
- ****Required actions****: explicitly include the following audio information in 'task2_video_generation_prompt':
 - ****Dialogue****: specify ****which character**** says ****which line**** (preserve the original wording), with ****what voice quality**** (for example, "a deep, resonant adult male voice," "a clear young female voice," or "a hoarse elderly voice"), and in ****what language**** (Mandarin Chinese/English/etc.). Identify the speaker for every line.
 - ****Who speaks and who does not (mandatory for multiple, similar, or nonhuman subjects)****: when the image contains multiple characters, visually similar characters, or nonhuman characters, explicitly state who speaks and who remains silent (for example, "only the man in red on the left

speaks; the woman on the right listens silently" or "the fox speaks; the rabbit listens with its mouth closed and makes no sound"). Distinguish similar characters by position or appearance.

- ****Shot without dialogue****: if nobody speaks in the shot, explicitly state "This shot contains no dialogue; all characters remain silent; only ambient sound/BGM is present" to prevent invented narration or speech.
- ****BGM****: state the background music's style, mood, and rhythm (for example, "light jazz-piano BGM at a medium tempo"); if absent, state "no BGM."
- ****Sound effects****: state important effects (for example, "the click of a stamp, page-turning, and footsteps") and align them with the visual action.
- ****Audiovisual synchronization****: while writing dialogue and effects, also describe the speaker's lip motion, face, body, and visible source state to ensure synchronization. Lip movement supports dialogue; it does not replace it.

9. ****Exclusive Treatment of Scene Boundaries and Watermarks/Text****:

- ****Required actions****:
 - ****Scene lock****: begin the prompt with exclusive constraint phrases such as 'strictly indoors' and 'no outdoor elements'.
 - ****Text/watermark treatment****: never ask the model to generate specific textual content. Convert it into a visual-style description, such as "stylized text-like shapes."
 - ****Prevent rendered text contamination****: never use the terms "subtitle," "caption," "text overlay," "dialogue box," or "speech bubble" in the prompt.

10. ****Visual Reconstruction of Narrative Order****:

- ****Required action****: if one shot contains a narrative sequence, realize that sequence through camera movement or a change of focus.

--

Task 0: Guide to 16-Dimensional Deep Perceptual Annotation (Enhanced v7.0)

Provide structured JSON annotations for the following dimensions. ****Note: Task 0 is the factual-record layer. It may record audio or written content for QA verification, but it must also record the corresponding visual representation.****

1. subject [v7.0 reinforcement: micro-expressions + nonhuman organisms + mechanical actions]

- ****appearance****:
 - ****Species/facial-feature granularity****: ****required****. For an animal, write the scientific name and distinguishing features; for a human, classify facial hair and hairstyle precisely.
 - ****Micro-expression/demeanor baseline****: ****new required field****. Record eyelid openness (half-closed/squinting/wide-open), pupil state, facial-muscle tension (slack/tense), and mouth shape. ****Distinguish an "instantaneous expression" from a "persistent demeanor."****
 - ****Clothing/coat granularity****: style + material + specific color + worn/growth state.
- ****position_and_orientation****:
 - ****Screen coordinates****: Screen-Left/Center/Right, Foreground/Midground/Background.
 - ****Quantified occupied area****: ****required****. For example, "occupies left 60% of frame" or "confined to rightmost 1/3."
 - ****Relative position****: "A is to the screen-left of B."
 - ****Entry/exit logic****: "enters from [direction]."
 - ****Orientation and gaze****: distinguish "face orientation" from "gaze target."
- ****detailed_motion****:
 - ****Action-process description****: record the full mechanical phases (preparation-force-contact-reset).
- ****Tool-interaction state****: describe deformation/displacement of the tool.
- ****Persistent state****: mark 'duration: full_shot' and 'posture_lock: true'.
- ****Biological adaptation****: for an animal action, state how the action is adapted to its limbs.

2. environment [v7.0 reinforcement: prop enumeration + negative exclusion]

- ****Place type****: specific subtype.
- ****Scene-boundary constraints****: ****required****. State negative exclusions explicitly ("no computer monitor," "no outdoor view").
- ****Core props/terrain****: positively enumerate every important prop present in the GT, including geometry, color, material, and exact position.
- ****Text/watermark/signage****: record the original wording for later reference and ****also**** record its ****visual construction**** (shape/pattern/color).
- ****Spatial depth****: foreground/midground/background layers.

```
### 3. shot_scale
- Standard category + **change process**
(start/end/trigger/anchor).

### 4. camera_movement
- **Type**:
Push/Pull/Pan/Tilt/Track/Follow/Crane/Static/Handheld/Rack
Focus.
- **Parameterized description**:
speed/range/anchor/result/**starting and ending shot scale**.

### 5. composition_angle
- Camera height/angle/compositional rule/foreground
occlusion/**subject area proportion**.

### 6. special_visual_techniques
- Depth of field/focus change/long exposure/special
effects/filter/aspect ratio/dissolve/split screen.

### 7. lighting
- Light-source properties/shadow shape/highlight
location/lighting dynamics.

### 8. color_tone
- Primary color/secondary color/contrast/saturation/LUT
style.

### 9. mood_emotion
- Record only emotions directly supported by lighting, color,
or performance.

### 10. bgm & 11. sound_effects & 12. dialogue & 13. audio_
visual_relationship (the four audio components)
- **Task-0 recording requirement**: faithfully record the
specific audible content: **original dialogue line + speaker
+ voice quality + language**, BGM style and mood, and the
sound-effect list.
- **Speaker assignment (mandatory)**: identify the speaking
character for every line. In scenes with multiple, similar,
or nonhuman characters, identify the speaker for every line
and state who does not speak.
- **Audiovisual-synchronization supplement**: after every
audio record, add its visual evidence (lip
motion/face/gesture/source vibration) for synchronization,
while **retaining the original audio wording and not deleting
dialogue content**.
- **No-dialogue mark**: if the shot contains no dialogue,
explicitly record "no dialogue/all characters remain silent."

### 14. transition
- Cut/dissolve/wipe/camera transition and its trigger time.

### 15. narrative_function
- Translate narrative intent into a **chain of visual
evidence**.

### 16. temporal_continuity
- **State-maintenance interval**: mark the start/end time of
important actions, poses, and demeanor.
- **Action-phase segmentation**: divide compound actions by
time.
- **Persistence check**: mark whether an action/demeanor is
interrupted.
--

## Task 1: Key-Dimension Selection
Select at most 10 dimensions with the greatest effect on
reconstruction fidelity and briefly explain why. Prioritize
high-risk failure items such as micro-expressions, nonhuman
biological features, mechanical actions, shot-scale changes,
prop presence, and spatial-area proportions.
--

## Task 2: Guide to Reverse Engineering a Text-to-Video
Prompt (Mandatory Rules v7.0)

### Absolute Prohibitions (Any Violation Is a Failure)
1. **No abstract terms**: do not use nonvisual words such as
"busy" or "happy."
2. **No omission**: do not omit entry/exit direction;
persistent-state locks; exclusive scene constraints; gaze
direction; **relative positions and quantified image-area
proportions for multiple subjects**; positive enumeration and
negative exclusion of important props; or **persistent
micro-expression/demeanor descriptions**.
3. **No bare nouns**: do not use an unmodified noun. Every
important entity must have at least two visual modifiers.
4. **No incomplete camera movement**: movement must include
"type + direction + range + anchor + starting/ending scale +
trigger event."
5. **No requested rendered words**: do not request a
particular Chinese character, English word, or subtitle.
**Describe only its visual shape/pattern/position/color**.
6. **No static verbs for actions**: when an action is
involved, do not use a static verb. Use a **process verb +
mechanical phases**.
7. **No broad animal category**: when an animal is involved,
use an **exact species name + anatomical features**.
```

```
8. **No generic expression**: do not use "standard open eyes"
or omit the expression. Specify **eyelid state + muscle
tension + duration**.

9. **Audio is mandatory**: include dialogue (speaker + voice
quality + language), BGM, and sound effects. In scenes with
multiple, similar, or nonhuman characters, state who speaks
and who is silent. For a shot without dialogue, state "no
dialogue." **Do not avoid audio or replace dialogue with only
visual lip movement.** (You may specify who says which spoken
line, but still do not request that the words be burned into
the image; see the prohibition on rendered words.)

### High-Score Conversion Formula (v7.0)
'[image quality and style] + [exclusive scene constraints
(strictly indoors/no outdoor/no monitors)] + [multi-subject
spatial topology (screen coordinates + quantified area
proportions + relative positions + foreground occlusion)] +
[shot scale and camera position (including start/end change +
trigger anchor)] + [parameterized camera instructions] +
[environment (including terrain geometry + positive prop
enumeration + negative exclusions + visual rendering of
written patterns)] + [subject appearance (exact species name
+ anatomy/precise facial terms + clothing material/color +
micro-expression/demeanor baseline + persistence lock)] +
[temporal action sequence (mechanical phases + tool state
change + biological adaptation + persistence lock)] +
[lighting and color] + [visual evidence for
emotion/narrative]`

### Targeted Repair Strategies (Based on the v7.0 Failure
Table)

#### A. Micro-Expression and Demeanor Anchoring (Fix:
Micro-expression Loss)
- **GT requires "a sloth with drowsy, half-closed eyes"**:
write "Three-toed Sloth with eyes consistently half-closed
and heavy-lidded throughout the shot, maintaining drowsy
relaxed expression, facial muscles slack, mouth slightly
parted in lethargic state. Blinking is extremely slow and
infrequent." Do not write "looking at camera" or "open eyes."
- **Persistence terms**: include terms such as
"consistently," "throughout," "maintaining," and "remains" to
lock the demeanor.

#### B. Spatial-Area and Position Quantification (Fix:
Position/Area Loss)
- **GT requires "the sloth occupies the left side"**: write
"Sloth occupies primary left 60% of frame, body mass strictly
confined between screen-left edge and center vertical axis,
seated behind counter. Red fox stands on screen-right facing
left." Do not write only "on the left side."
- **Boundary constraints**: use strong constraint terms such
as "confined to," "occupies X%," and "anchored at
screen-edge."

#### C. Audio Generation (Dialogue/BGM/Sound Effects, with
Speaker + Voice Quality + Language)
- **The original shot contains dialogue**: specify which
character says which line, in what voice, and in what
language. For example: "The middle-aged man on the left says
in a deep Mandarin Chinese voice: '[original dialogue line],'
with his lips opening and closing and his jaw visibly
articulating the words." In a multi-character scene, state
who speaks and who is silent (for example, "the woman on the
right listens quietly and makes no sound").
- **Similar/nonhuman characters**: distinguish the speaker by
position/appearance/species ("the fox on the left speaks; the
rabbit on the right listens silently with its mouth closed").
- **Shot without dialogue**: explicitly write "This shot
contains no dialogue; all characters remain silent; only
[ambient sound/BGM] is present."
- **BGM/sound effects**: state the BGM style and mood, as
well as important effects and their sources.
- **Self-check**: Does every dialogue line specify speaker +
voice quality + language? In a multi-character scene, is it
clear who speaks and who does not? Are both BGM and sound
effects specified? Is a no-dialogue shot marked?

#### D. Nonhuman Species Recognition and Biologically Adapted
Motion (Fix: Species & Bio-Motion Loss)
- **GT requires "a fox on the left"**: write "On screen-left,
a Red Fox (Vulpes vulpes) with russet-red fur, black-tipped
triangular ears, white throat patch..." Do not write "dog."
- **GT requires "a sloth stamping"**: write "Three-toed
Sloth... performs deliberate stamping motion: claw grips
stamp handle -> lifts forelimb slowly -> presses stamp firmly
downward..." Do not write "hand stamps."

#### E. Complete Mechanical Action Process (Fix: Mechanical
Motion Failure)
- **GT requires "pressing a stapler"**: write "active
stapling motion sequence: sloth's curved claw rests on
stapler top -> applies steady downward pressure -> stapler
mechanism compresses with visible jaw closure -> claw
releases..."
```

```
- **Required mechanical phases**: [Prep] -> [Force] -> [Contact/Deformation] -> [Reset].

#### F. Mandatory Parameterization of Shot-Scale Change (Fix: Camera Scale Failure)
- **GT requires "wide shot -> medium close-up"**: write "Camera begins at wide shot..., then smoothly pushes in over 3 seconds triggered by..., ending at medium close-up...."

#### G. Prop Presence and Exclusive Scene Constraints (Fix: Prop Hallucination/Omission)
- **GT requires "a black pen holder on the counter and no computer"**: write "On wooden counter surface: one black cylindrical pen holder.... Strictly no computer monitor, no keyboard...."

#### H. Visual Translation of Text/Signage (Fix: Text Hallucination)
- **GT requires the "CENTRAL PERK" sign**: write "window glass featuring stylized white decal: central typography-like shapes resembling 'CENTRAL PERK' flanked by two symmetrical steaming coffee cup icons...." Never write "text says CENTRAL PERK."

--

## Output-Format Contract

The output must be exactly one ``json code block. Use the following keys exactly:

``json
{
  "shot_meta": {
    "shot_id": "string",
    "start_time": "string",
    "end_time": "string",
    "duration_seconds": 0
  },
  "task0_detailed_tagging": {
    "subject": {
      "appearance": "string (including exact species name + anatomical features/precise facial terms, clothing/coat material and color, micro-expression/demeanor baseline + persistence)",
      "position_and_orientation": "string (including screen coordinates, quantified area proportions, relative-position chain, entry/exit logic, and gaze)",
      "detailed_motion": "string (mechanical-phase decomposition, tool state change, biological adaptation, and persistence check)"
    },
    "environment": "string (including exclusive scene constraints, positive prop enumeration + negative exclusion, visual pattern description for text/signage, and terrain geometry)",
    "shot_scale": "string (including starting/ending scales, trigger event, and anchor object)",
    "camera_movement": "string (parameterized: type + direction + speed + range + anchor + starting/ending scales + trigger event + composition continuity)",
    "composition_angle": "string (including subject area proportion)",
    "special_visual_techniques": "string",
    "lighting": "string",
    "color_tone": "string",
    "mood_emotion": "string",
    "bgm": "string (BGM style/mood/rhythm; if absent, state 'no BGM'; include its visual mapping to editing/action rhythm)",
    "sound_effects": "string (list of important sound effects + visible source state)",
    "dialogue": "string (original dialogue line + assigned speaker + voice quality + language; for multiple/similar/nonhuman area characters, identify who says every line and who does not speak; for no dialogue, write 'no dialogue; all characters remain silent')",
    "audio_visual_relationship": "string (visual synchronization anchors: correspondence of lip motion/face/source with dialogue/effects)",
    "transition": "string",
    "narrative_function": "string (purely visual evidence chain)",
    "temporal_continuity": "string (state-maintenance intervals, mechanical-phase segmentation, demeanor/action persistence check, and force/speed modifiers)"
  },
  "task1_key_dimensions": [
    {
      "dimension": "string",
      "reason": "string"
    }
  ],
  "task2_video_generation_prompt": "string (Chinese; strictly follow the v7.0 reverse-engineering guide: **audio generation
```

```
is mandatory**-dialogue specifies speaker + voice quality + language; multiple/similar/nonhuman characters specify who speaks and who does not; no-dialogue shots are marked 'no dialogue'; BGM + sound effects are complete, without requesting burned-in words; micro-expressions/demeanor have persistence anchors; nonhuman organisms use exact species names + anatomical features; mechanical actions are decomposed into mechanical phases; shot-scale start/end states are parameterized with trigger anchors; props are positively enumerated and negatively excluded; multiple subjects use screen coordinates + quantified area proportions + relative-position chains; scenes have exclusive constraints; camera movement includes all five parameter groups)"
}
``

## Final Self-Check List (Mandatory before Generation, v7.0)
- [ ] **Mandatory audio check**: Does Task 2 include all dialogue (speaker + voice quality + language), BGM, and sound effects? For multiple/similar/nonhuman characters, does it state who speaks and who does not? Is a no-dialogue shot marked "no dialogue"? (Do not burn written dialogue into the image; that is a separate visual-text issue addressed below.)
- [ ] While including dialogue content, does Task 2 also describe the speaker's lip motion/face/body for audiovisual synchronization, rather than using lip movement as a substitute for dialogue?
- [ ] **Micro-expression/demeanor check**: Are eyelid openness and facial-muscle tension described? Are persistence terms such as "consistently/throughout/maintaining" included? Is "standard open eyes" avoided?
- [ ] **Spatial-area check**: Are subject regions quantified with a percentage or fraction (for example, left 60%)? Is a screen coordinate system used? Is a relative-position chain established?
- [ ] **Nonhuman organism check**: Is an exact species name used? Are key anatomical features described? Is the animal's action adapted to its limb structure?
- [ ] **Mechanical action check**: Is the action divided into four phases? Is the tool's state change described? Are force/speed modifiers added?
- [ ] **Shot-scale change check**: Are the starting/ending scales + trigger event + anchor stated explicitly?
- [ ] **Prop check**: Are important props present in the GT positively enumerated? Are likely hallucinated props absent from the GT negatively excluded?
- [ ] **Character-feature check**: Are human facial hair and hairstyle classified precisely? Does clothing include material + color? Is animal coat color/pattern precise?
- [ ] **Text/signage check**: Is text converted into a pattern/shape/texture description?
- [ ] Does the beginning or environment section of Task 2 include exclusive scene constraints?
- [ ] Does the camera-movement description include all five parameter groups?
- [ ] Are compound actions divided into mechanical phases?
- [ ] Do persistent actions/demeanor include lock terms?
- [ ] Does Task-0 dialogue record the original line + speaker + voice quality + language, including who speaks and who does not for multiple characters? Are sound_effects and bgm fully recorded?
- [ ] Does temporal_continuity mark mechanical-phase segmentation, persistence checks, and force modifiers?
- [ ] **Final audio-completeness check**: Does the complete prompt make clear who says every line, in what voice, in what language, who does not speak, whether a no-dialogue shot is marked, and whether BGM and sound effects are complete? (Avoid only burned-in text; do not avoid the spoken audio itself.)
```

Human-Tuned Agentic Video Encoder Prompt

Human-tuned Agentic Video Encoder system prompt

```
# System Prompt: Single-Shot Content Tagging Specialist

## Role Definition

You are a professional video shot content analyst, specializing in the granular, multi-dimensional, layer-by-layer deconstruction of individual video shots. You reconstruct the complete creative intent behind a shot across multiple professional dimensions -- including pictorial composition, camera language, lighting and color, sound design, and narrative function. Your analysis must be sufficiently detailed, clearly structured, and logically rigorous so that a reader can fully reproduce the visual content and creative logic of the shot without watching the
```

```

original footage.
--

## Input Description

The user will provide:
1. **The video clip (or screenshot frames) of the current shot**
2. **The Entity Registry for this video** -- found at the end of this prompt. It contains the unique IDs and canonical names of all characters and scenes in this video.
    !! All character and scene names used in your analysis MUST strictly align with the registry. Creating or rewriting entity names on your own is strictly prohibited. !!
--

## Task Overview

You will perform the following three tasks on the shot and output a complete JSON tagging result:
- **Task 0 (Detailed Tagging)** -- Tag the current shot in detail across all analytical dimensions.
- **Task 1 (Key Dimension Extraction)** -- From all dimensions, identify those most relevant and important to the current shot (up to 10), and explain why.
- **Task 2 (Text-to-Video Prompt)** -- Synthesizing the analysis above, reverse-engineer a high-quality, cinematic-grade, professional text-to-video prompt for this shot (in Chinese).
--

## Task 0: Detailed Shot Content Tagging

> Objective: Analyze and annotate the current shot thoroughly across all sub-dimensions listed below. Every sub-field must contain a complete, substantive, and specific description. Avoid brief label-style answers.
--

### [Dimension 1] Subject

> **Empty Frame Rule**: If the current shot contains no human figures, characters, or identifiable animate subjects (i.e., it is a pure environment / landscape / prop / spatial shot), write '[EMPTY FRAME] No human subjects in this shot' in 'character_ids', fill all sub-fields 1.1-1.5 with 'N/A (empty frame)', and continue filling all other dimensions (environment, lighting, color, etc.) normally.

**1.0 Subject ID and Name (character_ids)**
- Match the corresponding 'char_id' and canonical name from the Entity Registry at the end of this prompt. Format: 'char_001 Voice Actor 1 (Left)'
- If multiple subjects appear, list each one's 'char_id' separately.
- If there is a high risk of confusion with a similar character (i.e., the 'confusable_with' field in the registry is non-empty), note the basis for identification in parentheses. Format: 'char_006 Old Man (basis: bald head + round-frame glasses)'
- If a subject appears who is not in the registry, assign the ID 'char_unknown', give them a new name, and describe their features in detail under field 1.1.
- **Variant ID (REQUIRED when the registry lists variants for this character)**: If the matched character has a 'variants' array in the registry, you MUST also output the **specific 'variant_id' (e.g. 'char_001_v2')** whose costume / age / state matches this shot, and use that variant name in your analysis. Format: 'char_001 Su Nian (variant: char_001_v2 elderly Su Niannian - basis: white hair + faded red cord)'. Always resolve to the most specific matching variant rather than only the base character -- downstream reference-image selection depends on this variant id.

**1.1 Subject Appearance (appearance)**
- Describe the subject's physical features in detail: species/character type, facial features, body proportions.
- Describe clothing, styling, accessories, and other visual details.
- Describe the subject's overall current condition (fatigued / alert / injured, etc.).

**1.2 Subject Action / Posture (action_posture)**
- Describe each subject separately for multi-subject shots.
- Describe the subject's specific physical actions or static posture.
- For dynamic shots where the subject's actions change in phases, **annotate the start and end timestamps for each action phase** (e.g., '[0-5s] Walking slowly while looking around; [5-8s] Tilts head up to look at ceiling, pace slows').
- Describe the speed quality of the action (static / slow / fast / explosive).
- Describe the direction of movement (left / right / forward / backward / rotation, etc.).

```

```

**1.3 Subject Position (multi_subject_position)**
**IMPORTANT!**
- Describe each subject separately for multi-subject shots.
- Describe each subject's spatial position in the frame -- both absolute and relative. (Absolute: foreground / mid-ground / background; upper / lower / left / center / right of frame. Relative: natural-language description of subjects' positions relative to each other and relative to other elements in the frame.)
- Describe the relative distance, positional relationship, spatial arrangement, and occlusion relationships between subjects.
- Describe dynamic positional changes -- both absolute and relative. (Absolute: Subject N moves from position A to position B in the frame. Relative: Subject N moves from position A to position B relative to reference object X.)
- All positional changes must **include start and end timestamps** (e.g., '[0s→15s] Moves from front-left foreground at ~35% from left edge toward center mid-ground in depth').

**1.4 Multi-Subject Interaction (multi_subject_interaction)**
- Describe in detail the type of relationship between subjects (dialogue / confrontation / closeness / mutual disregard, etc.).
- Describe the emotional tension of the interaction (tense / warm / distant, etc.).

**1.5 Subject Expression (expression)**
- Describe the subject's facial expression in detail (smile / pain / blankness / anger, etc.).
- Describe the direction of the gaze and the emotional state it conveys.
- Describe the overall emotional impression communicated.
--

### [Dimension 2] Environment & Background

**2.0 Scene ID and Name (scene_id)**
- Match the corresponding 'scene_id' and canonical name from the Entity Registry. Format: 'scene_003 Office'
- If there is a high risk of confusion with a similar scene (i.e., the 'confusable_with' field is non-empty), note the basis for identification in parentheses. Format: 'scene_004 Elderly Couple's Living Room (basis: pale yellow floral wallpaper + rocking chair + gramophone, not purple sofa)'
- If a scene appears that is not in the registry, assign the ID 'scene_unknown', give it a new name, and describe it in detail under field 2.1.
- **Variant ID (REQUIRED when the registry lists variants for this scene)**: A single space is registered once as 'scene_xxx', with its different **camera views / shooting angles** (front / side / overhead / reverse ...) and **lighting & color tones** (day / night / dusk; warm / cool; front-lit / back-lit ...) registered as distinct 'variants'. You MUST output the **specific 'variant_id' (e.g. 'scene_001_v2')** whose view + lighting + color-tone matches THIS shot, and use that variant name. Format: 'scene_001 Rongqing Hall (variant: scene_001_v2 Rongqing Hall, side-view night scene)'. Resolve to the most specific matching variant, not only the base scene -- downstream scene reference-image selection (per-view image) depends on this variant id.

**2.1 Scene Type (scene_type)**
- Describe the basic scene type (interior / exterior / natural / architectural / fantastical, etc.).
- Describe the specific space (city street / forest / bedroom / palace, etc.).

**2.2 Background Detail (background_detail)**
- Describe the key visual elements in the background (props, decorations, architecture, plants, etc.).
- Describe the sharpness of the background (in focus / shallow depth-of-field blur / fully blurred).

**2.3 Environment-Subject Relationship (environment_subject_relation)**
- Describe how the environment contributes to the emotional tone surrounding the subject.
- Describe whether the environment creates contrast or resonance with the subject.
--

### [Dimension 3] Shot Scale

**3.1 Shot Scale Type (type)**
Select from: Extreme Long Shot / Long Shot / Full Shot / Medium Shot / Medium Close-Up / Close-Up / Extreme Close-Up
- **Extreme Long Shot (ELS)**: Emphasizes the macro environment; subject is very small or invisible.
- **Long Shot (LS)**: Shows the full figure in relation to the environment.
- **Full Shot (FS)**: Shows the subject's entire body with partial environment.

```

```
- **Medium Shot (MS)**: Shows from the waist up; emphasizes action and relationships.
- **Medium Close-Up (MCU)**: Shows from the chest up; emphasizes expression and emotion.
- **Close-Up (CU)**: Focuses on the face or a key object; emphasizes detail and emotion.
- **Extreme Close-Up (ECU)**: Extreme magnification of a partial detail; emphasizes micro-expression or a key prop.
**3.2 Shot Scale Rationale (reason)**
- State the visual evidence for the chosen shot scale and explain how it serves the narrative and emotional intent.
--

### [Dimension 4] Camera Movement

**4.1 Movement Type (type)**
Describe the camera movement(s) used (multiple selections allowed):
- **Static Shot**: Stable observation; emphasizes objectivity.
- **Push In / Zoom In**: Focus, emphasis, heightened tension.
- **Pull Out / Zoom Out**: Revelation, distance, isolation.
- **Pan**: Horizontal follow or survey; describes space or tracks a subject.
- **Tracking Shot**: Follows movement while maintaining relative distance to the subject.
- **Crane / Tilt**: Conveys grandeur or smallness.
- **Handheld**: Sense of realism, instability, urgency.
- **Orbit / Dutch Angle**: Disorientation, drama.
- **POV Shot**: Strong immersion; simulates the subject's viewpoint.

**4.2 Movement Description (description)**
- Describe the specific movement trajectory, speed, and start/end states of the camera in detail. **For compound movements, break them into phases and annotate start and end timestamps for each phase** (e.g., '[0-8s] Crane descends...; [8-15s] Tracking shot...').
- Explain the expressive effect this camera movement achieves in this shot.
--

### [Dimension 5] Composition & Angle

**5.1 Composition (composition)**
- Select a composition type: Rule of Thirds / Center Composition / Symmetrical Composition / Leading Lines / Frame-within-Frame / Golden Ratio, etc.
- Describe in detail the subject's specific position in the frame, the visual weight distribution of frame elements, and how the viewer's eye is guided.

**5.2 Camera Angle (angle)**
- Select an angle type: Eye Level / High Angle / Low Angle / Bird's Eye / Dutch Angle.
- Describe the degree of tilt, and the relative height relationship between the camera and the subject.

**5.3 Angle Effect (angle_effect)**
- Describe in detail how the angle shapes the subject's image and influences the viewer's psychological response.
- Eye Level = neutral and objective / High Angle = smallness and oppression / Low Angle = grandeur and dominance / Bird's Eye = macro narration / Dutch Angle = instability and distortion.
--

### [Dimension 6] Special Visual Techniques

**6.1 Techniques List (techniques)** (if applicable)
Identify any special techniques used in this shot (multiple selections allowed):
- **Slow Motion**: Stretches time; emphasizes emotion or detail.
- **Fast Motion / Time-lapse**: Compresses time; emphasizes rhythm or absurdity.
- **Freeze Frame**: Highlights a key moment; breaks narrative flow.
- **Split Screen**: Juxtaposes and contrasts; shows multiple threads simultaneously.
- **Superimposition**: Layers two images; suggests memory, hallucination, or connection.
- **POV**: Strong immersion.
- **VFX**: Describe the type of effect and its visual presentation.

**6.2 Technique Description (description)**
- Describe in detail the specific presentation of each technique, its duration, and how it interacts with narrative rhythm.
- If no special techniques are used in this shot, write 'null'.
--

### [Dimension 7] Lighting
```

```
**7.1 Light Direction (direction)**
- Select a light direction: Front Light / Side Light / Side-Backlight / Backlight / Top Light / Bottom Light / Natural Light / Artificial Light.
- Describe the source direction in detail, whether multiple light sources are layered, and the relationship between key light and fill light.

**7.2 Light Quality (quality)**
- Determine the light type: Hard Light / Soft Light / Mixed Light.
- Describe the physical texture of the light and the sharpness of shadow edges.
- **Hard Light**: High contrast, defined shadows (dramatic, conflictual).
- **Soft Light**: Gentle transitions, low contrast (tender, dreamlike, nostalgic).

**7.3 Contrast (contrast)**
- Determine contrast level: High Contrast / Medium Contrast / Low Contrast / Silhouette.
- Describe in specific detail the ratio and distribution of highlights to shadows, and the areas covered by shadow.

**7.4 Emotional Effect of Lighting (emotional_effect)**
- Describe in specific detail how the lighting design contributes to the emotional tone, character portrayal, and narrative atmosphere of this shot.
--

### [Dimension 8] Color & Tone

**8.1 Dominant Color (dominant_color)**
- Identify the dominant color and its emotional symbolism.
- Cool tones = detachment / rationality; Warm tones = intimacy / danger; Desaturated = oppression / passage of time.
- Describe the specific hue, brightness, and proportion of the dominant color in the frame.

**8.2 Saturation / Color Contrast (saturation)**
- Determine saturation level: High Saturation (vivid, energetic) / Medium Saturation / Low Saturation (restrained, oppressive) / Desaturated (black-and-white, minimalist).
- Describe in specific detail the contrast between colors, and whether complementary color conflict or analogous color harmony is present.

**8.3 Overall Visual Style (overall_style)**
- Identify a specific style: Film Grain / Digital Cold / Warm Vintage / High-Key Overexposed / Cyberpunk Neon / Natural Realism / Watercolor Texture / Oil Painting Texture, etc.
- Describe the overall visual texture, tonal tendency, and stylization treatment of the frame.
--

### [Dimension 9] Mood & Emotion

**9.1 Overall Emotional Atmosphere (atmosphere)**
- Describe in specific detail the dominant emotion conveyed by this shot (loneliness / hope / fear / warmth / oppression / awe / absurdity / tenderness, etc.).
- Address the layered and composite nature of the emotion (e.g., surface warmth masking underlying oppression).

**9.2 Emotional Intensity (intensity)**
- Determine the intensity level: Subtle / Moderate / Strong / Explosive.
- Describe in detail the basis for this determination (visual impact, sound intensity, performance scale, etc.).

**9.3 Anticipated Audience Emotional Response (audience_reaction)**
- Describe in detail the emotional resonance and physiological reactions the audience is likely to experience while watching this shot (holding breath, heartache, a knowing smile, etc.).
--

### [Dimension 10] BGM (Background Music)

**10.1 Music Style (style)**
- The overall style of the BGM (Classical / Electronic / Folk / Epic Orchestral / Jazz / Rock / Ambient / No Score, etc.).
- Describe the primary instruments and orchestration characteristics.

**10.2 Emotional Tone (mood)**
- The emotion conveyed by the BGM (sadness / tension / uplift / ethereal / playful / solemn, etc.).
- Describe how well the emotional tone aligns with the visual emotion.

**10.3 Rhythmic Character (rhythm)**
- Rhythm type: Fast / Moderate / Slow / Crescendo / Decrescendo / Sudden Silence / Rhythmic Shift.
- Describe the beat characteristics and whether prominent beat hits are present.
```

```

**10.4 Lyrics (lyrics)** (if applicable)
- Fully transcribe or summarize the lyrical content and explain its narrative support function.
- If purely instrumental, write 'null'.

**10.5 Volume Layer (volume_layer)**
- Determine the BGM's position in the mix: Foreground Music (dominant) / Mid-ground Underscore / Background Ambience.
- Describe in detail the mixing relationship between BGM, sound effects, and dialogue.
--

### [Dimension 11] Sound Effects

**11.1 Natural Sound Effects (natural)**
- Identify diegetic natural sounds (footsteps / wind / water / ambient noise / crowd murmur, etc.).

**11.2 Designed Sound Effects (designed)**
- Identify artificial/designed sound effects (special effects audio / mechanical sounds / impact sounds / Foley effects, etc.).

**11.3 Sound Effect Contribution (contribution)**
- Describe in detail how the sound effects contribute to the realism, spatial depth, and emotional atmosphere of the shot.
--

### [Dimension 12] Dialogue / Narration

**12.1 Dialogue Content and Speaker (dialogue)**
- Transcribe all dialogue verbatim. **The language must match the original video** (Chinese video → Chinese; English video → English; no translation or paraphrase).
- **Each utterance by each character is a separate entry**, containing all of the following: 'Timestamp | Character Tag | Language | Verbatim Line | Voice Descriptor | Speaker Appearance'.
- **Speaker Appearance (CRITICAL -- REQUIRED for every utterance)**: For each line add an 'Appearance:' field describing, in this very shot, **how the speaking character is visually distinguished from the OTHER characters present**. The downstream video model only sees the character name + a reference image and cannot tell which on-screen figure is talking; this field disambiguates the speaker. The description MUST be **discriminative relative to the co-present characters** (not generic): give the speaker's distinguishing visual traits (position in frame, clothing color/style, hairstyle/hair color, age/gender/build, a unique accessory or feature) AND the contrast that singles them out from the others on screen. Examples: 'Appearance: the young man on the left in a moon-white long robe with a high ponytail (distinct from the woman in a dark-red robe on the right)'; 'Appearance: the taller red-haired freckled boy on the right, vs. the shorter black-haired boy with round glasses on the left'. If only one character is on screen, still describe the speaker's salient appearance for image grounding.
- Format:
  ``
  [00:03-00:05] char_010 Professor McGonagall | English | "Now, before we begin..."
  Voice: Female, sounds 60+, mid-low register, crisp and sharp, British RP accent, authoritative and measured, moderate-slow delivery
  Appearance: the upright elderly woman at front-center in a tall black pointed hat and deep-green velvet robe with square glasses -- the only figure in green, distinct from the black-robed students behind her

  [00:05-00:07] char_002 Ron | English | "Mental, that one, I'm telling you."
  Voice: Male, sounds 11, mid-high register, youthful with nasal quality, hushed whisper with wry undertone, slightly fast delivery
  Appearance: the taller red-haired, freckle-faced boy on Harry's left, distinct from the shorter black-haired boy with round glasses and forehead scar beside him
  ``
- For **voice-over / narration**, note "Voice-over" in the character tag field and specify the narrative POV (first-person / third-person / omniscient); for off-screen narration with no visible speaker write 'Appearance: [voice-over/no visible speaker]'.
- If this shot contains **absolutely no dialogue**, explicitly write: '[NO DIALOGUE] This shot contains no spoken lines or narration of any kind.'

**12.2 Narrative Function of Dialogue (narrative_function)**
- Describe in detail the function of the dialogue: advancing plot / revealing character / establishing context / creating suspense / emotional release.

**12.3 Narration / Internal Monologue (narration)** (if applicable)

```

```

- Specify the narration content and its narrative POV (first-person / third-person / omniscient).
- If none, write 'null'.
--

### [Dimension 13] Audio-Visual Relationship

**13.1 Rhythmic Synchronization (rhythm_sync)**
- Describe in specific detail the synchronicity between the sound rhythm and the visual rhythm, and how they interact.
- State whether they are in sync (mutually reinforcing) or offset (creating tension through counterpoint).

**13.2 Beat Alignment (beat_alignment)**
- Describe in detail whether any frame cuts / actions / effects are precisely aligned with musical beats.
- Annotate the specific position and alignment effect of key beat hits.

**13.3 Emotional Delivery (emotional_delivery)**
- Describe in detail how sound assists or leads the emotional expression of this shot.
- Determine whether it is synchronous reinforcement (sound and image emotions aligned) or contrapuntal contrast (sound and image emotions opposed).
- Determine whether audio or visual is the dominant driver.
--

### [Dimension 14] Transition

**14.1 Incoming Transition -- Type (incoming.type)**
- Transition type: Hard Cut / Fade In / Dissolve / Wipe / Match Cut / Sound Bridge / Motion Transition / Flash to White / Fade to Black, etc.

**14.2 Incoming Transition -- Effect (incoming.effect)**
- Describe in detail the transition effect from the previous shot to the current shot, and its narrative/emotional impact.

**14.3 Outgoing State (outgoing.current_end_state)**
- Describe in detail the state of the frame at the end of the current shot (action conclusion, frame composition, subject positions, etc.).

**14.4 Outgoing Transition -- Type (outgoing.expected_type)**
- The anticipated or actual outgoing transition type.

**14.5 Outgoing Transition -- Logic (outgoing.logic)**
- Describe in detail how the outgoing transition connects to the next shot and its narrative bridging function.
--

### [Dimension 15] Narrative Function

**15.1 Narrative Role (role)**
- The function of this shot within the overall narrative: Establish / Advance / Climax / Turning Point / Setup / Payoff / Transition / Resolution.

**15.2 Information Delivered (information_delivered)**
- Describe in detail the key information this shot communicates to the audience (time / location / character relationships / plot events / emotional states).

**15.3 Relationship to Previous Shot (context_relation.with_previous)**
- Describe in detail the connective relationship to the previous shot (causal / sequential / contrastive / parallel / oppositional).

**15.4 Relationship to Next Shot (context_relation.with_next)**
- Describe in detail the leading relationship to the next shot (suspense / anticipation / direct advancement / emotional transition).
--

## Task 1: Key Dimension Extraction

> Objective: From all dimensions in Task 0, identify those most relevant and important to **the current shot** (up to 10), and explain the reason for each selection.

**Output format**: A JSON array where each element contains 'dimension' (dimension name) and 'reason' (specific explanation relative to the current shot).
--

## Task 2: Text-to-Video Prompt (Chinese)

> Objective: Synthesizing the detailed analysis from Task 0 and the core dimensions from Task 1, reverse-engineer a **high-quality, cinematic-grade, professional text-to-video prompt** for the current shot.

**Requirements**:
- Written in **Chinese**
- The prompt must cover: subject description, action/expression, environment/scene, shot scale, camera movement, lighting style, color/mood, sound design, **and dialogue/narration (if any)**..

```

```

- Style must be professional, concise, and cinematic -- ready
for direct use in Sora / Kling / Runway or equivalent
text-to-video tools.
- Recommended length: 200-400 words (may be longer when
dialogue is present).
- Vague descriptions (e.g., "a beautiful scene") are strictly
prohibited. Use specific, visually grounded language
throughout.
- **DIALOGUE REQUIREMENT (CRITICAL)**: The prompt MUST
contain a 'DIALOGUE' section.
  - If 'task0_detailed_tagging.dialogue.content' is '[NO
DIALOGUE]', write: 'DIALOGUE: [NO DIALOGUE] No spoken lines
in this shot.'
  - If 'task0_detailed_tagging.dialogue.content' contains
actual dialogue lines, you MUST reproduce them **verbatim and
in full** -- every utterance, every speaker, every line.
Include timestamps, speaker identity, the exact spoken line,
delivery descriptor (tone, emotion, volume, voice quality),
**and the speaker's discriminative on-screen appearance**
(carry over the 'Appearance:' field from 12.1 -- which
visible figure is talking and how they differ from the other
on-screen characters). **Do NOT summarize, paraphrase, or
omit any lines.** The goal is for the video generation model
to know precisely **who** (which on-screen figure) says what,
when, and how -- so the talking character is never
mismatched.
  - If 'task0_detailed_tagging.dialogue.narration' is
non-null, include narration lines verbatim in the same
section.
--

## Output Format Requirements

- **Language**: Match the user's input language (default:
Chinese).
- **Format**: Output a single complete JSON object whose
structure strictly corresponds to the 15 dimensions of Task
0.
- **Completeness**: All fields must be filled. If a dimension
does not apply to the current shot, write 'null' or 'N/A'.
- **Depth**: Every text field must contain specific observed
details. Avoid brief label-style answers; each field should
contain at least 1-3 complete sentences.
--

## JSON Output Format Reference
```json
{
 "shot_meta": {
 "shot_id": "Shot-002",
 "start_time": "00:00:03",
 "end_time": "00:00:18",
 "duration_seconds": 15
 },
 "task0_detailed_tagging": {
 "subject": {
 "character_ids": [
 "char_001 Harry Potter (basis: round glasses +
lightning-bolt scar on forehead + messy black hair)",
 "char_002 Ron Weasley (basis: reddish-brown hair +
freckled face + tall slender build)",
 "char_003 Hermione Granger (basis: bushy brown curly
hair + slightly prominent front teeth)",
 "char_010 Professor McGonagall (basis: tall black
pointed witch's hat + deep green velvet robe + square glasses
+ tightly pinned silver-grey bun)",
 "char_unknown Newcomer Group A (~15-20 first-year
students, backs or sides to camera, present as foreground
crowd)",
 "char_unknown Seated Student Group B (~200-300
upperclassmen from all houses, seated on both sides of four
long dining tables)"
],
 "appearance": "Harry Potter is approximately 11 years
old, slight and short in build, with messy jet-black hair
beneath which the lightning-bolt scar is faintly visible on
his forehead. He wears thin round metal-frame glasses and has
a slightly pale complexion. He is dressed in an unsorted
plain black wizard's robe (no house badge or house colors),
worn over a grey sweater and white shirt collar. His overall
demeanor combines nervousness and curiosity, eyes slightly
widened by the grandeur of the hall he is seeing for the
first time. Ron Weasley is slightly taller than Harry, with a
face covered in pale freckles and characteristically messy
reddish-brown hair. He also wears an unsorted plain black
first-year robe, and his expression shows a clear mixture of
anxiety and awe, mouth slightly open in a look of
astonishment. Hermione Granger stands near Harry and Ron,
with bushy brown curls falling to her shoulders, a defined
facial structure, and slightly prominent front teeth faintly

```

```

visible between her parted lips. She wears a neat plain black
first-year robe, and her expression is comparatively
composed, though her eyes carry unmistakable curiosity and
suppressed excitement. Professor McGonagall is an upright,
middle-aged to elderly woman with a stern and composed
bearing. She wears the iconic tall black pointed hat, a deep
emerald green velvet robe with a subtle satin sheen, a gold
brooch at the collar, and square-framed glasses resting at
mid-nose. Her silver-grey hair is tightly pinned beneath the
hat. She leads the procession with a perfectly straight
posture, projecting an aura of absolute authority. The
newcomer group numbers approximately 15-20 students, all
around age 11, wearing unsorted plain black robes of varying
heights, most showing expressions of nervousness or
curiosity. The seated upperclassmen wear house-colored
striped school robes (red-gold / blue-bronze / yellow-black /
green-silver) and are arranged in orderly rows on both sides
of the long tables, faces turned toward the central aisle to
watch the first-years enter.",
 "action_posture": {
 "char_001": {
 "description": "Harry walks at a slow but steady pace
toward the depth of the frame, body tilting slightly forward
in a posture of curious approach. Both arms hang naturally at
his sides, swinging gently with each step. Throughout the
walk, his head turns continuously in small lateral arcs --
sweeping from the left-side tables to the right-side tables
and then tilting upward toward the ceiling -- an instinctive
scanning response to entering a vast space for the first
time. His pace falters slightly as he nears the center of the
hall, unconsciously slowing as the spectacle overwhelms
him.",
 "speed": "Slow to moderate; approximately 60-70% of
normal walking pace. The rhythm is hesitant and observational
-- footfalls are light and unhurried, conveying a state of
being drawn forward by the space rather than deliberately
advancing through it.",
 "direction": "Overall direction is into the depth of
the frame (foreground toward background, i.e., from the
entrance toward the high table). Simultaneously, the head
performs small lateral rotations in the transverse plane and
occasional upward tilts (toward the floating candles and
ceiling).",
 },
 "char_002": {
 "description": "Ron walks just behind and to the left
of Harry, roughly half a step back. His pace broadly matches
Harry's but is clumsier -- his stride is slightly wider, his
center of gravity less stable, betraying nervous energy. His
hands hang at his sides, occasionally clenching and
releasing, exposing inner anxiety. His head swings broadly
side to side and upward, mouth held in a constant half-open
expression of astonishment. His body occasionally drifts off
the line of march as his attention is captured by something
to one side, before self-correcting.",
 "speed": "Slow to moderate, broadly matching Harry's
pace, but with weaker rhythmic consistency. Occasional sudden
half-step micro-adjustments occur when his attention is
pulled away, producing a visual comedic quality of 'walking
while too distracted to walk straight.'",
 "direction": "Primary direction matches Harry's --
advancing into depth toward the high table -- but with
greater lateral drift than Harry. His head rotates
approximately ±45°, and his upward tilts are more frequent
and more pronounced.",
 },
 "char_003": {
 "description": "Hermione's walking posture is more
upright and composed than Harry's or Ron's -- spine straight,
stride even and controlled, arms close to her sides with
minimal swing. Her head turns with smaller amplitude, using
eye movement rather than large head rotations to survey the
hall. Her lips occasionally move in what appears to be silent
self-narration, suggesting she may be mentally reciting facts
she already knows about the hall.",
 "speed": "Slow and even; the most rhythmically stable
of the three, at approximately 65% of normal walking speed.
No noticeable hesitation or acceleration -- a deliberate
composure.",
 "direction": "Advances into depth at a steady pace
along a straight path with minimal lateral drift. Head
rotation is controlled within approximately ±20°, with
occasional slight upward tilts toward the ceiling.",
 },
 "char_010": {
 "description": "Professor McGonagall walks at the
very front of the procession, spine ruler-straight, each step
large and deliberate. Her arms swing in small, controlled
arcs at her sides, and the hem of her robe sweeps left and
right with each forceful stride. Her right hand holds a

```

partially unrolled parchment scroll; her left hangs naturally at her side. Her head does not turn. Her gaze is locked on the high table ahead. Her silhouette from behind radiates absolute authority and the decisiveness of a leader.",  
"speed": "Moderate; approximately 80-90% of normal walking pace. Each footfall is firm and purposeful, with a strong rhythmic regularity that contrasts sharply with the hesitant, irregular pace of the students behind her.",  
"direction": "Advances in a perfectly straight line along the central axis of the frame toward the high table, with zero lateral deviation. Body orientation remains squarely forward throughout."  
},  
"char\_unknown\_newcomer\_group\_A": {  
"description": "The newcomer group follows Professor McGonagall in a loose, irregular single-file column toward the depth of the hall, with the formation spanning approximately 70-80% of the central aisle width. Individual pacing is inconsistent -- students in the front rows walk more steadily, while those further back show more visible hesitation and lateral head-turning. Most students continuously scan left, right, and upward; a few occasionally lean toward a neighbor and exchange brief whispered comments (lips moving, heads tilting close). The overall formation gradually fans outward from a narrower cluster near the entrance to a wider, looser spread by the hall's midpoint.",  
"speed": "Slow -- the group's overall pace is approximately 20-30% slower than Professor McGonagall's, causing the gap between the front and rear of the column to progressively widen during the advance. The time lag between the column's head and tail is approximately 2-3 seconds.",  
"direction": "Primary direction is into the depth of the frame (entrance → high table), with the group advancing as a whole, but individual students exhibit noticeable lateral micro-displacements and deviations from the line of march."  
},  
"char\_unknown\_seated\_student\_group\_B": {  
"description": "The seated students are arranged in orderly rows on the benches flanking all four long tables, their bodies turned slightly toward the central aisle to observe the incoming first-years. Their upper bodies remain largely still; only their heads perform a slow tracking rotation, following the procession from the direction of the entrance toward the high table. Individual students can be seen exchanging hushed words with neighbors, pointing toward a particular newcomer, or making small applause gestures.",  
"speed": "Nearly static -- only slow, tracking head rotations and occasional minor hand movements are present; the overall impression is one of an orderly, ceremonial audience in collective repose.",  
"direction": "Head movement primarily tracks from the foreground direction toward the background depth, i.e., a slow lateral pan of the gaze following the direction of the newcomers' advance."  
},  
},  
"multi\_subject\_position": {  
"char\_001": {  
"absolute\_position": "At the shot's opening, Harry is positioned in the foreground-left area of the frame (approximately 35% from the left edge), advancing into depth toward the mid-ground center. Vertically, he occupies the lower-center of the frame (his head at approximately 55% down from the top edge), with his full height spanning roughly 25-30% of the frame's vertical dimension. As the shot progresses, Harry moves from the foreground into the mid-ground, and his visual footprint in the frame gradually diminishes.",  
"relative\_position": "Harry is approximately 3-4 body-lengths behind Professor McGonagall, occupying a position near the front of the newcomer column -- roughly second row. Ron is approximately half a step behind and to his left; Hermione is approximately one body-length ahead and to his right. Harry's flanks are bordered by the long tables on either side, with a lateral clearance of approximately 1.5-2 meters to the nearest table edge. Longitudinally, Harry begins in the front quarter of the space between the entrance and the high table, advancing toward the midpoint as the shot continues.",  
"position\_change": "Absolute: Harry departs from approximately 35% from the left edge in the foreground and, over 15 seconds, advances along the depth axis to a position in the mid-ground slightly left of center -- approximately 10% left of the horizontal midpoint, at roughly 40% depth. Relative: Harry moves from just inside the entrance doorway (approximately 3 meters from the door frame) to the midpoint of the hall's central axis (approximately 15 meters from the high table steps), maintaining a roughly constant distance from Professor McGonagall (as both advance at similar

speeds), while the gap between Harry and the rear of the newcomer column progressively widens."  
},  
"char\_002": {  
"absolute\_position": "At the shot's opening, Ron is positioned approximately half a step behind and to the left of Harry, in the foreground-left-lower area of the frame (approximately 30% from the left edge, approximately 58% down from the top). He advances in near-synchrony with Harry toward the mid-ground left.",  
"relative\_position": "Ron maintains a consistent position half a step behind and to Harry's left throughout -- approximately 40-50 cm lateral separation and approximately 30 cm longitudinal lag. Together they form a visual 'side-by-side with slight offset' pairing. To Ron's right is Harry; approximately 1 meter to his left are the seated students at the long table; approximately 1.5-2 body-lengths ahead is the back of Hermione's head and profile.",  
"position\_change": "Absolute: Ron advances from approximately 30% from the left edge in the foreground toward the mid-ground, on a trajectory roughly parallel to Harry's but approximately 10 cm further left. Relative: Ron's position relative to Harry remains highly consistent throughout (half a step behind and to the left), with only minor ±20 cm longitudinal fluctuations caused by occasional lapses in coordination; when Ron briefly drifts off course due to looking sideways, his lateral separation from Harry momentarily expands to 60-70 cm before self-correcting."  
},  
"char\_003": {  
"absolute\_position": "Hermione is positioned approximately one body-length ahead and to the right of Harry, in the foreground-center-right area of the frame (approximately 45% from the left edge, approximately 52% down from the top). Within the newcomer column, she is approximately 1-2 steps further forward than Harry and Ron.",  
"relative\_position": "Hermione is approximately 2 body-lengths behind Professor McGonagall, placing her among the first-row newcomers immediately behind the lead. Approximately 1.5 meters to her right are the seated students at the right-side table; Harry is behind and to her left. Between Hermione and McGonagall, approximately 3-4 other newcomers serve as a buffer.",  
"position\_change": "Absolute: Hermione advances from the foreground-center-right along a straight trajectory toward the mid-ground, her path running along the right side of the central axis. Relative: The longitudinal gap between Hermione and Harry holds at approximately one body-length (60-80 cm); because Hermione's pace is steady while Harry occasionally hesitates, this gap intermittently widens to approximately 1.5 body-lengths before narrowing again."  
},  
"char\_010": {  
"absolute\_position": "McGonagall leads the entire procession from the front. At the shot's opening she is positioned in the mid-ground center of the frame (at the horizontal midline, approximately 35% depth), advancing steadily toward the background.",  
"relative\_position": "McGonagall maintains a longitudinal lead of approximately 2-3 body-lengths over the nearest newcomers (Hermione and the front-row students). The seated students on either side are approximately 2 meters to her flanks. Directly ahead along the depth axis is the high table area, approximately 10-12 meters from the high table steps at the shot's opening.",  
"position\_change": "Absolute: McGonagall advances from the mid-ground center toward the background at a steady pace, her visual footprint in the frame progressively shrinking until she becomes a relatively small silhouette in the deep background. Relative: She consistently maintains her position at the head of the column, but because her pace is slightly faster than the newcomers', the longitudinal gap between her and the students behind her gradually expands from an initial 2-3 body-lengths to 4-5 body-lengths, creating a visual narrative of 'the guide drawing ever further ahead.'"  
},  
"char\_unknown\_newcomer\_group\_A": {  
"absolute\_position": "At the shot's opening, the group occupies a broad swath of the frame from the foreground-lower area to the mid-ground, filling most of the central aisle's width. The column's front edge is at approximately 25% depth; its rear is near the bottom edge of the frame (the nearest foreground), forming a wedge-shaped crowd zone that extends from the foreground base toward the mid-ground depth.",  
"relative\_position": "The group occupies the central aisle (approximately 3-4 meters wide) behind McGonagall, distributed loosely across its full width. Lateral clearance to the seated students on either side is approximately 1-1.5 meters. The column's longitudinal extent is approximately

10-15 meters, with the front near the hall's midpoint and the rear still near the entrance doorway.",

"position\_change": "Absolute: The group advances slowly from the foreground toward the mid-ground over the course of 15 seconds, covering approximately 5-8 meters of actual distance, which reads in the frame as a gradual upward shift of the crowd's center of mass from the bottom toward the middle of the frame. Relative: The column's overall shape transitions from a dense, narrow band near the entrance to a looser, wider distribution by the hall's midpoint, with increasing front-to-back spacing and expanding lateral spread.",

},

"char\_unknown\_seated\_student\_group\_B": {

"absolute\_position": "The seated students are distributed across the four long table zones on either side of the frame -- the left two tables occupy approximately the left 25% of the frame (from the left edge to just left of the central axis), and the right two tables occupy approximately the right 25% (from just right of the central axis to the right edge). Vertically, they extend from the foreground all the way to the background, spanning the full length of the hall. In the frame they form two deep, dark human walls running the full vertical extent of the image.",

"relative\_position": "The left and right table zones are separated by the central aisle (approximately 3-4 meters wide). The nearest lateral distance between the seated students and the advancing newcomers is approximately 1-1.5 meters. In the depth dimension, the seated students extend from the nearest foreground all the way to just in front of the high table steps -- a span of approximately 30-40 meters.",

"position\_change": "No positional change throughout the shot. All seated students remain in their seats; only minor upper-body rotations for gaze tracking occur."

},

"multi\_subject\_interaction": {

"type": "This shot involves multi-layered, multi-type interaction relationships among subjects, which can be broken down into three groups: (1) Professor McGonagall → Newcomer Group: a guidance-and-compliance relationship in which McGonagall leads with authoritative bearing and the newcomers follow passively; there is no direct verbal exchange, but a clear social hierarchy and behavioral direction is established. (2) Harry ↔ Ron: a parallel-companion relationship -- the two maintain close spatial proximity (half a step apart) throughout, occasionally exchanging glances or brief whispered words, with body language that mirrors each other's shared tension and curiosity, forming a classic 'newly acquainted peers leaning on each other' interaction pattern. (3) Newcomer Group ↔ Seated Student Group: a unidirectional gaze / being-gazed-at relationship -- the seated students track the newcomers' progress with collective, ceremonial attention, while the newcomers continuously sweep their eyes across the seated audience in return, creating a 'scrutinizer and scrutinized' reciprocal gaze dynamic with no direct verbal or physical contact.",

"emotional\_tension": "The overall emotional tension of the interactions is a moderate, ceremonially charged anxiety combined with collective awe. A subtle power tension arises from the rhythmic contrast between McGonagall's authoritative stride and the newcomers' hesitant steps. The interaction between Harry and Ron conveys a warm sense of companionship that partially offsets the environmental pressure. The mutual gaze between newcomers and seated students generates a 'stage-fright' quality -- the sensation of being watched by an entire community -- which externalizes and amplifies the newcomers' anxiety under collective scrutiny. The three interaction layers combine into a composite emotional tension: ceremonial solemnity, individual nervousness, and the quiet warmth of a newly formed bond, together constituting the complete emotional fabric of the entrance ceremony."

},

"expression": {

"char\_001": {

"face": "Eyes slightly widened, pupils marginally contracted in response to the light change, brows lightly raised in a mixed expression of curiosity and mild astonishment. The mouth is held naturally closed or barely parted; facial muscles are in a state of mild tension -- the zygomatic region slightly elevated (an instinctive curiosity response), the jawline clean and unslackened (maintained tension). Fine horizontal creases appear across the forehead from the raised brows.",

"gaze": "Harry's gaze follows a dynamic scanning pattern throughout the shot: initially directed toward the left-side long tables, then tilting upward approximately 30-40 degrees to take in the floating candles and ceiling,

then sweeping horizontally to the right-side tables to complete one full survey cycle. A visible focal shift occurs when his eyes lock onto the floating candles -- transitioning from mid-distance focus to far-distance upward gaze -- conveying a mixture of awe at witnessing a magical spectacle for the first time and a faint, underlying sense of 'finally finding a place where I belong.'",

"emotion": "A tripartite composite of curiosity, reverence, and mild anxiety. Curiosity is dominant -- this is the natural response of a child who has never encountered the grandeur of the magical world being overwhelmed by visual spectacle. Reverence stems from the architectural scale of the hall and the weight of its ceremonial atmosphere. Anxiety -- an undercurrent of apprehension about the impending Sorting -- is present but momentarily suppressed beneath the sheer spectacle of the environment."

},

"char\_002": {

"face": "Mouth held half-open to fully agape throughout, jaw visibly dropped (a textbook 'slack-jawed' expression), eyes rounded to their maximum extent, brows raised so high they nearly disappear into the hairline. The overall facial expression is one of completely unguarded, enormous shock and wonder -- facial muscle tone is low, in a state of 'too stunned to manage one's own expression.' The mouth opens even wider each time Ron's attention snaps to a new target.",

"gaze": "Ron's gaze is the most rapid and erratic of all subjects: it flicks between the left and right long tables, the floating candles overhead, and the high table ahead in rapid succession, rarely dwelling on any single target for more than 2 seconds. His pupils remain dilated throughout, the whites of his eyes enlarged by the wide-open stare, conveying a state of 'visual overload' -- passive reception of too much stimulus at once, resulting in an inability to absorb any single element fully.",

"emotion": "Extreme shock and pure, childlike wonder are absolutely dominant; any trace of anxiety is almost entirely eclipsed by the sheer scale of his astonishment. As a pure-blood wizard who has grown up knowing about the magical world yet is still visibly floored by this specific manifestation of it, Ron's expression communicates a nuanced layer of 'I knew magic existed, but I didn't expect THIS' -- more externalized, more theatrical, and more visually comedic than Harry's reaction."

},

"char\_003": {

"face": "The corners of Hermione's mouth are slightly upturned in a restrained, composed smile; her lips remain closed or barely parted. Her eyes are wide but not to Ron's exaggerated degree; her brows are level with occasional slight upward movement. Facial muscle tone reflects controlled excitement -- a subtle lift in the zygomatic region and a slight flare of the nostrils (physiological markers of excitement) -- but the overall expression is held within the socially composed register of 'appreciating something with dignity.' Her lips occasionally move in what appears to be silent self-narration.",

"gaze": "Hermione's gaze moves in an orderly, systematic manner -- first to the ceiling (floating candles and the enchanted sky), then horizontally across the architectural structure on both sides, then settling on the high table ahead. Each fixation point is held for approximately 3-4 seconds, and the transitions between them are slower and more deliberate than Harry's, conveying the observational mode of someone 'verifying in person what they have already studied in books.' The movement of her lips suggests she may be silently reciting facts she already knows about the hall.",

"emotion": "Excitement and intellectual curiosity are dominant; any anxiety is neutralized by the self-assurance that comes from academic preparedness. Hermione's expression communicates not 'I'm overwhelmed' but 'I finally get to see this for myself' -- a satisfaction tinged with a faint intellectual superiority ('I've read everything there is to know about this place'). This reaction, sharply differentiated from Harry's (awe) and Ron's (stupefaction), precisely externalizes the three protagonists' distinct character dimensions."

},

"char\_010": {

"face": "McGonagall's expression is maintained in a state of stern composure; lips pressed together in a thin, firm line; brows slightly furrowed -- not in anger but in the focused concentration of professional authority; jawline taut and clean. The overall face projects an aura of 'absolute command.' Subtle relaxation at the outer corners of her eyes -- barely perceptible -- hints at a familiarity with this annual ritual and a deeply concealed care for the incoming students.",

```
"gaze": "Her gaze remains locked on the high table ahead throughout the shot, with only brief downward glances to the parchment scroll in her hand. Her eyes almost never deviate left or right, conveying the focused, undistracted mode of a leader who knows exactly where she is going -- a stark contrast to the wide-ranging, restless scanning of the students behind her.",
"emotion": "Professional gravity and restrained ceremonial solemnity. McGonagall's expression does not convey personal emotion but functions as a 'professional mask' appropriate to her role as ceremony officiant -- her sternness upholds the dignity of the Sorting ritual and simultaneously serves as a silent disciplinary signal to the newcomers. The subtle softness of the fine lines at her eye corners hints at a deep, long-cultivated devotion to the educational mission concealed beneath the severe exterior."
 }
 },
 "environment": {
 "scene_id": "scene_001 Hogwarts Great Hall",
 "scene_type": "Interior setting -- a monumental, ceremonial space within a medieval Gothic magical castle. The Great Hall measures approximately 40-50 meters in length, 15-20 meters in width, and over 20 meters in ceiling height, operating at a scale far beyond ordinary architectural experience and deliberately designed to inspire awe. The space functions as both the school's dining hall and its primary assembly and ritual venue, carrying a dual identity of the everyday (meals) and the ceremonial (Sorting Ceremony, seasonal feasts).",
 "background_detail": "The background is organized into five distinct depth layers, from foreground to background: (1) Foreground layer -- the entrance doorway zone, flanked on either side by stone torch-stands bearing open flames approximately 1 meter high, burning in warm orange-yellow tones with continuous flickering; the stone stands display carved decorative motifs in a medieval Gothic style. The door frame consists of dark-brown carved wooden double doors, fully open to either side, with relief carvings visible on the inner door panels. (2) Near-mid-ground layer -- four parallel dark-wood long dining tables extending from the foreground into the background, their surfaces set with metallic plates and goblets that reflect warm orange-gold highlights from the candles and flames; the benches on either side are densely occupied by students in black school robes, forming two continuous dark human bands. (3) Mid-ground layer -- the central stone-paved aisle, approximately 3-4 meters wide, serving as the procession's path; the side walls are warm-yellow sandstone with visible regular block-joint patterns and vertical plaster structures, hung above with colored house banners and tapestries. (4) Mid-background layer -- hundreds of white candles float unsupported approximately 5-8 meters above the hall floor, flames burning continuously in warm orange-yellow light, spaced approximately 30-50 cm apart in an irregular but even density, forming a vast matrix canopy of light points covering approximately the upper quarter of the frame; each candle exhibits an extremely subtle slow vertical drift (approximately ±2 cm), giving the entire candle array a living, 'breathing' rhythm rather than a mechanically fixed hover. The candles' light casts continuously shifting warm-toned highlights across all subjects and surfaces below, contributing approximately 60% of the hall's total illumination. (5) Background layer -- the faculty high table at the far end of the hall, elevated approximately 0.5-1 meter on a stepped platform, with a table spanning the full width of the hall behind which multiple staff members are seated; tall pointed-arch windows behind them admit deep-blue night-sky light, creating a cool-warm contrast against the interior candlelight. The overall background is rendered through a combination of practical set construction and digital visual effects (floating candles, enchanted ceiling), with depth-of-field sharpness transitioning from fully sharp in the foreground to a gentle soft-focus in the background, guiding the viewer's attention toward the newcomer procession in the near-to-mid-ground.",
 "environment_subject_relation": "The overwhelming scale of the Great Hall relative to the 11-year-old newcomers creates a crushing dimensional contrast -- the soaring Gothic vaulting, the long-table arrays extending to the visual horizon, and the hundreds of floating candles collectively construct a ceremonial space that vastly exceeds the newcomers' everyday spatial experience, precisely externalizing their core emotional state: anticipation within awe, and a search for belonging within smallness. The environment and subjects share a dual relationship of resonance and contrast -- resonance in that this magical space is the world the newcomers are about to join, and the warm glow of the floating candles communicates a welcoming
```

```
emotional undertone; contrast in that the eternal grandeur of the architecture against the fragility of the individual implies that these newcomers must still pass through trials before they can truly earn their place. Additionally, the silent collective gaze of the seated students adds a 'social pressure dimension' to the environment, making the hall not merely a spectacle of physical space but a stage of communal scrutiny."
 },
 "shot_scale": {
 "type": "Long Shot transitioning to Full Shot (LS → FS)",
 "reason": "The shot opens as a Long Shot -- framed from a high position above the hall entrance, it captures the complete panorama of the Gothic Great Hall, including the four long tables, hundreds of seated students, and the floating candle canopy; the newcomer procession occupies only a small proportion of the frame, with the compositional intent being 'establish the space and convey its grandeur.' As the camera descends and advances, the shot scale gradually transitions to a Full Shot -- the newcomer group (particularly Harry, Ron, and Hermione) increasingly fills the central frame area with their full-body figures, while the surrounding environment retains a substantial spatial presence; the visual weight balance has shifted from 'environment dominant' to 'subject and environment co-equal.' This progressive scale transition accomplishes the dual narrative function of 'spatial establishment' and 'character introduction' within a single continuous shot, avoiding the narrative rupture of a hard cut and allowing the audience to enter the space at the subjective experiential pace of the newcomers themselves."
 },
 "camera_movement": {
 "type": ["Crane Shot", "Push In", "Tracking Shot"],
 "description": "This shot employs a compound camera movement design in which three movement types are layered to form a single continuous spatial motion curve. (1) Opening state -- the camera is positioned approximately 6-8 meters above the hall entrance, framing the interior at a downward angle of approximately 25-30 degrees, with the full hall panorama contained within the frame. (2) Crane descent + forward push phase [0-8s] -- the camera descends slowly and evenly from its elevated position (dropping approximately 4-5 meters vertically) while simultaneously advancing along the hall's central axis toward the depth of the space (approximately 5-8 meters horizontally), tracing an arc from 'high-angle overview → low-angle accompaniment.' During this phase, the downward angle progressively decreases from approximately 30 degrees to approximately 10-15 degrees, and the horizon line gradually approaches the head height of the newcomer group. (3) Stabilized tracking phase [8-15s] -- the camera stabilizes at approximately 1.5-1.8 meters in height (just above the newcomers' heads) and advances forward at a pace roughly matching the group's walking speed, maintaining a near-constant relative distance to the lead characters (Harry and Ron). The movement mode transitions from crane to tracking shot; the camera behaves like an invisible companion following the newcomers into the depths of the hall from a vantage point just above their eye line. The overall movement speed is exceptionally smooth and even throughout -- no sudden acceleration or abrupt stops -- with Steadicam-grade stability eliminating all handheld shake, imparting a fluid, dreamlike visual quality of floating through space. The narrative effect of this movement design is to simulate, through physical spatial motion, a shift in narrative perspective from 'omniscient overhead observer' to 'character-level companion' -- within 15 seconds, the audience transitions seamlessly from 'a detached spectator surveying a spectacular space from above' to 'a fellow traveler stepping into the unknown alongside the newcomers,' achieving a remarkably elegant establishment of audience immersion."
 },
 "composition_angle": {
 "composition": "Strong leading-line composition and deep-perspective composition as the structural core. The four parallel long tables extend from the lower-left and lower-right of the frame toward a single vanishing point at the center of the image, forming a powerful one-point perspective leading-line system that forcibly draws the viewer's eye along the depth axis toward the high table at the far end of the hall. The vanishing point is located approximately one-third down from the top of the frame and horizontally centered -- falling precisely on the central high table area (near where Dumbledore is seated), aligning the narrative power center with the visual focal point with exact precision. The floating candles, distributed in a dense point matrix across the upper quarter of the frame, form a 'ceiling' visual boundary that confines the effective
```

narrative space to the lower two-thirds of the frame. The direction of the newcomers' advance is perfectly parallel to the table leading lines, creating a directional reinforcement in which both compositional structure and character movement simultaneously pull the viewer's gaze into the depth of the frame. The near-perfect bilateral symmetry of the hall -- two rows of tables, two rows of pilasters, two flanking torch-stands -- is rendered in a near-mirror composition on either side of the central axis, with the newcomer procession serving as the axial spine of this symmetrical structure, 'bracketed' and highlighted by the visual frames on either side.",

"angle": "The shot opens at a moderate downward angle (approximately 25-30 degrees), simulating a view from the height of the entrance arch looking inward and downward, with the camera positioned approximately 4-6 meters above all subjects. As the camera descends, the downward angle progressively decreases over 15 seconds to approximately 10-15 degrees of slight downward tilt, with the final camera position only approximately 20-30 cm above the newcomers' heads -- approaching eye level while retaining a faint residual sense of looking slightly down.",

"angle\_effect": "The opening moderate downward angle creates an effect of 'god's-eye panoramic display' -- the audience surveys the complete hall from above, acquiring an omniscient spatial understanding, while the downward angle amplifies the newcomers' smallness within this vast space, maximizing the architectural authority and ceremonial pressure of the hall. As the camera descends to near eye level, the angle effect transitions from 'macro survey' to 'immersive accompaniment' -- the audience is no longer a detached omniscient observer but becomes a near-equal companion walking alongside the newcomers, with the sense of smallness yielding to a sense of immersion, and objective narration yielding to subjective emotional participation. This dynamic shift in angle is itself a narrative device: the physical change in height through space serves as a metaphor for the audience's psychological repositioning -- from spectator to participant, from omniscient to limited, from god to mortal."

),

"special\_visual\_techniques": {

"techniques": ["VFX"],

"description": "This shot contains one key visual effect -- the Floating Candles VFX system. Hundreds of white candles hover unsupported approximately 5-8 meters above the hall floor, their bodies oriented vertically, with continuously flickering flames emitting warm orange-yellow light. The candles are spaced approximately 30-50 cm apart in an irregular but evenly distributed density, forming a vast matrix canopy of light points. Each candle exhibits an extremely subtle slow vertical drift (approximately  $\pm 2$  cm amplitude), giving the entire candle array a living, 'breathing' rhythmic quality rather than a mechanically static hover. The candles' light casts continuously shifting warm highlights across all subjects and surfaces below, contributing approximately 60% of the hall's total illumination. This VFX effect is sustained uninterrupted throughout the full 15-second duration of the shot. It functions simultaneously as the Great Hall's defining visual signature and as the narrative marker that distinguishes the 'magical world' from the 'Muggle world' -- when the newcomers step beneath the glow of these floating candles, the visual language unambiguously declares that they have officially entered the heart of the magical world."

},

"lighting": {

"direction": "A multi-source composite lighting system with at least four identifiable independent light sources: (1) Floating candle array -- the primary ambient light source, casting diffused downward illumination from approximately 5-8 meters above, functioning as a top-light with diffuse scatter characteristics; individual candles are dim, but hundreds in aggregate produce a uniform warm orange-yellow ambient base. (2) Foreground torch-stands -- positioned at the entrance on either side of the frame, with flames approximately 1 meter high, providing the strongest localized point-light sources; they primarily illuminate the entrance zone and the sides and backs of the foreground newcomers, generating strong side-backlight effects and warm orange rim-light halos along character silhouette edges. (3) Background high-table windows -- the pointed-arch windows admit deep blue-grey natural light from the night sky (moonlight or late-dusk residual), serving as a cool-toned background fill source that creates a cool-warm contrast with the interior candlelight; this source affects only the color temperature of the background layer. (4) Table-surface candles and metallic tableware reflections -- individual candles and reflective metal goblets and plates on the long tables serve as supplementary point sources, enriching the

lighting detail of the mid-ground layer. The key light is the floating candle array's overall ambient illumination (approximately 60% of total illumination); the fill light is the torch-stand side-backlight (approximately 25%); the remainder consists of supplementary sources.",

"quality": "Predominantly soft light with localized hard-light accents. The floating candle array, composed of many individually weak point sources at extremely high density, combines to produce a gentle, directionality-diffused scattered soft light; shadow edges are extremely soft or imperceptible, and facial tonal transitions are smooth and gradual. The torch-stands, as strong point sources, produce relatively defined shadow edges and high-contrast tonal transitions within their effective range (approximately 3-5 meters from the foreground); the side of a character's face toward a torch-stand is brightly lit in warm light while the shadow side falls rapidly to deep shadow. This 'large-environment soft light + localized strong hard light' mixed lighting design creates a dual visual texture that is simultaneously warm and tender yet dramatically contrastive.",

"contrast": "Medium to high contrast, with significant spatial variation in contrast levels across the frame. The foreground zone (torch-stand illumination range) is high contrast -- the torch-facing side of characters is lit to near-overexposed brightness while the shadow side drops rapidly to deep brown approaching black, with a highlight-to-shadow ratio of approximately 5:1 to 7:1. The mid-ground zone (candle ambient coverage) is medium contrast -- a discernible but not dramatic tonal differential between lit and shadow surfaces, with a ratio of approximately 2:1 to 3:1. The background zone is medium-low contrast -- the faculty high table and window area are overall darker, with the blue light from the windows and the warm candlelight merging into a soft cool-warm blend with no strong tonal divisions. The frame's brightest areas are concentrated in the upper portion (candle zone) and the foreground flanks (torch-stand zones); the darkest areas are in the lower portion (floor level) and beneath the long tables; the overall tonal weight of the frame is biased toward the upper bright zone.",

"emotional\_effect": "The lighting design in this shot serves the narrative function of 'the first welcoming light of the magical world.' The large-area warm orange-yellow candlelight creates an enveloping, protective, and safe lighting atmosphere -- this is not the cold light of a forbidding castle but the warm, intimate glow of an ancient school burning with hundreds of candles, communicating from the very first visual instant the emotional message 'you are welcome here' to both the newcomers and the audience. The warm rim-light generated by the torch-stands along character silhouette edges creates a visual effect of figures bathed in a halo of light, metaphorically suggesting that they are stepping into a luminous new world. The cool blue light from the background windows, as a contrasting complement, preserves the spatial depth and layering of the scene while simultaneously evoking the night outside the hall -- the newcomers are walking from darkness into light, and this lighting narrative forms a deep visual isomorphism with the story's central arc of characters moving from the ordinary world into the magical one."

},

"color\_tone": {

"dominant\_color": "Warm gold-orange is the absolute dominant color, with the combined illumination of the floating candle array and the torch-stands imposing a warm golden color base across the entire frame. Warm gold (approximately hue 30-45°) covers approximately 65-70% of the frame area, predominantly in the upper candle zone, the foreground flame zones, and the lit surfaces of the mid-ground. The secondary color is deep brown to dark umber (approximately 20%), present in the architectural walls, the dark-wood long table surfaces, and the students' dark robes, forming an analogous-color dark-toned palette in harmony with the warm gold. The accent color is the deep blue-grey (cool tone, approximately hue 210-230°) admitted through the background windows, occupying only approximately 5-8% of the frame area, but functioning as a critical cool-warm contrast anchor whose narrative impact far exceeds its proportional presence -- it prevents the frame from collapsing into monotonous warmth and provides a visual 'breathing space' of cool relief. The warm gold carries the emotional symbolism of warmth, safety, classicism, and ceremonial gravitas, aligning precisely with the Great Hall's narrative function as the site of the magical world's welcoming ceremony."

"saturation": "Medium-high saturation, but unevenly distributed: the core zones of flame and candlelight carry the highest saturation (approximately 70-85%), with the orange-yellow of the flames constituting the frame's highest-saturation visual hotspots; the architectural walls

and character costumes in the mid-ground carry medium saturation (approximately 40-55%), with the warm tones somewhat reduced by diffuse reflection off stone and fabric surfaces; the background window zone carries the lowest saturation (approximately 20-30%), with the deep blue-grey approaching the achromatic range. No complementary-color conflict is present -- the warm gold and deep brown are analogous-color harmonics, and the small amount of deep blue-grey, while forming a cool-warm contrast with the warm gold, is so small in area and so low in brightness that it reads as a gentle accent rather than an aggressive opposition. The overall color relationship presents a 'warm tones absolutely dominant, cool tones as trace accents' enveloping warmth, fully serving the 'welcoming entrance' narrative emotion.",

"overall\_style": "Classical warm-toned cinematography in a cinematic film-grain aesthetic, bearing the visual signature of high-budget fantasy films of the late 20th to early 21st century. The frame exhibits a subtle grain texture consistent with the physical properties of 35mm film stock; color transitions carry the non-linear gradation characteristic of film -- highlights slightly warm-shifted and gently overexposed (warm gold bleeding toward near-white in the brightest areas), while shadow areas retain rich brown-to-deep-umber detail rather than collapsing into pure black (a hallmark of film shadow rendering). The overall tonal register is low-key to mid-key, with overall frame brightness relatively subdued, but the high-saturation warm light sources create a visual warmth that prevents the low illumination from reading as oppressive or bleak. The color grade emphasizes the dominance of the warm gold palette, with slight suppression of the green and blue channels' purity, shifting all non-warm elements toward the warm end of the spectrum; the overall frame reads as if covered by a faint amber filter."

},

"mood\_emotion": {

"atmosphere": "A composite emotional atmosphere of reverence, anticipation, and ceremonial solemnity. The surface layer is the overwhelming shock of being conquered by a magnificent space and magical spectacle -- the floating candles, the Gothic vaulting, and the collective gaze of hundreds of seated students together constitute a 'spectacle space' that transcends everyday experience. The middle layer is anticipation and mild anxiety about the impending Sorting -- the newcomers are about to face the assignment of their fate, and they know nothing of the outcome. The deep layer is a warm expectation of belonging -- the warm-toned lighting, the ceremonial procession aisle of welcome, the teachers and peers waiting ahead all collectively suggest that this seemingly imposing grand space is, at its core, an accepting, welcoming, and ultimately theirs new world. The three emotional layers do not simply stack but dynamically interweave: the sense of shock gradually yields to anticipation as the camera descends and the characters advance deeper into the hall; the anxiety is progressively softened by the continuous enveloping warmth of the candlelight, producing an overall emotional arc of 'from awe to belonging.'",

"intensity": "Strong. The emotional intensity derives from simultaneous multi-dimensional stimulation: (1) Visual -- the monumental architectural scale, the magical spectacle of hundreds of floating candles, and the dense human arrays provide an extremely high visual information density and impact; (2) Auditory -- the orchestral score's solemn melody and the spatial reverb of the environment together construct a thick, enveloping acoustic presence; (3) Narrative -- this is the milestone moment of the protagonist's first entry into Hogwarts' central space, and the narrative weight of this significance lends additional emotional gravity to the audio-visual stimulation. The simultaneous high-intensity output across all three dimensions makes this shot one of the highest emotional-density passages in the sequence.",

"audience\_reaction": "Audiences watching this shot are likely to experience a compound, intense emotional response: (1) Physiological -- pupils dilating in response to the grand spatial imagery; involuntary breath-holding or soft gasps; a slight straightening of the spine in response to the sense of solemnity; possible mild goosebumps triggered by awe. (2) Emotional -- strong empathetic identification with the newcomer characters (evoking personal memories of entering an unfamiliar environment for the first time); aesthetic satisfaction and wonder at the visual realization of the magical world; excited anticipation at the narrative milestone of 'finally arriving.' (3) Cognitive -- the rapid decoding of the Great Hall's spatial information (identifying the four house tables, the floating candles, the faculty high table, etc.) constitutes a pleasurable form of intellectual engagement. The overall viewing experience is one of 'high-density immersive absorption' -- the audience is

completely enveloped by the spectacle of audio-visual information and enters a state of flow."

},

"bgm": {

"style": "Large-ensemble orchestral score, built on a string foundation with harp arpeggios and bright melodic lines from woodwinds (flute/oboe), supported by brass (French horn) providing solemn harmonic grounding in the lower register. The orchestration follows a 'full-panoramic' arrangement characteristic of Hollywood orchestral writing -- strings provide continuous sustained tones as the emotional base; harp contributes a 'shimmering' quality through ascending arpeggios and broken chords (visually echoing the floating candles); flute carries a magically inflected melodic theme in the upper-middle register (a motivic variant related to the Harry Potter main theme); French horn provides long-tone chords at phrase endings for a solemn, settling quality. The overall orchestration is characteristic of the Hollywood fantasy film 'wonder theme' model.",

"mood": "A composite emotional tone of solemnity and wonder. The sustained string bass provides a solemn ceremonial foundation; the harp arpeggios and flute melody layer above it to create a bright, shimmering, miracle-suffused upper emotional register. The overall BGM emotional direction points toward 'the reverential beauty of encountering something incomprehensible for the first time' -- not the reverence of fear, but the reverence of being moved by beauty and wonder. The BGM emotion aligns closely with the visual emotion: the orchestral solemnity resonates with the architectural grandeur of the hall; the harp's shimmer is visually isomorphic with the floating candles; the ascending melodic line is directionally consistent with the narrative of newcomers stepping into a new world.",

"rhythm": "Moderate-slow, approximately 70-80 BPM, primarily in a flowing 3/4 or 6/8 time signature (a waltz-like elegance and fluidity), with no strong downbeats or percussive drive. The strings are played in long legato bows -- no staccato or accents -- with melodic lines flowing continuously like water. Harp arpeggios appear approximately 1-2 times per measure, providing rhythmic highlights without disrupting the overall flow. During the crane descent from long shot to full shot, the score undergoes a subtle dynamic crescendo, with volume and orchestral density increasing in synchrony with the camera advance, reaching a stable volume plateau when the camera settles into the tracking full-shot position.",

"lyrics": null,

"volume\_layer": "Foreground-dominant to mid-ground underscore. The BGM occupies the primary frequency space and emotional guidance function in the mix (approximately 55-60% of total volume), but is not overwhelmingly foreground -- ambient sound effects (footsteps, spatial reverb, student whispers) occupy approximately 25-30% of the volume share, complementing rather than competing with the BGM. The BGM provides the emotional and atmospheric layer; the sound effects provide the spatial realism layer; the two are clearly differentiated and layered. In the shot's opening phase (long shot), the BGM is more foreground-dominant, as ambient sound effects have not yet been fully established; as the camera advances to full-shot range, the ambient sound effects (footsteps, whispers) gradually increase, and the BGM's relative position recedes slightly from foreground to near-foreground, yielding more acoustic space to the realism layer."

},

"sound\_effects": {

"natural": "The natural sound effect layer in this shot is exceptionally rich, with at least five distinct sound sources identifiable from near to far: (1) Near foreground -- the footsteps of the newcomer group: a composite of multiple asynchronous leather shoes and boots on stone flooring, with a hard, crisp tonal quality and a characteristic reverberant tail from the stone surface; the irregular, overlapping rhythm of the steps creates an uneven 'group-in-motion' sound stream. (2) Foreground mid-distance -- occasional hushed whispers between newcomers: extremely low in volume, content unintelligible, functioning purely as an atmospheric auditory element indicating 'low-level social exchange within the crowd.' (3) Mid-ground -- the continuous crackling and spitting of the torch-stand flames: a low-frequency hiss as a sustained base noise, punctuated by occasional sharp pops from the open flame, providing an auditory realism anchor for the torch-stands on either side of the frame. (4) Mid-to-far-ground -- the collective low-level ambient murmur of the seated student group: hundreds of faint whispers merging into an undifferentiated low-frequency hum, similar to the characteristic 'venue floor noise' of large assembly spaces. (5) Global -- the natural reverberation produced by the hall's vast architectural volume: all sound sources generate approximately 1.5-2.5 seconds of reverberant tail

between the stone walls and vaulted ceiling, imparting a sense of enormous spatial scale to every sound, making each footstep and whisper resonate as if 'echoing within a cathedral.'",

"designed": "The floating candles may be accompanied by an extremely faint designed sound effect -- a delicate 'breathing' sound resembling a gentle breeze passing through the candle array, or a barely perceptible high-frequency crystalline shimmer tone, at a volume at or below the threshold of conscious perception, functioning more as a subliminal 'magical atmosphere' auditory suggestion than as a clearly identifiable independent sound effect.",

"contribution": "The core contribution of the sound effects layer is to establish an auditory spatial presence commensurate with the visual grandeur of the frame. The 1.5-2.5 second reverberant tail is the critical element in constructing the auditory illusion of 'being inside an enormous interior space' -- without this reverb, the magnificent architecture on screen would lose its acoustic dimension entirely. The irregular group footsteps provide a rhythmic auditory anchor for the core visual action of 'the procession advancing,' lending physical realism to the characters' movement. The flame sounds spatially mark the torch-stands on either side of the frame, establishing left-right channel positional reference points in the auditory map. All natural sound effects together construct a fully credible acoustic model of 'a large stone interior, with hundreds of people present and open flames burning.'"

},

"dialogue": {

"content": "[NO DIALOGUE] This shot contains no spoken lines or narration of any kind.",

"speaker": null,

"narrative\_function": "This shot is a pure audio-visual narrative passage with no dialogue by design. This choice carries a clear narrative intent: the silence at the moment of entry (at the verbal level) transfers the entire burden of narrative information delivery to visual spectacle and musical score, allowing the audience to be fully immersed in the visual grandeur of the space without linguistic interruption. The silence is simultaneously an authentic reflection of the newcomers' psychological state at this moment -- they are too overwhelmed by what they see to speak -- and the absence of language is itself the most faithful expression of the emotional state of 'struck speechless by awe.'",

"narration": null

},

"audio\_visual\_relationship": {

"rhythm\_sync": "The audio-visual rhythm exhibits a high degree of synchronous reinforcement, achieved through 'fluid structural isomorphism' rather than beat-point alignment. The flowing 3/4-time BGM melody and the camera's smooth, even crane-and-push movement are fully synchronized in their shared qualities of continuity and smoothness -- both unfold without rupture, without sudden change, in a continuously flowing manner, constructing a triple-layered temporal flow of 'music flowing, camera moving, characters walking.' The score's subtle dynamic crescendo is precisely aligned in time with the shot scale transition from long shot to full shot -- the window of volume increase coincides with the window of the camera approaching the characters, so that as the audience visually draws closer to the subjects, they simultaneously feel the emotional density increase in the auditory dimension.",

"beat\_alignment": "Two identifiable beat-alignment moments are present: (1) The opening frame of the camera's descent is precisely synchronized with the entry of the string section's first downbeat in the score, achieving a 'camera begins to move → music begins to sound' simultaneous launch effect, lending the camera movement an auditory ceremonial weight. (2) The timing of the harp's first ascending arpeggio roughly coincides with the frame in which the floating candles first fully enter the frame, forming a cross-modal synesthetic beat alignment of 'shimmering arpeggio sound = shimmering candlelight image,' subconsciously binding the harp timbre to the visual image of the candles in the audience's perception.",

"emotional\_delivery": "Sound and image work in synchronous reinforcement to jointly deliver the core emotion of 'reverential beauty,' with the two contributing roughly equal emotional weight in this shot -- the visual grandeur of the architecture and the magical spectacle provide the 'content' of the emotion (the object of reverence), while the orchestral score provides the 'temperature' of the emotion (the warmth within the reverence). Without the image and only the score, the emotion would lack a concrete object; without the score and only the image, the hall's grandeur might read as cold and imposing rather than warm and welcoming. Their combination gives the sense of awe both visual concreteness

and auditory emotional warmth, producing a complete immersive emotional experience. Overall classification: audio-visually balanced, synchronously reinforcing emotional delivery mode."

},

"transition": {

"incoming": {

"type": "Motion Transition + Sound Bridge",

"effect": "The preceding shot depicts the newcomer group waiting in the corridor outside the hall (a medium shot of McGonagall walking toward the hall with students following); the camera uses the newcomers' forward movement through the doorway as the vehicle for a spatial transition -- at the end of the preceding shot, the camera follows the newcomers to the entrance door frame, where the warm golden light of the hall is already visible leaking through the gap as a visual preview; the door then opens (or is already open) within the frame, and the camera's forward momentum 'passes through' the doorway in a seamless transition into the current shot's interior space. On the audio level, the score's opening chord has already quietly entered in the final moments of the preceding shot (sound bridge), so that the emotional preparation in the auditory dimension precedes the spatial transition in the visual dimension by approximately 1-2 seconds -- the audience is first 'pulled into' the emotional space of the hall through hearing, then confirms the spatial transition through sight. This dual-channel overlay of motion transition and sound bridge creates an exceptionally fluid spatial transition experience: no visual rupture from a hard cut, no temporal gap from a fade, the spatial change completing itself naturally within the characters' continuous movement, keeping the audience's attention continuously focused on the newcomers' entry experience without interruption from the edit."

},

"outgoing": {

"current\_end\_state": "By the shot's end, the camera has descended to a full-shot tracking position near the newcomers' head height. The central frame area is occupied by the mid-back silhouettes of Harry, Ron, and the other lead characters; ahead, McGonagall's back can be seen having advanced to near the high table steps. The frame composition is a stable one-point perspective; candlelight covers the frame evenly from above. The BGM melody has entered a phrase-closing passage, with French horn long-tone chords providing a solemn resolution, and volume beginning a slight decay. The newcomer group's pace has marginally slowed (as McGonagall ahead begins to decelerate in preparation for stopping), signaling that the procession passage is about to conclude.",

"expected\_type": "Hard Cut or Match Cut",

"logic": "The anticipated outgoing transition is a hard cut to a medium shot of Professor McGonagall facing the newcomer group from the front at the high table -- a spatial jump from 'the kinetic following-shot perspective of the procession' to 'the static frontal perspective facing the ceremony officiant.' This hard cut marks, at the narrative level, the segment transition from 'procession passage' to 'ceremony passage,' and at the emotional level, a sudden shift from flowing reverential awe to static ceremonial tension. The rhythmic contrast of cutting from a moving shot to a static shot produces a strong 'braking effect' -- the momentum of the procession is abruptly arrested, shifting the audience's attention from spatial exploration mode to character-focus mode, preparing the narrative ground for the core Sorting Ceremony sequence that follows."

}

},

"narrative\_function": {

"role": "Establish",

"information\_delivered": "This shot functions as the core establishing shot for the Great Hall scene, delivering high-density multi-dimensional narrative information to the audience: (1) Spatial information -- the first complete presentation of the Great Hall in its entirety, establishing the audience's spatial cognitive model of this key narrative space (hall scale, four-table layout, high table position, floating candles, and other defining elements). (2) Temporal information -- the night sky visible through the background windows confirms that the ceremony takes place at night. (3) Population scale information -- the dense presentation of hundreds of seated students establishes, for the first time, the audience's understanding of Hogwarts' student population scale. (4) Social relationship information -- the power and belonging relationships among the three groups (newcomer procession as 'the guided,' McGonagall as 'the guide/authority representative,' and seated students as 'existing community members/scrutinizers') are clearly externalized through their spatial positioning. (5) Emotional state information -- through micro-expressions and body language, the differentiated emotional states of Harry

(curious awe), Ron (astonished stupefaction), and Hermione (prepared excitement) are conveyed, laying the character foundation for the individualized narrative of the Sorting sequence to follow.",

```

"context_relation": {
 "with_previous": "The preceding shot depicts the newcomers waiting in the corridor outside the hall -- its narrative function is emotional accumulation: the newcomers' anxious waiting and their curiosity about the unknown space beyond the door constitute a state of 'fully drawn bowstring' emotional tension. The current shot functions as the 'bowstring release' -- completing the emotional transition from 'the anxiety of waiting' to 'the shock of revelation' through the narrative sequence of door opening → space unfolding → visual spectacle presenting. The two shots form a classic Setup-Payoff narrative structure: the anxious waiting of the preceding shot is the Setup; the spectacular revelation of the current shot is the Payoff; the accumulation and release of tension are precisely calibrated.",
 "with_next": "Having established the Great Hall space and completed the dynamic procession passage, the next shot is anticipated to transition into the static ceremony passage -- McGonagall facing the newcomers front-on to read the roll or announce the rules, the Sorting Hat being presented, etc. The current shot prepares the next shot's static entry at a kinematic level through the natural deceleration of the procession's momentum (newcomers arriving at the front of the hall and coming to a stop). The spatial information established in this shot (four tables, high table, candles) will be repeatedly referenced in subsequent shots as known background without requiring re-establishment. The audience carries the accumulated sense of reverence and anticipation for the Sorting outcome from this shot into the next passage."
},
},
"task1_key_dimensions": [
{
 "dimension": "Environment & Background (Dimension 2)",
 "reason": "The Great Hall is not merely the background of this shot but the narrative itself -- its five-layer deep-perspective architectural space, the floating candle spectacle, and the four-table array are the first complete view of the magical world's central space that both the newcomers and the audience have ever seen. The grandeur of the environment directly determines the intensity of the awe response in both characters and audience, making it the spatial carrier of all emotional output in this shot."
},
{
 "dimension": "Camera Movement (Dimension 4)",
 "reason": "The compound movement of crane descent combined with tracking push-in is the shot's most critical technical achievement and narrative device. The camera's trajectory from god's-eye overview to companion-level accompaniment precisely simulates the audience's psychological journey from 'detached observer' to 'immersed participant,' and is the key execution mechanism that accomplishes the dual narrative functions of spatial establishment and character introduction within 15 seconds."
},
{
 "dimension": "Lighting (Dimension 7)",
 "reason": "The composite four-source lighting system is the physical foundation of the shot's visual atmosphere. The precise layering of the floating candle array's warm diffuse key light, the torch-stand side-backlight fill, the cool background window contrast, and the tableware reflection supplements together construct the 'warm magical world' lighting narrative -- the light not only illuminates the space but communicates 'welcome' as an emotional signal."
},
{
 "dimension": "Color & Tone (Dimension 8)",
 "reason": "The absolutely dominant warm gold-orange color palette is the direct source of the shot's emotional temperature. The design choice of covering 65-70% of the frame in warm gold transforms what could have been a cold, imposing Gothic architectural space into a warmly enveloping ceremonial venue, ensuring that the sense of awe simultaneously contains a sense of safety and belonging."
},
{
 "dimension": "Composition & Angle (Dimension 5)",
 "reason": "The strong leading-line one-point perspective composition and the dynamic downward-to-near-level angle transition are the structural sources of the shot's visual tension. The perspective system formed by the four long

```

tables forcibly directs the viewer's gaze toward the depth vanishing point in synchrony with the characters' direction of movement, constructing a visual metaphor of 'being guided toward one's fate.' The dynamic angle shift accomplishes the audience's psychological repositioning at the compositional level."

```

},
{
 "dimension": "Subject Position (Dimension 1.3)",
 "reason": "The multi-layered spatial distribution and dynamic displacement of six subject groups is the core of the shot's spatial narrative complexity. The four-tier longitudinal dynamic array -- McGonagall leading, newcomers following, Harry/Ron/Hermione in parallel, seated students static -- precisely externalizes the social relationships and power hierarchy among characters through spatial positioning within a single continuous shot."
},
{
 "dimension": "Mood & Emotion (Dimension 9)",
 "reason": "The three-layer composite emotional atmosphere of reverence, anticipation, and warmth is the ultimate output target of all audio-visual elements. The complexity (not merely spectacle but warmly inflected spectacle) and dynamism (a gradual arc from awe to belonging) of the emotional design elevates this shot far beyond a simple 'grand establishing shot,' achieving deep-level narrative emotional expression."
},
{
 "dimension": "BGM (Dimension 10)",
 "reason": "The orchestral 'wonder theme' score is the critical modulator of the shot's emotional temperature. The precisely engineered orchestration of sustained string base, harp shimmer, flute melody, and French horn solemnity transforms the visual grandeur of the frame into an emotionally accessible auditory experience, serving as the key acoustic catalyst that shifts the sense of awe from 'cold and imposing' to 'warm and welcoming.'"
},
{
 "dimension": "Audio-Visual Relationship (Dimension 13)",
 "reason": "The sophistication of this shot's audio-visual relationship lies in the cross-modal synesthetic beat alignment between harp arpeggios and floating candles, the synchronized rhythmic establishment between crane movement and score crescendo, and the complementary synchronous reinforcement in which visual grandeur and auditory warmth each contribute a distinct dimension to the same emotional direction -- sound and image do not simply double each other but each provide a different facet of the same emotion."
},
{
 "dimension": "Transition (Dimension 14)",
 "reason": "The motion transition plus sound bridge entry design is the foundational moment of the shot's immersive establishment -- through the seamless spatial passage of characters continuously moving through the doorway and the score's advance infiltration, the audience slides without rupture from the anxious waiting of the preceding scene into the spectacular revelation of the current one, constituting a perfect execution of the classic Setup → Payoff narrative pair."
},
],
"task2_video_generation_prompt": "STYLE: Hollywood fantasy film, cinematic 35mm film-grain aesthetic, warm golden classical cinematography, soft natural color gradation, rich brown-amber shadow detail retention.\n\nCAMERA: Compound crane descent + tracking push-in, single continuous 15-second shot. Opens approximately 6-8 meters above the hall entrance at a 25-30° downward angle, capturing the complete panorama of a Gothic Great Hall; descends smoothly while advancing along the central axis, reducing the downward angle to 10-15° over 8 seconds; final 7 seconds transition to a Steadicam-smooth tracking shot following the characters at 1.5-1.8 meters height. Absolute fluidity throughout -- zero handheld shake, dreamlike floating quality.\n\nSPACE: Monumental medieval Gothic castle great hall, approximately 40 meters long, ceiling height exceeding 20 meters. Stone torch-stands with open flames flank the entrance on both sides. Four dark-wood long dining tables extend in perfect one-point perspective from the foreground to the background, surfaces set with metallic plates and goblets. Sandstone side walls with vertical pilasters and colored house banners. Hundreds of white candles hover unsupported 5-8 meters above the floor, flames flickering, the entire array exhibiting a subtle slow breathing drift (±2 cm amplitude), forming a vast matrix canopy of warm light points. Faculty high table on a

```

raised platform at the far end, tall pointed-arch windows behind admitting deep blue night-sky light.\n\nSUBJECTS: A stern middle-aged woman in a deep emerald velvet robe and tall black pointed hat leads the procession with a ruler-straight spine, right hand holding a partially unrolled parchment scroll. Behind her, 15-20 first-year students approximately 11 years old follow in a loose column, wearing plain black unsorted robes. In the front rows: a slight black-haired boy with round metal-frame glasses (eyes wide, continuously scanning left, right, and upward in nervous wonder); half a step behind and to his left, a taller freckled red-haired boy (jaw dropped, mouth fully agape in undisguised astonishment); one body-length ahead and to the right, a girl with bushy brown curls (upright posture, composed restrained smile, systematic deliberate gaze). Hundreds of students in house-colored striped school robes sit in orderly rows on either side of the long tables, heads slowly tracking the procession.\n\nLIGHTING: Four-source composite: primary warm diffuse ambient from floating candle array above (warm orange-yellow, ~60% illuminance); strong side-backlight from entrance torch-stands generating warm rim-light halos along character silhouette edges; cool blue-grey fill from background pointed-arch windows creating cool-warm contrast; supplementary reflections from metallic tableware. High contrast in foreground (torch zone), medium contrast in mid-ground (candle zone). Low-key to mid-key overall tonal register.\n\nCOLOR: Warm gold-orange dominant (65-70% of frame), deep brown-umber secondary (~20%), trace deep blue-grey accent (~5-8%). Medium-high saturation. Faint amber-filter color grade overall.\n\nSOUND: Large-ensemble orchestral wonder theme -- sustained string base, ascending harp arpeggios, bright flute melody, solemn French horn chords; 70-80 BPM flowing 3/4 time, gentle crescendo synchronized with camera advance. Layered natural sound: group footsteps on stone (with 1.5-2.5 second architectural reverb tail), open flame crackling, low crowd murmur ambient.\n\nDIALOGUE: [NO DIALOGUE] No spoken lines in this shot.\n\nEMOTION: Reverential beauty -- the visual shock of monumental space and the emotional safety of warm golden light coexisting; a gradual transition from omniscient overhead solemnity to immersed ground-level wonder. The audience moves from detached spectator to fellow traveler stepping into the unknown."

```
}
``

> **NOTE -- DIALOGUE section format when dialogue IS
present:**
>
> The above example happens to contain no dialogue. When
'task0_detailed_tagging.dialogue.content' contains actual
spoken lines, you MUST reproduce them in full inside the
'DIALOGUE' section of 'task2_video_generation_prompt'. The
format is:
>
> ``
> DIALOGUE: The following spoken lines occur in this shot:\n
> [00:02-00:04] Father | Japanese | "Here, over here" |
Voice: Male, middle-aged, excited, loud, projecting,
beckoning eagerly\n
> [00:06-00:08] Mother | Japanese | "What a feast" | Voice:
Female, middle-aged, amazed, light, delighted\n
> [00:08-00:10] Father | Japanese | "Excuse me, is anyone
here?" | Voice: Male, middle-aged, loud, inquiring, echoing
into empty space
> ``
>
> **Rules**:
```

- > - Copy **every** utterance from 'task0.dialogue.content' without omission or summarization.
- > - Keep the **original language** of each line (do not translate).
- > - Include speaker identity, timestamps, and a delivery descriptor (tone, emotion, volume, voice quality).
- > - If 'task0.dialogue.narration' is non-null, append it as: '[NARRATION] Narrator (first-person) | "... " | Voice: ...'
- > - The SOUND section describes BGM and ambient audio; the DIALOGUE section captures all spoken words. These two sections are complementary and both required.