

# FoR-Net: Learning to Focus on Hard Regions for Efficient Semantic Segmentation

Hsin-Jui Pan<sup>a</sup>, Sheng-Wei Chan<sup>a</sup>, Meng-Qian Li<sup>a</sup> and Chun-Po Shen<sup>a,\*</sup>

<sup>a</sup>Department of Electrical and Computer Engineering, Tamkang University, No.151, Yingzhuan Rd., Tamsui Dist., New Taipei City, 251301, Taiwan

## ARTICLE INFO

### Keywords:

semantic segmentation  
region-focused reasoning  
Top-K selection  
sparse attention  
efficient segmentation

## ABSTRACT

We present FoR-Net, a lightweight architecture for semantic segmentation that focuses on identifying and enhancing hard regions. Instead of relying on heavy global modeling, FoR-Net adopts an efficient strategy that selectively emphasizes informative regions through a learned importance map and a Top-K activation mechanism. Specifically, a selector module predicts region-wise importance, enabling the model to focus on challenging areas such as thin structures and object boundaries. Multi-scale reasoning is achieved using convolutional branches with different receptive fields, allowing diverse spatial context aggregation. We evaluate FoR-Net on the Cityscapes benchmark under limited computational resources. Despite its lightweight design and standard training configuration, FoR-Net achieves competitive performance and exhibits improved attention to difficult regions. These results suggest that selective region-focused reasoning can serve as a practical and efficient alternative for semantic segmentation. This work explores region-focused reasoning under resource-constrained settings and provides insights for developing lightweight and region-aware segmentation models.

## 1. Introduction

Semantic segmentation is a fundamental task in computer vision, with applications in autonomous driving, robotics, and scene understanding. Early approaches are primarily based on convolutional neural networks (CNNs), which establish dense prediction frameworks through local convolution operations. While these methods benefit from strong inductive bias and computational efficiency, their limited receptive field restricts their ability to capture long-range dependencies. To address this limitation, various multi-scale context aggregation techniques have been proposed, such as atrous convolution and pyramid pooling, which significantly improve segmentation performance. However, these approaches often rely on complex architectural designs or dense multi-branch structures, leading to increased computational cost. More recently, Transformer-based methods have demonstrated strong capability in modeling global dependencies. Despite their effectiveness, these models typically require substantial computational resources, making them less suitable for practical deployment under constrained environments. In addition to global context modeling, handling challenging regions, such as thin structures and object boundaries, remains a persistent difficulty. These regions are often underrepresented during training and are prone to errors due to over-smoothing or insufficient local detail preservation. In this work, we explore an efficient region-focused alternative: instead of uniformly processing all spatial regions, we propose to explicitly focus on the most informative and difficult regions. We hypothesize that emphasizing such regions can improve segmentation quality while maintaining computational efficiency. To this end, we propose FoR-Net, a lightweight architecture that learns to focus on hard regions through a selector-driven mechanism. A learned importance map is used to identify critical regions, followed by a Top-K selection strategy that activates the most informative areas for further reasoning. In addition, multi-scale convolutional branches are employed to capture diverse spatial context. We evaluate FoR-Net on the Cityscapes dataset under resource-constrained settings. The proposed approach demonstrates stable performance, particularly in challenging regions such as thin structures and object boundaries. This work focuses on efficient region-focused reasoning under limited computational resources, emphasizing practical applicability rather than extensive optimization. Compared to recent heavy architectures, FoR-Net prioritizes efficiency and interpretability while maintaining competitive performance.

**Contributions.** The main contributions of this work are summarized as follows:

\*Corresponding author

✉ 412441064@mail.tku.edu.tw (C. Shen)

ORCID(s):

- We propose FoR-Net, a lightweight segmentation framework that explicitly focuses on hard regions through a selector-driven Top-K mechanism.
- We demonstrate that region-focused reasoning provides an effective inductive bias, enabling stable training without relying on complex architectures or loss functions.
- We conduct extensive experiments on the Cityscapes dataset, including ablation studies on multi-scale dilation, showing consistent improvements with increasing receptive fields.
- We show that FoR-Net achieves competitive performance under resource-constrained settings, highlighting its practical applicability.

## 2. Related Work

### 2.1. CNN-based Semantic Segmentation

Early semantic segmentation methods are primarily based on convolutional neural networks (CNNs). Fully Convolutional Networks (FCN) first introduced an end-to-end framework for dense prediction by replacing fully connected layers with convolutional layers [17]. Subsequent works improve segmentation performance by incorporating multi-scale context. DeepLab [2, 3, 4] introduces atrous convolution to enlarge the receptive field without reducing spatial resolution, while PSPNet [29] employs pyramid pooling to aggregate global context. Later works such as UPerNet [23], HRNet [21], and OCRNet [27] further improve feature representation through multi-scale fusion and high-resolution representations. These methods significantly improve accuracy but often rely on complex multi-branch designs or dense sampling strategies.

### 2.2. Transformer-based Methods

Recently, Transformer-based approaches have achieved strong performance in semantic segmentation due to their ability to model long-range dependencies. Methods such as SegFormer [24], Swin Transformer [16], Mask2Former [5], and SETR [31] demonstrate superior capability in capturing global context. However, these models typically require substantial computational resources and memory, limiting their applicability in resource-constrained settings. This motivates the exploration of lightweight alternatives that can maintain efficiency while preserving performance.

### 2.3. Efficient and Lightweight Segmentation

To address computational limitations, various efficient architectures have been proposed. BiSeNet [25] introduces a dual-path design to balance spatial detail and context information, while ICNet [30] focuses on real-time segmentation using multi-resolution inputs. DDRNet [13] and STDC [7] further improve real-time performance with efficient feature fusion strategies. MobileNet-based approaches further reduce computational cost through depthwise separable convolutions [14]. Despite their efficiency, these methods often suffer from degraded performance in challenging regions, such as thin structures and object boundaries.

### 2.4. Attention and Region-based Methods

Attention mechanisms have been widely used to improve feature representation by emphasizing important regions. Various spatial and channel attention modules have been proposed to selectively enhance informative features [22, 8]. Region-based approaches further extend this idea by focusing on specific spatial areas. However, most existing methods rely on soft attention mechanisms, which may still distribute focus across irrelevant regions. In contrast to these approaches, our work adopts an explicit and efficient selection strategy through a Top-K mechanism, which enforces hard region selection. This design allows the model to concentrate on difficult regions, such as boundaries and thin structures, leading to more focused feature aggregation.

### 2.5. Multi-scale Context Modeling

Techniques such as atrous spatial pyramid pooling (ASPP) [2] and pyramid pooling [29] aim to capture features at different spatial scales. In FoR-Net, we adopt a simple multi-branch design with convolutional kernels of different sizes to achieve multi-scale reasoning. Unlike complex pyramid structures, our approach maintains efficiency while still capturing diverse spatial dependencies.

## 2.6. Additional Context on Efficient Modeling

Beyond conventional CNN and Transformer-based methods, several recent works have explored efficient modeling strategies for dense prediction. Lightweight architectures such as ENet [19] and ERFNet [20] focus on real-time performance with reduced computation. ShuffleNet-based segmentation models [28] further improve efficiency through channel shuffling operations. More recent designs such as SegNeXt [11] revisit convolutional attention mechanisms for improved efficiency.

In addition, context modeling has been extensively studied. Methods such as GCNet [1] and CCNet [15] aim to capture global dependencies efficiently. More recently, state space models and efficient sequence modeling approaches have also been explored for vision tasks [10, 9]. Despite these advances, many approaches still rely on either complex architectures or dense global modeling. In contrast to these approaches, FoR-Net adopts a simple region-focused strategy that explicitly selects informative areas, offering an alternative perspective for efficient segmentation.

## 3. Method

### 3.1. Overview

FoR-Net follows a standard encoder-decoder architecture built upon a ResNet-101 backbone with an output stride of 8. To ensure stable training under small batch sizes, we replace all Batch Normalization layers with Group Normalization. Given an input image  $I \in \mathbb{R}^{H \times W \times 3}$ , the backbone extracts hierarchical feature maps, where high-level features  $F \in \mathbb{R}^{C \times H' \times W'}$  are used for global reasoning, and low-level features are used for spatial refinement.

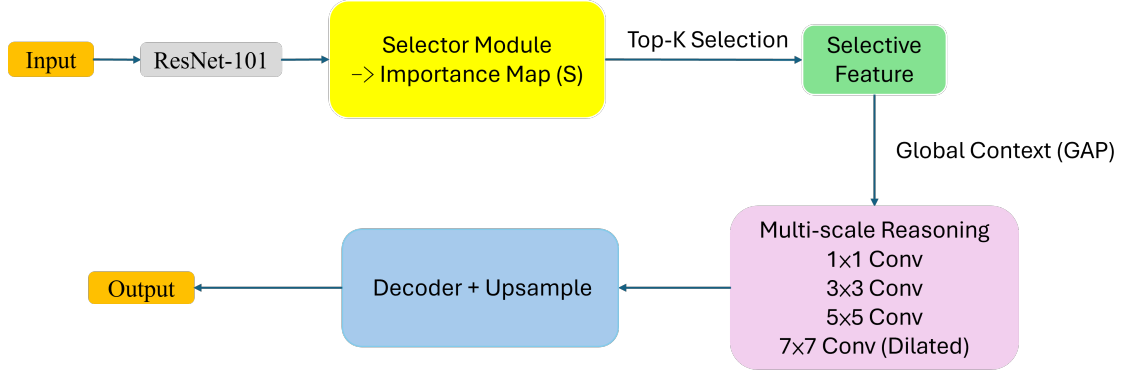


Figure 1: Overview of FoR-Net. The model predicts an importance map via a selector module and selects hard regions using a Top-K mechanism. The selected features are enhanced through multi-scale reasoning branches, followed by a lightweight decoder for semantic segmentation.

The core idea of FoR-Net is to explicitly focus on informative regions and enhance them through selective reasoning, as illustrated in Fig. 1. This is achieved via three key components: (1) a selector module that predicts region-wise importance, (2) a Top-K activation mechanism that enforces hard selection, and (3) multi-scale reasoning branches for contextual aggregation.

### 3.2. Selective Region Focus

To identify informative regions, we introduce a selector module that operates on high-level feature maps  $F$ . The selector consists of a lightweight convolutional block followed by a  $1 \times 1$  projection, producing an importance map:

$$S = \sigma(\phi(F)), \quad (1)$$

where  $\phi(\cdot)$  denotes the selector network and  $\sigma(\cdot)$  is the sigmoid activation. The resulting map  $S \in [0, 1]^{H' \times W'}$  represents the importance of each spatial location.

To enforce explicit region selection, we adopt a Top-K mechanism. Specifically, we select the top  $k$  percent of spatial locations based on their importance scores, producing a binary mask  $M$ :

$$M = \text{TopK}(S), \quad (2)$$

where  $M \in \{0, 1\}^{H' \times W'}$ . This mask is applied to feature maps via element-wise multiplication, ensuring that only the most informative regions are emphasized:

$$F_{sel} = F \odot M. \quad (3)$$

Unlike soft attention mechanisms, this hard selection strategy encourages the model to concentrate on difficult regions, such as object boundaries and thin structures. This highlights that hard selection provides a more explicit mechanism for emphasizing critical regions compared to conventional soft attention.

### 3.3. Global Context Integration

To incorporate global information, we extract a global context vector via global average pooling:

$$g = \psi(\text{GAP}(F)), \quad (4)$$

where  $\psi(\cdot)$  is a projection layer. The global context is then broadcast and added to the feature maps:

$$F_{ctx} = F + g. \quad (5)$$

This allows FoR-Net to integrate global semantic information while preserving spatial structure.

### 3.4. Multi-scale Reasoning

To capture diverse spatial dependencies, we employ multiple convolutional branches with different receptive fields. Specifically, we apply four parallel convolutions with kernel sizes  $1 \times 1$ ,  $3 \times 3$ ,  $5 \times 5$ , and  $7 \times 7$ :

$$F_i = C_i(F_{ctx} \odot M_i), \quad (6)$$

where  $C_i(\cdot)$  denotes convolution with kernel size  $k_i$ , and  $M_i$  represents masks with different Top-K ratios. The outputs from all branches are aggregated:

$$F_{agg} = F + \sum_i F_i. \quad (7)$$

This design enables the model to capture both fine-grained details and broader contextual information while maintaining computational efficiency.

### 3.5. Decoder and Feature Fusion

The refined high-level features are upsampled and fused with low-level features extracted from earlier layers. A lightweight decoder consisting of convolutional layers is used to generate the final segmentation logits:

$$Y = D(F_{agg}, F_{low}), \quad (8)$$

where  $D(\cdot)$  denotes the decoder.

### 3.6. Auxiliary Supervision

To further emphasize challenging regions, we introduce an auxiliary supervision signal derived from boundary information. A boundary map is constructed from ground truth labels, and a binary cross-entropy loss is applied to the selector output:

$$\mathcal{L}_{sel} = \text{BCE}(S, B), \quad (9)$$

where  $B$  denotes the boundary map.

The overall training objective is defined as:

$$\mathcal{L} = \mathcal{L}_{CE} + \lambda_1 \mathcal{L}_{Dice} + \lambda_2 \mathcal{L}_{sel}, \quad (10)$$

where  $\mathcal{L}_{CE}$  is cross-entropy loss and  $\mathcal{L}_{Dice}$  is Dice loss.

To further understand the behavior of the proposed mechanism, we provide the following analysis. The proposed Top-K mechanism can also be viewed from a sparse learning perspective. By explicitly selecting a subset of spatial locations, the model reduces redundancy in feature representation and focuses computational resources on critical regions. This is particularly beneficial in dense prediction tasks, where many spatial locations may contribute little to the final decision.

Moreover, this mechanism implicitly balances exploration and exploitation. While the selector module learns to identify informative regions, the Top-K constraint enforces a structured sparsity that prevents the model from over-relying on trivial or redundant features. This leads to more robust and discriminative representations.

## 4. Experiments

This comparison is not intended as a strictly controlled benchmark, but rather to demonstrate practical usability under constrained hardware.

### 4.1. Experimental Setup

We evaluate FoR-Net on the Cityscapes dataset [6], a widely used benchmark for urban scene understanding. The dataset contains high-resolution images with fine-grained annotations across 19 semantic classes. All experiments are conducted under limited computational resources using a single GPU (NVIDIA A100). The model is built upon a ResNet-101 backbone [12] and trained with a batch size of 8. To stabilize training, Group Normalization is adopted throughout the network. Following common practice, we use an output stride of 8 and a crop size of  $768 \times 768$  during training. Data augmentation includes random scaling, cropping, and horizontal flipping. The model is optimized using AdamW [18] with an initial learning rate of  $1 \times 10^{-4}$  and trained for 200 epochs. A poly learning rate schedule is applied. The training objective consists of cross-entropy loss, Dice loss, and an auxiliary selector supervision loss that emphasizes boundary regions.

### 4.2. Quantitative Results

We report mean Intersection-over-Union (mIoU) on the validation set. Despite its lightweight design and standard training configuration, FoR-Net achieves competitive performance under resource-constrained settings. Compared to baseline methods, FoR-Net demonstrates more stable performance across different categories, particularly in challenging regions such as thin structures and object boundaries. These results further validate the effectiveness of the proposed region-focused reasoning mechanism.

This suggests that explicitly focusing on informative regions provides a strong inductive bias for efficient segmentation.

| Method                | Backbone   | Val mIoU (%) |
|-----------------------|------------|--------------|
| PSPNet                | ResNet-101 | 78.4         |
| DANet                 | ResNet-101 | 78.8         |
| DeepLabV3+            | ResNet-101 | 79.3         |
| <b>FoR-Net (ours)</b> | ResNet-101 | 80.49        |

### 4.3. Qualitative Results

Fig. 2 presents qualitative results on the Cityscapes validation set. FoR-Net demonstrates a strong ability to focus on structurally challenging regions, including thin objects (e.g., poles and traffic signs) and object boundaries. Compared to baseline models, FoR-Net produces more consistent predictions and reduces over-smoothing effects, particularly in regions where fine structures are typically lost. Despite its lightweight architecture and standard training objective, the model maintains coherent segmentation without relying on complex refinement modules or heavy post-processing.

These observations suggest that explicitly focusing on informative regions, even with a standard training pipeline, can lead to meaningful improvements in segmentation quality.

FoR-Net achieves the best performance among the compared methods while maintaining an efficient architecture and training strategy. Notably, the improvement is obtained without relying on complex modules such as attention-based refinement or multi-stage optimization. This result suggests that explicitly focusing on informative regions can effectively compensate for the lack of heavy global modeling, leading to competitive segmentation performance. These qualitative observations are consistent with the quantitative results.

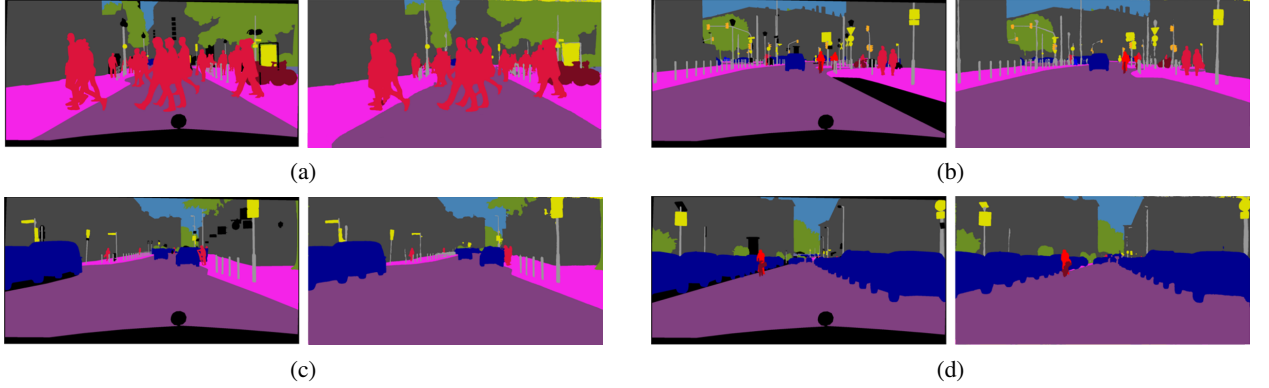


Figure 2: Qualitative comparison on the Cityscapes validation set. For each pair, the left image shows the baseline prediction, while the right image shows the result of FoR-Net. FoR-Net demonstrates improved consistency in challenging regions such as thin structures and object boundaries, while reducing over-smoothing effects.

#### 4.4. Analysis of Training Efficiency

A key advantage of FoR-Net lies in its efficiency. Unlike many recent segmentation models that rely on sophisticated loss functions or carefully tuned optimization strategies, FoR-Net can be effectively trained using a standard combination of cross-entropy and Dice loss, along with a lightweight auxiliary supervision signal. We observe that the model converges stably without requiring additional techniques such as complex regularization terms, multi-stage training, or heavy architectural modifications. This suggests that the proposed selective reasoning mechanism itself provides a strong inductive bias, allowing the model to focus on informative regions without relying on complicated training objectives. Furthermore, the Top-K selection mechanism introduces an implicit form of hard attention, which naturally emphasizes difficult regions during training. As a result, FoR-Net achieves competitive performance with a stable and efficient training pipeline. Overall, these observations highlight that effective region-focused reasoning can be achieved without increasing training complexity, making FoR-Net a practical choice under limited computational resources.

#### 4.5. Ablation on Multi-scale Dilation

We further investigate the impact of multi-scale receptive fields by varying the dilation rates in the  $7 \times 7$  convolution branch. Specifically, we evaluate five configurations: no dilation, and dilation rates of 2, 4, 8, and 16.

| Dilation Rate   | mIoU (%) |
|-----------------|----------|
| 0 (no dilation) | 77.42    |
| 2               | 78.59    |
| 4               | 79.44    |
| 8               | 80.16    |
| 16              | 80.49    |

As the dilation rate increases, the model consistently improves in performance. This trend suggests that larger receptive fields provide more effective context aggregation, which is consistent with prior studies on dilated convolutions [26] that demonstrate the importance of expanding receptive fields for dense prediction tasks. Notably, the improvement is achieved without increasing model depth or introducing additional modules, further supporting the efficiency of the proposed design. These results highlight that combining region-focused selection with multi-scale

dilated convolutions is an effective strategy for enhancing segmentation performance. Interestingly, the improvement trend remains consistent across all configurations, indicating that the model benefits from progressively larger receptive fields. However, the marginal gain decreases at higher dilation rates, suggesting that there exists a saturation point where additional context provides diminishing returns. This observation highlights that effective segmentation requires a balance between local detail and global context, rather than relying solely on extremely large receptive fields.

#### 4.6. Discussion

FoR-Net is motivated by a simple observation: not all spatial regions contribute equally to segmentation quality. In particular, challenging regions such as object boundaries and thin structures are often underrepresented during training and prone to errors due to over-smoothing. Instead of increasing model complexity, FoR-Net introduces an explicit region selection mechanism that focuses on informative areas. This design can be interpreted as a form of hard attention, where only the most relevant regions are emphasized for further processing. Compared to conventional soft attention mechanisms, the Top-K selection enforces sparsity and reduces the influence of less informative regions.

Another key aspect of FoR-Net is its simplicity. Unlike many recent approaches that rely on complex architectures or carefully engineered loss functions, FoR-Net can be effectively trained using a straightforward objective. However, this work has several limitations. First, the current design relies on a fixed Top-K ratio, which may not adapt optimally across different scenes. Second, the model is evaluated under a standard training setup, and further optimization could potentially improve performance. Finally, comparisons with more advanced architectures are limited, as this work focuses on exploring region-focused reasoning under practical constraints rather than exhaustive benchmarking. Despite these limitations, we believe that the idea of explicitly selecting and enhancing hard regions provides a promising direction for developing efficient and practical segmentation models.

Building upon the above observations, we further discuss the broader implications of our design. Compared to recent trends that emphasize scaling model size and complexity, FoR-Net takes an alternative approach by improving the efficiency of feature utilization. This suggests that better inductive bias design can sometimes be more effective than simply increasing model capacity. In particular, explicitly modeling region importance provides a structured way to guide feature learning, which may complement existing approaches such as attention mechanisms and multi-scale context modeling. From a receptive field perspective, dilated convolutions enable the model to capture long-range dependencies without increasing the number of parameters. Larger dilation rates effectively expand the coverage of each convolutional operation, allowing the network to integrate broader contextual information. However, excessively large dilation may lead to sparse sampling and loss of local detail. Therefore, combining multiple dilation scales provides a balance between local feature preservation and global context modeling, which is critical for semantic segmentation tasks.

### 5. Conclusion

In this paper, we presented FoR-Net, a lightweight semantic segmentation framework that explicitly focuses on hard regions through a selector-driven Top-K mechanism. By emphasizing informative regions and combining multi-scale reasoning, FoR-Net achieves competitive performance while maintaining an efficient and practical design.

Unlike many existing approaches, FoR-Net does not rely on complex architectures or sophisticated training strategies. Our results suggest that incorporating region-focused inductive bias can significantly improve segmentation quality, particularly in challenging areas such as thin structures and object boundaries. This work highlights the potential of explicit region selection for efficient semantic segmentation. Future work may explore adaptive selection strategies, integration with more advanced backbones, and broader evaluation across diverse datasets.

### References

- [1] Cao, Y., Xu, J., Lin, S., Wei, F., Hu, H., 2019. Gcnets: Non-local networks meet squeeze-excitation networks and beyond, in: ICCV.
- [2] Chen, L.C.e.a., 2017a. Rethinking atrous convolution for semantic image segmentation, in: arXiv preprint arXiv:1706.05587.
- [3] Chen, L.C.e.a., 2017b. Rethinking atrous convolution for semantic image segmentation, in: arXiv.
- [4] Chen, L.C.e.a., 2018. Encoder-decoder with atrous separable convolution for semantic image segmentation, in: ECCV.
- [5] Cheng, B.e.a., 2022. Masked-attention mask transformer for universal image segmentation, in: CVPR.
- [6] Cordts, M.e.a., 2016. The cityscapes dataset for semantic urban scene understanding, in: CVPR.
- [7] Fan, M.e.a., 2021. Rethinking bisenet for real-time semantic segmentation, in: CVPR.
- [8] Fu, J.e.a., 2019. Dual attention network for scene segmentation, in: CVPR.
- [9] Gu, A., Dao, T., 2022. Efficiently modeling long sequences with structured state spaces, in: ICLR.

- [10] Gu, A., Goel, K., Re, C., 2021. Combining recurrent, convolutional, and continuous-time models with linear state space layers, in: NeurIPS.
- [11] Guo, M.H.e.a., 2022. Segnext: Rethinking convolutional attention design for semantic segmentation, in: NeurIPS.
- [12] He, K.e.a., 2016. Deep residual learning for image recognition, in: CVPR.
- [13] Hong, Y.e.a., 2021. Deep dual-resolution networks for real-time and accurate semantic segmentation, in: CVPR.
- [14] Howard, A.e.a., 2017. Mobilenets: Efficient convolutional neural networks, in: arXiv preprint arXiv:1704.04861.
- [15] Huang, Z., Wang, X., Wei, Y., Huang, L., Shi, H., 2019. Ccnet: Criss-cross attention for semantic segmentation, in: ICCV.
- [16] Liu, Z.e.a., 2021. Swin transformer: Hierarchical vision transformer, in: ICCV.
- [17] Long, J., Shelhamer, E., Darrell, T., 2015. Fully convolutional networks for semantic segmentation, in: CVPR.
- [18] Loshchilov, I., Hutter, F., 2019. Decoupled weight decay regularization, in: ICLR.
- [19] Paszke, A.e.a., 2016. Enet: A deep neural network architecture for real-time semantic segmentation, in: arXiv preprint arXiv:1606.02147.
- [20] Romera, E., Alvarez, J.M., Bergasa, L.M., Arroyo, R., 2017. Erfnet: Efficient residual factorized convnet for real-time semantic segmentation, in: IEEE Transactions on Intelligent Transportation Systems.
- [21] Wang, J.e.a., 2020. Deep high-resolution representation learning for visual recognition, in: TPAMI.
- [22] Wang, X.e.a., 2018. Non-local neural networks, in: CVPR.
- [23] Xiao, T.e.a., 2018. Unified perceptual parsing for scene understanding, in: ECCV.
- [24] Xie, E.e.a., 2021. Segformer: Simple and efficient design for semantic segmentation with transformers, in: NeurIPS.
- [25] Yu, C.e.a., 2018. Bisenet: Bilateral segmentation network, in: ECCV.
- [26] Yu, F., Koltun, V., 2016. Multi-scale context aggregation by dilated convolutions, in: ICLR.
- [27] Yuan, Y.e.a., 2020. Object-contextual representations for semantic segmentation, in: ECCV.
- [28] Zhang, X., Zhou, X., Lin, M., Sun, J., 2018. Shufflenet: An extremely efficient convolutional neural network for mobile devices, in: CVPR.
- [29] Zhao, H.e.a., 2017. Pyramid scene parsing network, in: CVPR.
- [30] Zhao, H.e.a., 2018. Icnet for real-time semantic segmentation, in: ECCV.
- [31] Zheng, S.e.a., 2021. Rethinking semantic segmentation from a sequence-to-sequence perspective with transformers, in: CVPR.