

Edge-Efficient Image Restoration: Transformer Distillation into State-Space Models

Srinivas Soumitri Miriyala^{1,*},[✉], Sowmya Vajrala^{1,*},[✉], Sravanth Kodavanti^{1,*},[✉],
Vikram Nelvoy Rajendiran¹, and Sharan Kumar Allur¹

Samsung Research Institute Bangalore, India

Abstract. We propose a modular framework for hybrid image restoration that integrates transformer and state-space model (SSM) blocks with a focus on improving runtime efficiency on edge hardware. While transformers provide strong global modeling through self-attention, their attention kernels incur substantial latency on mobile devices, especially for high-resolution inputs. In contrast, SSMs such as Mamba offer linear-time sequence modeling with lower runtime overhead but may underperform on fine-grained restoration tasks. To balance accuracy and efficiency, we train lightweight SSM blocks as feature-distilled surrogates of transformer blocks and use them to construct hybrid U-Net-style architectures. To automatically discover effective block combinations, we introduce **Efficient Network Search (ENS)**, a multi-objective search strategy that selects task-specific hybrid configurations from pre-aligned components. ENS optimizes restoration quality while penalizing transformer usage, serving as a lightweight proxy for latency and enabling architecture discovery without repeated hardware profiling. On a Snapdragon 8 Elite CPU, the Restormer baseline requires **10119.52 ms** for inference. In contrast, ENS-discovered hybrids significantly reduce runtime: **ENS-Deblurring** runs in **2973 ms** (**3.4× faster**), **ENS-Deraining** in **5816 ms** (**1.74× faster**), and **ENS-Denoising** in **8666 ms** (**1.17× faster**), while maintaining competitive restoration quality.

1 Introduction

Transformer-based architectures have demonstrated strong performance across a variety of vision tasks, including image restoration, due to their ability to model long-range dependencies via self-attention [56]. However, the quadratic complexity of standard attention makes them inefficient for high-resolution inputs, particularly on edge devices. To address this, several linear-scaling transformer variants—such as Linformer [58], Restormer [65], and Performer [12]—reduce attention cost via approximation or architectural simplification. While effective, these designs often encode task-specific inductive biases; for example, Restormer’s gated attention favors spatial patterns, while Linformer assumes

[✉]srinivas.soumitri@gmail.com, v.lahari@samsung.com, k.sravanth@samsung.com

*Equal Contribution

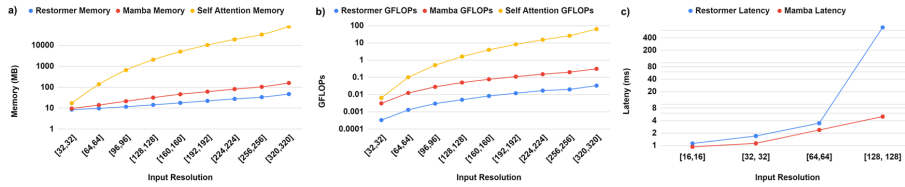


Fig. 1: a) Computational characteristics of Transformers (quadratic self attention), Mamba, and Restormer (linear Transformer) as profiled on Qualcomm chipset SM8750 on Android smartphone. The Y axis in all three plots is in log-scale. It can be observed that FLOPs and memory consumption are lower for Mamba than Transformer, whereas, Restormer is far more efficient than Mamba. However, when profiled for on-device latency it can be clearly seen that Mamba is the most efficient alternative among the three.

low-rank projections suited to language modeling. Such constraints may limit their generalizability.

State-space models (SSMs) like Mamba [19] offer an alternative, enabling linear-time modeling via implicit memory and recurrent dynamics. Mamba shows promise in long-context tasks [18], but its application to dense vision remains limited [63], and performance still lags behind transformers on high-fidelity detail restoration [34]. Recent adaptations such as MambaIR [6], MaIR [31] and MatIR [34] extend SSMs to pixel-level modeling, leveraging spatial priors and hierarchical encoders. However, in challenging image restoration tasks, these SSMs underperform relative to transformers [34].

Restormer, a highly efficient linear variant of transformers achieves lower FLOPs and memory usage than both vanilla Transformers and Mamba as can be seen in Figure 1, yet its attention mechanism still incurs substantial latency on edge hardware. Our block-level profiling on a commercial mobile chipset shows a consistent trend: as input resolution increases, Mamba blocks exhibit noticeably lower runtime despite their comparable or higher FLOPs. This mismatch reflects the hardware inefficiency of attention-dominated operations relative to Mamba’s linear state-space updates. Such observations motivate the need for hybrid architectures that preserve Transformer accuracy while benefiting from the practical latency advantages of Mamba. While we establish Mamba’s low latency, execution-friendly and compute efficient nature, a natural question that arises is whether the representational capacity of a Restormer block can, in practise, be distilled into a Mamba block?

To study the effectiveness of the distillation process, we performed an Effective Reception Field analysis (ERF) [41] (see Figure 2). We observe that while transformers exhibit wide, uniform receptive fields, vanilla SSM blocks remain local. However, after distillation, the SSM ERFs expand significantly, and fine-tuning further narrows the gap. This indicates that global attention behavior can be transferred through feature-level supervision. In addition, attention heatmaps (in Figure 2) show that SSM blocks help transformer layers become more glob-

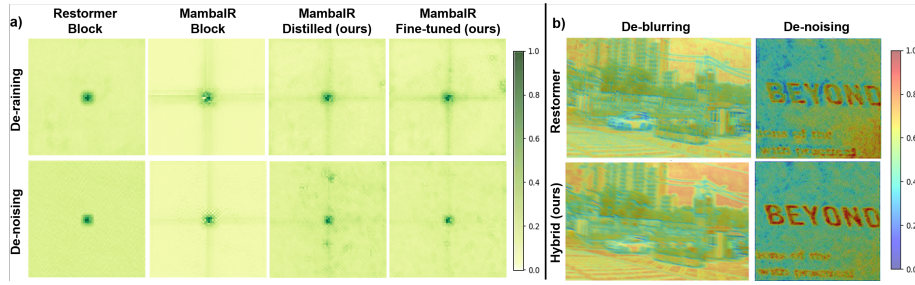


Fig. 2: (a) ERF visualization during hybrid training. Restormer shows global coverage, while standalone MambaIR exhibits limited spatial context. Feature distillation expands the MambaIR ERF, and after end-to-end fine-tuning it closely matches Restormer, indicating successful transfer of global context. (b) Attention heatmaps of Restormer blocks. In the hybrid model, attention becomes more globally distributed than in the pure Restormer, showing that MambaIR enhances spatial awareness of transformer layers and highlighting the complementary interaction between the two blocks.

ally focused, suggesting bidirectional complementarity: transformers help SSMs generalize globally, while SSMs sharpen transformer attention. Together, this highlights the strength of our hybrid formulation.

Motivated by this possibility, in this work, we propose a modular, block-wise hybrid framework in which each transformer block is paired with an SSM block trained as a feature-distilled digital twin. Rather than redesigning operators or co-training hybrid layers, we formulate hybridization as a distillation problem. We introduce a method called *Efficient Network Search* (ENS), which transforms deep hybrid design into a shallow block selection task by operating over pre-trained transformer and SSM components. ENS avoids training during the search and maintains computational efficiency.

We select Restormer as the expressive baseline because it represents the upper bound of accuracy among efficient Transformer models, owing to its linear attention and hierarchical design. MambaIR is chosen as the efficient counterpart, as its state-space recurrence delivers strong scalability and device-level latency benefits. Together, they form a natural expressive-efficient pairing for hybridization.

We cast hybrid architecture design as a multi-objective discrete optimization problem, jointly maximizing restoration quality (e.g., PSNR, SSIM) and minimizing architectural complexity (e.g., transformer count). To solve this, we adopt Bayesian Optimization [51] with Expected Hypervolume Improvement (EHVI) as the acquisition strategy, suitable for expensive, black-box search in low dimensions. While BO itself is standard, its use over a distillation-aligned block pool enables practical and scalable hybrid exploration. From the resulting Pareto front, we apply knee-point analysis to select candidates with strong accuracy-efficiency trade-offs and fine-tune them end-to-end.

We evaluate our approach on motion and defocus deblurring, denoising, and deraining—using datasets such as GoPro, RealBlur, HIDE, SIDD, Rain13K and Test100. Our method consistently outperforms or matches strong baselines while reducing computation, validating the effectiveness of ENS across diverse degradation scenarios. Our key contributions are as follows:

- We propose a modular hybrid framework that combines transformer and SSM blocks within a U-Net backbone, instantiated with Restormer and MambaIR.
- We introduce a digital twin distillation strategy that enables SSM blocks to replicate transformer outputs, enabling modular, training-free block substitution.
- We formulate an efficient hybrid architecture search method (ENS), using multi-objective Bayesian Optimization over pre-aligned blocks.
- We demonstrate competitive or improved performance across five restoration tasks compared to transformer- or SSM-only baselines.
- We provide empirical insights showing how SSM and transformer blocks mutually benefit each other through distillation and hybrid composition.
- Our framework is general and architecture-agnostic, enabling scalable hybridization for any compatible expressive-efficient block pair.

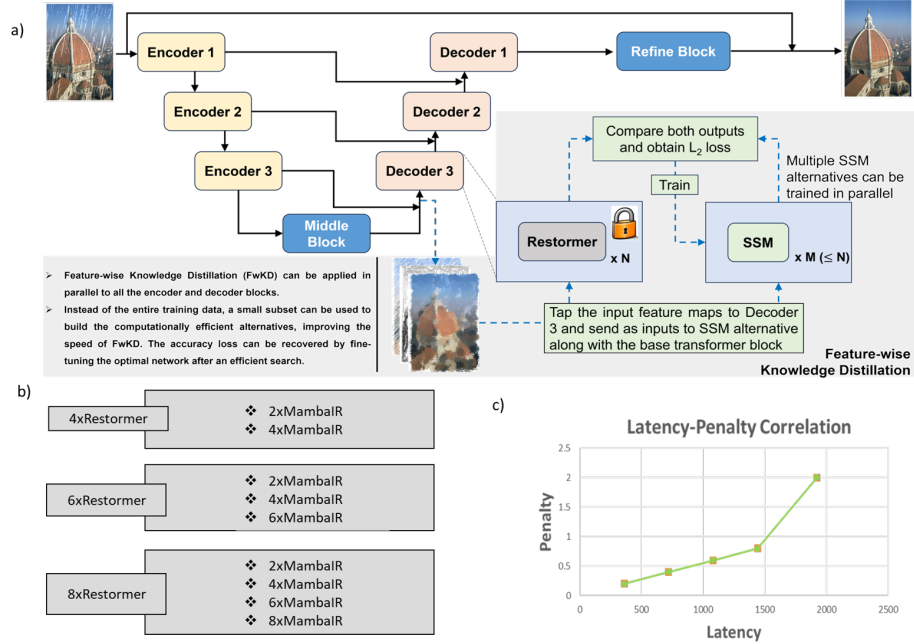


Fig. 3: a) Pictorial representation of Feature-wise Knowledge Distillation b) Alternatives considered for each base block c) Correlation between latency and penalty

2 Related Work

Transformer-based architectures have transformed vision tasks by enabling long-range dependency modeling, beginning with ViT [16] and extending to hierarchical variants like Swin Transformer [39] and CSWin [15]. To reduce their quadratic complexity, several linear and efficient attention approximations have been proposed, including Linformer [58], Performer [12], Longformer [4], and BigBird [64]. In the context of image restoration, task-specific transformer variants such as Restormer [65], HAT [9], and Uformer [57] adapt attention mechanisms to spatial hierarchies and encoder-decoder designs. Additional efforts like IPT [5], SwinIR [35], DRSformer [30], and Rformer [40] improve transformer efficiency via multi-scale reasoning, cross-attention modules, or dual-branch fusion. Alongside these, lightweight convolutional baselines such as NAFNet [7] and KBNet [72] are widely adopted for their simplicity and competitive performance in low-resource scenarios.

Recently, state-space models (SSMs), especially Mamba [19], have gained traction for image restoration due to their linear-time inference and long-context modeling capacity. MambaIR [6] augments SSMs with local convolutions and channel attention to address spatial redundancy and pixel forgetting. MambaIRv2 [74] introduces non-causal scanning for improved global context modeling. CU-Mamba [38] employs spatial and channel-wise SSMs in a U-Net backbone for enhanced representational richness. MambaLLIE [76] uses global-to-local SSMs for low-light enhancement, while TAMambaIR [13] adds texture-aware modulation to handle localized degradations. RestorMamba [21] addresses inpainting and denoising using Skip Scan and Enhanced Synergistic Mamba (ESM) blocks. Serpent [24] applies structured SSMs in multi-scale form for high-res restoration; Hi-Mamba [53] reduces sequential bias with hierarchical direction-aware blocks. VmambaIR [59] introduces Omni-Selective Scan, and DVMSR [8] distills transformer knowledge into compact Mamba-based models for super-resolution. TinyViM [23] incorporates frequency-aware routing to achieve resource-efficient designs. Surveys [20, 54] consolidate these developments, framing Mamba as a strong alternative to attention-centric pipelines in restoration.

Hybrid models seek to combine the precision of transformers with the efficiency of SSMs. Jamba [14] integrates Mamba, transformer, and mixture-of-expert (MoE) layers to scale to long sequences. Samba [73] alternates Mamba and sliding window attention for extrapolation over 1M tokens. Hymba [36] utilizes hybrid-heads combining attention and SSM within each layer, supplemented by meta tokens to improve memory and pattern recall. MambaVision [75] fuses attention into SSM blocks for dense prediction. MatIR [34] and Contrast [78] alternate or interleave transformer and SSM modules at the block level, while TinyViM [23] routes low-frequency features through Mamba in compact dual-branch structures.

The rise of hybrid and SSM-only models illustrates growing interest in alternatives to attention-heavy architectures for image restoration. Most hybrid approaches fuse transformer and SSM functionality within a single block, in-

heriting both their strengths and limitations. In contrast, our work introduces a modular hybrid framework that decouples the two: transformer blocks are paired with feature-distilled SSM counterparts and selected via a training-free search. This hybridization strategy allows for better control over architectural composition and, to our knowledge, has not been previously explored in image restoration.

3 Method

We propose a modular hybrid framework for image restoration by integrating transformer and state-space model blocks within a unified U-Net backbone. Rather than designing new SSM variants or fusing attention and SSM into monolithic operators, we decouple the design into two tractable subproblems: feature-level distillation and block-wise architecture selection. Transformer blocks serve as expressive teachers, while Mamba-based SSM blocks are trained to mimic their behavior as lightweight digital twins. This enables a training-free, modular search for compact, task-adaptive architectures.

3.1 Preliminaries

In standard transformers, attention complexity scales quadratically with input resolution (H, W) as $\mathcal{O}(\hat{H}^2\hat{W}^2)$, making them inefficient for high-resolution inputs. Restormer [65] mitigates this by performing attention along channels, reducing spatial complexity to linear. Each Restormer block takes input $\mathbf{I} \in \mathbb{R}^{\hat{H} \times \hat{W} \times \hat{C}}$ and outputs $\mathbf{O} \in \mathbb{R}^{\hat{H} \times \hat{W} \times \hat{C}}$, using two key modules: Multi-DConv Head Transposed Attention (MDTA), which applies 1×1 convolutions, depth-wise spatial convolutions, and channel-wise attention; and Gated-DConv Feed-Forward Network (GDFN), which fuses two linear paths (one passed through GELU) via Hadamard product and applies a depth-wise convolution for spatial refinement. Both modules are wrapped with residual connections and Layer-Norm [65].

MambaIR [6] blocks also map $\mathbf{I} \in \mathbb{R}^{\hat{H} \times \hat{W} \times \hat{C}}$ to $\mathbf{O} \in \mathbb{R}^{\hat{H} \times \hat{W} \times \hat{C}}$ via stacked Residual State Space Blocks (RSSBs), each comprising a Vision SSM (VSSM) with residual and normalization layers. VSSM flattens feature maps using four directional 1D scans (e.g., top-left to bottom-right), applies state-space modeling per scan, and aggregates the outputs. It includes two parallel branches: one processes features with depth-wise convolution and 2D SSM; the other uses a linear layer with SiLU activation. Outputs are fused via Hadamard product and passed through channel attention.

3.2 Overall Architecture

The backbone follows a four-level U-Net architecture. An input image $\mathbf{X} \in \mathbb{R}^{H \times W \times 3}$ is passed through a shallow convolution to obtain $\mathbf{F}_0 = \text{Conv}_{\text{stem}}(\mathbf{X})$. Three encoder stages $\mathcal{E}_1, \mathcal{E}_2, \mathcal{E}_3$ generate hierarchical features $\mathbf{F}_1, \mathbf{F}_2, \mathbf{F}_3$, followed

by a bottleneck block $\mathcal{B}$ yielding $\mathbf{F}_4$. Between encoder stages, pixel-unshuffle halves spatial resolution and doubles channels.

The decoder upsamples features via pixel-shuffle, passes them through $\mathcal{D}_3$, $\mathcal{D}_2$, and $\mathcal{D}_1$, and fuses skip-connected encoder outputs using concatenation followed by 1×1 convolution. This produces $\mathbf{G}_1$, refined via a block $\mathcal{R}$ to yield $\hat{\mathbf{F}} = \mathcal{R}(\mathbf{G}_1)$. The restored image is given by $\hat{\mathbf{X}} = \mathbf{X} + \hat{\mathbf{F}}$. The model is optimized using an ℓ_1 reconstruction loss: $\mathcal{L}_{\text{rec}} = |\hat{\mathbf{X}} - \mathbf{X}_{\text{GT}}|_1$. Following Restormer, we adopt a progressive learning strategy: training begins with small patches and gradually increases to full-resolution crops, adjusting batch size to maintain epoch time.

3.3 Feature-wise Distillation

Each encoder, decoder, and bottleneck stage in the transformer teacher contains multiple identical Restormer blocks. To enable modular substitution and training-free design, we align each MambaIR block with its Restormer counterpart via feature-level knowledge distillation (see Figure 3 detailed pictorial description). Given input $\mathbf{I}$, we compute $\mathbf{O}_T = \text{Restormer}(\mathbf{I})$ and $\mathbf{O}_S = \text{MambaIR}(\mathbf{I})$. We minimize the loss $\mathcal{L}_{\text{distill}} = |\mathbf{O}_S - \mathbf{O}_T|_2^2$ to make MambaIR blocks serve as lightweight surrogates. As each pair is trained independently, this process is scalable and parallelizable, reducing the hybrid design problem to selection over pre-aligned modules.

3.4 Hybrid Search Space Design

We define an 8-dimensional search space based on the fixed Restormer configuration: [4, 6, 6, 8] in encoder and bottleneck, and [6, 6, 4, 4] in decoder and refinement. Instead of one-to-one replacements, we consider configurations where MambaIR blocks are used in full, partial, or compact forms as shown in Figure 3. For example, a 6-block Restormer stage may be replaced by 6, 4, or 2 MambaIR blocks. This yields a search space of $3 \times 4 \times 4 \times 5 \times 4 \times 4 \times 3 \times 3 = 34,560$ hybrid configurations.

To support this, we pretrain 22 MambaIR surrogates: 2 for encoder-1, 3 each for encoder-2, encoder-3, decoder-3, decoder-2, 4 for the bottleneck, and 2 for decoder-1 and refinement. Each block is trained independently via distillation. This allows Efficient Network Search (ENS) to explore a large hybrid space using only a small, pre-aligned component pool. The obtained search space is tabulated in Supplementary file.

3.5 Efficient Network Search

We formulate hybrid design as a discrete multi-objective optimization problem. Each architecture is encoded by an 8-dimensional vector $\mathbf{z} = [z_1, \dots, z_8]$, where z_i is a categorical variable denoting block type in stage i . The first objective is difference in PSNR($\mathbf{z}$) and PSNR of base transformer model, measured on

a fixed validation set. The second is $\text{Penalty}(\mathbf{z})$, which quantifies architectural complexity by summing penalties based on block type: full Restormers incur the highest, followed by large and small MambaIR variants as represented in Figure 3. This yields the formulation:

$$\min_{\mathbf{z} \in \mathbb{Z}^8} (\text{PSNR}_{\text{Difference}}(\mathbf{z})) \text{ and } \min_{\mathbf{z} \in \mathbb{Z}^8} (\text{Penalty}(\mathbf{z})) \quad \text{subject to} \quad \mathbf{z}_{\min} \leq \mathbf{z} \leq \mathbf{z}_{\max} \quad (1)$$

Although networks are composed via plug-and-play block integration, evaluating PSNR on high-resolution validation sets is computationally expensive. Both objectives are black-box and gradient-free, motivating the use of Bayesian Optimization (BO). We map the categorical space to a continuous vector $\mathbf{x} \in [0, 1]^8$, which is discretized into $\mathbf{z}$ via fixed thresholds. BO models both objectives with Gaussian Processes and iteratively selects $\mathbf{x}$ by maximizing the Expected Hypervolume Improvement (EHVI) [51]. The resulting closed-loop search defines ENS: a training-free, sample-efficient strategy for discovering Pareto-optimal hybrid architectures.

To select the final architecture, we perform knee point analysis on the Pareto front to identify the configuration offering the best trade-off between PSNR and complexity. The selected model is then fine-tuned end-to-end, which helps recover accuracy losses arising from cascading mismatches introduced during surrogate-based block substitution in the search process.

4 Experiments and Results

Implementation Details. Our experiments are built upon the Restormer [65] architecture, which serves as the teacher model for all hybrid designs. The fixed block configuration is [4, 6, 6, 8] in the encoder and bottleneck, and [6, 6, 4, 4] in the decoder and refinement stages, resulting in an 8-dimensional search space and 34,560 possible configurations. To support this, we train 22 MambaIR surrogates in total—2 to 8 variants per stage, depending on block count. Each surrogate is trained independently via feature-level knowledge distillation, using fixed input-output pairs obtained from the pretrained Restormer model. This exercise required approximately 20 A100 hours. We adopt multi-objective Bayesian Optimization (BO) to explore the hybrid architecture space, modeling PSNR as the primary objective and block-wise penalty as the secondary objective. We start with $2 * \text{Dimensions} + 1 = 17$ initial points distributed uniformly across the search space, and the BO is run for 500 function evaluations. From each resulting Pareto front, we select the five closest candidates near the knee and fine-tune each of them end-to-end following the same training schedule as the Restormer [65] baseline. This includes progressive patch size scheduling, ℓ_1 loss supervision, and validation on full-resolution images. The final model per task is chosen based on the best validation PSNR among the knee-region candidates.

Table 1: Comparison of Image deraining between different State-of-the-arts based on the considered baselines. The best results are highlighted in **red**, second-best in **blue**, and third-best in **green**.

Method	Test100 [32]		Rain100H [61]		Rain100L [61]		Test2800 [22]		Test1200 [22]		Average	
	PSNR $\uparrow$	SSIM $\uparrow$	PSNR $\uparrow$	SSIM $\uparrow$	PSNR $\uparrow$	SSIM $\uparrow$	PSNR $\uparrow$	SSIM $\uparrow$	PSNR $\uparrow$	SSIM $\uparrow$	PSNR $\uparrow$	SSIM $\uparrow$
DerainNet [17]	22.77	0.810	14.92	0.592	27.03	0.884	24.31	0.861	23.38	0.835	22.48	0.796
UMRLL [62]	24.41	0.829	26.01	0.832	29.18	0.923	29.97	0.905	30.55	0.910	28.02	0.880
RESCAN [33]	25.00	0.835	26.36	0.786	29.80	0.881	31.29	0.904	30.51	0.882	28.59	0.857
PreNet [47]	24.81	0.851	26.77	0.858	32.44	0.950	31.75	0.916	31.36	0.911	29.42	0.897
MSPFN [22]	27.50	0.876	28.66	0.860	32.40	0.933	32.82	0.930	32.39	0.916	30.75	0.903
SPAIR [45]	30.35	0.909	30.95	0.892	36.93	0.969	33.34	0.936	33.04	0.922	32.91	0.926
MPRNET [67]	30.27	0.897	30.41	0.890	36.40	0.965	33.64	0.938	32.91	0.916	32.73	0.921
Restormer [65]	32.00	0.923	31.46	0.904	38.99	0.978	34.18	0.944	33.19	0.926	33.96	0.935
Fourmer [77]	NA	NA	30.76	0.896	37.47	0.970	NA	NA	33.05	0.921	NA	NA
IR-SDE [42]	NA	NA	31.65	0.904	38.30	0.980	30.42	0.891	NA	NA	NA	NA
MambaIR [6]	NA	NA	30.62	0.893	38.78	0.977	33.58	0.927	32.56	0.923	33.89	0.930
VMambaIR [59]	NA	NA	31.66	0.909	39.09	0.979	34.01	0.944	33.33	0.926	NA	NA
FreqMamba [79]	NA	NA	31.74	0.912	39.18	0.981	34.25	0.951	33.36	0.931	NA	NA
Ours	32.03	0.923	31.86	0.912	39.37	0.979	34.13	0.944	32.85	0.923	34.05	0.936

4.1 Edge Efficiency

A central motivation of our work is that FLOPs and GPU memory—commonly used as efficiency proxies—do not reliably predict latency on edge hardware. This mismatch is particularly pronounced for attention-based models, where operations that appear efficient in theory can incur substantial runtime overhead on mobile SoCs. Although Restormer is highly FLOP- and memory-efficient due to linear attention (Fig. 1), its attention kernels lead to significant latency during on-device execution. To address this, our ENS objective incorporates a lightweight transformer-usage penalty as a surrogate for latency, enabling fully training-free architecture search without repeatedly profiling thousands of candidates on hardware.

The effectiveness of this design is evident on the Snapdragon 8 Elite CPU. Restormer requires **10119.52 ms** for inference, whereas the ENS-discovered hybrids achieve substantially lower latency. **ENS-Deblurring** reduces runtime to **2973 ms**, delivering a **3.4 $\times$ speedup** over Restormer. **ENS-Deraining** achieves **5816 ms**, corresponding to a **1.74 $\times$ improvement**, while **ENS-Denoising** runs in **8666 ms**, yielding a **1.17 $\times$ improvement**. Importantly, these latency reductions are achieved while maintaining competitive restoration quality.

These results highlight that FLOPs and memory alone do not reflect real runtime behavior on edge devices, and demonstrate that the penalty-based ENS strategy effectively discovers hybrid architectures that provide meaningful practical efficiency improvements over pure transformer designs.

4.2 Deraining Performance

We evaluate our framework on single-image deraining using the Rain13K dataset for training, and test it across five diverse benchmarks: Rain100H, Rain100L,

Test100, Test1200, and Test2800. We compare the performance of the Restormer baseline, MambaIR-only model, and the hybrid architecture discovered through ENS in Table 1.

Our hybrid model consistently outperforms the MambaIR-only baseline and performs competitively with Restormer, despite using fewer transformer blocks. The improvement is particularly noticeable on complex scenes with dense or fine-grained rain streaks as shown in Figure 4. The hybrid architecture benefits from Restormer’s contextual richness and Mamba’s memory efficiency, leading to more balanced performance across datasets. Visual comparisons further reveal that our model retains more background texture while effectively removing rain artifacts.

4.3 Deblurring Performance

We evaluate the hybrid framework on two types of deblurring: motion and defocus. For motion deblurring, the model is trained on the GoPro dataset and tested on RealBlur and HIDE, representing cross-domain generalization. For defocus deblurring, the architecture selected from the ENS process is fine-tuned on the DPDD [2] dataset.

Table 2: Comparison of Motion deblurring between different State-of-the-arts based on the considered baselines. The best results are highlighted in **red**, second-best in **blue**, and third-best in **green**.

Method	GoPro [43]		HIDE [49]		RealBlur-J [48]		RealBlur-R [48]	
	PSNR [↑]	SSIM [↑]	PSNR [↑]	SSIM [↑]	PSNR [↑]	SSIM [↑]	PSNR [↑]	SSIM [↑]
Xu et al. [60]	21.00	0.741	NA	NA	27.14	0.830	34.46	0.937
DeblurGAN [26]	28.70	0.858	24.51	0.871	27.97	0.834	33.79	0.903
Nah et al. [43].	29.08	0.914	25.73	0.874	27.87	0.827	32.51	0.841
Zhang et al. [69].	29.19	0.931	NA	NA	27.80	0.847	35.48	0.947
DeblurGAN-v2 [27]	29.55	0.934	26.61	0.875	28.70	0.866	35.26	0.944
SRN [55]	30.26	0.934	28.36	0.915	28.56	0.867	35.66	0.947
DBGAN [70]	31.10	0.942	28.94	0.915	24.93	0.745	33.78	0.909
MT-RNN [44]	31.15	0.945	29.15	0.918	28.44	0.862	35.79	0.951
DMPHN [68]	31.20	0.940	29.09	0.924	28.42	0.860	35.70	0.948
SPAIR [45]	32.06	0.953	30.29	0.931	28.81	0.875	NA	NA
MIMO-Unet+ [11]	32.45	0.957	29.99	0.930	27.63	0.837	35.54	0.947
MPRNet [67]	32.66	0.959	30.96	0.939	28.70	0.873	35.99	0.952
Restormer [65]	32.92	0.961	31.22	0.942	28.96	0.879	36.19	0.957
MambaIR(ours)	31.56	0.950	30.29	0.909	28.76	0.871	36.00	0.953
Ours	33.08	0.962	31.25	0.943	30.22	0.901	36.76	0.959

This is the first known application of a Mamba-based architecture to image deblurring (mentioned as ours in Table 2). Our hybrid approach achieves com-

parable or superior PSNR and SSIM scores relative to the Restormer baseline, with improved performance on unseen test sets like RealBlur (see Table 2 and Table 3). The hybrid architecture demonstrates strong generalization, aided by the MambaIR blocks’ efficient temporal memory and the transformer blocks’ ability to capture global image structure. As presented in Figure 4 the output images show sharper edges and fewer residual blur artifacts.

Table 3: Comparison of Defocus deblurring between different State-of-the-arts based on the considered baselines, where subscripts S and D stand for single and dual-pixel defocus deblurring, respectively. Best results are in **red**, second-best in **blue**, and third-best in **green**.

Method	Outdoor				Indoor				Combined			
	PSNR $\uparrow$	SSIM $\uparrow$	MAE $\downarrow$	LPIPS $\downarrow$	PSNR $\uparrow$	SSIM $\uparrow$	MAE $\downarrow$	LPIPS $\downarrow$	PSNR $\uparrow$	SSIM $\uparrow$	MAE $\downarrow$	LPIPS $\downarrow$
<i>Single-pixel (S) Methods</i>												
JNB _S [50]	21.10	0.608	0.064	0.355	26.73	0.828	0.031	0.273	23.84	0.715	0.048	0.315
EBDB _S [25]	21.25	0.599	0.058	0.373	25.77	0.772	0.040	0.297	23.45	0.683	0.049	0.336
DMENets [28]	21.43	0.644	0.063	0.397	25.50	0.788	0.038	0.298	23.41	0.714	0.051	0.349
DPDNets [2]	22.25	0.682	0.056	0.313	26.54	0.816	0.031	0.239	24.43	0.747	0.044	0.277
KPAC _S [52]	22.62	0.701	0.053	0.269	27.97	0.852	0.026	0.182	25.22	0.774	0.040	0.227
IFAN _S [29]	22.76	0.720	0.052	0.254	28.11	0.861	0.026	0.179	25.37	0.789	0.039	0.217
KBNet _S [72]	23.10	0.736	0.050	0.233	28.87	0.882	0.025	0.143	NA	NA	NA	NA
Restormers [65]	23.24	0.743	0.050	0.209	28.87	0.882	0.025	0.145	25.98	0.811	0.038	0.178
MambaIR _S (ours)	22.99	0.739	0.051	0.278	28.25	0.874	0.024	0.190	25.55	0.805	0.038	0.235
Ours_S	23.34	0.741	0.050	0.243	29.14	0.876	0.024	0.174	26.16	0.807	0.037	0.209
<i>Dual-pixel (D) Methods</i>												
RDPD _D [3]	22.82	0.704	0.053	0.298	28.10	0.843	0.027	0.210	25.39	0.772	0.040	0.255
DPDNet _D [2]	22.90	0.726	0.052	0.255	27.48	0.849	0.029	0.189	25.13	0.786	0.041	0.223
Uformer _D [57]	23.10	0.728	0.051	0.285	28.23	0.860	0.026	0.199	25.65	0.795	0.039	0.243
IFAN _D [29]	23.46	0.743	0.049	0.240	28.66	0.868	0.025	0.172	25.99	0.804	0.037	0.207
Restormer _D [65]	23.97	0.773	0.047	0.175	29.48	0.895	0.023	0.134	26.66	0.833	0.035	0.155
MambaIR _D (ours)	22.39	0.699	0.053	0.342	27.05	0.845	0.028	0.240	24.66	0.770	0.041	0.292
Ours_D	24.00	0.768	0.046	0.200	29.63	0.893	0.023	0.147	26.74	0.829	0.035	0.174

Table 4: Comparison of Real Denoising between different State-of-the-arts based on the considered baselines. Best results are in **red**, second-best in **blue**, and third-best in **green**.

Dataset	DeamNet [46]		MIRNet [66]		MPRNet [67]		NBNet [10]		Uformer [57]		Restormer [65]		MambaIR [6]		MaIR [31]		Ours	
	PSNR $\uparrow$	SSIM $\uparrow$	PSNR $\uparrow$	SSIM $\uparrow$	PSNR $\uparrow$	SSIM $\uparrow$	PSNR $\uparrow$	SSIM $\uparrow$	PSNR $\uparrow$	SSIM $\uparrow$	PSNR $\uparrow$	SSIM $\uparrow$	PSNR $\uparrow$	SSIM $\uparrow$	PSNR $\uparrow$	SSIM $\uparrow$	PSNR $\uparrow$	SSIM $\uparrow$
SIDD [1]	39.47	0.957	39.72	0.959	39.71	0.958	39.75	0.959	39.77	0.959	40.02	0.960	39.89	0.960	39.92	0.960	40.04	0.961
SenseNoise [71]	NA	NA	39.3	0.919	35.43	0.922	NA	NA	35.43	0.920	35.52	0.924	NA	NA	NA	NA	35.87	0.923

4.4 Denoising Performance

We evaluate our method on real image denoising, where the model is trained on SIDD and evaluated on SenseNoise. The hybrid architecture is obtained via ENS, and fine-tuned following the same progressive strategy used in Restormer.

The hybrid model surpasses both MambaIR and Restormer baselines on real-noise benchmarks (see Table 4), offering improved noise suppression while preserving fine details. The transformer blocks provide accurate global context modeling, whereas the MambaIR blocks help reduce redundancy and noise artifacts with lower overhead. In challenging conditions with strong degradations, our model produces cleaner and sharper outputs (see Figure 4).

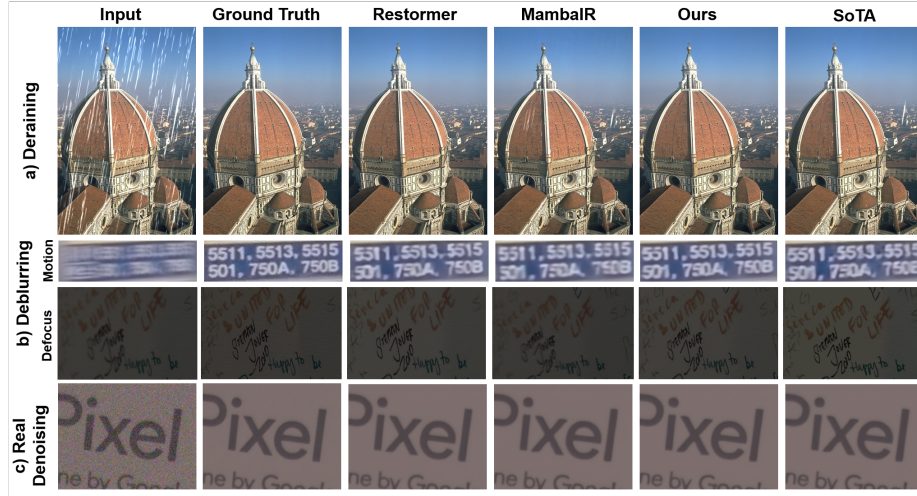


Fig. 4: Visual Quality comparison across different Image Restoration tasks. State-of-the-art (SOTA) being compared in case of Deraining is MPRNet [67], Motion Deblurring is DBGAN [70], Defocus Deblurring is KBNNet [72], and Denoising is MaIR [31]

4.5 Ablation Analysis

Impact of Feature-wise Distillation Feature-wise knowledge distillation (FwKD) is central to our hybrid design framework, enabling the transformation of MambaIR blocks into lightweight surrogates of transformer blocks without full-model retraining. To evaluate its contribution, we perform an ablation where the ENS-optimized architectures are initialized with random weights and trained with progressive learning.

We observe a significant drop in validation PSNR across all tasks when FwKD is removed (see Table 5), indicating that the surrogate blocks fail to capture the functional behavior of their transformer counterparts. This not only degrades individual block quality but also compromises the architecture search, as block-level substitutions no longer preserve performance under hybrid composition. Furthermore, attention heatmaps and receptive field analysis as presented in Figure 2 shows narrower activation spread and weaker context modeling when

FwKD is omitted. These results confirm that distillation is critical for convergence to desired accuracy and not only for enabling modular, training-free hybrid design, thus justifying its role in ENS.

Table 5: Ablation studies analyzing the effect of feature-wise knowledge distillation, impact of ENS, and justification of hybrid architecture.

Ablation Analysis	GoPro [43] - Deblur		SIDD [1] - Denoise		Rain100L [61] - Derain	
Design & Training Configuration	PSNR [†]	SSIM [†]	PSNR [†]	SSIM [†]	PSNR [†]	SSIM [†]
<i>Impact of Feature-wise Knowledge Distillation</i>						
Proposed model with FwKD	33.08	0.962	40.04	0.961	39.37	0.979
Proposed model without FwKD	28.54	0.913	39.69	0.958	35.39	0.960
<i>Impact of Efficient Network Search (ENS)</i>						
Randomly designed Hybrid network	31.82	0.952	39.88	0.960	39.98	0.977
Hybrid design with Equal blocks	31.02	0.944	39.85	0.960	37.51	0.968

Importance of Efficient Network Search To assess the effectiveness of our Efficient Network Search (ENS), we compare it against two alternative hybrid design strategies: (i) random selection of hybrid configurations from the same search space, and (ii) rule-based hybrids constructed by assigning 50% of the blocks in each stage to Restormer and the remaining 50% to MambaIR, similar to strategies used in prior hybrid vision models [37]. All configurations are composed using the same feature-distilled block pool to ensure fairness and are fine-tuned identically.

Hybrid architectures discovered via ENS consistently outperform both baselines in terms of PSNR and efficiency (see Table 5), demonstrating better trade-offs between transformer usage and restoration quality. Random and rule-based designs tend to fall outside the knee region of the Pareto front (see the diagrams in the Supplementary file), often overusing transformer layers or failing to allocate sufficient expressivity to key stages. In contrast, ENS identifies architectures concentrated around the Pareto knee, where performance plateaus despite increasing complexity.

Extending to another expressive-efficient - Uformer-MambaIR: To evaluate the generality of the proposed framework beyond the Restormer-MambaIR pairing, an ablation study was conducted using Uformer as the expressive backbone and MambaIR as the efficient surrogate. Results show that Uformer achieves high denoising accuracy but incurs significant latency (660 ms) on a Qualcomm SM8750 platform, while MambaIR offers lower latency (111 ms) but reduced PSNR. Applying the hardware-aware ENS formulation to this pair yielded hybrid architectures with near-identical accuracy to Uformer but reduced latency (437 ms and 489 ms). These hybrids balance expressive power and efficiency by leveraging Uformer in high-level stages and MambaIR in latency-critical stages, without architectural modifications to either model.

Table 6: Edge-efficiency of Uformer-SSM hybrids designed by ENS for denoising use-case. Once again, it can be seen that the proposed method generates architectures which balances the accuracy and latency (profiled on CPU of Qualcomm’s SM8750 chipset on Samsung Galaxy S25 ultra in INT4 precision). We reiterate that, these architecture reach the accuracy of the transformer base models but have significant lower latencies on device balancing the trade-off efficiently.

Model	PSNR	SSIM	Latency (ms)
Uformer	39.8	0.959	660
Arch-1	39.6	0.9586	437.8
Arch-2	39.8	0.9589	489.8

The study demonstrates that ENS is not specific to Restormer but generalizes robustly to other expressive models with different attention layouts and U-Net structures. The hardware-aware search space and feature-wise distillation (FwKD) remain effective across diverse backbones, enabling meaningful latency-accuracy trade-offs. These findings highlight the architecture-agnostic nature of the framework, driven by principled surrogate alignment and hardware-aware search, offering a systematic approach to edge-efficient image restoration.

Limitations Our framework presents a scalable path for efficient hybrid architectures. Key limitations include the assumption of sufficient block-wise functional substitution (without modeling deeper dependencies), the use of an indirect complexity proxy rather than direct latency measurement during search, and the inherent trade-off of training-free ENS between scalability and co-adaptation. These points suggest clear future research directions.

5 Conclusion

We presented a modular framework for hybrid architecture design that combines expressive transformer blocks with efficient state-space models for high-resolution image restoration. By framing the problem as a block-level distillation and selection task, we enabled plug-and-play substitution of transformer blocks with distilled MambaIR surrogates, converting deep sequence modeling into a shallow architectural optimization problem. Our Efficient Network Search (ENS) procedure leverages multi-objective Bayesian optimization over this compact space to discover task-adaptive hybrids without retraining during search. Through experiments on five restoration tasks, we demonstrated that our approach achieves strong performance with reduced computational cost, outperforming both transformer-only and SSM-only baselines. Analyses of receptive fields and attention maps reveal how distilled blocks inherit contextual capacity, while hybridization enables mutual enhancement between components. Our framework is architecture-agnostic and extensible to other expressive-efficient block pairings, offering a scalable path toward efficient and adaptable model design.

References

1. Abdelhamed, A., Lin, S., Brown, M.S.: A high-quality denoising dataset for smart-phone cameras. In: Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR). pp. 1692–1700 (2018)
2. Abuolaim, A., Brown, M.S.: Defocus deblurring using dual-pixel data. In: Computer Vision–ECCV 2020: 16th European Conference, Glasgow, UK, August 23–28, 2020, Proceedings, Part X 16. pp. 111–126. Springer (2020)
3. Abuolaim, A., Delbracio, M., Kelly, D., Brown, M.S., Milanfar, P.: Learning to reduce defocus blur by realistically modeling dual-pixel data. In: Proceedings of the IEEE/CVF International Conference on Computer Vision. pp. 2289–2298 (2021)
4. Beltagy, I., Peters, M.E., Cohan, A.: Longformer: The long-document transformer. In: arXiv preprint arXiv:2004.05150 (2020)
5. Chen, H., Wang, Y., Guo, J., et al.: Pre-trained image processing transformer. In: CVPR (2021)
6. Chen, J., Zhang, Y., Xu, Y., et al.: Mambair: Efficient state space model for image restoration. arXiv preprint arXiv:2402.15648 (2024)
7. Chen, L., He, J., Fan, Y., et al.: Simple baseline for image restoration with transformer. In: ECCV (2022)
8. Chen, R., Song, K., et al.: Dvmsr: Distilled mamba for lightweight super-resolution. arXiv preprint arXiv:2404.11778 (2024)
9. Chen, Y., Xie, L., Lin, W., et al.: Hat: Image restoration using hierarchical aggregation transformer. In: CVPR (2023)
10. Cheng, S., Wang, Y., Huang, H., Liu, D., Fan, H., Liu, S.: Nbnnet: Noise basis learning for image denoising with subspace projection. In: Proceedings of the IEEE/CVF conference on computer vision and pattern recognition. pp. 4896–4906 (2021)
11. Cho, S.J., Ji, S.W., Hong, J.P., Jung, S.W., Ko, S.J.: Rethinking coarse-to-fine approach in single image deblurring. In: Proceedings of the IEEE/CVF international conference on computer vision. pp. 4641–4650 (2021)
12. Choromanski, K., Likhoshesterov, V., Dohan, D., et al.: Rethinking attention with performers. In: ICLR (2021)
13. Dai, X., Wu, Y., et al.: Texture-aware mambair for fine-grained image restoration. arXiv preprint arXiv:2501.18401 (2024)
14. Dao, T., Gu, A., et al.: Jamba: Hybrid transformer-mamba with moe for scalable long-context language modeling. arXiv preprint arXiv:2404.14219 (2024)
15. Dong, X., Bao, J., Chen, D., et al.: Cswin transformer: A general vision transformer backbone with cross-shaped windows. In: CVPR (2022)
16. Dosovitskiy, A., Beyer, L., Kolesnikov, A., et al.: An image is worth 16x16 words: Transformers for image recognition at scale. ICLR (2021)
17. Fu, X., Huang, J., Ding, X., Liao, Y., Paisley, J.: Clearing the skies: A deep network architecture for single-image rain removal. IEEE Transactions on Image Processing **26**(6), 2944–2956 (2017)
18. Gu, A., Dao, T., Chen, X., et al.: Combining recurrent state spaces and linear attention for long-context tasks. arXiv preprint arXiv:2312.17143 (2023)
19. Gu, A., Dao, T., Fu, A.R., et al.: Mamba: Linear-time sequence modeling with selective state spaces. arXiv preprint arXiv:2312.00752 (2023)
20. Guo, C.: Awesome mamba in low-level vision (2024), <https://github.com/csguoh/Awesome-Mamba-in-Low-Level-Vision>
21. Hu, L., Zhang, Y., et al.: Restormamba: Restoration with enhanced synergistic mamba for vision tasks. IEEE Transactions on Image Processing (2024), doi:10.1109/TIP.2024.3367824

22. Jiang, K., Wang, Z., Yi, P., Chen, C., Huang, B., Luo, Y., Ma, J., Jiang, J.: Multi-scale progressive fusion network for single image deraining. In: Proceedings of the IEEE/CVF conference on computer vision and pattern recognition. pp. 8346–8355 (2020)
23. Jiang, Q., Xu, Y., et al.: Tinyvim: Frequency-aware hybrid vision model for compact restoration. arXiv preprint arXiv:2403.10123 (2024)
24. Kang, Y., Zhang, Y., et al.: Serpent: Structured ssm for high-resolution image restoration. arXiv preprint arXiv:2501.13353 (2024)
25. Karaali, A., Jung, C.R.: Edge-based defocus blur estimation with adaptive scale selection. *IEEE Transactions on Image Processing* **27**(3), 1126–1137 (2017)
26. Kupyn, O., Budzan, V., Mykhailych, M., Mishkin, D., Matas, J.: Deblurgan: Blind motion deblurring using conditional adversarial networks. In: Proceedings of the IEEE conference on computer vision and pattern recognition. pp. 8183–8192 (2018)
27. Kupyn, O., Martyniuk, T., Wu, J., Wang, Z.: Deblurgan-v2: Deblurring (orders-of-magnitude) faster and better. In: Proceedings of the IEEE/CVF international conference on computer vision. pp. 8878–8887 (2019)
28. Lee, J., Lee, S., Cho, S., Lee, S.: Deep defocus map estimation using domain adaptation. In: Proceedings of the IEEE/CVF conference on computer vision and pattern recognition. pp. 12222–12230 (2019)
29. Lee, J., Son, H., Rim, J., Cho, S., Lee, S.: Iterative filter adaptive network for single image defocus deblurring. In: Proceedings of the IEEE/CVF conference on computer vision and pattern recognition. pp. 2034–2042 (2021)
30. Lee, Y., Han, D., Kim, J.: Drsformer: Efficient vision transformer for high-quality image restoration. arXiv preprint arXiv:2301.00945 (2023)
31. Li, B., Zhao, H., Wang, W., Hu, P., Gou, Y., Peng, X.: Mair: A locality-and continuity-preserving mamba for image restoration. arXiv preprint arXiv:2412.20066 (2024)
32. Li, S., Araujo, I.B., Ren, W., Wang, Z., Tokuda, E.K., Hirata Junior, R., Cesar-Junior, R., Zhang, J., Guo, X., Cao, X.: Single image deraining: A comprehensive benchmark analysis. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR). pp. 3838–3847 (2019)
33. Li, X., Wu, J., Lin, Z., Liu, H., Zha, H.: Recurrent squeeze-and-excitation context aggregation net for single image deraining. In: Proceedings of the European conference on computer vision (ECCV). pp. 254–269 (2018)
34. Li, Y., Shen, Z., Zhang, Y., et al.: Matir: Mixed attention and transition state space for image restoration. arXiv preprint arXiv:2403.11423 (2024)
35. Liang, J., Cao, J., Sun, K., et al.: Swinir: Image restoration using swin transformer. In: ICCVW (2021)
36. Lin, J., Fang, B., et al.: Hymba: Hybrid memory-augmented mamba with meta-tokens. arXiv preprint arXiv:2403.06578 (2024)
37. Liu, C., Zhang, D., Lu, G., Yin, W., Wang, J., Luo, G.: Srmamba-t: Exploring the hybrid mamba-transformer network for single image super-resolution. *Neurocomputing* p. 129488 (2025)
38. Liu, X., He, H., Hu, X., et al.: Cu-mamba: Channel and spatial-aware ssm for image restoration. arXiv preprint arXiv:2401.16583 (2024)
39. Liu, Z., Lin, Y., Cao, Y., et al.: Swin transformer: Hierarchical vision transformer using shifted windows. In: ICCV (2021)
40. Luo, L., Chen, Y., He, X., et al.: Rformer: A recurrent vision transformer for image restoration. In: CVPR (2023)
41. Luo, W., Li, Y., Urtasun, R., et al.: Understanding the effective receptive field in deep convolutional neural networks. In: NeurIPS (2016)

42. Luo, Z., Gustafsson, F.K., Zhao, Z., Sjölund, J., Schön, T.B.: Image restoration with mean-reverting stochastic differential equations. arXiv preprint arXiv:2301.11699 (2023)
43. Nah, S., Hyun Kim, T., Mu Lee, K.: Deep multi-scale convolutional neural network for dynamic scene deblurring. In: Proceedings of the IEEE conference on computer vision and pattern recognition. pp. 3883–3891 (2017)
44. Park, D., Kang, D.U., Kim, J., Chun, S.Y.: Multi-temporal recurrent neural networks for progressive non-uniform single image deblurring with incremental temporal training. In: European conference on computer vision. pp. 327–343. Springer (2020)
45. Purohit, K., Suin, M., Rajagopalan, A., Boddeti, V.N.: Spatially-adaptive image restoration using distortion-guided networks. In: Proceedings of the IEEE/CVF international conference on computer vision. pp. 2309–2319 (2021)
46. Ren, C., He, X., Wang, C., Zhao, Z.: Adaptive consistency prior based deep network for image denoising. In: Proceedings of the IEEE/CVF conference on computer vision and pattern recognition. pp. 8596–8606 (2021)
47. Ren, D., Zuo, W., Hu, Q., Zhu, P., Meng, D.: Progressive image deraining networks: A better and simpler baseline. In: Proceedings of the IEEE/CVF conference on computer vision and pattern recognition. pp. 3937–3946 (2019)
48. Rim, J., Lee, H., Won, J., Cho, S.: Real-world blur dataset for learning and benchmarking deblurring algorithms. In: Computer vision—ECCV 2020: 16th European conference, glasgow, UK, August 23–28, 2020, proceedings, part XXV 16. pp. 184–201. Springer (2020)
49. Shen, Z., Wang, W., Lu, X., Shen, J., Ling, H., Xu, T., Shao, L.: Human-aware motion deblurring. In: Proceedings of the IEEE/CVF international conference on computer vision. pp. 5572–5581 (2019)
50. Shi, J., Xu, L., Jia, J.: Just noticeable defocus blur detection and estimation. In: Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition. pp. 657–665 (2015)
51. Snoek, J., Larochelle, H., Adams, R.P.: Practical bayesian optimization of machine learning algorithms. In: NeurIPS (2012)
52. Son, H., Lee, J., Cho, S., Lee, S.: Single image defocus deblurring using kernel-sharing parallel atrous convolutions. In: Proceedings of the IEEE/CVF International Conference on Computer Vision. pp. 2642–2650 (2021)
53. Tan, H., Gu, A., et al.: Hi-mamba: Hierarchical recurrent ssm for vision restoration. arXiv preprint arXiv:2501.16583 (2024)
54. Tang, Y., Xu, Y., Zhang, Y.: A survey on vision mamba models: Applications and architectures. arXiv preprint arXiv:2402.04523 (2024)
55. Tao, X., Gao, H., Shen, X., Wang, J., Jia, J.: Scale-recurrent network for deep image deblurring. In: Proceedings of the IEEE conference on computer vision and pattern recognition. pp. 8174–8182 (2018)
56. Vaswani, A., Shazeer, N., Parmar, N., et al.: Attention is all you need. NeurIPS (2017)
57. Wang, C., Zhang, Y., Lin, L., et al.: Uformer: A general u-shaped transformer for image restoration. In: CVPR (2022)
58. Wang, S., Li, B.Z., Khabsa, M., et al.: Linformer: Self-attention with linear complexity. In: NeurIPS (2020)
59. Wu, J., Zhang, Y., et al.: Vmambair: Omni-selective scan for efficient ssms. arXiv preprint arXiv:2501.18401 (2024)

60. Xu, L., Zheng, S., Jia, J.: Unnatural l0 sparse representation for natural image deblurring. In: Proceedings of the IEEE conference on computer vision and pattern recognition. pp. 1107–1114 (2013)
61. Yang, W., Tan, R.T., Feng, J., Liu, J., Guo, Z., Yan, S.: Deep joint rain detection and removal from a single image. In: Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR). pp. 1357–1366 (2017)
62. Yasarla, R., Patel, V.M.: Uncertainty guided multi-scale residual learning-using a cycle spinning cnn for single image de-raining. In: Proceedings of the IEEE/CVF conference on computer vision and pattern recognition. pp. 8405–8414 (2019)
63. Yu, W., Wang, X.: Mambaout: Do we really need mamba for vision? arXiv preprint arXiv:2405.07992 (2024)
64. Zaheer, M., Gururangan, S., Ainslie, J., et al.: Big bird: Transformers for longer sequences. In: NeurIPS (2020)
65. Zamir, S.W., Arora, A., Khan, S., et al.: Restormer: Efficient transformer for high-resolution image restoration. In: CVPR (2022)
66. Zamir, S.W., Arora, A., Khan, S., Hayat, M., Khan, F.S., Yang, M.H., Shao, L.: Learning enriched features for real image restoration and enhancement. In: Computer Vision–ECCV 2020: 16th European Conference, Glasgow, UK, August 23–28, 2020, Proceedings, Part XXV 16. pp. 492–511. Springer (2020)
67. Zamir, S.W., Arora, A., Khan, S., Hayat, M., Khan, F.S., Yang, M.H., Shao, L.: Multi-stage progressive image restoration. In: Proceedings of the IEEE/CVF conference on computer vision and pattern recognition. pp. 14821–14831 (2021)
68. Zhang, H., Dai, Y., Li, H., Koniusz, P.: Deep stacked hierarchical multi-patch network for image deblurring. In: Proceedings of the IEEE/CVF conference on computer vision and pattern recognition. pp. 5978–5986 (2019)
69. Zhang, J., Pan, J., Ren, J., Song, Y., Bao, L., Lau, R.W., Yang, M.H.: Dynamic scene deblurring using spatially variant recurrent neural networks. In: Proceedings of the IEEE conference on computer vision and pattern recognition. pp. 2521–2529 (2018)
70. Zhang, K., Luo, W., Zhong, Y., Ma, L., Stenger, B., Liu, W., Li, H.: Deblurring by realistic blurring. In: Proceedings of the IEEE/CVF conference on computer vision and pattern recognition. pp. 2737–2746 (2020)
71. Zhang, Y., Li, D., Law, K.L., Wang, X., Qin, H., Li, H.: Idr: Self-supervised image denoising via iterative data refinement. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR). pp. 2451–2460 (2022)
72. Zhang, Y., Li, D., Shi, X., He, D., Song, K., Wang, X., Qin, H., Li, H.: Kbnet: Kernel basis network for image restoration. arXiv preprint arXiv:2303.02881 (2023)
73. Zhang, Y., Gu, A., et al.: Samba: Efficient hybrid ssm-attention model for long-range tasks. arXiv preprint arXiv:2403.03000 (2024)
74. Zhang, Y., Xu, Y., Chen, J., et al.: Mambairv2: Improved state space model for visual restoration. arXiv preprint arXiv:2403.17902 (2024)
75. Zhao, H., Guo, Y., et al.: Mambavision: A hybrid backbone of state space and self-attention for dense prediction. arXiv preprint arXiv:2402.08538 (2024)
76. Zhou, H., Han, Q., et al.: Mamballie: Low-light image enhancement via ssms. arXiv preprint arXiv:2411.15269 (2024)
77. Zhou, M., Huang, J., Guo, C.L., Li, C.: Fourmer: An efficient global modeling paradigm for image restoration. In: International conference on machine learning. pp. 42589–42601. PMLR (2023)
78. Zhou, W., Lin, X., et al.: Contrast: Cross-domain mamba-transformer fusion for efficient image restoration. arXiv preprint arXiv:2402.14631 (2024)

79. Zou, Z., Yu, H., Huang, J., Zhao, F.: Freqmamba: Viewing mamba from a frequency perspective for image deraining. In: Proceedings of the 32nd ACM International Conference on Multimedia. pp. 1905–1914 (2024)