
ObjView-Bench: Rethinking Difficulty and Deployment for Object-Centric View Planning

Sicong Pan

University of Bonn
pan@cs.uni-bonn.de

Hao Hu

Independent Researcher
hozierhu@gmail.com

Xuying Huang

University of Bonn
huang@cs.uni-bonn.de

Benno Wingender

University of Bonn
wingende@cs.uni-bonn.de

Maren Bennewitz

University of Bonn
maren@cs.uni-bonn.de

Abstract

Object-centric view planning is a core component of active geometric 3D reconstruction in robotics, yet existing evaluations often conflate object complexity, planning difficulty, budget assumptions, and physical reachability constraints. As a result, conclusions drawn from idealized view-planning evaluations may not reliably predict performance under realistic reconstruction settings. We introduce ObjView-Bench, an evaluation framework for rethinking difficulty and deployment in object-centric view planning. First, we disentangle three quantities underlying view-planning evaluation: omnidirectional self-occlusion as an object-side attribute, observation saturation difficulty, and protocol-dependent planning difficulty defined through a set-cover formulation. This separation supports controlled dataset construction, analysis of slow-saturation objects, and a case study showing that planning difficulty-aware sampling can improve learned view planners. Second, we design deployment-oriented evaluation protocols that reveal how budget regimes and reachable-view constraints alter method behavior. Across classical, learned, and hybrid planners, ObjView-Bench shows that difficulty, budget, and reachability constraints substantially change method rankings and failure modes.

1 Introduction

View planning has long been studied in robot active vision across diverse applications [Zeng et al., 2020a]. Object-centric view planning for active geometric 3D reconstruction is a basic yet deployment-critical instance of this problem: given an unknown object, a robot has to decide where to look next in order to recover its geometry under limited sensing and motion resources. As illustrated in Figure 1, this decision is shaped by both the object being reconstructed and the deployment workspace. A simple object may be covered by a few generic views, whereas objects with cavities or inter-part occlusions may require more specific viewing directions; under a limited view budget, such differences affect what can be reconstructed. At the same time, real robotic platforms rarely provide the full idealized view space: workspace, collision, and kinematic constraints restrict which camera poses are physically reachable.

However, current evaluation practice often treats these factors as incidental setup choices rather than as variables that can change the conclusion of a benchmark. Despite extensive progress in view-planning methods for 3D reconstruction, with next-best-view (NBV) planning as a common formulation [Alsadik et al., 2025], studies commonly differ in object sources, action spaces, budgets, stopping criteria, and assumptions on the simulated or real robotic system. This fragmentation of evaluation makes results difficult to compare across methods, and more importantly, can obscure

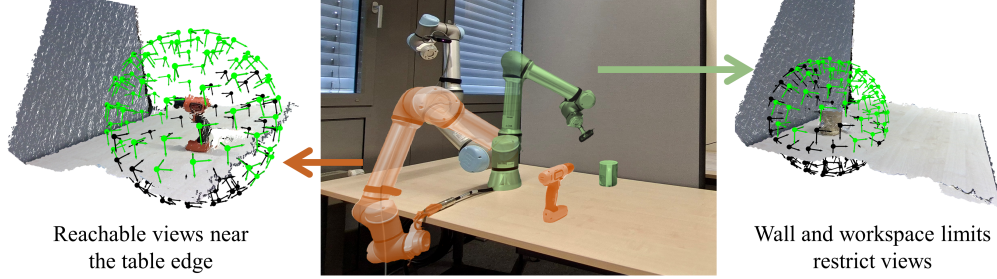


Figure 1: Object-centric view planning in a tabletop robot deployment. Starting from a home pose, the robot has to select feasible camera poses to reconstruct an object with unknown geometry. Hereby, different object geometries and placements induce different reachable-view subsets: green views are executable, while black views are filtered out by inverse kinematics and collision checks. The transparent robot overlays illustrate representative feasible actions under different trials.

why a method obtains a low surface coverage score. It may indicate surfaces that are not visible from any feasible external viewpoint, surfaces hidden by deep concavities, or physically unreachable camera poses. It may also indicate a planner-level limitation, such as repeatedly selecting redundant or low-informative views under a fixed budget. As a result, rankings obtained under a single idealized view-space protocol may not reliably indicate which methods are suitable for deployment.

To bridge this gap, we introduce *ObjView-Bench*, a difficulty-aware and deployment-oriented benchmark for object-centric view planning. Our contributions are threefold: (i) We formalize difficulty semantics for object-centric view planning by disentangling omnidirectional self-occlusion, observation saturation difficulty, and protocol-dependent planning difficulty. (ii) We construct a difficulty-characterized benchmark with an online hidden-geometry evaluation system, normalized surface coverage, budget protocols, and reachable-view constraints. (iii) We evaluate representative classical, learned, and hybrid planners, showing that difficulty, budget, and reachability assumptions substantially change method behavior and failure modes. To support reproducible evaluation, we will release the object pool, benchmark code, and baseline implementations with the final version.

2 Related Work

Object-centric view planning methods. Existing methods can be broadly grouped into classical planners, learned view predictors, and hybrid completion-planning approaches. Classical methods use information-gain objectives, geometric heuristics, or optimization-based search [Daudelin and Campbell, 2017, Delmerico et al., 2018, Pan and Wei, 2023]; learned methods predict views through classification, score regression, or reinforcement learning [Mendoza et al., 2020, Pan et al., 2024, Zeng et al., 2020b, Li et al., 2024, Peralta et al., 2020]; and hybrid methods first infer intermediate geometry through shape completion before performing explicit NBV or coverage-based planning [Dhami et al., 2023, Liu et al., 2024]. Rather than proposing another planner, *ObjView-Bench* evaluates those three method families under shared difficulty and deployment semantics.

Evaluation protocols and deployment assumptions. Many view-planning methods evaluate reconstruction quality under a fixed observation budget, typically after a predefined number of views [Kriegel et al., 2015, Jia et al., 2025]. Yet stopping criteria are themselves part of the evaluation semantics: some works use map-stabilization criteria [Yervilla-Herrera et al., 2022], while others use set-cover-inspired rules tied to coverage completion and path cost [Pan et al., 2022]. Evaluation also varies with the physical view-space assumptions of the underlying platform, such as feasible mobile-manipulator configurations [Vasquez-Gomez et al., 2017], tabletop robotic-arm views [Pan and Wei, 2021], or aerial free-space camera poses [Chen et al., 2024]. These choices change the reachable view space, action parameterization, and collision constraints, and are often embedded directly into each method’s planning and evaluation setup. This makes method comparisons difficult without explicit budget, stopping criteria, and reachability protocols.

Object 3D reconstruction resources. Real-world 3D scanning datasets, such as the Stanford 3D Scanning Repository [Krishnamurthy and Levoy, 1996] and Linemod [Hinterstoisser et al., 2012], contain valuable captured objects, but their scale is often too small to support systematic difficulty stratification. Large-scale 3D asset collections such as ShapeNet [Chang et al., 2015] and *Obja-*

verse [Deitke et al., 2023] offer broader coverage of object types, but they are not designed around the task-specific difficulty. Consequently, existing active reconstruction studies often construct their own object pools from these datasets and treat objects as uniformly valid test instances.

3 Disentangling Object Complexity and Planning Difficulty

3.1 Motivation for Disentanglement

Objects are usually represented as 3D meshes, making it natural to define surface coverage: a method is rewarded for recovering a larger fraction of the ground-truth surface. However, raw surface coverage implicitly treats the entire surface as an equally recoverable target. This assumption can be misleading under strong self-occlusion or internal structures, where *some ground-truth surface regions may never be observable from any external viewpoint*. In such cases, low raw coverage does not necessarily indicate poor planning; it may instead reflect an observable-surface ceiling, which we capture through the omnidirectional self-occlusion attribute.

Even among surface regions that are externally observable, objects can differ substantially in how their observable surfaces are revealed. Some geometries expose most of their observable surface from a small number of generic views, whereas *others contain narrow cavities or concavities that are visible only from specific viewing angles*. These objects may eventually achieve high coverage, but only after the view space is sampled densely enough to reveal such low-probability regions; we refer to this as observation saturation difficulty.

Finally, the central question of active 3D reconstruction is how efficiently a robot can cover the target surface with a limited number of selected views. Since *different views often observe overlapping surface regions, the difficulty of this problem depends on the combinatorial structure of their coverage sets*: some views may be highly redundant, while others provide complementary observations. Therefore, planning difficulty should be defined under a fixed candidate-view protocol, where the task is to select a compact set of views that cover the target surface as completely as possible.

3.2 Preliminaries

A view $v \in SE(3)$ denotes a camera pose from which the object is observed. Let $\mathcal{V}$ be a candidate view space. In the canonical object-centric setting used for difficulty characterization, $\mathcal{V}$ is instantiated as a spherical view set, where camera centers are sampled on an external sphere and oriented toward the object center, following a common setup in the view-planning literature for uniformly covering viewing directions around an object. We consider a normalized object mesh M in an object-centric coordinate frame. For difficulty characterization, we discretize the mesh surface into a finite set of surface voxels at resolution r , where r is measured in the same normalized coordinate units, i.e., relative to the unit object scale. We denote this discretized ground-truth surface by $S_{\text{gt}}^{(r)}$.

Given a view v , we define $\mathcal{O}(v; r) \subseteq S_{\text{gt}}^{(r)}$ as the subset of ground-truth surface voxels observable from v under the visibility model. In practice, this visibility operator is instantiated by ray-based first-hit visibility, so that only surface elements visible from the camera contribute to $\mathcal{O}(v; r)$.

3.3 Object Complexity: From Omnidirectional Self-Occlusion to Observation Saturation

For each view-set size N , let V_N denote a set of N approximately uniform object-centric views, obtained by solving the Tammes problem on the viewing sphere [Lai et al., 2023]. The jointly observable surface voxels under V_N and the corresponding observable-surface cardinality are

$$S_N^{(r)} = \bigcup_{v \in V_N} \mathcal{O}(v; r), \quad Y^{(r)}(N) = |S_N^{(r)}|. \quad (1)$$

This curve measures how much of the ground-truth surface can be revealed as the external view space is sampled more densely. Since Tammes sets of different cardinalities are not necessarily nested, we later use a monotone saturating approximation of $Y^{(r)}(N)$ when defining the observable-surface ceiling and observation saturation difficulty. Let $N_\star^{(r)}$ denote the first evaluated view-set size at which the monotone approximation $\widehat{Y}^{(r)}(N)$ enters a stable low-gain regime. We define the

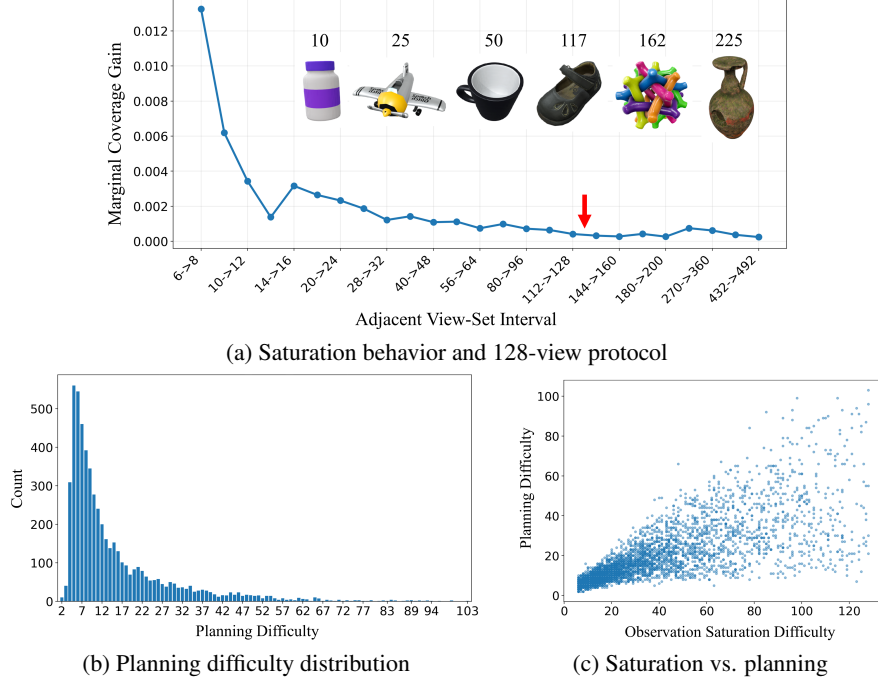


Figure 2: Difficulty characterization of ObjView-Bench. (a) Representative objects are ordered by observation saturation difficulty d_{sat} and overlaid on the marginal gain curve; the arrow marks the 128-view protocol. (b) Planning difficulty d_{plan} is long-tailed in the main pool. (c) Observation saturation difficulty d_{sat} and planning difficulty d_{plan} are related but not equivalent.

saturated observable-surface cardinality and the corresponding observable-surface ratio as:

$$Y_{\text{sat}}^{(r)} = \hat{Y}^{(r)}(N_{\star}^{(r)}), \quad r_{\text{vis}}^{(r)} = Y_{\text{sat}}^{(r)} / |S_{\text{gt}}^{(r)}|. \quad (2)$$

The quantity $r_{\text{vis}}^{(r)}$ is the **omnidirectional self-occlusion attribute** that estimates the externally observable fraction of the discretized surface. We define the **observation saturation difficulty** as the saturation view count $d_{\text{sat}}^{(r)} = N_{\star}^{(r)}$.

3.4 Planning Difficulty under a Fixed Candidate-View Protocol

We use a fixed Tammes candidate-view set $\mathcal{V}_{\text{plan}}$ here and define the protocol-coverable target universe for an object as $U^{(r)} = \bigcup_{v_i \in \mathcal{V}_{\text{plan}}} \mathcal{O}(v_i; r)$. We define **planning difficulty** as the minimum number $d_{\text{plan}}^{(r)}$ of views required to cover this target universe (Set Cover problem):

$$d_{\text{plan}}^{(r)} = \min_{x_i \in \{0,1\}} \sum_{i=1}^{|\mathcal{V}_{\text{plan}}|} x_i, \quad \text{s.t.} \quad \forall u \in U^{(r)}, \quad \sum_{i: u \in \mathcal{O}(v_i; r)} x_i \geq 1. \quad (3)$$

3.5 Implications for Benchmark Design

In summary, the three introduced quantities play distinct roles in ObjView-Bench. The omnidirectional self-occlusion attribute $r_{\text{vis}}^{(r)}$ provides a reference ceiling for interpreting raw surface coverage and for reporting normalized surface coverage. The observation saturation difficulty $d_{\text{sat}}^{(r)}$ characterizes slow-saturation reveal behavior. We therefore use $d_{\text{sat}}^{(r)}$ as a ranking signal for identifying slow-saturation or open-challenge objects. In our benchmark instantiation, we also choose the cardinality of the fixed planning view set $\mathcal{V}_{\text{plan}}$ based on saturation statistics of the main object pool, using the maximum $d_{\text{sat}}^{(r)}$ over non-slow-saturation objects as a conservative coverage criterion. The planning difficulty $d_{\text{plan}}^{(r)}$ measures how many complementary views are needed in a fixed candidate-view set. We use it as the difficulty notion for benchmark stratification and analysis.

4 Dataset Construction and Difficulty Statistics

ObjView-Bench is constructed from large-scale 3D assets with the goal of obtaining a reliable and difficulty-characterized object pool for object-centric view planning. We use a staged construction pipeline and first apply quality filtering using Objaverse++ [Lin et al., 2025]. We then perform conservative geometry filtering and stratify the remaining candidates using lightweight shape and fill statistics. Next, we run the difficulty annotation pipeline defined in Section 3. Finally, we conduct a manual reliability review after converting assets to a standardized rendering format.

After manual review, ObjView-Bench contains 5,691 objects. Figure 2 summarizes the difficulty characterization under the canonical view protocol with $r = 0.02$. Observation saturation varies substantially across objects, and the marginal gain curve motivates the fixed 128-view candidate protocol. Qualitatively, slow-saturation objects are dominated by recurring restricted-visibility structures, such as deep cavities, aperture-mediated internal surfaces, and inter-part occlusions. The $d_{\text{sat}}-d_{\text{plan}}$ scatter further shows that observation saturation difficulty is related to but distinct from planning difficulty. We therefore separate 5,523 objects into the main pool and identify 168 slow-saturation objects whose d_{sat} exceeds the 128-view threshold used to instantiate the planning protocol.

From the main pool, we construct Main-Train-Public and Main-Hidden-Test. Because planning difficulty is long-tailed, we sample the hidden test set with a two-stage difficulty-aware rule: first covering all non-empty d_{plan} buckets when possible, then allocating the remaining quota approximately proportional to bucket frequencies. This avoids a test set dominated by low-difficulty objects while preserving the natural difficulty distribution. Main-Hidden-Test contains 528 objects; the remaining 4,995 main-pool objects form Main-Train-Public. The 168 slow-saturation objects are kept as a separate diagnostic subset.

5 Deployment-Oriented Evaluation Protocols and Benchmarking System

5.1 Online Object-Centric Reconstruction Benchmark and Metrics

ObjView-Bench evaluates methods in an online object-centric reconstruction setting. To mimic realistic active perception, methods do not receive the object geometry, but only sequential RGB-D observations rendered from the camera poses they select. For each episode, the benchmark server holds the hidden object geometry and renders RGB-D observations. At each step, the algorithm returns a camera view pose. The benchmark checks feasibility, renders the corresponding RGB-D observation, updates the accumulated reconstruction state, and records per-step metrics.

At each step, the evaluator converts the newly rendered RGB-D frame into an observed point cloud and fuses it into an accumulated point cloud. Evaluation is performed on raw observation point clouds, thereby decoupling reconstruction evaluation from any particular mapping representation. We report Normalized Surface Coverage (NSC), Path Cost (PC), the number of acquired views (#Views), and Planning Runtime (PR) as the main metrics. $\text{SC}@ \tau$ measures the fraction of the full ground-truth surface point cloud covered by the accumulated observations, using τ as the threshold for counting a point as covered. $\text{NSC}@ \tau$ normalizes $\text{SC}@ \tau$ by a view-space-specific observable-surface reference computed from a dense 360-view Tammes set after applying the corresponding reachability constraint. Path cost measures accumulated camera travel distance in normalized object coordinates, using a collision-avoiding shell distance when straight transitions intersect the unit object. Planning runtime records algorithm-reported computation time.

5.2 Budget Protocols and Stopping Semantics

Objects with different geometric and planning difficulty may require substantially different numbers of views to reach comparable reconstruction quality, making budget a central deployment variable. We evaluate budget behavior using three representative deployment settings: a small fixed budget ($K = 5$), a large fixed budget ($K = 30$), and automatic stopping. Here, K denotes the maximum number of algorithm-selected views after the standardized initial observation. Fixed-budget settings thus ask what reconstruction quality a method can deliver with up to K feasible view actions.

The automatic setting represents free-budget execution with natural stopping. Based on the preceding difficulty characterization, 128 selected views provide a conservative upper bound that allows the observable surface of benchmark objects to saturate in practice, while keeping evaluation finite.

Table 1: Baseline families and execution interfaces under constrained views.

Method	Family	Execution Mode	Feasibility Handling & Ordering
Random+TSP	Classical	Budgeted plan	Solve over feasible views, TSP
RSE [Delmerico et al., 2018]	Classical	Iterative	Select best feasible view
RSE-Mov [Delmerico et al., 2018]	Classical	Iterative	Select best feasible view
NBV-Net [Mendoza et al., 2020]	Learned	Iterative	Stop if best view infeasible
BENBV-Net [Li et al., 2024]	Learned	Iterative	Select best feasible view
MA-SCVP [Pan et al., 2024]	Learned	Set cover plan	Filter infeasible views, TSP
PoinTr-C+NBV [Dhami et al., 2023]	Hybrid	Iterative	Select best feasible view
PoinTr-C+SCP [Pan et al., 2025]	Hybrid	Set cover plan	Solve over feasible views, TSP
PoinTr-C+MCP [Pan and Wei, 2023]	Hybrid	Budgeted plan	Solve over feasible views, TSP

This cap is reached only if no stopping criterion triggers earlier. Methods with an explicit finite plan terminate according to their native stopping criterion. For iterative next-view methods without a natural stopping criterion, we use a benchmark-side Map-Stabilization criterion: $MS@\delta$ voxelizes the accumulated observed point cloud at resolution δ and stops when the relative count gain is below 1% for three consecutive steps.

5.3 Reachability-Constrained View Spaces

Beyond budget, deployment also constrains which views can be executed. We therefore evaluate methods under two representative view-space settings: *whole* and *quarter*. The *whole* setting approximates the ideal object-centric view sphere, while *quarter* restricts execution to one quarter of that sphere as a strongly constrained reachable-view region. All methods are evaluated with the same reachability-aware execution interface. When the view space is constrained, methods may query feasibility from the benchmark and filter out unreachable views, analogous to checking inverse kinematics and collision constraints before executing a camera pose on a real robot.

6 Experiments

6.1 Baselines and Setup

ObjView-Bench is designed to study how different planning paradigms behave under difficulty, budget, and reachability shifts, rather than to produce a fine-grained leaderboard within a single method subclass. We therefore select representative methods with distinct decision mechanisms from each family, so that changes in ranking can be interpreted at the paradigm level. The selected baselines cover classical planning, learned next-view or view-set prediction, and hybrid completion-guided planning. Table 1 summarizes families, execution modes, and feasibility handling.

Execution mode. The baselines also differ in execution mode, which determines which deployment settings they can naturally enter. Random+TSP and PoinTr-C+MCP are budgeted finite-plan methods and are evaluated under fixed-budget settings. MA-SCVP and PoinTr-C+SCP produce finite view sets with native set-cover plan termination and are evaluated under the automatic setting. RSE, RSE-Mov, NBV-Net, BENBV-Net, and PoinTr-C+NBV operate as iterative replanning methods and can thus be evaluated under both fixed-budget and automatic-stopping (with $MS@0.02$) protocols.

Feasibility handling. We attach the same minimal reachability-aware adaptation to all methods. Score-based methods select the highest-scoring feasible candidate; set-prediction methods remove infeasible views before execution; and classical or hybrid planners optimize directly over the feasible candidate subset. NBV-Net is the exception: it outputs a single discrete view index rather than ranked candidates, so an infeasible prediction terminates the episode.

Training setup. All learned methods are trained only on Main-Train-Public and evaluated on Main-Hidden-Test. These learned baselines are trained under the unconstrained *whole* view-space setting, so that the *quarter* evaluation explicitly measures reachability shift at test time.

Candidate view spaces. Discrete learned methods that require a fixed action space use the canonical Tammes-128 view set, motivated by the difficulty statistics. Classical and hybrid planners are not tied to a learned 128-way action classifier, so we evaluate them on a denser Tammes-360 candidate set to better approximate continuous feasible-view search. BENBV-Net is a special case: its training

Table 2: Quality-oriented top-3 methods under different budget regimes in the *whole* view space. Methods are ranked by NSC@0.02. Views include the standardized initial observation.

Setting	Rank	Method	Family	#Views	NSC@0.02	Path Cost	Time bin (s)
$K = 5$	1	RSE	Classical	6.0	0.980	25.66	0.5–1
$K = 5$	2	NBV-Net	Learned	6.0	0.978	24.77	0.5–1
$K = 5$	3	PoinTr-C+MCP	Hybrid	6.0	0.977	20.28	1–3
$K = 30$	1	PoinTr-C+MCP	Hybrid	31.0	0.998	51.35	1–3
$K = 30$	2	Random+TSP	Classical	31.0	0.996	40.54	< 0.1
$K = 30$	3	PoinTr-C+NBV	Hybrid	31.0	0.996	99.11	> 5
Automatic	1	PoinTr-C+SCP	Hybrid	15.5	0.993	30.17	0.5–1
Automatic	2	RSE	Classical	9.6	0.991	40.70	1–3
Automatic	3	MA-SCVP	Learned	49.5	0.990	57.19	0.1–0.5

Table 3: Path-efficient top-3 methods under different budget regimes in the *whole* view space. Methods are first filtered by $\text{NSC@0.02} \geq 0.95$ and then ranked by path cost. In fixed-budget settings, lower path cost should be interpreted together with Views because some iterative methods may terminate early under their native action interface.

Setting	Rank	Method	Family	#Views	NSC@0.02	Path Cost	Time bin (s)
$K = 5$	1	BENBV-Net	Learned	6.0	0.956	15.64	0.5–1
$K = 5$	2	PoinTr-C+MCP	Hybrid	6.0	0.977	20.28	1–3
$K = 5$	3	NBV-Net	Learned	6.0	0.978	24.77	0.5–1
$K = 30$	1	Random+TSP	Classical	31.0	0.996	40.54	< 0.1
$K = 30$	2	NBV-Net	Learned	9.9	0.988	41.73	1–3
$K = 30$	3	PoinTr-C+MCP	Hybrid	31.0	0.998	51.35	1–3
Automatic	1	BENBV-Net	Learned	10.4	0.986	27.49	1–3
Automatic	2	PoinTr-C+SCP	Hybrid	15.5	0.993	30.17	0.5–1
Automatic	3	RSE-Mov	Classical	14.1	0.985	31.92	3–5

rollouts are initialized from the canonical 128-view protocol, but its predicted views are generated dynamically through its boundary-point representation and are evaluated with feasibility checks.

6.2 Budget Regimes Change Method Ranking

We first evaluate budget behavior in the unconstrained *whole* view space, isolating budget from reachability constraints. Iterative methods may terminate early when their native action interface cannot propose a valid new view, such as NBV-Net predicting an already visited index or BENBV-Net exhausting available boundary points. For budgeted coverage planners such as PoinTr-C+MCP, we fill the remaining budget with farthest candidates when the optimization target is exhausted, reflecting that fixed-budget deployment encourages using the available views to improve coverage.

Tables 2 and 3 show that method rankings are strongly budget-dependent. At $K = 5$, online view-selection methods such as RSE and NBV-Net achieve the highest quality, while PoinTr-C+MCP remains competitive with a shorter path. At $K = 30$, the ranking shifts toward coverage-oriented planning: PoinTr-C+MCP achieves the highest NSC@0.02, and even Random+TSP becomes both high-quality and path-efficient. This suggests that, when the view budget is large, a simple pipeline that densely samples candidate views and then orders them for short travel distance, as in Random+TSP, can become competitive with more complex view-selection strategies.

Automatic stopping exposes another behavior. PoinTr-C+SCP achieves the best quality with fewer views than large-budget execution, whereas MA-SCVP requires many more views to reach comparable quality. This suggests that the canonical 128-view protocol and higher planning difficulty make learned set prediction more challenging. The path-efficient ranking is also different from the quality ranking: BENBV-Net yields short qualifying paths, while PoinTr-C+SCP gives a stronger quality–efficiency trade-off. These results show that fixed-budget and automatic-stopping evaluations are not interchangeable; budget rules directly affect which method family appears strongest.

Total planning time is reported in coarse bins because exact wall-clock time depends on system load. Learned methods are generally fast due to amortized inference, while GPU-accelerated RSE remains practical but becomes more expensive as the number of replanning steps grows. Optimization-based

Table 4: Reachability-induced degradation under each method’s maximum-view deployment setting. For each method, we compare *whole* (W) and *quarter* (Q) view spaces under the evaluated budget protocol that executes the most views. ΔNSC and ΔSC are computed as W minus Q.

Method	Family	#Views W/Q	NSC@0.02 W/Q	ΔNSC	SC@0.02 W/Q	ΔSC
Random+TSP	Classical	31.0/31.0	0.996/0.997	0.000	0.942/0.805	0.137
RSE	Classical	31.0/31.0	0.995/0.998	-0.003	0.942/0.813	0.128
RSE-Mov	Classical	31.0/31.0	0.995/0.998	-0.003	0.941/0.813	0.128
NBV-Net	Learned	9.9/1.2	0.988/0.472	0.516	0.932/0.387	0.545
BENBV-Net	Learned	28.0/23.9	0.995/0.979	0.016	0.940/0.784	0.157
MA-SCVP	Learned	49.5/12.5	0.990/0.967	0.023	0.937/0.772	0.165
PoinTr-C+NBV	Hybrid	31.0/31.0	0.996/0.998	-0.003	0.942/0.813	0.129
PoinTr-C+SCP	Hybrid	15.5/20.1	0.993/0.997	-0.004	0.937/0.807	0.131
PoinTr-C+MCP	Hybrid	31.0/31.0	0.998/0.999	-0.001	0.944/0.813	0.131

Table 5: Map-stabilization behavior on main and slow-saturation objects. Both MS and NSC are reported at resolution 0.02, and ΔNSC denotes Tammes-128 NSC minus MS NSC.

Pool	N	d_{sat}	d_{plan}	MS Views	MS NSC	Tammes-128 NSC	ΔNSC
Main-Hidden	528	32.2	18.5	9.0	0.997	1.000	0.0026
Slow-Saturation	168	161.7	45.9	12.7	0.988	0.996	0.0081

planners (TSP, SCP, MCP) are also efficient at our candidate-set scale. Thus, runtime differences mainly reflect the execution mode: iterative planning, one-shot inference, or finite-plan optimization.

6.3 Reachability Constraints Change Method Behavior

We next evaluate how methods behave when the executable view space is constrained. A physical reachability check in the real-world tabletop setup of Figure 1 shows that only 45.4/128 candidate views are reachable on average, with counts ranging from 26/128 to 74/128 across five objects and five placements. The view space is obtained using the object size estimated from the home pose.

To focus on reachability-induced degradation rather than small-budget effects, Table 4 compares *whole* and *quarter* view spaces under each method’s maximum-view deployment setting. Two effects emerge. First, absolute surface coverage drops substantially for almost all methods, with ΔSC around 0.13–0.17 for most robust methods, confirming that reachability constraints remove access to a large portion of the full object surface. Second, NSC remains high for most classical and hybrid planners because it is normalized by the view-space-specific observable-surface reference; these methods still cover most of what is reachable, even though their absolute SC decreases.

Learned planners reveal a more sensitive failure mode. NBV-Net is the most extreme case: its NSC drops from 0.988 to 0.472 and its executed views decrease from 9.9 to 1.2, reflecting its single-index action interface under infeasible predictions. BENBV-Net and MA-SCVP can filter infeasible candidates or predicted view sets, but their SC drops remain larger than most classical and hybrid planners. This suggests that constrained view spaces are especially challenging for learned planners when recovering fine-grained surface regions. Overall, reachability constraints interact not only with the feasible views, but also with each method’s action representation and detail-recovery behavior.

6.4 Slow-Saturation Diagnostic Analysis

The slow-saturation subset is used as a diagnostic split rather than a primary leaderboard component. We therefore analyze it with a ground-truth oracle rollout instead of comparing planner rankings. At each step, the oracle selects the candidate view with the largest additional ground-truth surface coverage, and the Tammes-128 reference is obtained after exhausting the 128-view candidate protocol.

Table 5 shows that MS@0.02 triggers after a similar number of views in both pools, but its meaning differs across difficulty regimes. On Main-Hidden-Test, MS@0.02 reaches NSC@0.02 of 0.997 and leaves only a 0.0026 gap to the Tammes-128 reference. On the slow-saturation subset, the mean d_{sat} and d_{plan} are much larger, and the residual NSC gap after MS is roughly three times larger. For slow-saturation objects, additional views can still reveal small but real surface regions after the

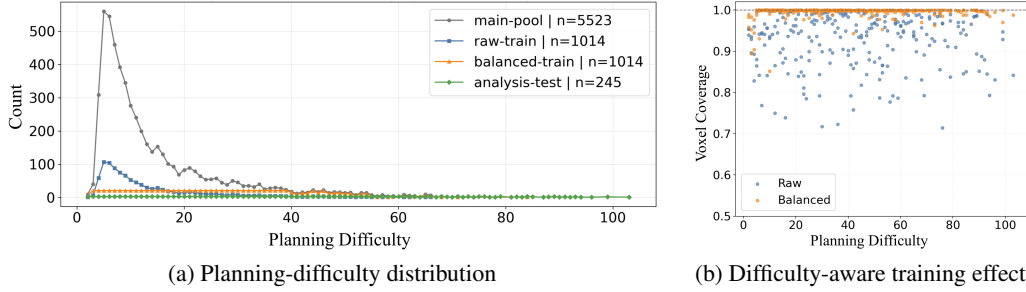


Figure 3: Planning difficulty-aware sampling. (a) Balanced sampling increases exposure to medium- and high- d_{plan} objects compared with raw sampling. (b) This improves MA-SCVP achieved voxel coverage across the planning-difficulty axis.

observed map appears stable. Thus, map stabilization is a practical stopping signal, but it measures observed-map stabilization rather than long-horizon observable-surface saturation.

6.5 Planning Difficulty-Aware Sampling

We finally test whether d_{plan} is only a descriptive statistic or also a useful axis for learning analysis. We construct two equal-size training subsets from the main pool: Main-Raw-Train follows the natural long-tailed d_{plan} distribution, while Main-Balanced-Train increases exposure to medium- and high-difficulty buckets. Both are evaluated on the held-out Main-Analysis-Test split. Figure 3 shows that d_{plan} can serve as an operational training-distribution axis. Using MA-SCVP as a representative learned set-prediction planner, we evaluate achieved voxel coverage at $r = 0.02$, matching the difficulty-annotation resolution. Difficulty-aware sampling improves coverage on medium- and high- d_{plan} objects without changing the model architecture, suggesting that planning difficulty is a meaningful learning factor rather than only a descriptive benchmark statistic.

7 Lessons for Future View-Planning Methods

ObjView-Bench is intended not only as a leaderboard, but also as a diagnostic tool for identifying open challenges in object-centric view planning, especially for learning-based methods. Our experiments highlight several research directions: **(1) Scaling learned view-set prediction.** The canonical 128-view protocol and higher planning difficulty expose a harder regime for learned set-prediction methods than many prior object-centric settings. Future learned planners should better reason over large candidate view sets and long planning horizons, where coverage depends on selecting many complementary views. **(2) Reachability-aware learning.** Constrained view spaces interact strongly with learned action representations. Test-time feasibility filtering is only a minimal adaptation; future methods should incorporate reachability information directly into the input, scoring function, or training objective. **(3) Hybrid geometry learning and explicit planning.** Completion-guided planning and explicit coverage optimization are currently robust under budget and reachability shifts, but introduce additional computation. A promising direction is to accelerate the explicit planning stage. **(4) Slow-saturation and budget allocation.** Slow-saturation objects reveal a gap between map stabilization and observable-surface saturation. This raises an open problem: how to allocate budget when remaining surfaces are hard to reveal, and marginal gains are small but persistent? **(5) Planning difficulty as a learning signal.** The difficulty-aware sampling experiment shows that planning difficulty is not merely a post-hoc statistic. It may guide dataset construction, curriculum learning, and active learning by identifying objects that are more informative for training.

8 Conclusion and Future Work

We presented ObjView-Bench, a difficulty-aware and deployment-oriented benchmark, showing that self-occlusion, saturation, planning difficulty, budget, and reachability jointly shape view-planning behavior. ObjView-Bench intentionally focuses on single-object, object-centric active geometric 3D reconstruction as a scalable and reproducible entry point toward deployment-oriented view-planning evaluation, abstracting platform-specific factors such as robot workspaces, collision constraints, sensors, and scene layouts into a reproducible reachable-view protocol. Future work can extend this

setting along several directions. At the representation level, incorporating appearance-centric objectives and neural rendering representations such as NeRF or 3D Gaussian Splatting would require new difficulty definitions that account for texture and photometric fidelity. At the sensing level, incorporating depth noise and calibration error is another natural extension beyond the current idealized rendered RGB-D setting. At the task level, multi-object scenes, scene-level exploration, and multi-robot coordination introduce additional challenges beyond the current object-centric scope. Finally, a public evaluation server and leaderboard, including dedicated diagnostic tracks for slow-saturation objects, would be a natural next step toward community-wide evaluation.

References

- Bashar Alsadik, Hussein Alwan Mahdi, and Nagham Amer Abdulateef. A structured review and taxonomy of next-best-view strategies for 3d reconstruction. *ISPRS Open Journal of Photogrammetry and Remote Sensing*, page 100098, 2025.
- Angel X Chang, Thomas Funkhouser, Leonidas Guibas, Pat Hanrahan, Qixing Huang, Zimo Li, Silvio Savarese, Manolis Savva, Shuran Song, Hao Su, et al. Shapenet: An information-rich 3d model repository. *arXiv preprint arXiv:1512.03012*, 2015.
- Xiao Chen, Quanyi Li, Tai Wang, Tianfan Xue, and Jiangmiao Pang. Gennbv: Generalizable next-best-view policy for active 3d reconstruction. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 16436–16445, 2024.
- Jonathan Daudelin and Mark Campbell. An adaptable, probabilistic, next-best view algorithm for reconstruction of unknown 3-d objects. *IEEE Robotics and Automation Letters*, 2(3):1540–1547, 2017.
- Matt Deitke, Dustin Schwenk, Jordi Salvador, Luca Weihs, Oscar Michel, Eli VanderBilt, Ludwig Schmidt, Kiana Ehsani, Aniruddha Kembhavi, and Ali Farhadi. Objaverse: A universe of annotated 3d objects. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 13142–13153, 2023.
- Jeffrey Delmerico, Stefan Isler, Reza Sabzevari, and Davide Scaramuzza. A comparison of volumetric information gain metrics for active 3d object reconstruction. *Autonomous Robots*, 42(2): 197–208, 2018.
- Harnaik Dhami, Vishnu D Sharma, and Pratap Tokekar. Pred-nbv: Prediction-guided next-best-view planning for 3d object reconstruction. In *2023 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, pages 7149–7154. IEEE, 2023.
- Stefan Hinterstoisser, Vincent Lepetit, Slobodan Ilic, Stefan Holzer, Gary Bradski, Kurt Konolige, and Nassir Navab. Model based training, detection and pose estimation of texture-less 3d objects in heavily cluttered scenes. In *Asian conference on computer vision*, pages 548–562. Springer, 2012.
- Zhizhou Jia, Yuetao Li, Qun Hao, and Shaohui Zhang. Pb-nbv: Efficient projection-based next-best-view planning framework for reconstruction of unknown objects. *IEEE Robotics and Automation Letters*, 2025.
- Simon Kriegel, Christian Rink, Tim Bodenmüller, and Michael Suppa. Efficient next-best-scan planning for autonomous 3d surface reconstruction of unknown objects. *Journal of Real-Time Image Processing*, 10(4):611–631, 2015.
- Venkat Krishnamurthy and Marc Levoy. Fitting smooth surfaces to dense polygon meshes. In *Proceedings of the 23rd annual conference on Computer graphics and interactive techniques*, pages 313–324, 1996.
- Xiangjing Lai, Dong Yue, Jin-Kao Hao, Fred Glover, and Zhipeng Lü. Iterated dynamic neighborhood search for packing equal circles on a sphere. *Computers & Operations Research*, 151: 106121, 2023.
- Leihui Li, Lixuepiao Wan, and Xuping Zhang. Boundary exploration of next best view policy in 3d robotic scanning. *arXiv preprint arXiv:2412.10444*, 2024.

- Chendi Lin, Heshan Liu, Qunshu Lin, Zachary Bright, Shitao Tang, Yihui He, Minghao Liu, Ling Zhu, and Cindy Le. Objaverse++: Curated 3d object dataset with quality annotations. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 6813–6822, 2025.
- Ruishuang Liu, Chuan Li, Weiwei Wan, Jia Pan, and Kensuke Harada. Nbv/nbc planning considering confidence obtained from shape completion learning. *IEEE Robotics and Automation Letters*, 9(3):2774–2781, 2024.
- Miguel Mendoza, J Irving Vasquez-Gomez, Hind Taud, L Enrique Sucar, and Carolina Reta. Supervised learning of the next-best-view for 3d object reconstruction. *Pattern Recognition Letters*, 133:224–231, 2020.
- Sicong Pan and Hui Wei. A global max-flow-based multi-resolution next-best-view method for reconstruction of 3d unknown objects. *IEEE Robotics and Automation Letters*, 7(2):714–721, 2021.
- Sicong Pan and Hui Wei. A global generalized maximum coverage-based solution to the non-model-based view planning problem for object reconstruction. *Computer Vision and Image Understanding*, 226:103585, 2023.
- Sicong Pan, Hao Hu, and Hui Wei. Scvp: Learning one-shot view planning via set covering for unknown object reconstruction. *IEEE Robotics and Automation Letters*, 7(2):1463–1470, 2022.
- Sicong Pan, Hao Hu, Hui Wei, Nils Dengler, Tobias Zaenker, Murad Dawood, and Maren Bennewitz. Integrating one-shot view planning with a single next-best view via long-tail multiview sampling. *IEEE Transactions on Robotics*, 41:394–414, 2024.
- Sicong Pan, Xuying Huang, and Maren Bennewitz. Temporal-prior-guided view planning for periodic 3d plant reconstruction. *arXiv preprint arXiv:2510.07028*, 2025.
- Daryl Peralta, Joel Casimiro, Aldrin Michael Nilles, Justine Aletta Aguilar, Rowel Atienza, and Rhandley Cajote. Next-best view policy for 3d reconstruction. In *European Conference on Computer Vision*, pages 558–573. Springer, 2020.
- J Irving Vasquez-Gomez, L Enrique Sucar, and Rafael Murrieta-Cid. View/state planning for three-dimensional object reconstruction under uncertainty. *Autonomous Robots*, 41(1):89–109, 2017.
- Heikel Yervilla-Herrera, Israel Becerra, Rafael Murrieta-Cid, Luis Enrique Sucar, and Eduardo F Morales. Bayesian probabilistic stopping test and asymptotic shortest time trajectories for object reconstruction with a mobile manipulator robot. *Journal of Intelligent & Robotic Systems*, 105(4):82, 2022.
- Rui Zeng, Yuhui Wen, Wang Zhao, and Yong-Jin Liu. View planning in robot active vision: A survey of systems, algorithms, and applications. *Computational Visual Media*, 6(3):225–245, 2020a.
- Rui Zeng, Wang Zhao, and Yong-Jin Liu. Pc-nbv: A point cloud based deep network for efficient next best view planning. In *2020 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, pages 7050–7057. IEEE, 2020b.

Acknowledgments and Disclosure of Funding

This work has partially been funded by the Deutsche Forschungsgemeinschaft (DFG, German Research Foundation) under grant 459376902 – AID4Crops, under Germany’s Excellence Strategy, EXC-2070 – 390732324 – PhenoRob, and by the German Federal Ministry of Research, Technology and Space (BMFTR) under the Robotics Institute Germany (RIG), grant No. 16ME0999.