

Initiation Safety: A Missing Dimension in Generalist-Robot Safety

Zhijin Meng and Francisco Cruz
 School of Computer Science and Engineering
 University of New South Wales
 Email: zhijin.meng@unsw.edu.au, f.cruz@unsw.edu.au

Abstract—Safety for generalist robots is usually discussed in terms of motion or dialogue. We argue a third question is missing: should the robot take its first hard-to-undo social action at all, such as a greeting, an uninvited grasp, or stepping into someone’s space? We call this *initiation authorization*. Current frameworks rarely treat it as a separate safety layer. Today’s stacks often skip this step: a high engagement score or a confident VLA rollout is treated as permission to act. But seeing a person is not the same as having their consent to be addressed. We frame initiation authorization within generalist-robot safety and contrast it with post-plan VLA guardrails, implementing PAS (probe–authorize–speak) on a doorway humanoid, comparing it with direct-init on logged traces, and proposing a three-condition user study, with open questions on metrics, governance, and where initiation ends and foundation-model generation begins.

I. INTRODUCTION

Generalist-robot safety must include *initiation authorization*: deciding whether a robot may take its first hard-to-undo social action when the situation is still unclear. An engagement score measures how receptive someone seems. It does not answer whether the robot should act when that signal is ambiguous [9, 14, 11].

Deployed stacks often distinguish two safety layers (physical and social-interaction) but treat initiation as part of the latter rather than as a separate decision. *Physical safety* limits motion (collisions, force, joint limits [15]). *Social-interaction safety* governs how the robot behaves once interaction has already started, including recovery when a first act misfires [1, 13, 6]. We argue for a third layer that this picture largely omits: *initiation authorization*, whether the robot may start at all. The harm often looks like an ordinary first move: a mistimed greeting that interrupts a call [4], or an end-to-end VLA that reaches for an object before the person has agreed [7]. A jailbroken planner can authorize a harmful first move as readily as a harmful first word [10].

Most deployed stacks treat initiation as a fixed threshold: $\text{speak} \Leftrightarrow e_t > \theta$ [3]. That treats an engagement score, or a single VLA rollout, as permission to act, with no context, no user preference, and no evidence from low-cost probes [12, 3]. Figure 1 contrasts this passive threshold with PAS (probe–authorize–speak): small reversible probes before any hard-to-undo action, an explicit bold/conservative setting, and runtime checks before foundation-model dialogue.

Building on this distinction, we make three contributions:

- 1) We introduce *initiation authorization* as a distinct safety layer, separate from physical shields, post-plan VLA guardrails, post-dialogue preference alignment, and engagement optimization.
- 2) We illustrate PAS (probe–authorize–speak) on a physical robot and propose an evaluation protocol that would compare three initiation policies.
- 3) We elaborate on future work and pose open questions on metrics, governance, and where initiation ends and foundation-model generation begins.

II. INITIATION AUTHORIZATION IN GENERALIST-ROBOT SAFETY

A. Where Initiation Fits

Physical safety (collisions, forces, joint limits) remains necessary [1, 15]. HRI already separates physical safety from how safe people feel [1], and social-error taxonomies list what goes wrong once interaction is already underway [13]. Less covered is whether the robot should start in the first place [11, 4]. We call that *initiation authorization*. Table I summarizes the three safety layers for generalist robots.

TABLE I: Safety layers for generalist robots.

Layer	What it protects	Example problem
Physical	Contact force, clearance	Unintended touch
Social-interaction	Felt safety, social norms during ongoing contact	Interrupt, pressure
Initiation authorization	When to act, whom to address	Acting too soon

Initiation is not only about speech. On talking robots the first hard-to-undo action is often a word. On manipulation VLAs it can be the first grasp, stepping into someone’s space, or a question that cuts into a human conversation [7]. What matters is whether the action is hard to take back while the situation is still unclear, not whether it is speech, reach, or approach. In Table II, we map common safety concerns to these before-the-first-act decisions.

Initiation authorization under uncertainty

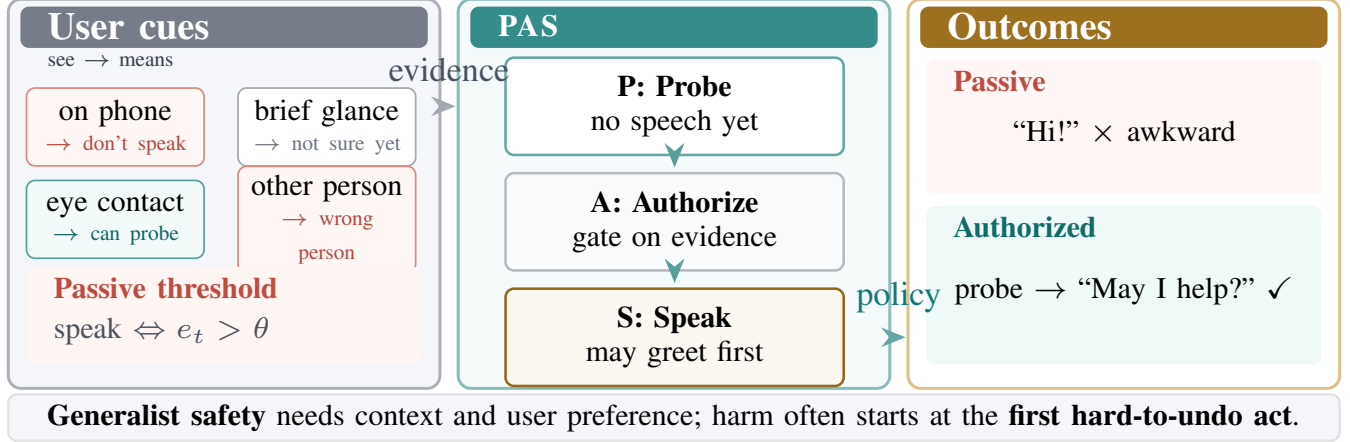


Fig. 1: Initiation authorization under uncertainty (left to right). **User cues** mix what the robot sees with what that should mean (on the phone so don't speak, a brief glance so the robot is not sure yet, eye contact so probing is OK, or attention on someone else so the robot has the wrong person), while many deployed stacks still use a *passive threshold* ($\text{speak} \Leftrightarrow e_t > \theta$) that treats an engagement score as permission to speak. **PAS** (probe–authorize–speak) uses small reversible *probes* that never emit speech, gathers response *evidence*, and opens an authorization *gate* as the only way to speak first. **Outcomes** contrast a passive early greeting ("Hi!" → awkward) with an allowed sequence (probe → "May I help?" → acceptable).

TABLE II: Safety concerns mapped to initiation authorization.

Concern	Question before the first act
Venue and context	Same greeting or reach OK in demo, rude at home
Willingness to interact	Looking at the robot $\neq$ wanting to be greeted
Social risk preference	Bold greeting vs. user who wants privacy
Speaking too early vs. too late	Awkward interrupt vs. user not greeted
Speak, act, and log permissions	Who may speak, move, log, or learn from data

B. Generalist Safety and Related Approaches

Single-purpose robots are often built on assumptions that generalists cannot use: (i) one engagement threshold θ works for everyone [3, 9], (ii) observable cues are enough to infer intent, without reversible probes [12, 14], (iii) speaking too soon and waiting too long are equally bad mistakes [11], and (iv) the same initiation script works in every venue [4, 1]. Fixed-task robots mostly worry about collisions and excess force, calibrated once at deploy. Generalist robots also face social interrupts, uncertain consent, and settings that call for different bold or conservative initiation. They need *tunable authorization*: a per-venue and per-user setting for how bold or conservative to be, without retraining the whole VLA stack [5].

When these assumptions fail, one safety layer is not enough. A full stack needs three checks. Physical shields and motion planning limit contact risk. VLA alignment [15] checks whether a chosen plan is safe once the robot is already trying to act. *Initiation authorization* runs before the first hard-to-undo social action. Recent post-plan guardrails [8] catch unsafe or

jailbroken plans, but only at that later stage. They do not decide whether the robot should speak, reach, or approach in the first place [10]. Initiation authorization complements this nearby work rather than replacing it. Post-plan guardrails and physical shields ask whether a chosen motion is safe once execution has started [15, 8]. Preference alignment and dialogue safety tools largely apply after interaction has begun [2, 10]. Proactive HRI and engagement scoring focus on how well to initiate, not whether to initiate when cues are still ambiguous [14, 11, 9]. A collision-free, well-aligned, high-engagement policy can still open with the wrong first word.

III. PAS AND EVALUATION PROTOCOL

We implement initiation authorization as PAS (probe–authorize–speak) on PAL Robotics' ARI humanoid robot. PAS combines an engagement score, staged probe rules, and a threshold gate [3, 12, 9] as a safety layer with (i) a probe module structurally prevented from emitting speech, (ii) a gate threshold $\tau(\rho)$ that is a deploy-time dial rather than a fixed trained constant, and (iii) a logged margin Δ_{init} at the moment the robot says its first word to someone.

A. System

The controller runs at 10 Hz. Each cycle follows three steps: perception, staged probes, then the authorization gate. Only the gate can trigger the robot's first word. The dialogue model runs only after that.

Step 1: Perception. The system tracks visible people and fuses gaze, speech activity, approach, and dwell into an engagement score e_t .

Step 2: Staged probes. The robot moves through four levels of nonverbal signaling. At each level it may only *wait*, *turn its head toward the person*, or *turn its body to face the person*,

and never speak. A higher level requires stronger signs that the person is open to interaction, and the level can drop back if the person looks away. Table III shows the person cues and robot actions at each level.

TABLE III: Four probe levels: person cues and robot actions.

Level	Person must show	Robot does
0	Someone nearby	Stays still
1	Brief eye contact	Turns head toward person
2	Sustained attention, not walking away	Turns body to face person
3	Stays nearby several seconds	Keeps facing person, gate may open

Step 3: Authorization gate. The gate releases the first word only when $e_t \geq \tau(\rho)$ and probe level ≥ 2 , where $\tau(\rho)$ is set by the venue bold/conservative dial ρ [5]. The system logs $\Delta_{\text{init}} = e_t - \tau(\rho)$ at that moment.

Algorithm 1 PAS initiation loop (10 Hz)

```

1: Input: frame, stage,  $\rho$ 
2:  $e_t \leftarrow \text{engagement\_score}()$ 
3:  $\tau \leftarrow \tau(\rho)$ 
4:  $a_t \leftarrow \text{staged\_probe}(e_t, \text{stage})$  ▷ never speak
5: if  $e_t \geq \tau$  and stage  $\geq 2$  then
6:    $a_t \leftarrow \text{speech}$  ▷ first word to user
7:   log  $\Delta_{\text{init}} = e_t - \tau$ 
8:   run dialogue model
9: end if

```

Figure 2 replays one logged doorway trace under PAS and direct-init, showing staged probes, gate crossing, and Δ_{init} at the first word.

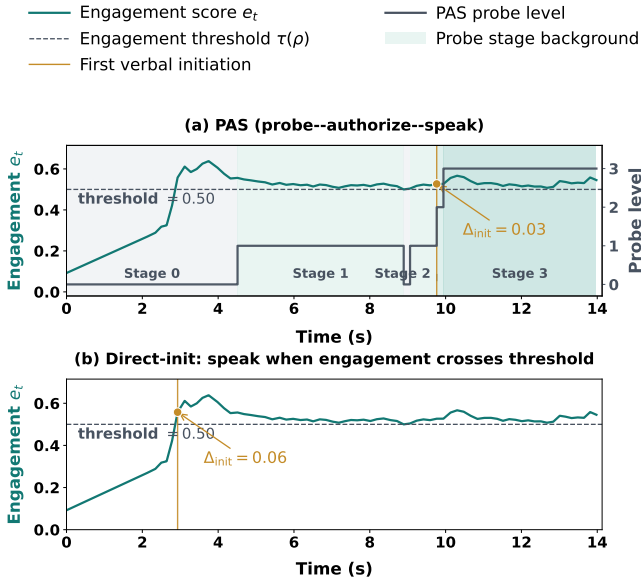


Fig. 2: Replay of one logged e_t trace under two initiation policies. (a) **PAS**: staged probes, then gate. The first word fires at $t \approx 10$ s only once $e_t \geq \tau(\rho)$ and probe level ≥ 2 are both satisfied ($\Delta_{\text{init}} = 0.03$). (b) **Direct-init**: threshold only. The first word fires at $t \approx 3$ s once $e_t \geq \theta$ ($\Delta_{\text{init}} = 0.06$). Although e_t crosses the threshold at $t \approx 3$ s, PAS withholds speech until staged evidence catches up. The delay reflects structural authorization rather than a change in the engagement signal.

B. Proposed Evaluation

We propose a between-subjects study in which each participant completes one doorway session under one initiation policy, while the robot, perception stack, scenario, and dialogue stack stay fixed (Table IV).

TABLE IV: Three initiation policies in the proposed study.

Condition	What it does
PAS	Probes + gate (default ρ)
Direct-init	$e_t > \theta$, no probes or gate
Passive-wait	Probes + gate with conservative ρ

a) *Scenario.*: Sessions would start at a scripted doorway. Each participant would follow one script: on a phone, mid-conversation, or clearly open to interaction. Reach, approach, and multi-party authorization are deferred to §IV-A.

b) *Endpoints.*: Sessions would log probe actions, gate state, probe stage, and Δ_{init} at the robot's first word, plus user-reported success, awkwardness, and naturalness on 7-point Likert scales. Subjective ratings would compare all three policies. Logged Δ_{init} would compare PAS with direct-init (Fig. 2); passive-wait uses the same probe-gate stack with a conservative ρ . On logged sessions we would also vary ρ to see how a bolder or more conservative dial changes how often the robot speaks and how large Δ_{init} is at the first word.

IV. DISCUSSION

A. Future Work

After the doorway study, we plan three extensions. First, extend PAS from single-encounter doorways to multi-party scenes, where choosing whom to speak to becomes part of authorization. Second, integrate PAS with VLA action policies, so that initiation authorization gates not only speech but reach and approach. Third, release the initiation log format as an open schema, supporting cross-platform comparison of first-act decisions.

B. Open Questions

Retail, home, and museum settings differ but share one pattern: the robot acts before knowing who is willing to be addressed [4, 11]. This raises three families of open questions.

a) *Measurement and standards.*: We do not yet agree on how to score whether a robot spoke or acted too soon. Should safety checklists list that problem on its own, instead of folding it into engagement scores? What should every study at least report: how awkward people felt, whether tasks were interrupted, whether the robot picked the right person, and the margin at the first word (such as Δ_{init})? Without numbers on that first act, a robot can look safe overall and still greet someone on a phone too often in the doorway cases that matter most [1].

b) *Preference and governance.*: Who should set how bold or shy the robot is: the deployer, the user, the platform, or a regulator? Can one policy fit every generalist robot, or do homes, shops, and clinics each need their own safety case? A

home user may want the robot to offer help early; a clinic may need it to wait. Operators need a dial they can read and change after an incident, not a hidden threshold buried in model weights.

c) *Foundation models and layering.*: Dialogue models may sound more natural without knowing better *when* to start [8]. Where should “what to say” stop and a runtime check on “may I start now?” begin? Some failures show up only when those two jobs are merged: greeting the wrong person, a jailbroken opening line, or talking too much too soon. Safety tests should include the first physical act. Adversarial prompts can trigger a bad first move, not just a toxic reply later, and text-only benchmarks will not catch that [10]. End-to-end VLAs [7] raise the stakes because one rollout can combine seeing, deciding, and acting in a single step.

V. CONCLUSION

Before motion or dialogue safety, generalist robots need one more check: should they take a first hard-to-undo social action now? We call that *initiation authorization*. The harm is often a mistimed greeting or reach (for example, to someone on a phone), not a collision; a robot can be collision-free and still feel unsafe at first contact. We implement this in PAS with reversible probes, an authorization gate, and only then dialogue generation. A “safe generalist robot” must mean more than collision-free motion or aligned dialogue; it must also mean that the robot knows when not to start.

REFERENCES

- [1] Neziha Akalin, Annica Kristoffersson, and Amy Loutfi. Do you feel safe with your robot? factors influencing perceived safety in human–robot interaction based on subjective and objective measures. *International Journal of Social Robotics*, 14(2):389–405, 2022. doi: 10.1007/s12369-021-00769-9. arXiv:2106.05854.
- [2] Yuntao Bai, Saurav Kadavath, Sandipan Kundu, Amanda Askell, Jackson Kernion, Andy Jones, Anna Chen, Anna Goldie, Azalia Mirhoseini, Cameron McKinnon, et al. Constitutional AI: Harmlessness from AI feedback. *arXiv preprint arXiv:2212.08073*, 2022.
- [3] Dan Bohus and Eric Horvitz. Managing human-robot engagement with forecasts and... um... hesitations. In *Proceedings of the 16th International Conference on Multimodal Interaction*, pages 2–9. ACM, 2014. doi: 10.1145/2663204.2663241.
- [4] Sachi Edirisinghe, Satoru Satake, Dražen Brščić, Yuyi Liu, and Takayuki Kanda. Field trial of an autonomous shopworker robot that aims to provide friendly encouragement and exert social pressure. In *Proceedings of the 2024 ACM/IEEE International Conference on Human-Robot Interaction (HRI)*, 2024. doi: 10.1145/3610977.3635007.
- [5] Hadassah Harland, Richard Dazeley, Peter Vamplew, Hashini Senaratne, Bahareh Nakisa, and Francisco Cruz. Adaptive alignment: Dynamic preference adjustments via multi-objective reinforcement learning for pluralistic AI. *arXiv preprint arXiv:2410.23630*, 2024.
- [6] Hadassah Harland, Richard Dazeley, Hashini Senaratne, Peter Vamplew, Francisco Cruz, and Bahareh Nakisa. AI apology: A critical review of apology in AI systems. *Artificial Intelligence Review*, 58:369, 2025. doi: 10.1007/s10462-025-11305-8.
- [7] Moo Jin Kim, Karl Pertsch, Siddharth Karamcheti, Ted Xiao, Ashwin Balakrishna, Suraj Nair, Rafael Rafailov, Ethan Foster, Grace Lam, Pannag Sanketi, et al. OpenVLA: An open-source vision-language-action model. *arXiv preprint arXiv:2406.09246*, 2024.
- [8] Zachary Ravichandran, Alexander Robey, Vijay Kumar, George J. Pappas, and Hamed Hassani. Safety guardrails for LLM-enabled robots. *arXiv preprint arXiv:2503.07885*, 2025.
- [9] Charles Rich, Brett Ponsler, Aaron Holroyd, and Candace L. Sidner. Recognizing engagement in human-robot interaction. In *Proceedings of the 5th ACM/IEEE International Conference on Human-Robot Interaction (HRI)*, pages 375–382. ACM, 2010.
- [10] Alexander Robey, Zachary Ravichandran, Vijay Kumar, Hamed Hassani, and George J. Pappas. Jailbreaking LLM-controlled robots. *arXiv preprint arXiv:2410.13691*, 2024.
- [11] Chao Shi, Michihiro Shimada, Takayuki Kanda, Hiroshi Ishiguro, and Norihiro Hagita. Spatial formation model for initiating conversation. In *Robotics: Science and Systems (RSS)*, 2011. doi: 10.15607/RSS.2011.VII.039.
- [12] Gabriel Skantze, Anna Hjalmarsson, and Catharine Oertel. Turn-taking, feedback and joint attention in situated human–robot interaction. *Speech Communication*, 65:50–66, 2014. doi: 10.1016/j.specom.2014.05.003.
- [13] Leimin Tian and Sharon Oviatt. A taxonomy of social errors in human–robot interaction. *ACM Transactions on Human-Robot Interaction*, 10(2):13:1–13:32, 2021. doi: 10.1145/3439720.
- [14] Marike K. van Den Broek and Thomas B. Moeslund. What is proactive human–robot interaction? — a review of a progressive field and its definitions. *ACM Transactions on Human-Robot Interaction*, 13(4):1–30, 2024. doi: 10.1145/3650117.
- [15] Borong Zhang, Yuhao Zhang, Jiaming Ji, Yingshan Lei, Yishuai Cai, Josef Dai, Yuanpei Chen, and Yaodong Yang. SafeVLA: Towards safety alignment of vision-language-action model via constrained learning. *arXiv preprint arXiv:2503.03480*, 2025.