

Recursive Block-Diagonal Coupling for Resource-Efficient Training of Vision Models

Maxim Henry[✉], Adrien Delière[✉], Sébastien Piérard[✉], and
Marc Van Droogenbroeck[✉]

Montefiore Institute, University of Liège, Liège, Belgium
{Maxim.Henry, Adrien.Deliere, S.Pierard, M.VanDroogenbroeck}@uliege.be

Abstract. Training high-capacity vision models from scratch requires substantial computational resources. To improve training efficiency of a wide target model, existing growth methods often assume the availability of narrower models, obscuring the true computational cost of the entire pipeline. We propose an efficient training protocol, RBDC, that builds wide models by coupling in a parameter-free block-diagonal way narrower, independently trained models in a recursive way. This allows a flexible allocation of the training budget available across all the models involved. Evaluated with vision transformers (DeiT) and convolutional networks (ResNet) on ImageNet, our RBDC training protocol shows a much better efficiency than models trained from scratch with the standard protocol, yielding 30% FLOPs reduction at similar test accuracies. It also achieves higher performances at same training FLOPs than training protocols from the model growth literature. Finally, we show that our models can serve as better backbones than their original counterparts for downstream object detection and instance segmentation tasks.

Keywords: Efficient Training · Recursive Training · FLOPs · Transformer · CNN · Model Weights Initialization

1 Introduction

Deep learning has achieved remarkable success across computer vision tasks, largely driven by the upscaling of models. However, model upscaling requires a proportional increase in computing power. Hardware limits are approached, and the financial cost of training high-capacity models from scratch and using them grows [27]. It is thus essential to improve the efficiency of such models, and in our case, those used in computer vision (*e.g.*, transformers, CNNs).

According to the Sustainability Directory [25], “resource-efficient machine learning, at its core, is about optimizing machine learning processes to minimize resource consumption without sacrificing performance”. However, a distinction must be made between the training efficiency and the inference efficiency. In this work, we aim at improving resource efficiency during training in the sense of

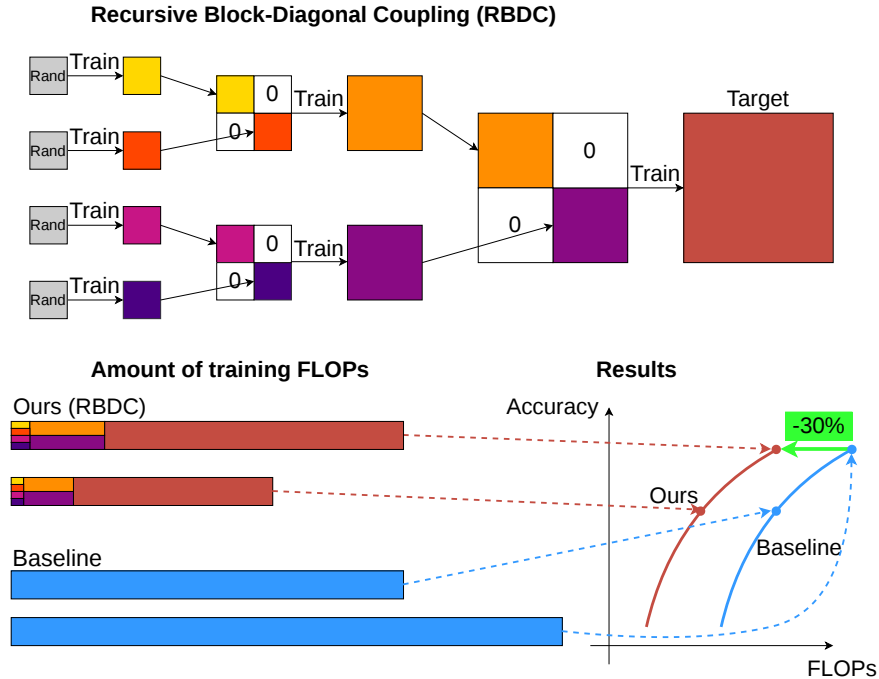


Fig. 1: Overview. We introduce a resource-efficient training protocol for high-capacity computer vision models (*e.g.*, transformers, CNNs) that we call *Recursive Block-Diagonal Coupling* (RBDC). To train a target model, RBDC recursively trains narrower models and couples them to build a block-diagonal initialization for training wider models (top). The budget of training FLOPs is distributed according to the different model sizes (bottom left). Our results show that RBDC is much more resource-efficient than the standard randomly initialized training protocol (bottom right).

improving the trade-off curve between a model’s performance and the computational resources consumed during training. Specifically, we measure performance via test accuracy and resources via floating-point operations (FLOPs).

Training efficiency depends on several elements that govern the overall training protocol (*e.g.*, number of epochs, model architecture, dataset size, etc.). Various training protocols can be defined. For example, the *standard protocol* to train a vision model from scratch consists of initializing randomly its weights and then training them. We then call *target model* the final, trained model ready for deployment. The standard training protocol is not the only way to obtain this target model. Wide-to-narrow approaches, such as pruning, initially train a *wide model* (characterized by a much larger parameter count than the target model) and prune it into the narrower target model (having fewer parameters). Conversely, narrow-to-wide approaches, such as model growing, begin with a

narrow model that is progressively expanded into the wider target model. In both cases, the target model remains the final objective, while the terms *narrow* and *wide* are relative size descriptors that depend on the direction of the optimization process (wide-to-narrow versus narrow-to-wide). Our work is closer to the latter case, and, contrary to training protocols based on fine-tuning pre-trained models, such as parameter-efficient fine-tuning [14, 15, 33], we focus on training models *from scratch*.

Contributions. Our goal is to develop a training protocol that improves the trade-off between the number of FLOPs used for training and the test accuracy reached by the trained model. In particular, our contributions are threefold.

First, we introduce *Recursive Block-Diagonal Coupling* (RBDC) as an efficient training protocol. RBDC constructs and trains high-capacity models recursively by independently training distinct narrow models and coupling them into a wide model using a block-diagonal initialization with zero-padded interaction terms, as illustrated in Fig. 1. This parameter-free initialization allows to start the optimization of the wide model from an “educated” state, rather than from a random initialization as done in the standard protocol.

Second, we show that our RBDC training protocol is much more efficient than the standard one, as also depicted in Fig. 1, reducing by up to 30% the training FLOPs needed to reach a high test accuracy on ImageNet with major computer vision model architectures, *i.e.* transformers (DeiT) and CNNs (ResNet).

Third, we show that the benefits of our RBDC training protocol extend beyond improving training efficiency. Specifically, models trained with RBDC can serve as well-performing pretrained backbones for downstream tasks such as object detection and instance segmentation on the COCO benchmark [17], with performances on par or better than models trained with the standard protocol.

2 Related Work

2.1 Inference Efficiency vs. Training Efficiency

Inference Efficiency. A significant portion of research focuses on the efficiency of a model after deployment (inference) [20, 26], with the objective of maximizing performance within a fixed computational inference budget. Common inference-efficient approaches include structured pruning [10, 12] and knowledge distillation [8] to reduce model size for deployment. However, such top-down paradigms require an initial (very) wide model or teacher, whose training consumes a high amount of resources. Similarly, post-training quantization [1] reduces the precision of model weights to lower memory footprint and latency but remains an inference-centric optimization. While effective for deployment, these techniques generally do not alleviate the computational burden of the initial training phase.

Training Efficiency. A parallel stream of research, including ours, focuses on methods to improve *training efficiency* [9, 24]. This focus is important because relying on model scaling for performance gains requires an exponential increase in computing power [28]. Furthermore, recent economic models for computer

vision systems demonstrate that the financial cost of training wide models from scratch can create significant barriers to deployment [27]. This computational scaling is evident in standard architectures: progressing from a vision transformer base (ViT-B, 86M parameters, 17.5 GFLOPs) to a large (307M parameters, 61.5 GFLOPs) or huge (632M parameters, 167 GFLOPs) increases training resource consumption [30]. Efforts to mitigate these costs include parameter-centric and model-centric approaches, as described hereafter.

2.2 Parameter-Centric Training Efficiency

Low-Precision Training. Distinct from quantization for inference, low-precision training aims to accelerate gradient calculation during the optimization process. Standard techniques now leverage mixed-precision (FP16/BF16) [21]. More aggressive approaches, such as FP8 training [22], exploit modern hardware capabilities to further reduce memory footprint, though they often require specialized stabilization techniques to prevent numerical underflow during back-propagation. Though effective, low-precision training is hardware-dependent and aims to reduce the cost per FLOP, while we focus on reducing the amount of FLOPs. Both can be naturally paired, meaning our RBDC training protocol with narrow models and the wide target model could in principle be trained in mixed-precision for compounded acceleration.

Parameter-Efficient Fine-Tuning (PEFT) [33]. Rather than updating all weights during training steps, PEFT methods target a small subset of parameters. Techniques like Adapters [14] and LoRA [15] freeze the pre-trained backbone and inject small, trainable modules. While these methods reduce the parameters updated per step, they are traditionally reserved for fine-tuning rather than for training from scratch. The block-diagonal coupling of our RBDC training protocol draws conceptual inspiration from the zero-initialization of interaction terms in LoRA but applies it much more extensively in a recursive way.

2.3 Model-Centric Training Efficiency

Progressive Growing. Training wide models from scratch prevents leveraging narrower models trained with fewer resources. Hence, recent research explores initializing wide architectures using weights from pre-trained narrower ones. A common approach is *function-preserving growth*. Techniques such as Net2Net [3] and progressive stacking [7] expand the width or depth of a single model while maintaining its exact function at the moment of expansion. For instance, Net2Net achieves this by duplicating existing units and breaking symmetry with small noise perturbations. Other methods, such as GradMax [5], initialize new capacity by setting incoming weights to zero to preserve the model’s function, while using gradient information to mathematically optimize the outgoing weights. This allows the wider model to bypass the initial chaotic phase of convergence. However, these methods typically focus on expanding a single model instance. Consequently, the expanded model is constrained by the singular

feature space learned by its precursor. In contrast, our RBDC training protocol benefits from the learned knowledge of multiple narrower models.

Recombining Learned Parameters. A more recent paradigm involves synthesizing a wider model by aggregating multiple narrower, pre-trained models. Unlike standard ensembling, which averages outputs, these methods integrate parameters into a single unified architecture. Approaches like MixtureGrowth [23] demonstrate that recombining distinct narrower models can act as a powerful initialization for a wider student. However, such methods typically assume that at least one of the narrow models is already available in an existing model zoo, using this assumption to justify the training speedup. Accounting for the resources needed to train the narrow models is a saner practice and reveals more moderate benefits. In that setting, we show that our RBDC training protocol provides an efficiency gain even when accounting for the total computational budget required to train all narrow models completely from scratch.

3 Method

In line with the model-centric approaches for training efficiency, we propose a recursive training protocol, RBDC, that constructs high-capacity target models by combining narrower, independently trained narrow models. Unlike prior recombination protocols that assume the availability of pre-trained models in a zoo [3, 23], our framework is designed to yield computational efficiency when training entirely from scratch. Essentially, RBDC leverages the observation that training multiple narrower models is computationally cheaper than training a single wide model from scratch. By training these narrow models with distinct initializations, we capture a diverse set of features. By initializing the wider target model via a block-diagonal formulation to benefit from the independently learned features of the narrow models, we observe that we can afford to effectively reduce the total FLOPs required to train the model at no performance drop, as we will show in Sec. 4. The pseudocode of RBDC, which complements Fig. 1, is given in Algorithm 1 and is further explained hereafter.

3.1 Recursive Width Halving

RBDC training protocol operates on the principle of recursive width halving. Let us consider a target model with width W (*e.g.*, channel count in CNNs or embedding dimension in transformers). Instead of initializing it randomly to train it, we initialize it with two narrower models, each with width $W/2$. These narrow models are themselves initialized with narrower models, which are also initialized with even narrower models, recursively. When the narrowest initializing models are small enough, or cannot be halved anymore, they are randomly initialized with distinct seeds and trained independently following the standard protocol. After training, they are distinct experts capturing potentially different features, and they are then coupled to serve as an educated initialization for training the wider model from which they originate.

Algorithm 1 Pseudocode of our Recursive Block-Diagonal Coupling (RBDC), exemplified in the case of training linear layers.

```

1: const  $r$                                 ▷ Training ratio of wide and narrow models
2: function RBDC(size, epochs, min_size)      ▷ Our RBDC definition
3:   if size < min_size then                  ▷ Model is narrow enough, stop recursion
4:      $M \leftarrow \text{rand}([\text{size}, \text{size}])$     ▷ Random initialization of narrow models
5:      $M \leftarrow \text{train}(M, \text{epochs})$         ▷ Regular model training
6:   else                                     ▷ Model is still too wide, apply recursion
7:     epochsnarrow  $\leftarrow$  epochs / ( $r + 2$ )    ▷ Epochs to train narrow models
8:     epochswide  $\leftarrow$  epochs  $\cdot r / (r + 2)$     ▷ Epochs to train wide model
9:      $M_1 \leftarrow \text{RBDC}(\text{size}/2, \text{epochs}_{\text{narrow}}, \text{min\_size})$     ▷ Train a narrow model
10:     $M_2 \leftarrow \text{RBDC}(\text{size}/2, \text{epochs}_{\text{narrow}}, \text{min\_size})$     ▷ Train a narrow model
11:     $M \leftarrow \begin{bmatrix} M_1 & 0 \\ 0 & M_2 \end{bmatrix}$     ▷ Block-diagonal coupling initializes wide model
12:     $M \leftarrow \text{train}(M, \text{epochs}_{\text{wide}})$     ▷ Train wide model
13:  end if
14:  return  $M$                                 ▷ Return the trained target wide model
15: end function

```

3.2 Block-Diagonal Initialization with Zero-Padding

Our RBDC training protocol is applicable to models composed of different types of layers. The code that we provide in supplementary material and used for our experiments includes specific implementations for seven types of layers: attention qkv projection layers, attention output projection layers, position-wise feed-forward layers, head layers, convolution layers, layer normalization layers, and batch normalization layers. These types cover most of the modern models used in computer vision (*e.g.*, ViTs and CNNs). Given that most FLOPs are consumed in linear layers (the first four types of layers listed) and convolution layers, we will focus below on a detailed explanation of RBDC for these layers. The pseudocode provided in Algorithm 1 and the depiction of RBDC in Fig. 1 apply to these layers, but only the 11th line of Algorithm 1 is specific to these cases. Explanations for the other types can be found in supplementary material.

For coupling two narrow models into a wide model, we propose a *block-diagonal initialization* with zero-initialized interaction terms. Given a linear layer in the narrow models defined by weight matrices $\mathbf{W}_{\text{narrow}}^{(1)}, \mathbf{W}_{\text{narrow}}^{(2)} \in \mathbb{R}^{d_{\text{out}}/2 \times d_{\text{in}}/2}$, we construct the corresponding weight matrix $\mathbf{W}_{\text{wide}} \in \mathbb{R}^{d_{\text{out}} \times d_{\text{in}}}$ of the wide model as:

$$\mathbf{W}_{\text{wide}} = \begin{bmatrix} \mathbf{W}_{\text{narrow}}^{(1)} & \mathbf{0} \\ \mathbf{0} & \mathbf{W}_{\text{narrow}}^{(2)} \end{bmatrix}, \quad (1)$$

where the weights of the off-diagonal blocks are initialized to zero (and are of course trainable weights). For convolution layers, the block-diagonal initialization is applied across the output and input channel dimensions. For a weight tensor of shape $(C_{\text{out}}, C_{\text{in}}, K, K)$, the learned spatial kernel dimensions $(K \times K)$ remain intact, while the cross-model channel connections are zero-padded.

The use of zero initialization for off-diagonal blocks follows other works, notably Net2Net [3], which aims to grow a model by ensuring that identity is preserved before training the grown model. In our case, it indeed ensures that at the start of the wide model training phase, the model behaves as an ensemble of the two narrow models. The forward pass of the wide model is almost equivalent to the independent execution of the narrow models, up to minor differences in normalization layers’ statistics. The zero initialization also echoes parameter-efficient fine-tuning methods like LoRA [15], which initialize trainable adapters to zero to preserve the pre-trained model’s function. In our case, although the entire combined matrix remains fully trainable, this initialization allows the wide model to gradually learn the correlations between the features of the narrow models without degrading the initial performance inherited from them. Finally, this design choice was also guided by our experiments, and we further show its advantage over a random initialization in Sec. 4.

3.3 Efficiency and Training Ratio of Wide and Narrow Models

We identify that the allocation of the computational budget to train the narrow models and the wide model is a parameter mostly overlooked in the literature related to growing models [3, 5, 23]. To investigate training efficiency based on this allocation, we define the following training ratio:

$$r = \frac{\text{epochs}_{\text{wide}}}{\text{epochs}_{\text{narrow}}}, \quad (2)$$

where $\text{epochs}_{\text{wide}}$ and $\text{epochs}_{\text{narrow}}$ represent, respectively, the number of epochs used to train the wide model and each narrow model. As a default value, we recommend using a ratio of $r = 2$, meaning that a wide model is trained with twice as many epochs as its initializing narrow models. This default choice echoes the width-halving process and is also guided by our experiments, as shown in 4.2. The efficiency in terms of FLOPs of our RBDC training protocol can be tied to the choice of r and to the total budget of epochs available for the whole training. More details on that matter are provided in supplementary material.

4 Results

Target Models. We evaluate RBDC on both vision transformers (DeiT) and CNNs (ResNet). Throughout this section, we use *tiny*, *small*, *base*, and *large* to refer to the different sizes of DeiT [29, 30] and 0.125x, 0.25x, 0.5x, and 1.0x to refer to the different sizes of ResNet-50D [34] where the multiplier used applies to the width of each convolutional layer, with 1.0x being the target model.

Training Efficiency through Normalized FLOPs. To ensure a rigorous and fair comparison between training protocols, we account for the computational cost of training every model involved, including all narrow models. We use the

`fvcore` library to compute the forward pass cost in multiply-accumulate operations (MACs). Because `fvcore` reports MACs under the FLOPs nomenclature, we adhere to the definition where 1 MAC represents exactly 2 FLOPs. These values represent the cost of a single forward pass. To estimate the total training compute, we apply the standard approximation established in the literature [13]: the backward pass requires approximately twice the compute of the forward pass to calculate gradients regarding both activations and weights. Therefore, the total compute per training step (one forward and one backward) is three times the forward cost. The total FLOPs for a complete training phase are thus calculated as $3 \times \text{forward FLOPs} \times \text{number of epochs} \times \text{training images}$. Throughout this section, we report these costs as *normalized FLOPs* as done in [23]. Specifically, we calculate the training FLOPs for a given experiment and divide it by the total FLOPs required to train the baseline target model from scratch (trained for 300 epochs for DeiT and 90 epochs for ResNet) with the standard training protocol, providing a clear relative measure of training efficiency.

Experiments. We present our results across 4 experiments: (1) we show the training efficiency of our RBDC training protocol in Sec. 4.1; (2) we analyze the impact of our off-diagonal blocks initialization and training ratio r in Sec. 4.2; (3) we compare RBDC against training protocols from the model growth literature in Sec. 4.3; (4) we validate the usefulness of the models trained with RBDC on downstream tasks in Sec. 4.4.

4.1 Resource Efficiency of RBDC

The objective of our 1st experiment is to show that, regarding the standard protocol, RBDC can train a model with a similar accuracy while requiring a much smaller amount of FLOPs.

Experimental Setup. We use the DeiT models [29] that we train on ImageNet-1K with the official DeiT codebase and their optimal setup [6]. Optimization is performed using AdamW [19] with a base learning rate of $5e-4$ and a weight decay of 0.05 and an effective batch size of 1024. The learning rate follows a cosine annealing schedule [18], preceded by a 5-epoch linear warmup. For RBDC, during the transition phase where narrow models are coupled to initialize a wide model, the training process is treated as an entirely new run. The optimizer state is not carried over, and the learning rate schedule—including the 5-epoch linear warmup and subsequent cosine decay—is restarted from scratch.

We consider DeiT-Base as the target model. With our RBDC training protocol and one recursive step, we first train DeiT-Small models and couple them to obtain a DeiT-Base model. With two recursive steps, RBDC couples DeiT-Tiny models to obtain the DeiT-Small models, further coupled into a DeiT-Base model. This whole training is therefore denoted Tiny→Small→Base. We compare our results with a baseline that corresponds to the training of a DeiT-Base model with the standard protocol. To visualize the efficiency gains, we plot the test accuracy against the total training cost expressed as normalized FLOPs.

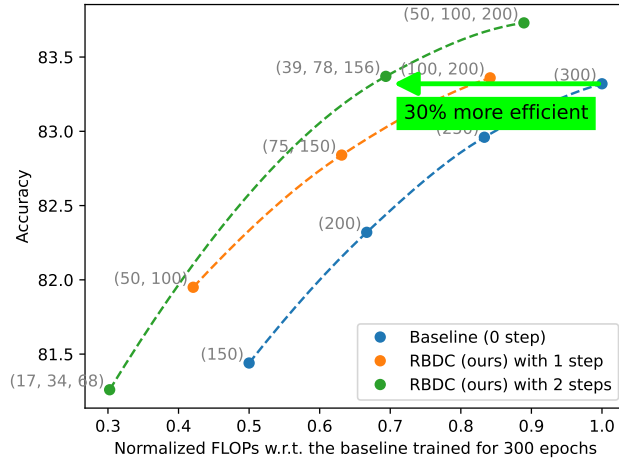



Fig. 2: Resource Efficiency of RBDC . Accuracy *vs.* FLOPs trade-off curves when training a target DeiT-Base model. The values written in gray correspond to the number of training epochs for each recursive step, from the narrowest to the target model. RBDC with two recursive steps (green) is more efficient than RBDC with one recursive step (orange), which is better than the standard training baseline (blue), yielding a 30% FLOPs decrease for equivalent test accuracies.

Results. The results are shown in Fig. 2, which illustrates the trade-off curve improvements induced by RBDC with one and two recursion steps over the baseline. For a given amount of recursion steps and a given number of training epochs, we obtain a point on a curve by training a DeiT-Base model with the default ratio $r = 2$. The curves graphically connect the points corresponding to the same number of recursion steps but with different numbers of training epochs. Each point is thus obtained after a complete and independent run, not by further training a previous model for a few more epochs. The results demonstrate that RBDC improves the efficiency over baseline training. Importantly, compared to training the baseline for 300 epochs, our results show that RBDC reduces the required FLOPs by 30% for a similar test accuracy. Conversely, for a fixed computational budget, our recursive approach achieves higher accuracy, presumably by benefiting from the diverse features learned by the narrow models.

Additionally, we note that the baseline failed to converge entirely when training a DeiT-Large using the code from DeiT. This is a known optimization challenge when scaling DeiT to large models, as documented in [30]. In contrast, RBDC successfully consistently trains DeiT-Large as target model, avoiding these catastrophic convergence drops, reaching a test accuracy of 84.11%.

4.2 Off-Diagonal Initialization and Training Ratio

The objective of our 2nd experiment is to validate the two design choices that we made in the description of RBDC: (1) the default training ratio $r = 2$ between the

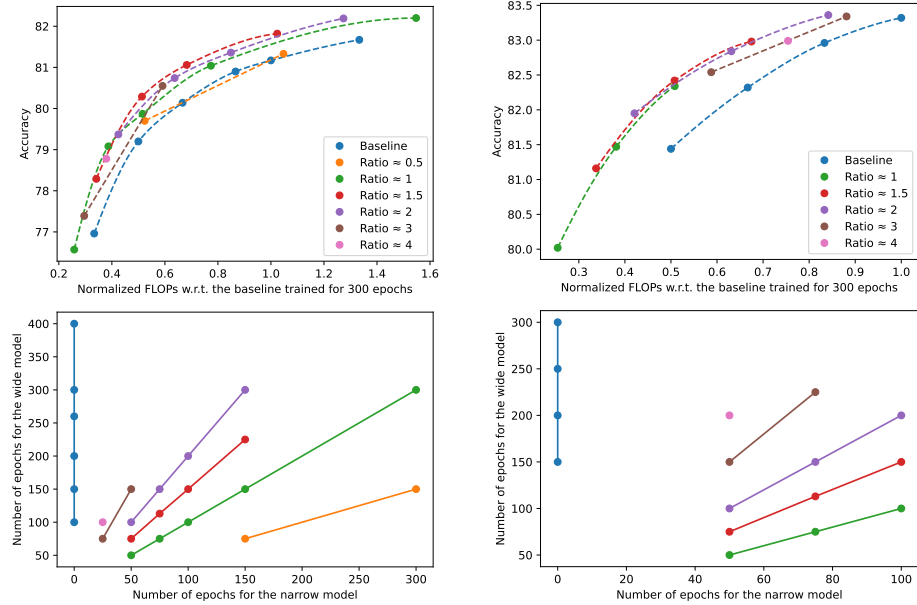

(a) Impact of different training ratios with one recursive step from DeiT-Tiny to DeiT-Small.

(b) Impact of different training ratios with one recursive step from DeiT-Small to DeiT-Base.

Fig. 3: Optimal Training Ratio. Experimental results corresponding to the training on ImageNet-1K of DeiT-Small (left) and DeiT-Base (right) models with one recursive step of RBDC. Top: the curves indicate an optimal ratio around the range between 1.5 and 2.0 across both model scales. Bottom: the repartition in training epochs of the narrow and wide phases for each point creating lines where the slope corresponds to r .

number of epochs in successive recursive steps and (2) our default off-diagonal zero-padding initialization. The experimental setup is the same as previously.

Optimal Training Ratio. Our experiments, conducted on both Tiny $\rightarrow$ Small and Small $\rightarrow$ Base transitions (Fig. 3), reveal that the allocation of the computational budget can impact training efficiency. From Figs. 3a and 3b, we observe that $r < 1$ leads to suboptimal training, implying that the wide models should be trained at least as much as the narrow ones. In our experiments, $r = 1.5$ and $r = 2$ yielded the best trade-offs between accuracy and training FLOPs. With $r > 2$, we noticed lower gains over baseline.

Impact of Initialization. We compare our default zero-initialization for the off-diagonal blocks against standard random initialization for these blocks. The comparison is performed on Tiny $\rightarrow$ Small. As shown in Tab. 2, both protocols perform comparably overall; however, the zero-initialization shows a slight advantage for longer training schedules (*e.g.*, reaching 82.20% versus 81.88% for

Table 1: Impact of Initialization. Comparison of two initialization methods, namely zero-padding and random-padding, by training a DeiT-Small model with our protocol in one recursive step and for two different ratios on ImageNet. For both ratios $r \in \{1, 2\}$, the two initializations are pretty close for lower amounts of training epochs, and the zero-padding initialization shows slight improvement (*e.g.* +0.32% for $r = 1.0$ and +0.11% for $r = 2$) over the random-padding for long narrow phase trainings (here, when the number of epochs for narrow is 300).

ratio	epochs narrow model	epochs wide model	accuracy zero-padding	accuracy random-padding
r=1.0	50	50	76.57%	76.58%
r=1.0	75	75	79.08%	78.99%
r=1.0	100	100	79.87%	79.92%
r=1.0	300	300	82.20%	81.88%
r=2.0	50	100	79.37%	79.23%
r=2.0	75	150	80.74%	80.74%
r=2.0	100	200	81.38%	81.30%
r=2.0	300	600	83.49%	83.38%

$r = 1$ at 300 epochs). Hence, its simplicity and its connections with existing literature justify its use more than performances.

4.3 Comparison with Model Growth Training Protocols

The objective of our 3rd experiment is to benchmark our method against the closest related literature: the model growth literature [3, 5, 23, 32]. Our target is a ResNet-50D model, and the training is performed on ImageNet-1K.

Implementation Details. Following the protocol in [23], we grow from a half-width ResNet-50D ($0.5\times$) to a full-width ResNet-50D ($1.0\times$) when using a single recursive step. For more recursive steps, we recursively apply this process, halving the initial width at each additional step (*e.g.*, a 2-step process shrinks from $1.0\times$ to $0.5\times$ and then to $0.25\times$, and a 3-step, finally, to $0.125\times$), while consistently maintaining the training ratio $r = 2$. Unlike MixtureGrowth, which relies on template mixing and linear combinations to generate new weights, our method uses a parameter-free block-diagonal zero-initialization.

Computational Budget and FLOPs Recalculation. Importantly, the original evaluation of [23] assumes the availability of a pre-trained narrow model and excludes its computational cost from the reported efficiency metrics. Because RBDC is designed to train target models entirely from scratch, we recalculate the normalized FLOPs for all recombination baselines of [23], which we report in Tab. 2. By doing so, we account for the full training budget of every model involved. Using the `fvcore` library, the resulting forward costs are 8.7G FLOPs for the $1.0\times$ target model, 2.20G FLOPs for $0.5\times$, 0.56G FLOPs for $0.25\times$, and 144.08M FLOPs for $0.125\times$.

Table 2: Comparison with Model Growth Training Protocols. Comparison of RBDC with different training protocols for CNNs on ImageNet-1K. The closest literature is about model growth methods that can be used as training from scratch protocols. The symbol $\dagger$ indicates a value reported in [23], and $\ddagger$ stands for amounts of FLOPs that are higher than the values reported in [23] because, when training from scratch, we should count the amount of FLOPs spent to train the narrow models.

Protocol	Accuracy on ImageNet	Normalized FLOPs
Standard training (baseline)	77.79%	1.00 $\times$
Random template [23]	71.47% $\dagger$	0.61 $\times$ $\ddagger$
Net2Net [3]	72.29% $\dagger$	0.61 $\times$ $\ddagger$
Firefly [32]	71.30% $\dagger$	0.61 $\times$ $\ddagger$
GradMax [5]	71.73% $\dagger$	0.61 $\times$ $\ddagger$
MixtureGrowth [23]	74.51% $\dagger$	0.61 $\times$ $\ddagger$
RBDC 1-step (Ours)	77.32%	0.61 $\times$
RBDC 2-step (Ours)	77.41%	0.61 $\times$
RBDC 3-step (Ours)	77.55%	0.61 $\times$

The method from [23] allocates 90 epochs to the first $0.5\times$ model, 74 epochs to the second $0.5\times$ model, and 14 epochs to the $1.0\times$ target model. To match this total computational budget with our default training ratio ($r = 2$), we allocate our recursive training epochs as follows:

- **1 recursive step:** Two $0.5\times$ models for 22 epochs each, and the $1.0\times$ target model for 44 epochs.
- **2 recursive steps:** Four $0.25\times$ models for 10 epochs each, two $0.5\times$ models for 21 epochs each, and the $1.0\times$ target model for 42 epochs.
- **3 recursive steps:** Eight $0.125\times$ models for 5 epochs each, four $0.25\times$ models for 10 epochs each, two $0.5\times$ models for 20 epochs each, and the $1.0\times$ target model for 42 epochs.

Training Configuration. To ensure a fair comparison with [23], we retrain the baseline model. While [23] describes a step-decay learning rate schedule, we align the standard training protocol with the actual hyperparameters implemented in their official code. Specifically, we train a ResNet-50D using the official PyTorch Image Models (timm) [31] pipeline, with a cosine annealing scheduler starting from a base learning rate of 0.1, preceded by a 2-epoch linear warmup, and a batch size of 512. Optimization is performed using Stochastic Gradient Descent (SGD) with a weight decay of $1e-4$. As established in our DeiT experiments, the transition to a wider model triggers a full restart of the learning rate schedule and optimizer state.

Results. Tab. 2 shows that RBDC achieves the best performance, almost matching the baseline accuracy with a FLOPs reduction of 39%. We hypothesize that our management of the training ratio allows a flexible allocation of computational resources to the models during training.

4.4 Transfer Learning on Downstream Tasks

Table 3: Transfer Learning on Downstream Tasks. Object detection and instance segmentation results on the COCO 2017 validation set [17] using the Mask R-CNN framework. For the detection and segmentation tasks, we report respectively the bounding box mean average precision (mAP^{box}) and mask mean average precision (mAP^{mask}) across different IoU thresholds and object sizes. We can see that even if the two backbones have been trained at the same classification accuracy, the backbone obtained with our training protocol outperforms the one obtained with the standard protocol.

Backbone	mAP^{box}	$\text{mAP}_{50}^{\text{box}}$	$\text{mAP}_{75}^{\text{box}}$	$\text{mAP}_S^{\text{box}}$	$\text{mAP}_M^{\text{box}}$	$\text{mAP}_L^{\text{box}}$
Baseline	43.0	64.7	47.0	25.3	46.0	59.2
RBDC (Ours)	43.4	65.4	47.2	26.3	46.7	59.5

(a) Transfer learning: classification $\rightarrow$ detection

Backbone	mAP^{mask}	$\text{mAP}_{50}^{\text{mask}}$	$\text{mAP}_{75}^{\text{mask}}$	$\text{mAP}_S^{\text{mask}}$	$\text{mAP}_M^{\text{mask}}$	$\text{mAP}_L^{\text{mask}}$
Baseline	38.5	61.7	40.7	18.6	41.4	59.1
RBDC (Ours)	39.0	62.1	41.1	19.9	42.0	59.3

(b) Transfer learning: classification $\rightarrow$ segmentation

The objective of our 4th experiment is to validate that RBDC provides valuable feature representations for downstream tasks. We evaluate the learned DeiT-Base backbone [29] on both the COCO 2017 object detection and instance segmentation benchmarks [17]. Throughout this section, we use the term backbone to refer specifically to the DeiT feature extractor, and model to describe the complete Mask R-CNN [11] model.

Implementation Details. Our model is built upon the Mask R-CNN framework [11]. We integrate the pre-trained DeiT-Base backbone utilizing the ViTDet approach [16] to adapt the plain Vision Transformer (*i.e.*, the pre-trained DeiT-Base backbone) for dense prediction tasks. Specifically, we apply windowed attention (with a window size of 14) in blocks 0, 1, 3, 4, 6, 7, 9, and 10, while leaving the remaining blocks as global attention to propagate information across the image. A SimpleFPN neck [16] is used to build a multi-scale feature pyramid from the single-scale 768-dimensional output of the backbone. Although our narrow and wide models, alongside the baseline, were pre-trained using the DeiT distillation objective (introducing an additional distillation token), the ViTDet architecture does not utilize the resulting distillation token. Therefore, we implemented a custom weight loader that discards this distillation token and realigns the class token with the standard patch positional embeddings during initialization.

Training Configuration. The model is trained for 36 epochs using standard resizing (short edge of 800 pixels, maximum long edge of 1,333 pixels), following the baseline training recipes established for Mask R-CNN [11]. Optimization is performed using AdamW [19] with a base learning rate of $1e-4$, a weight decay of 0.1 and an effective batch size of 16. We apply a cosine annealing learning rate schedule [19] that decays smoothly to 0.0, preceded by a linear warmup over the first 500 iterations. To preserve the spatial features learned during pre-training, we employ layer-wise learning rate decay [2, 4] with a decay rate of 0.7 across the 12 transformer blocks of the backbone. Normalization layers, biases, and positional embeddings are excluded from the weight decay penalty.

Results. We compare the downstream performance of our DeiT-Base backbone trained with RBDC against the standard DeiT-Base baseline. The performance of the detection and segmentation models is measured using the *mean average precision* (mAP). As detailed in Tab. 3, the model using our backbone achieves a bounding box mAP^{box} of 43.4 and a mask mAP^{mask} of 39.0. This outperforms the standard baseline, which yields a mAP^{box} of 43.0 and a mAP^{mask} of 38.5. Notably, these improvements are consistent across all intersection over union thresholds and object sizes. These results demonstrate that our efficient RBDC training protocol learns useful spatial features, providing a solid initialization for downstream tasks.

5 Conclusion

We introduced RBDC, an efficient training protocol to train high-capacity computer vision models from scratch. By leveraging independently trained narrow models and coupling them in a block-diagonal way to serve as educated initialization for training wider models, RBDC constructs target models recursively. That initialization is parameter-free, as it uses zero-padded interaction terms to preserve the learned features of the narrow models. RBDC enables to use training ratios between wide and narrow models that efficiently control the amount of FLOPs needed to train the target model.

Our results show that when fully accounting for the complete FLOPs budget of all training phases, our RBDC training protocol improves the trade-off curve over standard training, yielding up to a 30% FLOPs reduction at comparable test accuracies, and even a moderate performance improvement at similar FLOPs budgets. On ImageNet, we achieve competitive performance with both DeiT and ResNet models without relying on pre-trained models or parameter-heavy techniques, outperforming training protocols of the model growth literature in that regard. Furthermore, our trained models transfer successfully to downstream tasks when used as backbones, yielding improved object detection and instance segmentation performances on COCO [17] over the standard baselines.

Finally, we underline that our RBDC training protocol uses mechanisms that could be generalized beyond computer vision models. In particular, model architectures using mostly linear operations, such as transformers used by large

language models, could also benefit from RBDC. Given the cost of training such models, a training FLOPs reduction of 30% could yield spectacular savings.

Acknowledgements

M. Henry and S. Piérard are funded by grant 2010235 (ARIAC by **DIGITAL-WALLONIA4.AI**) of the SPW EER, Wallonia, Belgium; A. Deliège is a **F.R.S.-FNRS** postdoc researcher.

References

1. Banner, R., Nahshan, Y., Soudry, D.: Post training 4-bit quantization of convolutional networks for rapid-deployment. In: Adv. Neural Inf. Process. Syst. (NeurIPS). vol. 31, pp. 7950–7958. Curran Assoc. Inc., Vancouver, Can. (Dec 2018) [3](#)
2. Bao, H., Dong, L., Piao, S., Wei, F.: BEiT: BERT pre-training of image transformers. In: Int. Conf. Learn. Represent. (ICLR). pp. 1–18. Virtual conference (Apr 2022) [14](#)
3. Chen, T., Goodfellow, I., Shlens, J.: Net2Net: Accelerating learning via knowledge transfer. arXiv **abs/1511.05641** (2015) [4](#), [5](#), [7](#), [11](#), [12](#)
4. Clark, K., Luong, M.T., Le, Q.V., Manning, C.D.: ELECTRA: Pre-training text encoders as discriminators rather than generators. In: Int. Conf. Learn. Represent. (ICLR). pp. 1–18. Addis Ababa, Ethiopia (Apr 2020) [14](#)
5. Evci, U., van Merriënboer, B., Unterthiner, T., Vladymyrov, M., Pedregosa, F.: GradMax: Growing neural networks using gradient information. In: Int. Conf. Learn. Represent. (ICLR). pp. 1–17. Virtual conference (Sept 2022) [4](#), [7](#), [11](#), [12](#)
6. Facebook Research: Official DeiT repository, <https://github.com/facebookresearch/deit> [8](#)
7. Gong, L., He, D., Li, Z., Qin, T., Wang, L., Liu, T.: Efficient training of BERT by progressively stacking. In: Int. Conf. Mach. Learn. (ICML). Proc. Mach. Learn. Res., vol. 97, pp. 2337–2346. ML Res. Press (Jun 2019) [4](#)
8. Gou, J., Yu, B., Maybank, S.J., Tao, D.: Knowledge distillation: A survey. Int. J. Comput. Vis. **129**(6), 1789–1819 (Mar 2021) [3](#)
9. Gusak, J., Cherniuk, D., Shilova, A., Katrutsa, A., Bershatsky, D., Zhao, X., Eyraud-Dubois, L., Shliazhko, O., Dimitrov, D., Oseledets, I., Beaumont, O.: Survey on efficient training of large neural networks. In: Int. Jt. Conf. Artif. Intell. (IJCAI). pp. 5494–5501. Vienna, Austria (Jul 2022) [3](#)
10. Han, S., Pool, J., Tran, J., Dally, W.J.: Learning both weights and connections for efficient neural networks. In: Adv. Neural Inf. Process. Syst. (NeurIPS). pp. 1135–1143. Curran Assoc. Inc., Montréal, Can. (Dec 2015) [3](#)
11. He, K., Gkioxari, G., Dollár, P., Girshick, R.: Mask R-CNN. In: IEEE Int. Conf. Comput. Vis. (ICCV). pp. 2980–2988. IEEE, Venice, Italy (Oct 2017) [13](#), [14](#)
12. Henry, M., Deliège, A., Cioppa, A., Van Droogenbroeck, M.: LinDeps: A fine-tuning free post-pruning method to remove layer-wise linear dependencies with guaranteed performance preservation. arXiv **abs/2507.21573** (2025) [3](#)
13. Hoffmann, J., Borgeaud, S., Mensch, A., Buchatskaya, E., Cai, T., Rutherford, E., Casas, D.d.L., Hendricks, L.A., Welbl, J., Clark, A., Hennigan, T., Noland, E., Millican, K., Driessche, G.v.d., Damoc, B., Guy, A., Osindero, S., Simonyan, K., Elsen, E., Rae, J.W., Vinyals, O., Sifre, L.: Training compute-optimal large language models. In: Adv. Neural Inf. Process. Syst. (NeurIPS). vol. 36, pp. 30016–30030. Curran Assoc. Inc., New Orleans, LA, USA (Nov 2022) [8](#), [21](#)
14. Houshy, N., Giurigu, A., Jastrzebski, S., Morrone, B., De Laroussilhe, Q., Gesmundo, A., Attariyan, M., Gelly, S.: Parameter-efficient transfer learning for NLP. In: Int. Conf. Mach. Learn. (ICML). Proc. Mach. Learn. Res., vol. 97, pp. 2790–2799. ML Res. Press (Jun 2019) [3](#), [4](#)
15. Hu, E.J., Shen, Y., Wallis, P., Allen-Zhu, Z., Li, Y., Wang, S., Wang, L., Chen, W.: LoRA: Low-rank adaptation of large language models. In: Int. Conf. Learn. Represent. (ICLR). pp. 1–13. Virtual conference (Sept 2022) [3](#), [4](#), [7](#)

16. Li, X., Duan, H., Tian, Y., Wang, F.Y.: Exploring image generation for UAV change detection. *IEEE/CAA J. Autom. Sin.* **9**(6), 1061–1072 (Jun 2022) [13](#)
17. Lin, T.Y., Maire, M., Belongie, S., Hays, J., Perona, P., Ramanan, D., Dollár, P., Zitnick, C.L.: Microsoft COCO: Common Objects in Context. In: *Eur. Conf. Comput. Vis. (ECCV)*. *Lect. Notes Comput. Sci.*, vol. 8693, pp. 740–755. Springer (Sept 2014) [3](#), [13](#), [14](#)
18. Loshchilov, I., Hutter, F.: SGDR: Stochastic gradient descent with warm restarts. In: *Int. Conf. Learn. Represent. (ICLR)*. pp. 1–16. Toulon, France (Apr 2017) [8](#)
19. Loshchilov, I., Hutter, F.: Decoupled weight decay regularization. In: *Int. Conf. Learn. Represent. (ICLR)*. New Orleans, LA, USA (May 2019) [8](#), [14](#)
20. Menghani, G.: Efficient deep learning: A survey on making deep learning models smaller, faster, and better. *ACM Comput. Surv.* **55**(12), 1–37 (Mar 2023) [3](#)
21. Micikevicius, P., Narang, S., Alben, J., Diamos, G., Elsen, E., Garcia, D., Ginsburg, B., Houston, M., Kuchaiev, O., Venkatesh, G., Wu, H.: Mixed precision training. In: *Int. Conf. Learn. Represent. (ICLR)*. pp. 1–12. Vancouver, Can. (Apr 2018) [4](#)
22. Micikevicius, P., Stosic, D., Burgess, N., Cornea, M., Dubey, P., Grisenthwaite, R., Ha, S., Heinecke, A., Judd, P., Kamalu, J., Mellempudi, N., Oberman, S., Shoenybi, M., Siu, M., Wu, H.: FP8 formats for deep learning. *arXiv abs/2209.05433* (2022) [4](#)
23. Pham, C., Teterwak, P., Nelson, S., Plummer, B.A.: MixtureGrowth: Growing neural networks by recombining learned parameters. In: *IEEE/CVF Winter Conf. Appl. Comput. Vis. (WACV)*. pp. 2788–2797. IEEE, Waikoloa, HI, USA (Jan 2024) [5](#), [7](#), [8](#), [11](#), [12](#)
24. Shen, L., Sun, Y., Yu, Z., Ding, L., Tian, X., Tao, D.: On efficient training of large-scale deep learning models: A literature review. *arXiv abs/2304.03589* (2023) [3](#)
25. Sustainability Directory: Resource-efficient machine learning. <https://climate.sustainability-directory.com/term/resource-efficient-machine-learning> (2026) [1](#)
26. Sze, V., Chen, Y.H., Yang, T.J., Emer, J.S.: Efficient processing of deep neural networks: A tutorial and survey. *Proc. IEEE* **105**(12), 2295–2329 (Dec 2017) [3](#)
27. Thompson, N., Fleming, M., Tang, B.J., Pastwa, A.M., Borge, N., Goehring, B.C., Das, S.: A model for estimating the economic costs of computer vision systems that use deep learning. In: *AAAI Conf. Artif. Intell.* vol. 38, pp. 23012–23018. Assoc. Adv. Artif. Intell. (AAAI), Vancouver, Can. (Mar 2024) [1](#), [4](#)
28. Thompson, N.C., Greenewald, K., Lee, K., Manso, G.F.: The computational limits of deep learning. *arXiv abs/2007.05558* (2020) [3](#)
29. Touvron, H., Cord, M., Douze, M., Massa, F., Sablayrolles, A., Jégou, H.: Training data-efficient image transformers & distillation through attention. In: *Int. Conf. Mach. Learn. (ICML)*. *Proc. Mach. Learn. Res.*, vol. 139, pp. 10347–10357. ML Res. Press, Virtual Conf. (Jul 2021) [7](#), [8](#), [13](#)
30. Touvron, H., Cord, M., Jégou, H.: DeiT III: Revenge of the ViT. In: *Eur. Conf. Comput. Vis. (ECCV)*. *Lect. Notes Comput. Sci.*, vol. 13684, pp. 516–533. Springer Nat. Switz., Tel Aviv, Israël (2022) [4](#), [7](#), [9](#)
31. Wightman, R.: Pytorch image models. <https://github.com/rwightman/pytorch-image-models> (2019) [12](#)
32. Wu, L., Liu, B., Stone, P., Liu, Q.: Firefly neural architecture descent: a general approach for growing neural networks. In: *Adv. Neural Inf. Process. Syst. (NeurIPS)*. vol. 33, pp. 22373–22383. Curran Assoc. Inc., Virtual conference (Dec 2020) [11](#), [12](#)
33. Xu, L., Xie, H., Qin, S.J., Tao, X., Wang, F.L.: Parameter-efficient fine-tuning methods for pretrained language models: A critical review and assessment. *IEEE Trans. Pattern Anal. Mach. Intell.* pp. 1–20 (2026) [3](#), [4](#)

34. Zagoruyko, S., Komodakis, N.: Wide residual networks. arXiv **abs/1605.07146** (2016) [7](#)

A Supplementary Material

This is the supplementary material for the paper *Recursive Block-Diagonal Coupling for Resource-Efficient Training of Vision Models*.

A.1 Per-layer Implementation Details

To merge two narrow vision models into a wider model, we employ a block-diagonal initialization strategy, as motivated in Sec. 3.2.

Our code includes specific implementations for seven types of layers summarized in Tab. 4: attention qkv projection layers, attention output projection layers, position-wise feed-forward layers, head layers, convolution layers, layer normalization layers, and batch normalization layers.

Table 4: Summary of layer types and their recursive coupling initialization for each model.

#	Layer Type	ResNet	DeiT	Coupling Eq.
1	Attention QKV projection		✓	Eq. (3)
2	Attention output projection		✓	Eq. (4)
3	Position-wise feed-forward (MLP)		✓	Eq. (5)
4	Classification head	✓	✓	Eq. (6)
5	Convolution	✓		Eq. (7)
6	Layer Normalization		✓	Eq. (8)
7	Batch Normalization	✓		Eq. (9)

Our merging mechanism and initialization strategy are described hereafter:

1. **Attention QKV Projection Layers:** In standard multi-head self-attention mechanism, the query ($\mathbf{W}_Q$), key ($\mathbf{W}_K$), and value ($\mathbf{W}_V$) projections are packed into a single weight matrix. We apply the block-diagonal pattern to each projection independently. While the weight matrix $\mathbf{W}_{QKV} \in \mathbb{R}^{3d_{out} \times d_{in}}$ follows a block-diagonal structure, the bias $\mathbf{b}_{QKV} \in \mathbb{R}^{3d_{out}}$ is formed by concatenating the biases of each individual component:

$$\mathbf{W}_{QKV} = \begin{bmatrix} \mathbf{W}_Q^{(1)} & \mathbf{0} \\ \mathbf{0} & \mathbf{W}_Q^{(2)} \\ \mathbf{W}_K^{(1)} & \mathbf{0} \\ \mathbf{0} & \mathbf{W}_K^{(2)} \\ \mathbf{W}_V^{(1)} & \mathbf{0} \\ \mathbf{0} & \mathbf{W}_V^{(2)} \end{bmatrix}, \quad \mathbf{b}_{QKV} = \begin{bmatrix} \mathbf{b}_Q^{(1)} \\ \mathbf{b}_Q^{(2)} \\ \mathbf{b}_K^{(1)} \\ \mathbf{b}_K^{(2)} \\ \mathbf{b}_V^{(1)} \\ \mathbf{b}_V^{(2)} \end{bmatrix}. \quad (3)$$

2. **Attention Output Projection Layers:** The projection layer following the attention heads maps the concatenated features back to the embedding

dimension. We zero-initialize the off-diagonal interaction terms and concatenate the biases:

$$\mathbf{W}_{proj} = \begin{bmatrix} \mathbf{W}_{proj}^{(1)} & \mathbf{0} \\ \mathbf{0} & \mathbf{W}_{proj}^{(2)} \end{bmatrix}, \quad \mathbf{b}_{proj} = \begin{bmatrix} \mathbf{b}_{proj}^{(1)} \\ \mathbf{b}_{proj}^{(2)} \end{bmatrix}. \quad (4)$$

3. **Position-wise Feed-Forward Layers:** The MLP blocks typically consist of two linear layers. Both the expansion layer (FC_1) and the contraction layer (FC_2) follow the block-diagonal structure for weights and concatenation for biases:

$$\mathbf{W}_{\text{FC}_i} = \begin{bmatrix} \mathbf{W}_{\text{FC}_i}^{(1)} & \mathbf{0} \\ \mathbf{0} & \mathbf{W}_{\text{FC}_i}^{(2)} \end{bmatrix}, \quad \mathbf{b}_{\text{FC}_i} = \begin{bmatrix} \mathbf{b}_{\text{FC}_i}^{(1)} \\ \mathbf{b}_{\text{FC}_i}^{(2)} \end{bmatrix} \quad \text{for } i \in \{1, 2\}. \quad (5)$$

4. **Head Layers:** To aggregate the predictions from both merged branches into a single output, the final classification head is initialized as the average of the individual heads' weights and biases:

$$\mathbf{W}_{head} = \left[\frac{1}{2} \mathbf{W}_{head}^{(1)} \quad \frac{1}{2} \mathbf{W}_{head}^{(2)} \right], \quad \mathbf{b}_{head} = \frac{\mathbf{b}_{head}^{(1)} + \mathbf{b}_{head}^{(2)}}{2}. \quad (6)$$

5. **Convolution Layers:** For a weight tensor of shape (C_{out}, C_{in}, K, K) , the spatial kernel dimensions $(K \times K)$ are preserved. The merging occurs across the input and output channel dimensions, while the bias is concatenated:

$$\mathbf{W}_{conv}[:, :, k, k] = \begin{bmatrix} \mathbf{W}_{conv}^{(1)}[:, :, k, k] & \mathbf{0} \\ \mathbf{0} & \mathbf{W}_{conv}^{(2)}[:, :, k, k] \end{bmatrix}, \quad \mathbf{b}_{conv} = \begin{bmatrix} \mathbf{b}_{conv}^{(1)} \\ \mathbf{b}_{conv}^{(2)} \end{bmatrix}. \quad (7)$$

6. **Layer Normalization:** Since layer normalization parameters are learned per-feature, we concatenate the weights (γ) and biases (β) of the two models:

$$\gamma_{wide} = \begin{bmatrix} \gamma^{(1)} \\ \gamma^{(2)} \end{bmatrix}, \quad \beta_{wide} = \begin{bmatrix} \beta^{(1)} \\ \beta^{(2)} \end{bmatrix} \quad (8)$$

7. **Batch Normalization:** Similar to layer normalization, we concatenate the learnable affine parameters. Additionally, we concatenate the running statistics (mean and variance) to ensure the model preserves the internal activations of the narrow models:

$$\mu_{wide} = \begin{bmatrix} \mu^{(1)} \\ \mu^{(2)} \end{bmatrix}, \quad \sigma_{wide}^2 = \begin{bmatrix} \sigma^{2(1)} \\ \sigma^{2(2)} \end{bmatrix} \quad (9)$$

A.2 Link between FLOPs budget, training ratio, and epochs

As presented in Sec. 3.3, the amount of FLOPs budget is tied to the training ratio r and the number of epochs used in each stage of RBDC. In this section, we show how to determine the amount of epochs necessary at each stage of RBDC

when the FLOPs budget, the number of recursive steps, and the training ratio r are given.

To implement the RBDC protocol under a specific computational constraint, it is necessary to determine the number of training epochs allocated to each model. The protocol operates through recursive steps of width halving, which conceptually begin with the target model and end with the narrowest models, even though the training sequentially progresses from the narrowest models up to the target model.

We define the following terms to formalize the relation between the available computational budget and the training epochs:

- S : number of width halvings.
- i : current recursive step index ($i \in \{0, \dots, S\}$), where $i = 0$ corresponds to the final target model and $i = S$ corresponds to the initial narrowest models.
- $\text{epochs}_{\text{target}}$: number of training epochs allocated to the target model.
- epochs_i : number of training epochs allocated to a single model at recursive step i .
- r : training ratio, which dictates the proportion of training epochs between a wide model at step $i - 1$ and its constituent narrow models at step i .
- $\text{FLOPs}_{\text{total}}$: computational budget to train all models in the entire pipeline.
- $\text{FLOPs}_{\text{training}_i}$: computational cost to fully train one model at recursive step i .
- $\text{FLOPs}_{\text{forward}_i}$: computational cost of a single forward pass for one model at recursive step i .
- $|\mathcal{D}|$: number of images in the training dataset.

The total computational cost $\text{FLOPs}_{\text{total}}$ accounts for every model involved in the pipeline. Because each model at step $i - 1$ is initialized by coupling two narrower models from step i , the total number of independent models trained at any given level i is 2^i . The total budget is the sum of these training costs across all recursive levels:

$$\text{FLOPs}_{\text{total}} = \sum_{i=0}^S 2^i \text{FLOPs}_{\text{training}_i} . \quad (10)$$

To estimate $\text{FLOPs}_{\text{training}_i}$, we apply the standard approximation established in the literature [13]: the backward pass requires approximately twice the compute of the forward pass to calculate gradients regarding both activations and weights. Therefore, one training step (one forward followed by one backward pass) costs three times the forward cost. This is performed $|\mathcal{D}|$ times per epoch. Hence,

$$\text{FLOPs}_{\text{training}_i} = \text{epochs}_i |\mathcal{D}| 3 \text{FLOPs}_{\text{forward}_i} , \quad (11)$$

where $\text{FLOPs}_{\text{forward}_i}$ is obtained using the fvcare library as mentioned in Sec. 4.

Given a constant training ratio r , the number of epochs at each step i is defined relative to the target epochs $\text{epochs}_{\text{target}}$ as:

$$\text{epochs}_i = \frac{\text{epochs}_{\text{target}}}{r^i} . \quad (12)$$

Consequently, Eq. (10) becomes

$$\text{FLOPs}_{total} = \sum_{i=0}^S 2^i \frac{\text{epochs}_{target}}{r^i} |\mathcal{D}| 3 \text{FLOPs}_{forward_i}. \quad (13)$$

To compute the practical training schedule for the target model given the budget FLOPs_{total} , we isolate epochs_{target} :

$$\text{epochs}_{target} = \frac{\text{FLOPs}_{total}}{3 |\mathcal{D}| \sum_{i=0}^S \left(\frac{2}{r}\right)^i \text{FLOPs}_{forward_i}}. \quad (14)$$

Each training stage utilizes the full dataset (thus $|\mathcal{D}|$ images).

To generate the results from Figs. 2, 3a and 3b, we calculated the amount of FLOPs_{total} using a coefficient, α , applied to the amount of FLOPs necessary for the baseline using a reference number of epochs, $\text{epoch}_{baseline}$. FLOPs_{total} is then calculated as:

$$\text{FLOPs}_{total} = \alpha \text{epoch}_{baseline} |\mathcal{D}| 3 \text{FLOPs}_{forward_0}. \quad (15)$$

By injecting Eq. (15) in Eq. (14) we have:

$$\text{epochs}_{target} = \frac{\alpha \text{epoch}_{baseline} \text{FLOPs}_{forward_0}}{\sum_{i=0}^S \left(\frac{2}{r}\right)^i \text{FLOPs}_{forward_i}}. \quad (16)$$

As models get wider and wider, the ratio of FLOPs between two successive forward tends to 4. This is due to linear and convolution operations being quadratic with the size of the dimension and taking bigger and bigger proportions of the amount of FLOPs used in the forward. To remove the necessity of computing the amount of FLOPs for each model, we can approximate the amount of FLOPs for each forward i as:

$$\text{FLOPs}_{forward_i} \approx \frac{\text{FLOPs}_{forward_0}}{4^i}. \quad (17)$$

Simplifying Eq. (16) into:

$$\text{epochs}_{target} \approx \frac{\alpha \text{epoch}_{baseline}}{\sum_{i=0}^S \left(\frac{1}{2r}\right)^i}. \quad (18)$$

Once epochs_{target} is determined, the epochs for all preceding narrow stages epochs_i are derived from Eq. (12).