

Revitalizing Dense Material Segmentation: Stabilized Vision Transformers and the Generalization Paradox

Allan Kazakov^{1,2} , Duygu Cakir^{1,3}, Hilal Kurt İrfanoğlu², and Yavuz İrfanoğlu²

¹ Bahcesehir University, Istanbul, Turkey

allan.kazakov@bahcesehir.edu.tr, duygu.cakir@bau.edu.tr

² Poder Bilişim Teknolojileri Sanayi ve Ticaret A.Ş., Istanbul, Turkey

hilal@poder.com.tr, yavuz@poder.com.tr

³ Galatasaray University, Istanbul, Turkey

Abstract. Material segmentation—the pixel-wise classification of physical surface properties remains a challenging problem in computer vision, requiring physicochemical understanding distinct from object-centric parsing. Despite the introduction of the rigorous Apple Dense Material Segmentation (DMS) dataset, the benchmark has suffered from attrition and stagnation, increasingly overshadowed by geometry-biased foundation models. In this paper, we revive the Apple-DMS benchmark to establish a modern Vision Transformer baseline. We conduct an exhaustive evaluation of SegFormer and Mask2Former architectures, revealing that standard training paradigms fail on amorphous texture fields due to high-variance gradients. To address this, we introduce a stabilized training recipe featuring High-Fidelity Logit Projection, Query Entropy Regularization, and a domain-specific, physics-compliant augmentation pipeline. Our optimized SegFormer-B5 achieves a new State-of-the-Art (SOTA) of 0.4572 mIoU on the original dataset split, significantly surpassing the prior convolutional baseline. Furthermore, we identify a critical “Generalization Paradox”: while re-partitioning the dataset into a data-rich 80/10/10 split inflates the metric to 0.5276 mIoU, expert qualitative analysis reveals this induces distributional homogenization, severely degrading real-world, out-of-distribution performance. By releasing our recovered dataset index and robust training framework, we demonstrate that material perception is far from solved and urge the community to leverage the rigorous original split to drive genuine progress in physically grounded artificial intelligence.

Keywords: Material Segmentation · Vision Transformers · Apple-DMS

1 Introduction

Visual understanding is not limited to recognizing discrete objects (“things”) such as cars, chairs, or pedestrians; it also requires identifying the physical materials that compose them. Distinguishing concrete from stone, fabric from leather,

or polished wood from laminated plastic is essential for robotic manipulation, photorealistic augmented reality, acoustic simulation, and scene understanding. Unlike standard semantic segmentation, material segmentation depends less on object shape and more on high-frequency texture, reflectance, and surface appearance cues.

The Apple Dense Material Segmentation (DMS) dataset [1] remains one of the most rigorous benchmarks for this task, providing dense annotations over 46 material classes. Yet the benchmark has seen surprisingly little progress since its introduction, with the original ResNet-50 baseline still serving as the main point of comparison. At the same time, the field has shifted toward foundation models such as SAM 2 [15] and SAM 3 [16], which are highly effective at separating geometric regions but do not directly solve material recognition. A model may segment a tabletop accurately while still failing to decide whether it is wood, plastic, glass, or polished stone.

In this work, we revisit Apple-DMS and establish a modern Vision Transformer baseline for dense material segmentation. We evaluate two representative segmentation paradigms: **Mask2Former** [13], which formulates segmentation as mask classification, and **SegFormer** [12], which uses a hierarchical semantic encoder. Our experiments show that applying these architectures off the shelf is insufficient. Dense material fields produce unstable optimization, high-variance gradients, and rapid overfitting, especially because material boundaries are often gradual rather than object-like.

To address these issues, we introduce a stabilized training recipe built around *High-Fidelity Logit Projection*, *Query Entropy Regularization*, differential learning rates, and a physics-aware augmentation pipeline. With this recipe, SegFormer-B5 achieves a new state of the art of **0.4572 mIoU** on the original Apple-DMS split, surpassing the prior convolutional baseline of **0.4200 mIoU**.

We further study whether the difficulty of Apple-DMS is caused by limited training data. A stratified 80/10/10 re-partition raises SegFormer-B5 performance to **0.5276 mIoU**, but expert evaluation on real-world out-of-distribution samples reveals worse material behavior. We call this the *Generalization Paradox*: a data-rich IID split can inflate benchmark metrics while weakening real-world material generalization. This finding suggests that the original Apple-DMS split remains important precisely because it is difficult.

Our core contributions are summarized as follows:

1. We establish a new SegFormer-B5 state of the art on the original Apple-DMS split, achieving **0.4572 mIoU** and outperforming the previous convolutional baseline.
2. We identify optimization failures that arise when training modern Transformers on dense material fields and introduce a stabilization recipe based on *High-Fidelity Logit Projection*, *Query Entropy Regularization*, and differential optimization.
3. We propose a *Texture-First* augmentation strategy and show that its effect depends strongly on the evaluation split.

4. We identify the *Generalization Paradox*, showing that data-rich IID splits can inflate mIoU while reducing out-of-distribution robustness, and release recovered dataset indices, code, and training recipes to support reproducible future work: github.com/AllanK24/Material_Seg_AppleDMS.

2 Related Work

Material segmentation and texture analysis. Material perception has long been treated as distinct from object recognition: where object-centric segmentation identifies discrete “things,” material segmentation must classify the surface properties of “stuff” [2]. Early work focused on texture and material classification using image-level labels, leading to datasets such as the Describable Textures Dataset (DTD) [4] and the Flickr Material Database (FMD) [3]. These resources are valuable for recognizing material appearance, but they do not provide dense spatial supervision. Later benchmarks such as OpenSurfaces [5] and Materials in Context (MINC) [6] introduced spatial material annotations, but primarily through point-level labels. The Apple Dense Material Segmentation (DMS) dataset [1] addressed this limitation by providing dense annotations over 46 material classes, making it a uniquely rigorous benchmark for full-scene material parsing. Unlike broader segmentation datasets such as COCO-Stuff [7] and ADE20K [8], Apple-DMS focuses directly on physicochemical surface categories such as *Plastic*, *Ceramic*, *Wood*, and *Polished Stone*. Despite this, it has seen limited follow-up work since its introduction.

Segmentation architectures. Convolutional architectures such as Fully Convolutional Networks [9] and DeepLab [10] established the standard paradigm for dense prediction, using local filters and dilated convolutions to preserve spatial resolution while enlarging the receptive field. Vision Transformers [11] introduced global self-attention, which is attractive for material recognition because surface identity often depends on non-local cues such as illumination, reflectance, and repeated texture. Modern Transformer-based segmentation methods largely follow two directions. Hierarchical semantic encoders such as SegFormer [12] preserve multi-scale spatial detail, while mask-based models such as Mask2Former [13] formulate segmentation as a set prediction problem over learned mask queries. Both approaches perform well on object- and scene-centric benchmarks, but their behavior on dense, texture-heavy material fields remains underexplored.

Foundation models and the material gap. Foundation segmentation models such as SAM [14] and its successors [15,16] have shown impressive ability to separate visual regions using geometric and semantic cues. However, accurate region extraction is not equivalent to material understanding. Prior analyses have shown that SAM-style models can struggle on real-world cases where region boundaries are ambiguous or low-contrast [17]. For material parsing, the core challenge is not only to outline a table, wall, or floor, but to determine whether a surface is wood, laminate, glass, ceramic, or polished stone. This requires dense supervision over material categories, which motivates revisiting supervised specialists

trained on Apple-DMS rather than relying solely on geometry-first foundation models.

3 Methodology

We describe the pipeline used to evaluate modern Transformer architectures on Apple-DMS: dataset recovery, split construction, model configurations, optimization stabilizers, and material-specific augmentation.

3.1 Dataset Recovery and Preparation

The original Apple-DMS release referenced images hosted on Flickr and AWS, some of which are no longer accessible due to link rot. We recovered 41,396 of the intended 44,560 images, corresponding to a 92.9% recovery rate. The remaining images failed due to expired or unavailable URLs, request-limit errors, network failures, or corrupt payloads.

To support reproducibility, we release the recovered dataset indices and split configurations on HuggingFace. The Original and Custom splits are available as `AllanK24/apple-dms-materials` and `AllanK24/apple-dms-materials-v2`, respectively.

3.2 Data Splitting Strategy

We investigate two distinct data splitting strategies to analyze the impact of training volume on material generalization.

1. The Original Split (54/23/23): The authors of Apple-DMS proposed a highly rigorous split: 22,492 training images (54%), with a massive 46% of the data reserved for validation and testing. This distribution was designed to test extreme generalization but severely limits the data available for hungry Transformer models.

2. The Stratified Custom Split (80/10/10): We hypothesize that the poor performance of modern baselines may be attributed to data starvation. We propose a new stratified split that allocates 80% of the data (33,118 images) to training, while maintaining class balance across the validation (10%) and test (10%) sets. We utilize Jensen-Shannon Divergence (JSD) to verify that the pixel-level class distributions in our custom validation and test sets align closely with the training set ($\text{JSD} \approx 0.015$), ensuring a valid statistical evaluation.

3.3 Network Architectures

We benchmark two architectures that represent opposing philosophies in segmentation:

SegFormer-B5 (Semantic Encoder): We utilize the largest variant of the SegFormer family [12], initialized with weights pre-trained on ADE20K. SegFormer avoids positional encodings, using a hierarchical Mix Transformer (MiT)

encoder (*B5*) that relies on overlapping patch merging. We hypothesize this inductive bias is critical for materials, as it preserves the high-frequency texture continuity (e.g., wood grain) that is often lost in standard Vision Transformers.

Mask2Former Swin-Large (Mask Classification): We use Mask2Former [13] with a Swin-Large backbone, also initialized with weights pre-trained on ADE20K. This model predicts binary masks for “stuff” classes using object queries. While powerful for distinct objects, we analyze whether its reliance on masked attention struggles with the amorphous, boundary-less nature of material segments.

3.4 Architectural Adaptations and Optimization Recipe

A primary contribution of this work is the identification of a *Stabilized Training Recipe* for material parsing. Naive use of standard implementations produced gradient norms above 3.7 and rapid overfitting. We address these instabilities through two architectural adaptations that preserve high-frequency texture supervision, together with differential optimization.

1. High-Fidelity Logit Projection (SegFormer). A limitation of hierarchical encoders such as SegFormer is the resolution bottleneck: the decoder outputs logits $\mathbf{Z} \in \mathbb{R}^{C \times \frac{H}{4} \times \frac{W}{4}}$, while ground truth masks lie in $\mathbf{Y} \in \mathbb{R}^{H \times W}$. Standard training aligns these by downsampling $\mathbf{Y}$ with nearest-neighbor interpolation, which can introduce aliasing at fuzzy material boundaries and discard fine texture cues such as *Fabric* weave or *Wood* grain.

We therefore introduce **High-Fidelity Logit Projection**. Instead of degrading the supervision signal, we project logits into the high-resolution pixel space by bilinear interpolation $\mathcal{U}(\cdot)$ before computing the loss, and apply a resolution-aware label smoothing objective:

$$\mathcal{L}_{HFLP} = -\frac{1}{HW} \sum_{i,j} \sum_{c=1}^C \left[(1-\epsilon)y_{i,j,c} + \frac{\epsilon}{C} \right] \log(\sigma(\mathcal{U}(\mathbf{Z}))_{i,j,c}) \quad (1)$$

where σ is the softmax function and $\epsilon = 0.1$ balances robustness to fuzzy transitions with preservation of semantic identity.

2. Query Entropy Regularization (Mask2Former). For Mask2Former, applying standard label smoothing directly conflicts with the Hungarian matching objective, whose cost matrix depends on exact class probabilities. Modifying this cost with soft labels destabilizes query-to-mask assignment. To avoid this, we introduce **Query Entropy Regularization (QER)**, an auxiliary term applied to the class query logits $\mathbf{Q}$ after matching. We model the smoothing prior as a uniform distribution U and regularize the predicted query distribution by:

$$\mathcal{L}_{total} = \mathcal{L}_{match} + \lambda \cdot D_{KL}(\log(\sigma(\mathbf{Q})) \parallel U) \quad (2)$$

where $\lambda = 0.1$. This maximum-entropy constraint discourages early over-confident collapse while preserving the bipartite matching kernel. In our experiments, removing QER caused rare material classes to be ignored in favor of dominant background materials, while larger values over-penalized certainty and reduced mask precision.

3. Differential Learning Rates and Scheduling. To prevent catastrophic forgetting of ImageNet/ADE20K pretraining, we optimize backbone and decoder parameters with separate learning rates: $\eta_{back} = 1 \times 10^{-4}$ and $\eta_{head} = 1 \times 10^{-3}$. We also replace linear decay with cosine annealing to a hard minimum of $\eta_{min} = 1 \times 10^{-6}$, which keeps late training updates active enough to refine fine-grained texture boundaries.

3.5 Domain-Specific Augmentation Pipeline

Object-centric augmentations can distort material identity, particularly when they alter color, reflectance, or fine texture. We therefore use a *Texture-First* augmentation pipeline with three constraints. First, Large Scale Jittering encourages invariance to scene context while preserving local texture structure. Second, photometric perturbations are deliberately bounded, especially hue, to avoid changing perceived material identity. Third, we add synthetic specular highlights to improve robustness to view-dependent reflection, and apply Gaussian ISO noise only to SegFormer, since high-frequency noise destabilized Mask2Former’s query-based masks in our experiments. The full hyperparameter configuration is given in Table 1.

Table 1. Domain-Specific Augmentation Hyperparameters.

Category	Parameter	Mask2Former	SegFormer
Geometric	Scale Range (LSJ)	[0.1, 2.0]	[0.5, 2.0]
	Crop Size	512×512	512×512
	Horizontal Flip	$p = 0.5$	$p = 0.5$
Photometric	Hue Delta	0.02	0.02
	Saturation Range	[0.8, 1.2]	[0.8, 1.2]
	Contrast Range	[0.6, 1.4]	[0.7, 1.3]
	Specular Injection	$p = 0.3$	$p = 0.3$
	Gaussian Noise	Disabled	$p = 0.3$

4 Experiments and Results

We evaluate SegFormer-B5 and Mask2Former Swin-L on the recovered AppleDMS benchmark under two data partitioning strategies: the Original Split and

our Stratified Custom Split. All models use AdamW optimization, differential learning rates for backbone and decoder parameters, and cosine annealing with a hard minimum learning rate. Unless otherwise stated, performance is reported using mean Intersection-over-Union (mIoU), mean accuracy (mAcc), and overall accuracy (aAcc).

4.1 Implementation Details

Table 2 summarizes the shared optimization configuration. For the Original Split, convergence plateaued after 20 epochs. For the larger Custom Split, we trained for 40 epochs to account for the increased number of training images.

Table 2. Unified hyperparameter configuration. ϵ denotes the SegFormer smoothing coefficient used in High-Fidelity Logit Projection, while λ denotes the Mask2Former Query Entropy Regularization coefficient.

Hyperparameter	Value (Unified)
Optimizer	AdamW
Batch Size	256
Weight Decay	0.1
Regularization coefficient	$\epsilon = 0.1$ / $\lambda = 0.1$
Learning Rates	
Backbone (LR_{back})	1.0×10^{-4}
Decoder/Head (LR_{head})	1.0×10^{-3}
Min LR (η_{min})	1.0×10^{-6}
Epochs	
Original Split	20
Custom Split	40

4.2 Results on the Original Apple-DMS Split

Table 3 reports performance on the Original Split. SegFormer-B5 without augmentation achieves the best result, reaching **0.4572 mIoU** and surpassing the original ResNet-50 Apple-DMS baseline of **0.4200 mIoU**. Mask2Former improves over the baseline as well, but falls behind SegFormer despite using a Swin-Large backbone.

Interestingly, the Texture-First augmentation pipeline does not improve results on the Original Split. SegFormer decreases slightly from 0.4572 to 0.4544 mIoU, while Mask2Former drops from 0.4410 to 0.4072 mIoU. This suggests that the Original Split already acts as a challenging distribution-shift evaluation, and that additional augmentation can move the training distribution away from the held-out evaluation set.

Table 3. Test set results on the **Original Apple Split**. Aug. denotes the augmentation pipeline. SegFormer-B5 without augmentation establishes the new SOTA by mIoU.

Method	Aug.	mIoU	mAcc	aAcc	mB-IoU
Apple Baseline	–	0.4200	0.5850	0.7290	–
Mask2Former	✗	0.4410	0.4912	0.7582	0.1623
Mask2Former	✓	0.4072	0.4516	0.7652	0.1476
SegFormer	✓	0.4544	0.5415	0.8228	0.1342
SegFormer	✗	0.4572	0.5467	0.8229	0.1423

4.3 Impact of the Stratified Custom Split

Table 4 shows the effect of increasing training data through the Stratified Custom Split. SegFormer-B5 improves substantially, reaching **0.5276 mIoU** with augmentation. This indicates that modern Transformer models can exploit additional dense material supervision under an IID-style evaluation split.

The effect of augmentation reverses under this split. Whereas augmentation reduced performance on the Original Split, it improves SegFormer from 0.5117 to 0.5276 mIoU on the Custom Split. This indicates that augmentation behaves as a regularizer when the train and test distributions are closely aligned. However, as discussed in Sec. 5, the resulting metric gain does not necessarily translate to stronger out-of-distribution material recognition.

Mask2Former plateaued around 0.49 validation mIoU under both augmented and non-augmented settings, so we did not allocate final test evaluation compute to this model on the Custom Split.

Table 4. Performance on the **Custom Stratified Split (80/10/10)**. Augmentation improves performance here, contrasting with the Original Split.

Method	Augmentation	Val mIoU	Test mIoU
Mask2Former	✗	0.4944	<i>Not Evaluated</i>
Mask2Former	✓	0.4945	<i>Not Evaluated</i>
SegFormer	✗	0.5006	0.5117
SegFormer	✓	0.5168	0.5276

5 Discussion

Our experiments reveal two main findings. First, hierarchical semantic encoders are better aligned with dense material parsing than query-based mask classifiers. Second, higher IID test performance does not necessarily imply stronger real-world material generalization.

5.1 Architectural Inductive Biases: Texture vs. Object Queries

Although the gap between Mask2Former (0.4410 mIoU) and SegFormer (0.4572 mIoU) is modest, it reflects an important architectural mismatch. Mask2Former represents a scene as a set of learned mask queries, an assumption well suited to discrete objects but less natural for materials. A single material may appear in multiple disconnected regions, while adjacent materials often transition gradually rather than through sharp object boundaries.

SegFormer avoids explicit instance-style mask assignment. Its hierarchical MiT encoder progressively merges overlapping patches, preserving texture cues such as grain, weave, and roughness across the feature map. Our results suggest that material segmentation rewards semantic consistency over geometric isolation, which helps explain why SegFormer provides the stronger baseline on Apple-DMS.

5.2 The Generalization Paradox: Metrics vs. Reality

A central finding of this work is the *Generalization Paradox*. We compare two SegFormer-B5 variants: **Model V1**, trained on the rigorous Original Apple Split without augmentation, which achieves **0.4572** test mIoU; and **Model V2**, trained on the data-rich Stratified Custom Split with Texture-First augmentation, which achieves **0.5276** test mIoU.

Despite its higher benchmark score, Model V2 was consistently judged worse by domain experts on out-of-distribution real-world samples. We hypothesize that the Stratified Custom Split introduces distributional homogenization: random 80/10/10 re-partitioning makes the test set more IID with respect to training, allowing the model to exploit dataset-level statistical priors such as lighting, scene type, and photographic style. In contrast, the Original Split appears to function as a stricter distribution-shift evaluation, encouraging more robust material cues rather than split-specific correlations.

5.3 Qualitative Analysis: Real-World Evaluation

Figure 1 illustrates this discrepancy. In Scene 1, Model V1 preserves the polished stone identity of the central table despite strong window glare, whereas Model V2 misclassifies the same reflective surface as *Glass*. In Scene 2, Model V1 better preserves high-frequency wooden ceiling structure and cleaner tile boundaries, while Model V2 exhibits stronger spatial smoothing but also semantic drift, including wood being absorbed into *Paint/plaster/enamel* and tile regions bleeding into *Carpet/rug*. These examples show that the higher IID score of Model V2 does not translate into stronger material understanding under real-world conditions.

6 Conclusion and Limitations

This work revisits dense material segmentation through the rigorous Apple-DMS benchmark and establishes a new state of the art of **0.4572 mIoU** using

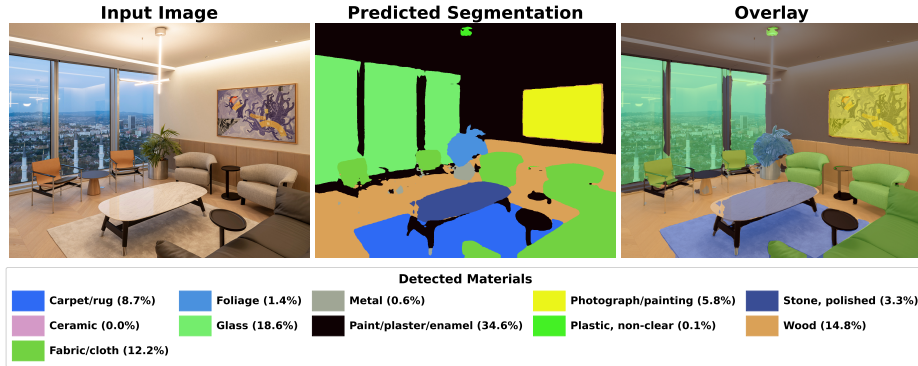
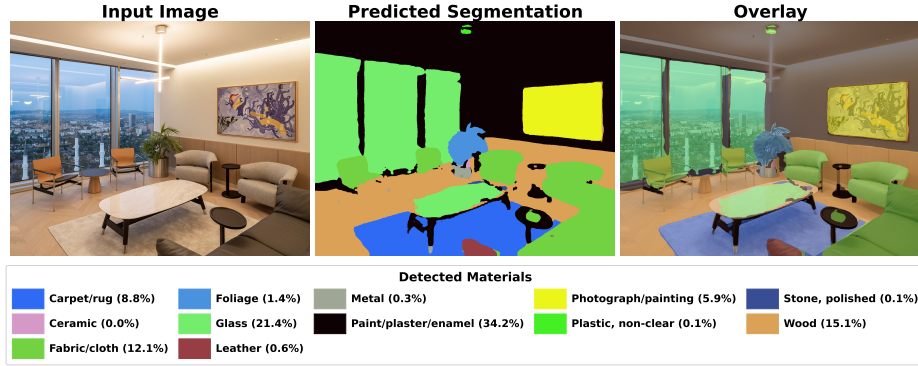
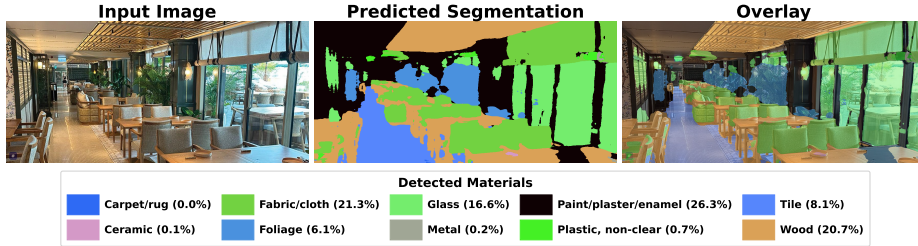
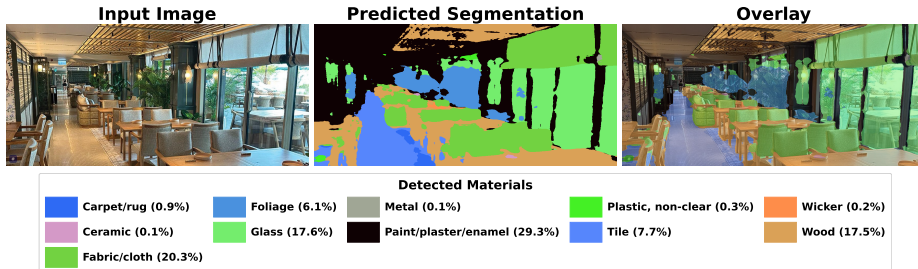
(a) Scene 1: **Model V1** (Original Split, 0.45 mIoU)(b) Scene 1: **Model V2** (Custom Split, 0.52 mIoU)(c) Scene 2: **Model V1** (Original Split, 0.45 mIoU)(d) Scene 2: **Model V2** (Custom Split, 0.52 mIoU)

Fig. 1. The Generalization Paradox on Real-World Samples. Comparison of SegFormer trained on the rigorous Original Split (V1) and the data-rich Custom Split (V2). Although V2 achieves higher IID test mIoU, V1 better preserves material identity under out-of-distribution conditions: polished stone remains robust to glare in Scene 1, and high-frequency wood and tile boundaries are better preserved in Scene 2.

SegFormer-B5 on the original split. Our results show that hierarchical semantic encoders are better aligned with the continuous, texture-driven nature of material regions than query-based mask classifiers such as Mask2Former, which are more naturally suited to discrete object instances.

We further show that modern Vision Transformers require domain-specific stabilization to succeed on dense material fields. High-Fidelity Logit Projection, Query Entropy Regularization, differential learning rates, and material-aware augmentation help mitigate the high-variance gradients, catastrophic forgetting, and query collapse observed under naive training.

A key finding is the *Generalization Paradox*: although a data-rich 80/10/10 split raises SegFormer-B5 performance to **0.5276 mIoU**, expert evaluation on real-world samples suggests weaker out-of-distribution behavior. This indicates that IID split construction can inflate benchmark metrics by encouraging reliance on dataset-specific statistical priors rather than robust material cues. The original Apple-DMS split therefore remains valuable precisely because it is difficult.

Several limitations remain. Due to link rot, approximately 7% of the original Apple-DMS images could not be recovered, so comparison with the 2022 baseline is based on the recovered subset. In addition, our out-of-distribution evaluation relies on expert qualitative review rather than a dense ground-truth “in-the-wild” benchmark. Building such a benchmark is an important direction for future work. By releasing our recovered indices, code, and training recipes, we aim to support renewed progress on physically grounded material perception.

Acknowledgments. This research was conducted in collaboration with Poder and supported by the Scientific and Technological Research Council of Türkiye (TÜBİTAK) under the 1812 Entrepreneurship Support Program (BiGG), project no. 2240407. We thank the domain experts at Poder for providing computational resources and out-of-distribution qualitative evaluations.

Disclosure of Interests. Allan Kazakov conducted this research during his tenure at Poder; Hilal Kurt İrfanoğlu is the founder of Poder; and Yavuz İrfanoğlu is affiliated with Poder. Duygu Cakir served as academic advisor. The authors declare no commercial or financial relationships that could be construed as a conflict of interest regarding the scientific findings presented in this article.

References

1. Upchurch, P., Niu, R.: A Dense Material Segmentation Dataset for Indoor and Outdoor Scene Parsing. In: Avidan, S., Brostow, G., Cissé, M., Farinella, G.M., Hassner, T. (eds.) ECCV 2022. LNCS, vol. 13668, pp. 450–466. Springer, Cham (2022). https://link.springer.com/chapter/10.1007/978-3-031-20074-8_26
2. Adelson, E.H.: On Seeing Stuff: The Perception of Materials by Humans and Machines. In: Rogowitz, B.E., Pappas, T.N. (eds.) Human Vision and Electronic Imaging VI. Proc. SPIE, vol. 4299, pp. 1–12. SPIE, Bellingham (2001). <https://doi.org/10.1117/12.429489>

3. Sharan, L., Rosenholtz, R., Adelson, E.H.: Recognizing Materials Using Perceptually Inspired Features. *Int. J. Comput. Vis.* **103**(3), 348–371 (2013). <https://doi.org/10.1007/s11263-013-0609-0>
4. Cimpoi, M., Maji, S., Kokkinos, I., Mohamed, S., Vedaldi, A.: Describing Textures in the Wild. In: *Proc. CVPR*, pp. 3606–3613. IEEE (2014). <https://arxiv.org/abs/1311.3618>
5. Bell, S., Upchurch, P., Snavely, N., Bala, K.: OpenSurfaces: A Richly Annotated Catalog of Surface Appearance. *ACM Trans. Graph. (Proc. SIGGRAPH)* **32**(4), 111:1–111:17 (2013). <https://doi.org/10.1145/2461912.2462002>
6. Bell, S., Upchurch, P., Snavely, N., Bala, K.: Material Recognition in the Wild with the Materials in Context Database. In: *Proc. CVPR*, pp. 3479–3487. IEEE (2015). <https://arxiv.org/abs/1412.0623>
7. Caesar, H., Uijlings, J., Ferrari, V.: COCO-Stuff: Thing and Stuff Classes in Context. In: *Proc. CVPR*, pp. 1209–1218. IEEE (2018). <https://arxiv.org/abs/1612.03716>
8. Zhou, B., Zhao, H., Puig, X., Fidler, S., Barriuso, A., Torralba, A.: Scene Parsing Through ADE20K Dataset. In: *Proc. CVPR*, pp. 633–641. IEEE (2017). <https://arxiv.org/abs/1608.05442>
9. Long, J., Shelhamer, E., Darrell, T.: Fully Convolutional Networks for Semantic Segmentation. In: *Proc. CVPR*, pp. 3431–3440. IEEE (2015). <https://arxiv.org/abs/1411.4038>
10. Chen, L.-C., Papandreou, G., Schroff, F., Adam, H.: Rethinking Atrous Convolution for Semantic Image Segmentation. *arXiv preprint arXiv:1706.05587* (2017). <https://arxiv.org/abs/1706.05587>
11. Dosovitskiy, A., et al.: An Image is Worth 16x16 Words: Transformers for Image Recognition at Scale. In: *Proc. ICLR*. OpenReview.net (2021). <https://arxiv.org/abs/2010.11929>
12. Xie, E., Wang, W., Yu, Z., Anandkumar, A., Alvarez, J.M., Luo, P.: SegFormer: Simple and Efficient Design for Semantic Segmentation with Transformers. In: *Proc. NeurIPS*, vol. 34, pp. 12077–12090 (2021). <https://arxiv.org/abs/2105.15203>
13. Cheng, B., Misra, I., Schwing, A.G., Kirillov, A., Girdhar, R.: Masked-Attention Mask Transformer for Universal Image Segmentation. In: *Proc. CVPR*, pp. 1290–1299. IEEE (2022). <https://arxiv.org/abs/2112.01527>
14. Kirillov, A., et al.: Segment Anything. In: *Proc. ICCV*, pp. 4015–4026. IEEE (2023). <https://arxiv.org/abs/2304.02643>
15. Ravi, N., et al.: SAM 2: Segment Anything in Images and Videos. *arXiv preprint arXiv:2408.00714* (2024). <https://arxiv.org/abs/2408.00714>
16. Feichtenhofer, C., et al.: SAM 3: Segment Anything with Concepts. *arXiv preprint arXiv:2511.16719* (2025). <https://arxiv.org/abs/2511.16719>
17. Ji, W., et al.: Segment Anything Is Not Always Perfect: An Investigation of SAM on Different Real-World Applications. *Mach. Intell. Res.* **21**(4), 617–630 (2024). <https://arxiv.org/abs/2304.05750>