

Smart-Insertion-V: Photorealistic Video Insertion via a Closed-Loop Feedback Dual-Stream Framework

Xiao Cao Yansong Qu Xiangzhen Chang Wen Xiao Jiakui Hu
Heyuan Li Jialun Liu* Zhiyong Huang* Xuelong Li

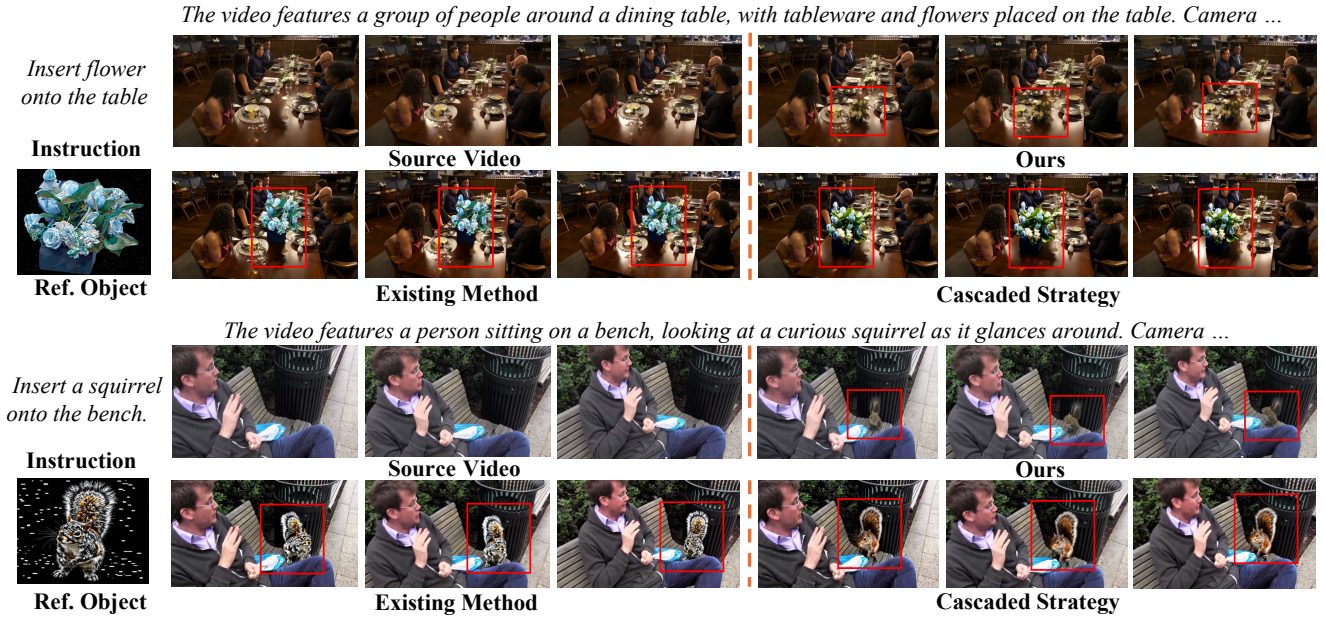


Figure 1. Our task aims to insert a raw reference object into a video. Existing image-based video insertion models and cascaded strategies (i.e., first performing image editing and then applying video insertion) fail to achieve satisfactory visual harmonization, while proposed Smart-Insertion-V inserts object into a plausible position with harmonized effect.

Abstract

Mask-free video object insertion has emerged as a challenging task, requiring harmonious integration of reference objects into source videos. However, existing methods struggle when references exhibit severe stylistic domain gaps with the source scene. To overcome this, we propose **Smart-Insertion-V**, an end-to-end **Dual-Stream** framework that concurrently conducts video insertion and image style transfer. Within this framework, the image stream synchronously guides the video generation process, while a **Closed-loop Feedback** mechanism is further incorporated to ensure robust insertion. Inevitably, integrating these diverse conditioning signals results in feature entanglement and style leakage. To tackle this issue, we design **Dual-World-View RoPE** to distinguish different signals via spatial-temporal offsets without incurring

heavy training overhead. Furthermore, to facilitate spatial grounding and stylistic adaptation, we introduce a **Decoupled Guidance Module** that leverages a Vision-Language Model for semantic reasoning while preserving original temporal guidance with native text encoder. To bridge data gap for harmonious reference insertion task, we propose a data curation pipeline and will release an **open-source dataset**. Experiments demonstrate that our method can insert objects into plausible positions while achieving the most harmonious results. Code and dataset will be released upon acceptance.

1. Introduction

Recent advances in diffusion-based video generation [1–8] have enabled increasingly powerful video editing capabili-

ties [9–20]. Among them, video object insertion-seamlessly integrating a reference object into a source video-remains a challenging problem. Beyond simply placing an object into a scene, successful mask-free insertion requires jointly reasoning about spatial plausibility, adapting object appearance to match the scene style, and maintaining temporal consistency. This challenge is further amplified when the reference image is visually incompatible with the source video.

Existing methods can be broadly categorized into three groups: explicit spatial guidance methods, mask-free methods, and cascaded methods. They remain limited in spatial reasoning, reference-scene harmonization, or robustness across multiple stages. Explicit spatial guidance methods [21–25] rely on user-specified priors, such as masks or control points, to localize the insertion region. Such dependence introduces additional annotation burden and limits practical applicability, while models’ insufficient scene understanding still leads to implausible object attributes, including inconsistent scale, perspective, or placement. Mask-free methods [26–28] successfully eliminate manual spatial annotations. However, raw references frequently exhibit severe domain gaps with the target video, including discrepancies in lighting and style. By generating videos conditioned on unprocessed reference images without imposing explicit constraints, these methods often suffer from contextual disharmony between the inserted object and the source video. A straightforward remedy is to employ a cascaded pipeline, which first adapts the reference image to the scene via an image editing model before performing video insertion. However, this decoupled approach is inherently prone to error accumulation. Artifacts or inaccurate adaptations introduced during the initial editing phase are propagated and amplified throughout the video generation process, severely degrading both visual quality and temporal coherence.

In this work, we propose Smart-Insertion-V, an end-to-end mask-free video insertion framework that seamlessly inserts raw reference objects into target videos under the guidance of coarse text prompts. To address spatial perception challenges, we introduce a Decoupled Guidance Module (DGM). Specifically, a Vision-Language Model (VLM) is incorporated to comprehend the scene’s spatial layout and resolve style discrepancies. Meanwhile, the native T5 text encoder is retained as a motion reasoner to preserve temporal dynamics. Furthermore, we propose an innovative dual-stream architecture consisting of a video stream and an image stream. While the video stream focuses on the core video insertion, the image stream concurrently performs reference image style transfer. Our core insight is that the image harmonization process can synchronously guide the video generation. Specifically, the image stream provides intermediate features that capture the stylistic transition trend from the raw reference toward the target video. This provides the video stream with high-quality, scene-adapted condi-

tioning signals. However, integrating these diverse conditioning signals often leads to feature entanglement with the target latents. This entanglement causes style leakage, which severely degrades the unedited regions of the target video. To resolve this, we propose a novel Dual-World-View RoPE (Dual-RoPE). Existing methods typically process condition embeddings by adding task-indicator dimensions [26, 29] or treating them as additional frames [30], both of which incur substantial training overhead. Dual-RoPE bypasses this limitation by applying distinct coordinate offsets. Specifically, target latents are anchored at zero-offset positions, whereas strong and weak conditions are offset spatially and temporally, respectively. This elegantly isolates all features, allowing the model to effectively process each component without heavy computational burdens.

To address the scarcity of paired data capturing both raw and harmonized object states, we develop a comprehensive data curation pipeline coupled with a rigorous dual-verification mechanism. Specifically, our pipeline automatically synthesizes the requisite training quadruplets from massive open-source text-to-video datasets. Each quadruplet consists of a source video, a target video, an unprocessed reference image, and a harmonized reference image, accompanied by tailored instruction prompts and detailed video captions. Here, the unprocessed reference image serves as the raw object exhibiting severe domain gaps, while the harmonized reference represents the ideal object seamlessly integrated into the target environment. Leveraging this pipeline, we construct a large-scale, high-quality dataset that has undergone strict evaluation via our automatic dual-verification strategy. This continuously expanding dataset will be open-sourced in phases.

In summary, the main contributions of our work are three-fold:

- **Decoupled Guidance Module (DGM):** We introduce DGM to equip the framework with comprehensive spatial perception and style discrepancy understanding. It integrates a Vision-Language Model (VLM) for spatial-style reasoning, while independently retaining the native T5 encoder to preserve temporal dynamics and motion priors.
- **Dual-Stream Framework:** We propose a dual-stream architecture with closed-loop feedback to concurrently perform video insertion and style transfer for adaptive refinement. Additionally, we design Dual-RoPE to effectively disentangle diverse conditioning signals via distinct spatial-temporal offsets, achieving high-fidelity results without heavy training overhead.
- **Scalable Data Curation and High-Quality Dataset:** We develop an automated, highly scalable data curation pipeline capable of leveraging massive text-to-video datasets. Based on it, we construct a high-quality open-source dataset.

2. Related Work

2.1. Video Generation

Driven by recent algorithmic breakthroughs, the landscape of video generation has undergone a profound paradigm shift. While proprietary systems like SeedDance [31] and Pika [32] initially set the benchmark for visual fidelity and spatiotemporal consistency, the recent surge of high-performance open-source foundations—such as Hunyuan-Video [33], CogVideo [34], and the Wan series—has rapidly democratized high-fidelity video synthesis, bridging the performance gap with state-of-the-art commercial alternatives.

2.2. Video Insertion

Image-based video insertion aims to seamlessly integrate and animate a reference subject within a source video, necessitating precise spatial localization, robust identity preservation, and genuine contextual harmonization. Existing methods predominantly rely on explicit spatial priors to achieve this. For instance, GetInVideo [21] demands impractical, shape-exact masks that severely hinder natural stylistic blending. To relax such stringent spatial constraints, VideoAnyDoor [22] utilizes coarse masks coupled with point trajectories. However, this explicit trajectory conditioning frequently disrupts the intrinsic motion priors of diffusion models, leading to spatiotemporal incoherence where the inserted subject moves asynchronously or disproportionately slower than native scene elements. Exploring alternative paradigms, Anything-in-Any-Scene [23] embeds 3D meshes into 3D-lifted video environments. Yet, it still mandates explicit and precise insertion coordinates and suffers from profound material and textural domain gaps compared to the native scene, despite simulating physical illumination. Recently, OmniInsert [26] introduced a mask-free approach driven solely by text instructions to bypass these spatial priors. Nevertheless, it fundamentally lacks joint multimodal comprehension; by failing to holistically analyze the video context to modulate the reference subject prior to insertion, it produces rigid, contextually isolated generations. To surmount these limitations, our Smart-Insertion-V framework leverages advanced vision-language reasoning to proactively adapt the subject’s appearance and autonomously infer physically plausible insertion layouts without relying on explicit spatial guidance.

3. Data Curation

Training the proposed Smart-Insertion-V framework necessitates a two-stage optimization paradigm: (1) pre-training the Vision-Language Model (VLM) adapter on large-scale text-to-video datasets to align multimodal feature spaces, and (2) fine-tuning the entire architecture for photorealistic insertion. To overcome the severe scarcity of paired training data for the fine-tuning phase, we construct a high-fidelity

benchmark comprising rigorously aligned data quadruplets (i.e., reference image, target image, source video, and target video). These quadruplets are meticulously synthesized from two distinct sources and subsequently filtered by our dual-verification, which we introduced in supplementary material.

3.1. Adaptation of Existing Video Editing Datasets

We repurpose subsets from existing video insertion and removal datasets [35], which typically consist of reference images, input videos, and corresponding ground-truth (GT) videos. We generate quadruplets through three core operations:

- **Subject Grounding:** We employ Gemini-3-Pro [36] to describe the object in reference images.
- **Text-Driven Spatiotemporal Segmentation:** Guided by these descriptions, LangSAM [37] is leveraged to extract accurate object masks—from the input videos for insertion tasks, and from the GT videos for removal tasks—ensuring structural integrity.
- **Occlusion-Aware Appearance Recovery:** Since objects extracted from dynamic videos frequently suffer from severe occlusion or frame truncation, we utilize the Nano-Banana [36] to proactively hallucinate and reconstruct missing regions.

3.2. Scalable Generation from Text-to-Video Corpora

To infinitely scale our dataset and explicitly force the model to learn visual harmonization, we pioneer a secondary curation pipeline built upon unannotated raw video collections as shown in Figure 2. We first deploy a VLM to autonomously identify optimal candidate objects for removal. To guarantee high-fidelity downstream processing, candidates must satisfy strict geometric and temporal priors: they must not spatially dominate the frame and must exhibit persistent temporal visibility.

Once the initial mask is extracted via LangSAM [37], we feed it into Minimax-remover [38], a robust video propagation and inpainting model to remove the subject, yielding a pristine source video. Crucially, to construct a substantial stylistic domain gap between the reference and the target space, we apply a randomized, template-driven style transfer to obtain raw references. Nano-Banana [36] systematically alters the material properties and artistic rendering of the subject while strictly preserving its underlying structural conditioning and core identity. Following the completion of occluded regions, Gemini 3 Pro generates spatial-aware insertion prompts. This deliberate injection of stylistic discrepancy prevents the network from learning trivial copy-paste shortcuts.

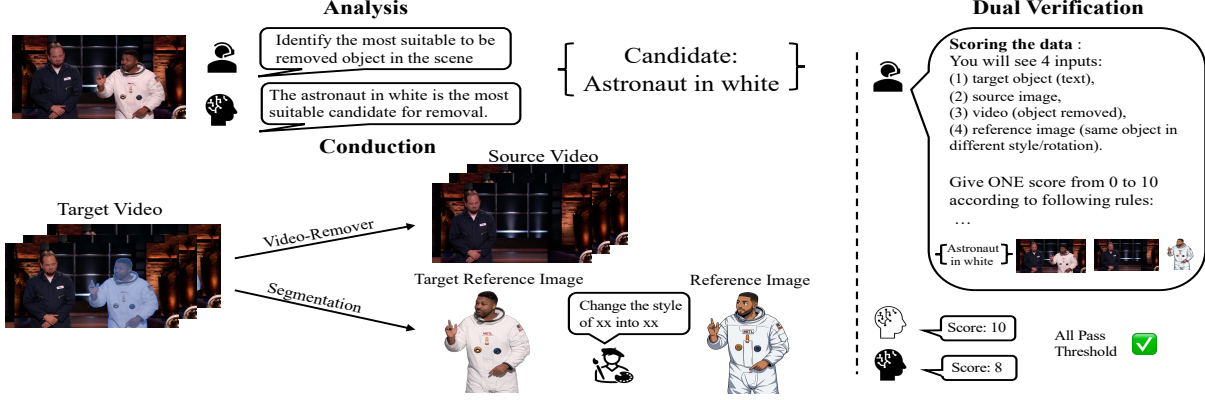


Figure 2. **Overview of the data curation pipeline.** We first identify the optimal object within a video that is most suitable for removal. Segmentation and video object removal techniques are then utilized to obtain the source video and the GT reference images. Next, we apply style transfer to the GT references to synthesize the raw, unharmonized references. Finally, all generated data undergo a strict filtering process driven by an automated dual-agent verification.

4. Method

Task Formulation. We formally define the task of style-adaptive, mask-free video object insertion. Given an unedited source video V_{src} , an unprocessed reference image I_{ref} , a base video description P_{desc} , and a coarse insertion instruction P_{insert} , our objective is to synthesize a high-fidelity target video $\hat{V}_{tar}$, yielding a style-harmonized reference image I_{tar} (i.e., target reference image mentioned earlier) as a byproduct. Specifically, the generated $\hat{V}_{tar}$ is expected to integrate the reference object into the target video, satisfying two primary criteria: (1) consistent stylistic harmonization with the source environment, and (2) semantically plausible spatial placement as dictated by the contextual semantics and P_{insert} .

Overview Smart-Insertion-V consists of three major components: (1) a Closed-Loop Feedback Dual-Stream framework (Section 4.1), (2) a Decoupled Guidance Module (Section 4.2), and (3) Dual-World-View RoPE (Dual-RoPE) (Section 4.3). The framework jointly performs video insertion and image style transfer during training. During inference, the framework incorporates a feedback signal derived from intermediate predictions to refine video generation path. The Decoupled Guidance Module consists of a native text branch and a VLM reasoning branch, serving as the core guidance of the framework. Dual-RoPE addresses the entanglement issue among target latents and conditions, enabling efficient training and superior performance. We provide the details of the *feature-sharing* mechanism, *semi-attention*, and the *attention operation sequence* within the dual-stream architecture in the supplementary material.

4.1. Dual-Stream Framework with Feedback

Smart-Insertion-V is a dual-stream framework that jointly optimizes a video insertion task and an image style transfer task. The image style transfer stream aims to synthesize style-aligned conditions for the video stream based on the first frame of the source video, while also serving as a feedback signal for the closed-loop mechanism during inference. The generation process of this stream can be formulated as:

$$\hat{I}_{tar} = DiT(V_{src}^0, I_{ref}, S_{style}),$$

where DiT refers to our backbone, V_{src}^0 denotes the first frame of the source video, and S_{style} denotes the system prompt for adapting the reference image according to the first frame of the source video. The generated $\hat{I}_{tar}$ captures the transformation from the inharmonious reference to the style of the source video, thereby providing effective conditions for the video stream.

The video stream aims to insert the raw reference into the source video. Conditioned on the source video, the raw reference, and the estimated reference features generated by the image stream, this process can be formulated as:

$$\hat{V}_{tar} = DiT(V_{src}, \hat{I}_{tar}, I_{ref}, P_{insert}, P_{desc}),$$

where P_{insert} and P_{desc} denote the insertion prompt and the overall video description, respectively. Together with the prompt guidance features from the Decoupled Guidance Module (Section 4.2), the reference image and the source video enable harmonized object insertion.

Building upon this dual-task framework, we further propose a closed-loop feedback mechanism for inference time. Specifically, at a denoising timestep t , we obtain a one-step estimate $\hat{x}_0^{\text{onestep}}$ from the image-stream alongside the standard image denoising process. Since the video-stream is explicitly conditioned on the intermediate features of the

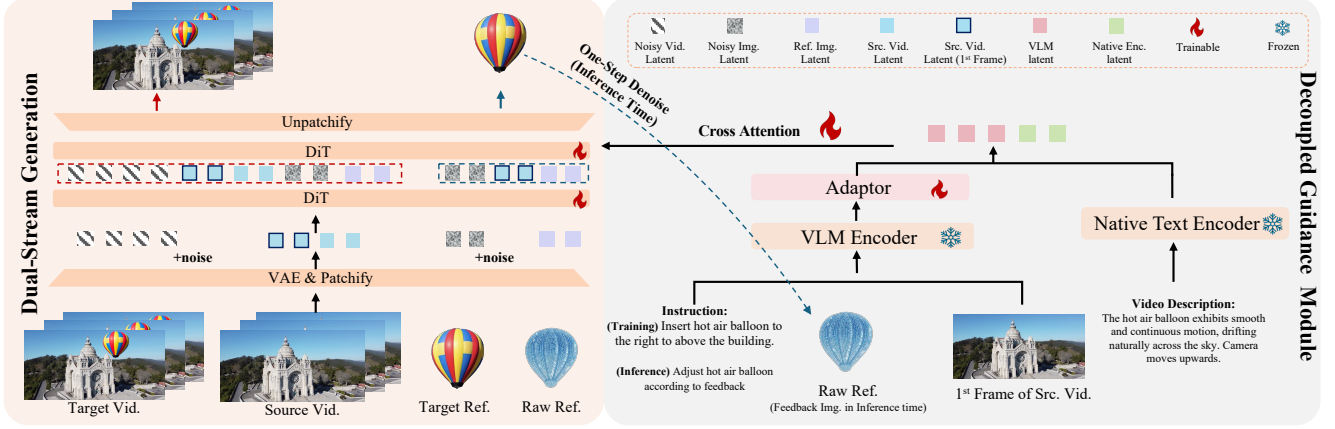


Figure 3. **Overview of the Smart-Insertion-V pipeline (fine-tuning stage).** The framework comprises an image style transfer stream and a video insertion stream. The Decoupled Guidance Module (DGM) processes the raw reference and the first frame of the source video to generate guidance embeddings. Both streams then operate simultaneously: while the video stream conducts the insertion task, the image stream synthesizes harmonized reference features based on 1st frame of source video. These image-stream intermediate features are injected into the video stream, providing crucial stylistic guidance to bridge the domain gap. Note that the shared latents between the two streams are drawn separately for illustration purposes only. During inference, the DGM leverages predictions from the image stream as feedback signals to refine the video generation path.

image stream, this estimated harmonized image serves as a reliable indicator of the current insertion quality. We then feed $\hat{x}_0^{\text{onestep}}$ into the VLM branch in the DGM to identify potential stylistic or spatial imperfections. The VLM then produces refinement guidance embeddings to replace the initial generated ones, which guide both streams to modify accordingly. More on feedback mechanism can be found in supplementary material.

4.2. Decoupled Guidance Module

Our guidance module consists of two components: (1) a VLM reasoning branch and (2) a native text branch (i.e., T5). Within our framework, these two branches play distinct yet complementary roles. The VLM reasoning module is primarily tasked with high-level comprehension. Specifically, for the image style transfer task, it infers how to adjust the style of the reference image according to source video. For the video insertion task, it interprets coarse insertion instructions to determine a suitable insertion location and adjust object attributes such as scale and orientation. In contrast, the native T5 branch processes general video captions and focuses on motion guidance.

To align the feature spaces of the VLM and the video generation backbone, we introduce an MLP-based adaptor. Since directly aligning the latent representations of two large-scale models is highly data-intensive, we strategically decouple the alignment process into two phases: (1) text-to-video pretraining stage (Figure 4), and (2) finetuning stage (Figure 3).

During the pre-training stage, the VLM is forced to describe the first video frame (i.e., environment, lighting and

atmosphere). The reasoning features extracted from the VLM are formulated as:

$$e_{\text{pretrain}}^{\text{vlm}} = \text{VLM}(P_{\text{pretrain}}^{\text{vlm}}, V_{\text{src}}^0), \quad (1)$$

where $e_{\text{pretrain}}^{\text{vlm}}$ denotes the VLM feature embedding, V_{src}^0 denotes the first frame of the source video as the visual condition, and $P_{\text{pretrain}}^{\text{vlm}}$ denotes the pre-training prompt for the VLM. We discard the token embeddings corresponding to $P_{\text{pretrain}}^{\text{vlm}}$, and retain only the visual and reasoning features, as the prompt embeddings only contain information specific to the VLM module and provide no benefit to the generation task. The remaining visual tokens act as additional conditioning signals for the generation branch, while the reasoning features serve as guidance. The embedding used in our framework is formulated as:

$$e_{\text{pretrain}}^{\text{vlm}} = [e_{\text{pretrain}|i}^{\text{vlm}} | e_{\text{pretrain}|i}^{\text{vlm}} \neq e_{\text{pretrain}}^{\text{vlm}}(P_{\text{pretrain}}^{\text{vlm}})], \quad (2)$$

where i denotes the token index.

During the subsequent fine-tuning stage, we tailor the feature extraction for each stream in framework. For the image style transfer task, the guidance features are extracted by:

$$e_{\text{vlm}}^{\text{style}} = \text{VLM}(P_{\text{style}}, I_{\text{ref}}, V_{\text{src}}^0), \quad (3)$$

where I_{ref} denotes the reference image with a distinct style. The prompt P_{style} instructs the VLM to analyze the style differences between the first frame of the source video V_{src}^0 and the reference image I_{ref} , and to infer how to adapt I_{ref} . For the video insertion task, the guidance features are derived via:

$$e_{\text{vlm}}^{\text{insert}} = \text{VLM}(P_{\text{insert}}, I_{\text{ref}}, V_{\text{src}}^0), \quad (4)$$

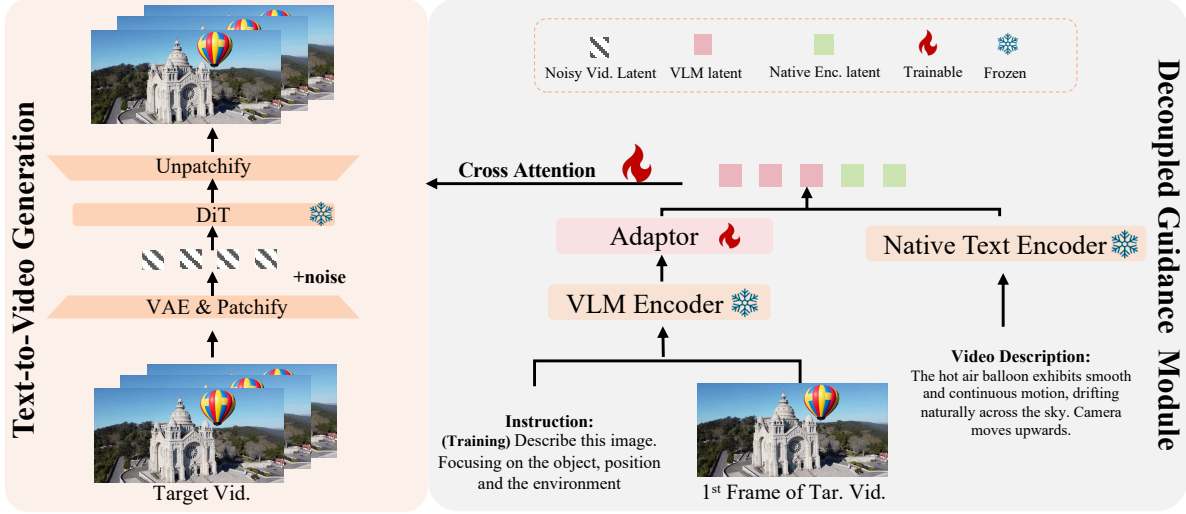


Figure 4. **Decoupled Module Pretraining Stage.** This stage aligns the VLM feature space with the video generation space via image captioning tasks, optimized on text-to-video datasets. Specifically, the VLM processes the first frame of the source video to generate descriptions. This process trains an adaptor to effectively map VLM image tokens into the generation space. Finally, the video branch utilizes both the text and the adapted VLM embeddings as guidance to synthesize the corresponding videos.

where P_{insert} denotes the coarse insertion instruction containing a brief location description. The VLM is required to identify a precise insertion location and infer how to refine object attributes such as scale. Similar to Equation 2, we remove the token embeddings corresponding to P_{style} and P_{insert} to obtain the clean embeddings $\epsilon_{\text{style}}^{\text{vlm}}$ and $\epsilon_{\text{insert}}^{\text{vlm}}$. For the feedback guidance embedding, we attach in supplementary material.

Regarding the T5 motion guidance, the native text branch focuses on temporal motion descriptions and produces the motion embedding ϵ_{motion} . By combining ϵ_{motion} and $\epsilon_{\text{insert}}^{\text{vlm}}$, we obtain the final guidance embedding for the video insertion stream.

4.3. Dual-world-View RoPE Position Embedding

In conditional video generation and editing, the entanglement among noisy target latents and various conditions remains a critical challenge. This issue is particularly pronounced within our proposed dual-task framework. Dual-World-View Rotary Position Embedding, denoted as Dual-RoPE, is proposed to effectively segregate the noisy target latent from the conditioning latents by employing disjoint RoPE operating ranges. Specifically, within the Dual-RoPE framework, we assign a zero-offset strategy to the noisy target latent, while applying tailored offsets along either spatial (width) or temporal dimensions for different conditioning signals. Dual-RoPE allocates task-specific ranges (e.g., for target latents) and maps identical conditions to distinct spaces across the two streams, forming a "Dual-World-View."

In the context of video editing task, we assign dis-

tinct spatial-temporal offsets to differentiate the inputs: $\text{Offset}_{\text{src}} = (F = 0, W = w, H = 0)$ for the source video, $\text{Offset}_{\text{tar}}^v = (F = 0, W = 0, H = 0)$ for the target noisy video latent, and $\text{Offset}_{\text{tar}}^i = (F = N, W = 2w, H = 0)$ for the target reference image (from image-stream). Here, F , W , and H correspond to the temporal, width, and height axes, respectively, whereas w and N denote the spatial width of the inputs and the number of video frames, respectively. The rationale behind this offset design is deeply rooted in the physical intuition of the inputs. First, given the maximum structural similarity between the source and target videos, their positional embeddings are kept in close proximity. Second, spatial offsets provide stronger conditioning signals [39] compared to temporal ones. Consequently, we employ the spatial offset along the W -axis to supply the target latent with fine-grained stylistic information of the inserted objects. In contrast, applying a temporal offset to the reference image ensures it acts as a weak condition, offering coarse structural guidance during the initial denoising steps.

Table 1. Quantitative results. Ours outperforms all baselines across all metrics. * indicates the cascaded strategy.

Metrics \ Model	UniVideo	UniVideo-Q	TeleOmni	VACE	UniVideo*	UniVideo-Q*	TeleOmni*	VACE*	Ours
FVD/100 ↓	1.687	1.389	2.202	1.302	1.888	1.721	1.807	1.189	1.055
Video-LPIPS ↓	0.283	0.246	0.373	0.235	0.286	0.307	0.358	0.232	0.125
DINO-Similarity-V ↑	0.629	0.709	0.564	0.738	0.594	0.635	0.628	0.739	0.746
Harmonic Score ↑	0.661	0.693	0.616	0.526	0.582	0.634	0.274	0.560	0.842

Following the same design principle, when addressing the image style transfer task, we set the target image to the canonical position without any offset, denoted as $\text{Offset}_{\text{tar}} = (F = 0, W = 0, H = 0)$. To provide precise stylistic guidance, we apply spatial offset along the W -axis to the first frame of source video, yielding $\text{Offset}_{\text{src}} = (F = 0, W =$

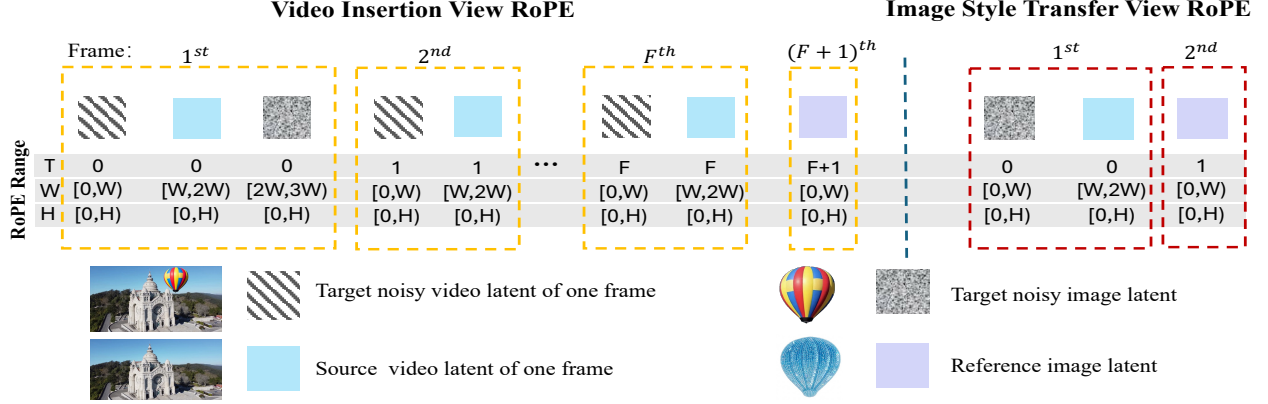


Figure 5. **Illustration of Dual-World-View RoPE.** The target latents are anchored at zero-offset positions. Strong conditions (e.g., target video and reference image latents) are offset spatially, whereas weak conditions are offset temporally. Notably, this Dual-RoPE strategy is task-agnostic and can be seamlessly applied to both processing streams without modification.

$w, H = 0$). The raw reference is restricted to a temporal shift, formulated as $\text{Offset}_{\text{ref}} = (F = 1, W = 0, H = 0)$. Although there is partial overlap in the RoPE spaces between the two streams, the image stream operates independently, thereby preventing any mutual interference. The Dual-RoPE mechanism is illustrated in Figure 5.

5. Experiment

In this section, we comprehensively evaluate our proposed Smart-Insertion-V against four representative baselines: TeleOmni [28], UniVideo [27] utilizing the last hidden layer feature, UniVideo equipped with a Q-Former [40], and VACE [29]. Furthermore, to substantiate the inherent limitations of naive cascaded pipelines (i.e., performing explicit image style transfer prior to video object insertion), we construct augmented cascaded variants for each baseline and discuss in section 5.3. Detailed implementation settings and attention optimization strategies are provided in the supplementary material.

5.1. Qualitative Results

Figure 6 and Figure 8 present the qualitative results. The visual comparison can be examined from three aspects: (1) the style of the inserted object, (2) the insertion position, and (3) the style of unedited regions. Aspects (1) and (2) reflect the core requirements of the proposed task, while aspect (3) highlights the necessity of Dual-RoPE. Smart-Insertion-V achieves the best qualitative performance in both insertion position and object style harmonization. In contrast, baseline methods often affect the appearance of objects surrounding the inserted object, leading to severe artifacts. Although the cascaded strategy improves baselines, their gains remain limited. More on cascaded strategy can be found in Section 5.3.

5.2. Quantitative Results

We evaluate the generated videos using FVD, Video-LPIPS (frame-averaged LPIPS), DINO-Similarity-V (frame-averaged DINO similarity), and a harmonic score evaluated by ChatGPT [41], as shown in Table 1. Specifically, the harmonic score measures whether the inserted object is stylistically consistent with the source scene, whether it is placed at a reasonable location, and whether its attributes are appropriately adjusted. Detailed evaluation criteria are provided in the Supplementary Material.

Table 2. Quantitative results of ablation studies.

Metrics\Ablation	Single-Stream	W/O Dual-RoPE	W/O Feedback	Ours
FVD(/100) ↓	1.364	1.837	1.074	1.055
Video-LPIPS ↓	0.129	0.126	0.141	0.125
DINO-Similarity-V ↑	0.706	0.734	0.749	0.746

5.3. Discussion on Cascaded Paradigms

Although sequentially adapting the source image I_{src} to the video V_{src} before insertion seems straightforward, this cascaded approach introduces critical bottlenecks. As demonstrated by applying a powerful image editor prior to baseline insertion methods (Figure 6 and Table 1), such pipelines frequently cause identity distortion and contextual disharmony. We attribute these failures to two fundamental flaws. First, the pipeline suffers from *error accumulation*. Initial editing artifacts and inaccurate style adaptations are inevitably propagated and amplified during subsequent video generation. Second, the decoupled models lack *unified training objectives*. Their independent optimization yields distinct generative priors and feature distributions. This creates a severe domain gap between the intermediate edited image and the insertion model’s expected input, ultimately breaking visual coherence. These mechanistic flaws highlight the necessity for our unified, end-to-end framework.

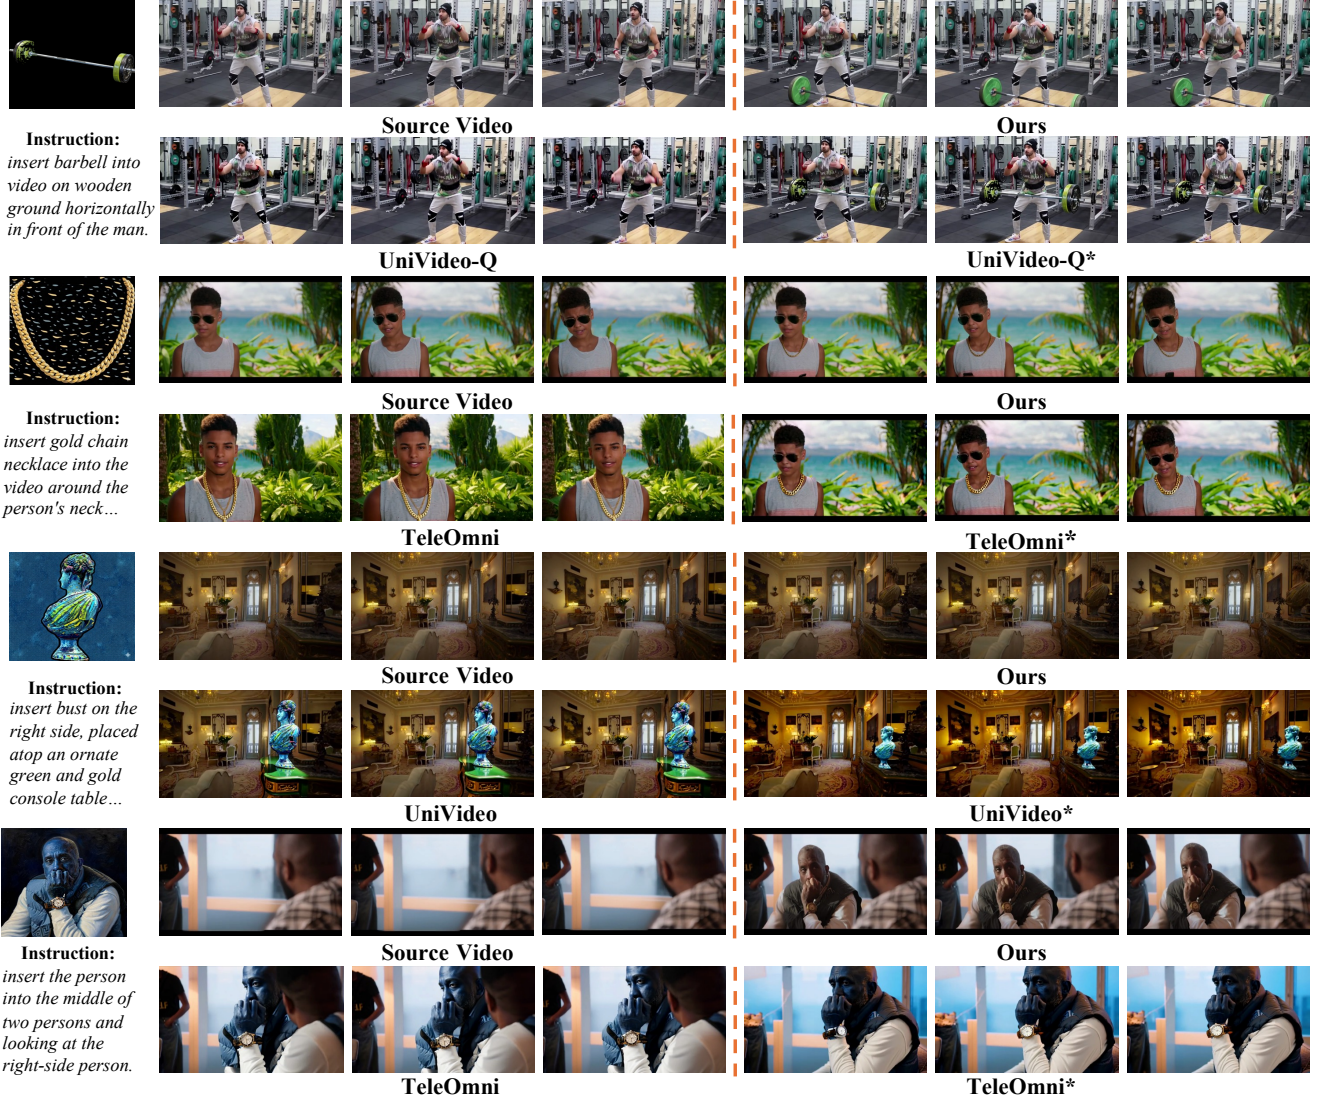


Figure 6. **Qualitative results.** Our method achieves the best overall performance among six baselines. In contrast, the baselines often fail to harmonize the inserted object with the scene, properly adjust object attributes, or identify a suitable insertion location. We show two representative baselines for each example while ensuring broad coverage of all competing methods across the figure. Full comparisons with all baselines are provided in the supplementary material. The note * refers to baseline cascaded with image editing.

5.4. Ablation Studies

In this section, we study the effectiveness of the proposed dual-stream framework, closed-loop feedback inference strategy, and Dual-RoPE. To evaluate the contribution of the auxiliary stream, we remove the image style transfer loss and optimize only the video stream. To assess the closed-loop feedback strategy, we perform inference without the feedback process. For Dual-RoPE, we replace it with the FullDiT [30] 3D RoPE. As shown in Table 2, all these variants lead to performance degradation. We also show the qualitative results in Figure 7 and discuss in supplementary material.

6. Limitations

While leveraging a Vision-Language Model (VLM) enables autonomous spatial grounding via coarse instructions, this semantic-driven paradigm inherently trades off fine-grained spatial controllability. The VLM optimizes for contextual harmony by anchoring the inserted object at a semantically ideal coordinate. Consequently, specifying fine-grained insertion locations within the local neighborhood of the VLM-selected position remains a non-trivial challenge. Future work will explore fine-grained location adjustment according to edited video with precise user intent.



Figure 7. Ablation studies on effectiveness of dual-stream design, dual-RoPE and closed-loop feedback.

7. Conclusion

We observe that mask-free video insertion remains fundamentally challenged by stylistically incompatible raw references. To overcome this, we propose Smart-Insertion-V, a dual-stream framework where an image stream conducts reference style transfer while simultaneously guiding the video insertion process. Equipped with DGM, our model further attains precise spatial and stylistic understanding. More broadly, this work suggests a novel generative paradigm that elegantly leverages intermediate predictions as feedback signals. Supported by our newly curated large-scale dataset and pipeline, we achieve harmonious insertion results.

Instruction:
insert boat into
video on left side,
partially visible,
near water's edge



Instruction:
insert blender into
video on the right
side of the table,
near the woman



Instruction:
insert golden deer
figurine into video
left side of the
stacked logs



Instruction:
insert neon sign
into black wall,
backside of
woman



Instruction:
insert tissue box
into video on the
table in front of
the person



Figure 8. **More Qualitative Results.** We show more qualitative comparisons with baselines. Ours outperforms them in all cases.

References

- [1] J. Ho, A. Jain, and P. Abbeel, “Denoising diffusion probabilistic models,” *Advances in neural information processing systems*, vol. 33, pp. 6840–6851, 2020.
- [2] W. Peebles and S. Xie, “Scalable diffusion models with transformers,” in *Proceedings of the IEEE/CVF international conference on computer vision*, 2023, pp. 4195–4205.
- [3] K. Tian, Y. Jiang, Z. Yuan, B. Peng, and L. Wang, “Visual autoregressive modeling: Scalable image generation via next-scale prediction,” *Advances in neural information processing systems*, vol. 37, pp. 84 839–84 865, 2024.
- [4] Z. Xing, Q. Feng, H. Chen, Q. Dai, H. Hu, H. Xu, Z. Wu, and Y.-G. Jiang, “A survey on video diffusion models,” *ACM Computing Surveys*, vol. 57, no. 2, pp. 1–42, 2024.
- [5] S. Xiao, Y. Wang, J. Zhou, H. Yuan, X. Xing, R. Yan, C. Li, S. Wang, T. Huang, and Z. Liu, “Omnigen: Unified image generation,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2025, pp. 13 294–13 304.
- [6] Z. Zheng, X. Peng, T. Yang, C. Shen, S. Li, H. Liu, Y. Zhou, T. Li, and Y. You, “Open-sora: Democratizing efficient video production for all,” *arXiv preprint arXiv:2412.20404*, 2024.
- [7] J. Xie, W. Mao, Z. Bai, D. J. Zhang, W. Wang, K. Q. Lin, Y. Gu, Z. Chen, Z. Yang, and M. Z. Shou, “Show-o: One single transformer to unify multimodal understanding and generation,” *arXiv preprint arXiv:2408.12528*, 2024.
- [8] Y. HaCohen, N. Chiprut, B. Brazowski, D. Shalem, D. Moshe, E. Richardson, E. Levin, G. Shiran, N. Zabari, O. Gordon *et al.*, “Ltx-video: Realtime video latent diffusion,” *arXiv preprint arXiv:2501.00103*, 2024.
- [9] Y. Deng, R. Wang, Y. Zhang, Y.-W. Tai, and C.-K. Tang, “Dragvideo: Interactive drag-style video editing,” in *European conference on computer vision*. Springer, 2024, pp. 183–199.
- [10] S. Yang, L. Hou, H. Huang, C. Ma, P. Wan, D. Zhang, X. Chen, and J. Liao, “Direct-a-video: Customized video generation with user-directed camera movement and object motion,” in *ACM SIGGRAPH 2024 Conference Papers*, 2024, pp. 1–12.
- [11] Y. Guo, C. Yang, A. Rao, C. Meng, O. Bar-Tal, S. Ding, M. Agrawala, D. Lin, and B. Dai, “Keyframe-guided creative video inpainting,” in *Proceedings of the Computer Vision and Pattern Recognition Conference*, 2025, pp. 13 009–13 020.
- [12] Y. Liu, T. Wang, F. Liu, Z. Wang, and R. W. Lau, “Shape-formotion: Precise and consistent video editing with 3d proxy,” in *Proceedings of the SIGGRAPH Asia 2025 Conference Papers*, 2025, pp. 1–12.
- [13] C. Gao, L. Ding, X. Cai, Z. Huang, Z. Wang, and T. Xue, “Lora-edit: Controllable first-frame-guided video editing via mask-aware lora fine-tuning,” *arXiv preprint arXiv:2506.10082*, 2025.
- [14] Y. Wang, L. Wang, Z. Ma, Q. Hu, K. Xu, and Y. Guo, “Videodirector: Precise video editing via text-to-video models,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2025, pp. 2589–2598.
- [15] Z. Ye, X. He, Q. Liu, Q. Wang, X. Wang, P. Wan, D. Zhang, K. Gai, Q. Chen, and W. Luo, “Unic: Unified in-context video editing,” *arXiv preprint arXiv:2506.04216*, 2025.
- [16] X. Yang, L. Zhu, H. Fan, and Y. Yang, “Videograin: Modulating space-time attention for multi-grained video editing,” in *The Thirteenth International Conference on Learning Representations*, 2025.
- [17] Y. Bian, Z. Zhang, X. Ju, M. Cao, L. Xie, Y. Shan, and Q. Xu, “Videopainter: Any-length video inpainting and editing with plug-and-play context control,” in *Proceedings of the Special Interest Group on Computer Graphics and Interactive Techniques Conference Papers*, 2025, pp. 1–12.
- [18] J. Bai, T. He, Y. Wang, J. Guo, H. Hu, Z. Liu, and J. Bian, “Uniedit: A unified tuning-free framework for video motion and appearance editing,” in *Proceedings of the 33rd ACM International Conference on Multimedia*, 2025, pp. 10 171–10 180.
- [19] D. J. Zhang, D. Li, H. Le, M. Z. Shou, C. Xiong, and D. Sahoo, “Moonshot: Towards controllable video generation and editing with motion-aware multimodal conditions,” *International Journal of Computer Vision*, vol. 133, no. 6, pp. 3629–3644, 2025.
- [20] Z. Gu, R. Yan, J. Lu, P. Li, Z. Dou, C. Si, Z. Dong, Q. Liu, C. Lin, Z. Liu *et al.*, “Diffusion as shader: 3d-aware video diffusion for versatile video generation control,” in *Proceedings of the Special Interest Group on Computer Graphics and Interactive Techniques Conference Papers*, 2025, pp. 1–12.
- [21] S. Zhuang, Z. Huang, B. Yang, Y. Zhang, F. Wang, C. Fu, C. Sun, Z.-J. Zha, C. Li, and Y. Wang, “Get in video: Add anything you want to the video,” *arXiv preprint arXiv:2503.06268*, 2025.
- [22] Y. Tu, H. Luo, X. Chen, S. Ji, X. Bai, and H. Zhao, “Videoanydoor: High-fidelity video object insertion with precise motion control,” in *Proceedings of the Special Interest Group on Computer Graphics and Interactive Techniques Conference Papers*, 2025, pp. 1–11.
- [23] C. Bai, Z. Shao, G. Zhang, D. Liang, J. Yang, Z. Zhang, Y. Guo, C. Zhong, Y. Qiu, Z. Wang *et al.*, “Anything in any scene: Photorealistic video object insertion,” *arXiv preprint arXiv:2401.17509*, 2024.
- [24] Q. Zhao, Z. Ma, and P. Zhou, “Dreaminsert: Zero-shot image-to-video object insertion from a single image,” *arXiv preprint arXiv:2503.10342*, 2025.
- [25] H. Jin, H. Jang, J. Kim, J. Hyung, K. Kim, D. Kim, H. Choi, H. Kim, and J. Choo, “Insertanywhere: Bridging 4d scene geometry and diffusion models for realistic video object insertion,” *arXiv preprint arXiv:2512.17504*, 2025.
- [26] J. Chen, X. Li, X. Bai, T. Ma, P. Zhang, Z. Chen, G. Li, L. Liu, S. Zhao, B. Li *et al.*, “Omniinsert: Mask-free video insertion of any reference via diffusion transformer models,” *arXiv preprint arXiv:2509.17627*, 2025.
- [27] C. Wei, Q. Liu, Z. Ye, Q. Wang, X. Wang, P. Wan, K. Gai, and W. Chen, “Univideo: Unified understanding, generation, and editing for videos,” *arXiv preprint arXiv:2510.08377*, 2025.
- [28] J. Liu, Y. Ma, X. Cao, T. Li, G. Shang, H. Huang, C. Zhang, X. Li, C. Liu, J. Liu *et al.*, “Tele-omni: a unified multimodal framework for video generation and editing,” *arXiv preprint arXiv:2602.09609*, 2026.
- [29] Z. Jiang, Z. Han, C. Mao, J. Zhang, Y. Pan, and Y. Liu, “Vace: All-in-one video creation and editing,” in *Proceedings of the*

- IEEE/CVF International Conference on Computer Vision*, 2025, pp. 17 191–17 202.
- [30] X. Ju, W. Ye, Q. Liu, Q. Wang, X. Wang, P. Wan, D. Zhang, K. Gai, and Q. Xu, “Fulldit: Multi-task video generative foundation model with full attention,” *arXiv preprint arXiv:2503.19907*, 2025.
 - [31] Y. Gao, H. Guo, T. Hoang, W. Huang, L. Jiang, F. Kong, H. Li, J. Li, L. Li, X. Li *et al.*, “Seedance 1.0: Exploring the boundaries of video generation models,” *arXiv preprint arXiv:2506.09113*, 2025.
 - [32] Pika Labs, “Pika,” <https://pika.art>, 2024, accessed: 2024-05-21.
 - [33] B. Wu, C. Zou, C. Li, D. Huang, F. Yang, H. Tan, J. Peng, J. Wu, J. Xiong, J. Jiang *et al.*, “Hunyuanvideo 1.5 technical report,” *arXiv preprint arXiv:2511.18870*, 2025.
 - [34] Z. Yang, J. Teng, W. Zheng, M. Ding, S. Huang, J. Xu, Y. Yang, W. Hong, X. Zhang, G. Feng *et al.*, “Cogvideox: Text-to-video diffusion models with an expert transformer,” *arXiv preprint arXiv:2408.06072*, 2024.
 - [35] H. He, J. Wang, J. Zhang, Z. Xue, X. Bu, Q. Yang, S. Wen, and L. Xie, “Openve-3m: A large-scale high-quality dataset for instruction-guided video editing,” *arXiv preprint arXiv:2512.07826*, 2025.
 - [36] G. Team, R. Anil, S. Borgeaud, J.-B. Alayrac, J. Yu, R. Soricut, J. Schalkwyk, A. M. Dai, A. Hauth, K. Millican *et al.*, “Gemini: a family of highly capable multimodal models,” *arXiv preprint arXiv:2312.11805*, 2023.
 - [37] L. Medeiros, “Langsam: Language-guided segment anything,” <https://github.com/luca-medeiros/lang-segment-anything>, 2023.
 - [38] B. Zi, W. Peng, X. Qi, J. Wang, S. Zhao, R. Xiao, and K.-F. Wong, “Minimax-remover: Taming bad noise helps video object removal,” *arXiv preprint arXiv:2505.24873*, 2025.
 - [39] P. Zhang, Y. Wu, M. Li, X. Bai, S. Zhao, F. Ye, C. Mou, X. Li, Z. Chen, Q. He *et al.*, “Omnitransfer: All-in-one framework for spatio-temporal video transfer,” *arXiv preprint arXiv:2601.14250*, 2026.
 - [40] Q. Zhang, J. Zhang, Y. Xu, and D. Tao, “Vision transformer with quadrangle attention,” *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 46, no. 5, pp. 3608–3624, 2024.
 - [41] OpenAI, “Chatgpt,” <https://openai.com/chatgpt/>, 2026, accessed: 2026-04-13.
 - [42] Y. Zhao, A. Gu, K. Narayanan, S. Subramanian, W. Xiao, C. Zhu, L. Dudziak, M. Lin, A. Azad, M. M. A. Rahman *et al.*, “Pytorch fsdp: Experiences on scaling fully sharded data parallel,” *Proceedings of the VLDB Endowment*, vol. 16, no. 12, pp. 3848–3860, 2023.
 - [43] S. Bai *et al.*, “Qwen3-vl technical report,” *arXiv preprint arXiv:2511.21631*, 2025.

Supplementary Material

A. Model Details

A.1. Implementation Details

We adopt Wan2.1-14B as the generation backbone and Qwen3-VL-8B as the VLM backbone. All video and image resolutions are fixed at 832×480 , with 33 frames extracted per training sample. During the pretraining stage of the Decoupled Guidance Module, we train for 100k iterations using a batch size of 128 and a learning rate of 2×10^{-5} . For the end-to-end fine-tuning stage, the batch size is reduced to 32 with a learning rate of 1×10^{-5} for 10k iterations. To save GPU memory, we utilize FSDP stage 3 [42]. During attention operations, only key and value tensors from image-stream are preserved for video-stream.

A.2. Dual-Stream Attention Mechanism Details

Smart-Insertion-V employs a Dual-Stream architecture comprising an image stream and a video-stream. During the self-attention computation, the image stream is processed first to extract features for the harmonized target references. These features are subsequently concatenated with the video-stream for its respective self-attention operation.

Notably, we constrain this process to an asymmetric semi-attention mechanism: while target latents are allowed to query the keys and values of the conditioning signals, the conditions are restricted to attending only to themselves. Compared with FullDiT [30], this design significantly mitigates the issue of condition information shift. In all other layers, the two streams operate strictly in parallel.

B. Closed-Loop Feedback

As described in Section 4.1 of the main paper, we introduce a closed-loop feedback mechanism during inference, in which the one-step estimate $\hat{x}_0^{\text{onestep}}$ from the image stream is fed back into the VLM reasoning branch to produce refinement guidance for both streams. Here we elaborate on how the corresponding feedback guidance embeddings are constructed.

The key idea is to reuse the VLM reasoning branch introduced in Section 4.2, but to replace the original reference image I_{ref} in its visual inputs with the one-step estimated harmonized image $\hat{x}_0^{\text{onestep}}$. Since $\hat{x}_0^{\text{onestep}}$ already reflects the current insertion result of the image stream, feeding it into the VLM allows the model to assess the present generation quality and infer targeted refinements, rather than reasoning purely from the inharmonious reference.

Image-Stream feedback embedding. For the image style transfer stream, the original style guidance embedding $\epsilon_{\text{style}}^{\text{vlm}}$ is computed from $\text{VLM}(P_{\text{style}}, I_{\text{ref}}, V_{\text{src}}^0)$. In the feedback

stage, we substitute I_{ref} with $\hat{x}_0^{\text{onestep}}$ while keeping the prompt and source-frame condition unchanged:

$$\epsilon_{\text{vlm}}^{\text{fb,style}} = \text{VLM}(P_{\text{style}}, \hat{x}_0^{\text{onestep}}, V_{\text{src}}^0). \quad (5)$$

Following the same token-selection strategy as in Equation (2) of the main paper, we discard the token embeddings corresponding to P_{style} and obtain the refinement embedding:

$$\epsilon_{\text{vlm}}^{\text{fb,style}} = [e_{\text{vlm}|i}^{\text{fb,style}} \mid e_{\text{vlm}|i}^{\text{fb,style}} \neq e_{\text{vlm}}^{\text{fb,style}}(P_{\text{style}})], \quad (6)$$

where i denotes the token index. The resulting $\epsilon_{\text{vlm}}^{\text{fb,style}}$ replaces $\epsilon_{\text{style}}^{\text{vlm}}$ as the guidance signal for the image stream during feedback-active timesteps.

Video stream feedback embedding. Similarly, for the video insertion stream, we apply an identical substitution strategy to extract the insertion-oriented VLM guidance. Specifically, the original insertion guidance embedding $\epsilon_{\text{insert}}^{\text{vlm}}$ is computed from $\text{VLM}(P_{\text{insert}}, I_{\text{ref}}, V_{\text{src}}^0)$. By replacing the initial reference I_{ref} with the intermediate prediction $\hat{x}_0^{\text{onestep}}$, we formulate the updated process as:

$$\epsilon_{\text{vlm}}^{\text{fb,insert}} = \text{VLM}(P_{\text{insert}}, \hat{x}_0^{\text{onestep}}, V_{\text{src}}^0). \quad (7)$$

After discarding the token embeddings corresponding to P_{insert} , we obtain:

$$\epsilon_{\text{vlm}}^{\text{fb,insert}} = [e_{\text{vlm}|i}^{\text{fb,insert}} \mid e_{\text{vlm}|i}^{\text{fb,insert}} \neq e_{\text{vlm}}^{\text{fb,insert}}(P_{\text{insert}})]. \quad (8)$$

This refinement embedding $\epsilon_{\text{vlm}}^{\text{fb,insert}}$ replaces $\epsilon_{\text{insert}}^{\text{vlm}}$ in the final video-stream guidance, while the T5 motion embedding ϵ_{motion} is kept unchanged since it describes temporal motion that is independent of the current insertion appearance.

Early-Stage Feedback. Both refinement embeddings are computed and applied only at early denoising timesteps $t \in [t_{\text{start}}, T]$, where T denotes the total number of denoising steps and t_{start} is a predefined threshold. At later timesteps, we stop invoking the VLM and keep $\epsilon_{\text{vlm}}^{\text{fb,style}}$ and $\epsilon_{\text{vlm}}^{\text{fb,insert}}$ fixed. This design establishes an accurate and style-aligned structural prior for both streams in the early denoising phase, while avoiding redundant VLM inference and preserving generation stability in the later refinement phase.

C. Data Dual-Verification

To guarantee the highest caliber of training data across both synthesis pipelines, we implement a rigorous spatiotemporal filtering protocol to eliminate samples exhibiting generative artifacts. Specifically, we discard quadruplets affected by any of the following anomalies: (1) *Identity Drift*: Significant semantic or structural shifts in the reference subject post-completion or style transfer; (2) *Incomplete Erasure*:

Prompt For Harmonious Score

Role: You are an expert evaluator for video object insertion quality, specializing in Aesthetic Stylization and Global Scene Coherence.

Task: Evaluate how naturally a new object has been integrated into a video frame. Your primary focus is on Style Harmony—whether the object appears to "belong" to the environment's artistic and lighting context, rather than its strict pixel-wise similarity to the reference image.

Input Data:

1. Reference Image: The object to be inserted (provides the semantic identity/category).
2. Condition Frame: The original source video frame (provides the target environment and style).
3. Generated Frame: The result after insertion.

Evaluation Criteria (Prioritize in this order):

1. Style & Aesthetic Harmony (CRITICAL):
 - a. Does the object adopt the visual style of the scene (e.g., color grading, film grain, artistic medium like oil painting/sketch, or specific lighting conditions like neon/sunset)?
 - b. If there is a style mismatch between the Reference Image and the Condition Frame, the object must adapt to the Condition Frame's style to score highly.
2. Lighting & Shadow Integration:
 - a. Are the light sources on the object consistent with the environment?
 - b. Are there realistic contact shadows or reflections where the object meets the ground/surfaces?
 - c. Does the object's contrast and saturation match the surrounding pixels?
3. Global Coherence & Placement:
 - a. Does the object look physically "grounded" in the scene rather than floating or "sticking" on top?
 - b. Is the scale and perspective of the object consistent with the camera angle of the source video?
4. Identity Preservation (Secondary):
 - a. Is the object still recognizable as the same type or identity as the Reference Image? (Note: Style changes are expected and encouraged as long as the object's core identity is kept).
5. Scene Preservation:
 - a. Is the background from the Condition Frame preserved without blurry patches, warping, or unintended artifacts around the insertion area?

Scoring:

- Provide a score between 0 and 1.
- 1.0: Perfect harmony. The object looks like it was part of the original scene; styles are indistinguishable.
- 0.5: The object is recognizable but looks "pasted" or the style (lighting/texture) clearly clashes with the background.
- 0: Severe artifacts, extreme style mismatch, or the scene is heavily distorted.

Output Format: Score: <float between 0 and 1> Reasoning: <A brief explanation focusing on why the style is or isn't harmonious.>

Figure 9. Details of prompts and rules for GPT Harmonious Score.

Residual ghosting or structural remnants of the target object within the background video; (3) *Temporal Artifacts*: Visual anomalies, blurring, or temporal flickering in the inpainted video regions; (4) *Background Perturbation*: Spurious, unintended modifications to non-target background areas.

Crucially, this quality assurance is strictly enforced through a dual-verification consensus mechanism utilizing Qwen-VL (32B) [43] and Gemini-3-Pro [36]. Only data quadruplets that successfully pass the stringent cross-validation of both agents are retained. We here show the detailed verification prompts and rules in Figure 10

D. Discussion on Ablation Studies

We investigated the effectiveness of our proposed Dual-Stream architecture, Dual-RoPE, and closed-loop feedback mechanism in the main paper. As illustrated in Fig. 6, removing the image stream causes the inserted dog to exhibit severe stylistic disharmony. This is primarily because, without a style-aligned reference to provide robust conditioning, the attention mechanism over-relies on features extracted from the out-of-domain raw reference. Furthermore, when replacing our Dual-RoPE with a standard 3D RoPE, the inserted object suffers from obvious color bleeding, erroneously adopting the color of the background person. We attribute this to severe feature entanglement between the conditioning signals and the human region in the source video.

Finally, disabling the feedback mechanism leads to severe color shifts, demonstrating its indispensable role in ensuring generation robustness. Overall, these results confirm that all proposed modules are highly effective and essential for harmonized insertion.

E. Harmonious Score

To quantitatively assess insertion quality, we introduce the Harmonious Score, evaluated via the ChatGPT 5.4 Thinking model [41]. Specifically, the generated videos are assessed across five dimensions: (1) stylistic and aesthetic harmony, (2) lighting and shadow integration, (3) global coherence and spatial placement, (4) reference identity preservation, and (5) background scene preservation. Detailed evaluation prompts are provided in Figure 9.

Data Verification Prompt

You are a strict yet flexible dataset evaluator.

You will see 4 inputs:

- (1) target object (text),
- (2) source image,
- (3) video (object removed),
- (4) reference image (same object in different style/rotation).

Your goal is to evaluate the quality of the pairing and the removal quality.

Give ONE score from 0 to 10.

Hard gate (score = 0), don't easily give this score [Important].

If any of the following is true, output 0:

- The source image is NOT suitable for editing (e.g., no single object, or object is messy/cluttered).
 - The target object described in the text is NOT clearly detectable in the source video.
 - The reference image depicts a completely DIFFERENT semantic object (e.g., cat vs. car).
- (Note: Do NOT fail based on rotation or style changes; only fail if the general shape is totally different).

Main scoring (1-10)

Score based on these priorities. You must be ROBUST to rotation and stylization.

The goal is to make sure the image is suitable for editing, the reference is the SAME OBJECT INSTANCE (same appearance but different style), and the removal is clean.

[Important] The following rule is not strict, so if you think it is a good edit instance and edit successfully

1. reference image share roughly similar shape with generated video, 2. No reference object inside source image,

3. reference image is {obj}, you can give a higher score (larger or equal to 6).

(1) Reference Identity Consistency (MOST IMPORTANT, ~50%)

- The reference image is a STYLIZED and/or ROTATED version of the object in the source video.
- CRITICAL: You MUST ALLOW for:
 - Planar Rotation (object may be rotated 10°, -10° clockwise, inverted, etc.).
 - Stylization (texture changes, artistic filters, color palette shifts).
- Evaluation Check: Despite the rotation or style change, is it clearly the ****same underlying object instance**** (same key features, structural topology)?
- Do NOT penalize for silhouette mismatch caused by rotation.
- Do NOT penalize for color mismatch caused by stylization.

(2) Removal success (~25%)

- The object should be fully gone in the video (Input 3).
- No obvious remnants, ghost edges, or leftover patches of the original object.

(3) Edited video realism & temporal stability (~20%)

- The inpainted background should look natural.
- No structural collapse, melting artifacts, or flickering in the removed area.

(4) No unintended changes (~5%)

- Background regions outside the removed object should remain untouched.

Score anchors:

- 10 (Excellent)
Reference is clearly the same instance (same outline but different texture style). The rotation or stylization is handled perfectly (identity is preserved). Removal is perfectly clean.
- 9 (Very strong)
Reference is undeniably the same object despite strong rotation or heavy stylization. Removal is clean with near-zero artifacts.
- 8 (Strong / Safe accept)
Reference identity is recognizable as the same object, even if rotation makes the silhouette look different. Removal is clean with only subtle artifacts.
- 7 (Minimum Accept / Borderline pass)
Reference looks like the same instance (same outline but different texture style), but extreme stylization/rotation makes it slightly hard to verify details. Removal is successful but has minor issues (small blur/seam) but no flickering.
- 6 (Borderline reject: same outline but different texture style)
Reference ambiguity: The stylization or rotation distorts the object so much that it's hard to tell if it's the same instance. Or removal has visible artifacts that draw attention.
- 4-5 (Reject: clear quality problems)
Reference appears to be a different instance (loss of shape features). Removal artifacts are clearly visible (ghosts/holes).
- 1-3 (Reject: very poor)
Severe artifacts, or the Reference is completely unrelated to the Source object.

Output format: only a single integer 0-10 inside [].

Input: {obj}

Returned Score: []

Figure 10. Details of data verification. We set detailed and strict scoring rules for AI agents.