

Look Where It Matters: Adaptive Visual Refinement for Vision-Language-Action Models

Jin Cui^{1*}, Yanbin Hu^{1, 2*}, Xinyue Long^{1, 2}, Linkai Li^{1, 2}, Boran Zhao^{1, 2†}, Pengju Ren¹

¹State Key Laboratory of Human-Machine Hybrid Augmented Intelligence,
and Institute of Artificial Intelligence and Robotics, Xi'an Jiaotong University

²School of Software Engineering, Xi'an Jiaotong University
andycui@stu.xjtu.edu.cn

Abstract

Vision-language-action (VLA) models inherit rich semantic priors from large-scale vision-language pretraining, yet their visual representations remain unreliable for spatially precise robotic manipulation. We uncover that vision encoders in VLAs also exhibit attention artifacts previously documented in generic Vision Transformers, and further show that, in embodied policies, these artifacts are closely associated with spatial perception capabilities acquired during post-training. As the encoder learns task-relevant information such as object location, depth ordering, and local geometry, limited global-token capacity causes part of this information to spill into low-information patch tokens. We introduce *AtVLA*, a framework that inserts learnable register tokens into the visual encoder. Trained end-to-end using only embodied data and the original action objective, these registers emerge as dedicated carriers of embodied spatial information, while the remaining patch tokens recover clean and spatially faithful attention distributions crucial for precise target localization and fine-grained contact. Clean attention restores reliable localization, but cannot recover geometric details lost in low-resolution observations. *AtVLA* therefore couples attention rectification with uncertainty-gated local refinement. The action expert samples multiple action chunks and estimates uncertainty from their disagreement; only for uncertain predictions, action-conditioned attention rollout identifies the task-relevant region, which is cropped, re-encoded at high resolution, and appended to the cached prefix for refined action generation. Across LIBERO, SimplerEnv, and a challenging single-view real-world benchmark, *AtVLA* improves the average LIBERO success rate from 94.2% to 98.4% and real-world success from 46.5% to 69.0% over π_0 . The additional inference cost remains limited: cropping is triggered on approximately 30% of replanning steps, resulting in only $1.4\text{--}1.6\times$ the total computation of π_0 under the representative deployment setting.

Introduction

Vision-language-action (VLA) models have emerged as a promising paradigm for generalist robot manipulation, transferring the semantic knowledge and instruction-following capabilities of large-scale vision-language models into continuous control policies (Kim et al. 2024; Brohan et al.

2023; Black et al. 2024). By post-training pretrained vision-language backbones on diverse robot demonstrations, recent VLAs achieve strong generalization across manipulation tasks. However, robotic control requires more than semantic recognition; the visual encoder must preserve spatially faithful representations for target localization, geometric reasoning, and precise contact. This raises a fundamental question: *how does embodied post-training reshape the visual representations of pretrained encoders, and are these representations sufficiently reliable for fine-grained manipulation?*

Through systematic analysis of manipulation failures, we identify two visual bottlenecks in current VLAs. **First, models frequently fail to correctly identify target objects and disambiguate task types**—a surprising deficiency given the powerful semantic understanding of their VLM backbones. Inspecting their attention distributions, we find that VLA visual encoders exhibit the high-norm artifacts previously observed in generic Vision Transformers (Darcet et al. 2023): background patches are repurposed as repositories for global information, displacing local spatial content and corrupting dense attention maps. We further show that this pathology is closely associated with embodied post-training. As the encoder acquires manipulation-relevant information such as object location, depth ordering, instance structure, and local geometry, the limited capacity of its original global tokens causes part of this information to spill into spatial patch tokens. Useful embodied knowledge is therefore stored in the wrong representational channels, undermining the precise localization and contact reasoning required for control.

Second, even correct localization does not guarantee precise manipulation. Fine-grained actions require local geometric details near the target and contact region, yet such details may occupy only a few patches in a low-resolution third-person observation. Wrist-mounted cameras provide close-range views, but suffer from acute viewpoint and pose-change sensitivity; the highly variable relative position between the gripper and object causes the relevant image region to shift unpredictably. Explicit vision experts or 3D representations can provide stronger geometry, but introduce additional sensing, calibration, and modeling complexity. These observations motivate a selective coarse-to-fine mechanism that first restores reliable localization and then increases visual resolution only when the base observation is insufficient.

We introduce *AtVLA*, a framework that combines register-

*These authors contributed equally.

†Corresponding author.

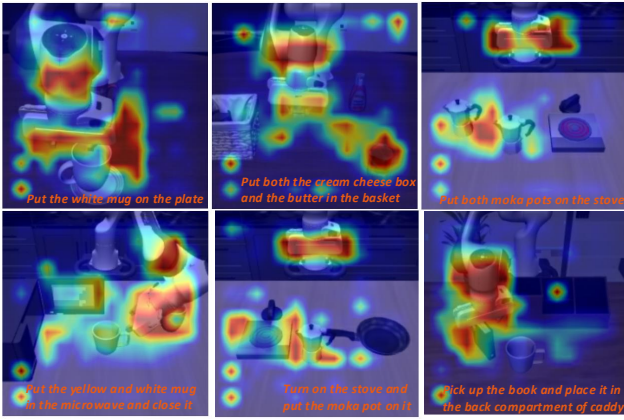


Figure 1: Attention artifacts in a standard VLA visual encoder. High-norm regions emerge in low-information backgrounds or unrelated objects, corrupting the spatial grounding of task-relevant targets and interaction regions.

enhanced visual encoding with uncertainty-gated local refinement. We insert learnable register tokens into the visual encoder and optimize them using only embodied demonstrations and the original action objective. During post-training, the registers emerge as dedicated carriers of spatial information acquired from robot interaction, while the remaining patch tokens recover clean and spatially faithful attention distributions. Unlike discarding these tokens, we retain their outputs as additional spatial context for action generation. Linear-probing confirms that they encode stronger task-relevant spatial information than the original class token or pooled patch features. Based on the rectified visual prefix, the action expert samples multiple action chunks and estimates uncertainty from their disagreement. Confident predictions follow the original inference path. For uncertain predictions, *AtVLA* reuses action-conditioned attention to localize the task-relevant region, crops and re-encodes it at high resolution, and appends the resulting tokens to the cached prefix for refined action generation. Clean attention determines *where* to look, while adaptive cropping recovers the local geometry needed to act precisely.

Across LIBERO, SimplerEnv, and a challenging real-world benchmark, *AtVLA* consistently improves object grounding, spatial reasoning, and fine-grained manipulation. It raises the average LIBERO success rate of π_0 from 94.2% to 98.4% and real-world success from 46.5% to 69.0%. Local refinement is triggered on only approximately 30% of replanning steps, yielding 1.4–1.6 $\times$ the total computation of π_0 under our deployment setting. Our contributions are summarized as follows:

- We uncover attention artifacts in VLA visual encoders and reveal their connection to spatial features acquired during embodied post-training. After rectification, registers emerge as stable carriers of embodied spatial information, while restoring clean, spatially faithful attention.
- We develop uncertainty-gated, attention-guided visual refinement that selectively crops and re-encodes task-

relevant regions, enabling high-resolution perception only when needed for precise manipulation.

- Extensive experiments across simulated and real-world benchmarks demonstrate substantial performance gains with modest overhead, as adaptive refinement is invoked on only a fraction of replanning steps.

Related Work

Attention Artifacts in Visual Encoders and VLA Grounding. Patch-level representations are critical for spatial grounding in vision-language-action models. Large-scale Vision Transformers can develop high-norm tokens in low-information regions, which act as repositories for global information and distort dense spatial features (Darcet et al. 2023). We find that this phenomenon is further exacerbated during embodied post-training, where visual encoders must capture task-relevant geometry, instance structure, and spatial relations beyond conventional 2D semantics (Qu et al. 2025; Li et al. 2025b,a). Related studies report attention sinks, representation collapse, and dispersed task attention in VLA policies (Kachaev et al. 2025; Song et al. 2025), while analyses of VLMs show that visual grounding signals can deteriorate across network depth (Kaduri, Bagon, and Dekel 2024; Jiang et al. 2024). Object-centric tokenization and slot-based representations improve VLA grounding through feature selection or decomposition (Bendikakis et al. 2025; Hanyu et al. 2025), but do not explicitly address corrupted patch representations. In contrast, we use register tokens to absorb excess global information while preserving clean patch features for spatial grounding.

Visual Refinement for Precise Perception. MLLMs may correctly localize task-relevant regions yet fail to resolve fine details under limited input resolution, motivating targeted visual re-examination (Zhang et al. 2025). Previous work explores hierarchical search, attention-guided cropping, KV-cache-based localization, and learned zoom policies (Shen et al. 2024; Liu et al. 2024; Zhang et al. 2024; Zhong et al. 2025; Carvalho, Dias, and Martins 2026). In robotic manipulation, related methods incorporate auxiliary visual cues or explicit spatial supervision to improve manipulation grounding (Li et al. 2024c; Zawalski et al. 2024; Deng et al. 2025), but do not directly leverage the policy’s internal attention for adaptive visual refinement. We instead use rectified attention maps for uncertainty-gated cropping, re-encoding task-relevant regions at high resolution only when the base action prediction is uncertain.

Method

Overview

Given a raw visual observation $\mathbf{I}_t$, a language instruction ℓ , and a proprioceptive state $\mathbf{s}_t$, our method augments π_0 with two complementary mechanisms: register-enhanced visual encoding and uncertainty-gated local visual refinement. Register tokens provide dedicated global-information slots inside the SigLIP encoder, preventing background patch tokens from being repurposed as high-norm information reservoirs. Their output features are retained as multi-slot global

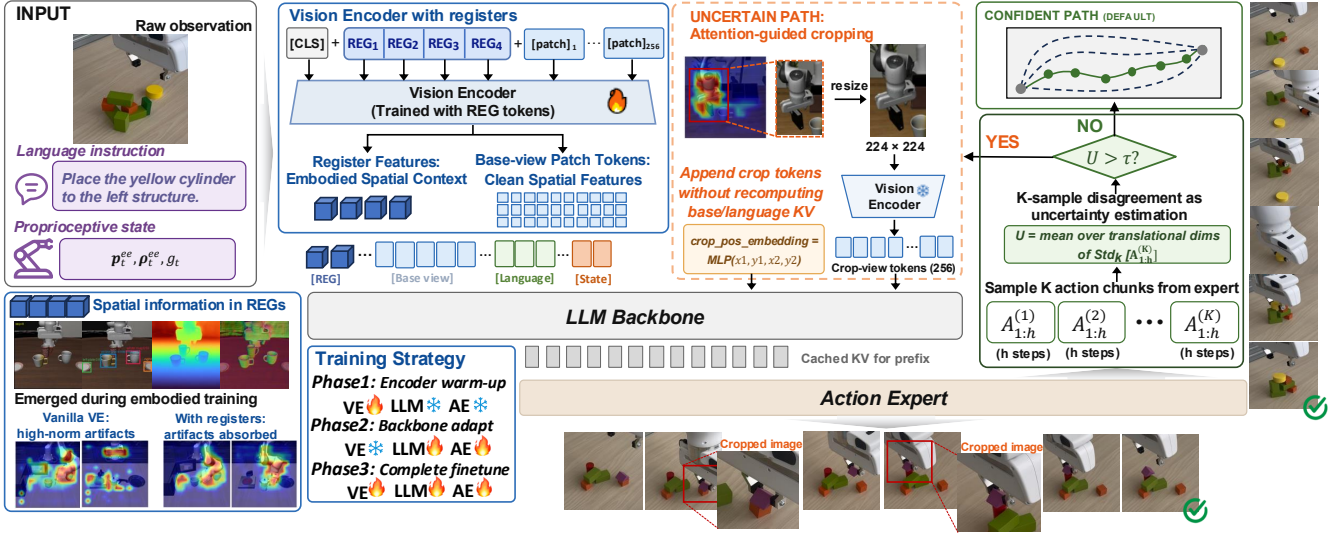


Figure 2: Overview of *AtVLA*. Register tokens absorb excess global information and retain embodied spatial context while restoring clean patch representations. The action expert estimates uncertainty from multiple sampled action chunks: confident predictions follow the base path, whereas uncertain predictions trigger attention-guided cropping, high-resolution re-encoding, and prefix extension. A three-stage curriculum progressively aligns the registers, crop branch, and complete policy.

context, while the remaining patch tokens preserve spatially faithful local representations. Based on this clean visual prefix, the flow-matching action expert first predicts multiple action chunks and estimates action uncertainty from their disagreement. The base prediction is executed directly when uncertainty is low. Otherwise, an attention rollout localizes the task-relevant region, which is re-encoded at full resolution and appended to the cached prefix for refined action generation. The gate is evaluated once per action-chunk re-planning step rather than at every low-level control step.

Register-Enhanced Visual Prefix

Let the vision encoder operate on 224×224 images with patch size 14, producing $N_b = 16 \times 16 = 256$ patch tokens. We insert $N_r = 4$ learnable register embeddings immediately after the class token:

$$\mathbf{X}_t = [\mathbf{x}_{\text{cls}}; \mathbf{r}_1, \dots, \mathbf{r}_{N_r}; \mathbf{p}_1, \dots, \mathbf{p}_{N_b}]. \quad (1)$$

The register-augmented visual encoder E_{vis} outputs

$$[\mathbf{h}_{\text{cls}}, \mathbf{R}_t, \mathbf{P}_t] = E_{\text{vis}}(\mathbf{X}_t), \quad (2)$$

where $\mathbf{R}_t \in \mathbb{R}^{N_r \times d_v}$ denotes register features and $\mathbf{P}_t \in \mathbb{R}^{N_b \times d_v}$ denotes spatial patch features. Unlike the original use of registers solely as internal workspace, we retain $\mathbf{R}_t$ and project it through the PaliGemma visual projector Π . The base multimodal prefix is

$$\mathbf{C}_t^b = [\Pi(\mathbf{R}_t); \Pi(\mathbf{P}_t); E_{\text{lang}}(\ell); E_{\text{state}}(\mathbf{s}_t)]. \quad (3)$$

Thus, the registers expose several global context slots to the downstream policy, while the full 16×16 patch grid remains available for spatial grounding. For multiple camera views, each view is encoded independently with the same register-augmented encoder, and the resulting visual sequences are concatenated in the prefix.

Uncertainty-Gated Action Prediction

LLM backbone processes $\mathbf{C}_t^b$ once to construct a reusable prefix key-value cache. Conditioned on this cache, the flow-matching action expert generates K action chunks from independent Gaussian initializations:

$$\mathbf{z}_0^{(k)} \sim \mathcal{N}(\mathbf{0}, \mathbf{I}), \quad \mathbf{A}_{1:H}^{(k)} = \text{ODESolve}(v_\theta, \mathbf{z}_0^{(k)} \mid \mathbf{C}_t^b) \quad (4)$$

where H is the predicted chunk horizon. All samples share the visual and language prefill and differ only in action-expert denoising. We measure disagreement over the translational action dimensions $\mathcal{D}_{\text{tr}}$ and the first $h \leq H$ actions that will actually be executed:

$$U_t = \frac{1}{h|\mathcal{D}_{\text{tr}}|} \sum_{j=1}^h \sum_{d \in \mathcal{D}_{\text{tr}}} \sqrt{\frac{1}{K-1} \sum_{k=1}^K \left(A_{j,d}^{(k)} - \frac{1}{K} \sum_{k=1}^K A_{j,d}^{(k)} \right)^2} \quad (5)$$

Restricting the score to near-term translation isolates disagreement in the end-effector motion most directly related to spatial ambiguity. The noise schedule, ODE solver, and number of integration steps are fixed when computing U_t . If $U_t \leq \tau$, the mean action chunk $\bar{\mathbf{A}}_{1:H}$ is returned through the default confident path. The threshold τ is selected on a held-out set by measuring how well U_t predicts the empirical error reduction obtained from cropping.

Attention-Guided Local Refinement

When $U_t > \tau$, we derive a task-conditioned spatial map from attention matrices already produced during base action sampling. For layer l , we average the attention matrices over heads and a fixed subset of denoising steps, add the residual

Table 1: Success rates (%) on commonly used benchmarks with standard deviations reported when available. Baseline results are taken from reported settings. PCC, MN and O/C denote Pick Coke Can, Move Near and Open/Close. π_0 + *Cropping* variant takes cropped images from an external VLM without embodied pre-training, while * is analyzed in the following context.

Method	Standard LIBERO Suites				Method	SimplerEnv Google		
	Spatial	Object	Goal	Long-10		PCC	MN	O/C
Octo (Team et al. 2024)	78.9 $\pm$ 1.0	85.7 $\pm$ 1.2	84.6 $\pm$ 0.9	50.9 $\pm$ 1.2	Octo (Team et al. 2024)	17.0	4.2	22.7
OpenVLA (Kim et al. 2024)	85.0 $\pm$ 1.1	88.6 $\pm$ 0.9	79.2 $\pm$ 1.0	53.6 $\pm$ 1.0	OpenVLA (Kim et al. 2024)	16.3	46.2	35.6
π_0 (Black et al. 2024)	96.8 $\pm$ 1.3	98.8 $\pm$ 1.2	95.8 $\pm$ 1.5	85.2 $\pm$ 1.0	π_0 (Black et al. 2024)	88.0	80.3	56.0
$\pi_{0.5}$ (Intelligence et al. 2025)	97.3 $\pm$ 1.7	98.8 $\pm$ 0.9	96.9 $\pm$ 1.2	94.2 $\pm$ 1.8	RT-1-X (Brohan et al. 2023)	56.7	31.7	59.7
SpatialVLA (Qu et al. 2025)	88.2 $\pm$ 0.5	89.9 $\pm$ 0.7	78.6 $\pm$ 0.6	55.5 $\pm$ 1.0	RT-2-X (Brohan et al. 2023)	78.7	77.9	25.0
CoT-VLA (Zhao et al. 2025)	81.13 $\pm$ 0.6	87.5 $\pm$ 1.4	91.6 $\pm$ 0.5	69.0 $\pm$ 0.8	RoboVLM (Li et al. 2024b)	77.3	61.7	43.5
OFT (Kim, Finn, and Liang 2025)	96.2	98.3	96.2	90.7	SpatialVLA (Qu et al. 2025)	86.0	77.9	57.4
VLANeXt (Wu et al. 2026)	99.0	99.2	96.6	94.8	TraceVLA (Zheng et al. 2024)	28.0	53.7	57.0
π_0 + Registers	98.8 $\pm$ 0.6	99.0 $\pm$ 0.8	98.0 $\pm$ 0.9	93.1 $\pm$ 1.7	π_0 + Registers	88.2	80.5	56.0
π_0 + Cropping	96.5 $\pm$ 1.3	98.2 $\pm$ 1.2	96.7 $\pm$ 1.5	93.3 $\pm$ 2.1	π_0 + Cropping	90.0	79.2	56.9
AtVLA (Full)	99.3$\pm$0.7	99.4$\pm$0.8	98.3$\pm$1.2	96.5$\pm$2.6	AtVLA (Full)	91.3	81.6	57.5*

Table 2: **Evaluation in RealWorld scene.** All models underwent extensive fine-tuning tailored to their respective architectures, and standard deviations were derived from 20 independent experiments.

Method	Kitchen					Building Blocks				
	Move	Grab	Pick	Long	Spatial	Stack	Edge	Spatial	Long	Grab
Octo (Team et al. 2024)	20 $\pm$ 10	10 $\pm$ 5	25 $\pm$ 5	0	15 $\pm$ 10	20 $\pm$ 15	0	10 $\pm$ 15	0	5 $\pm$ 5
OpenVLA (Kim et al. 2024)	35 $\pm$ 15	30 $\pm$ 10	45 $\pm$ 5	0	45 $\pm$ 10	35 $\pm$ 5	0	30 $\pm$ 10	0	10 $\pm$ 5
π_0 (Black et al. 2024)	50 $\pm$ 5	35 $\pm$ 5	55 $\pm$ 15	15 $\pm$ 5	75 $\pm$ 5	55 $\pm$ 10	25 $\pm$ 5	55 $\pm$ 15	15 $\pm$ 5	35 $\pm$ 10
$\pi_{0.5}$ (Intelligence et al. 2025)	65 $\pm$ 5	35 $\pm$ 10	60 $\pm$ 10	30 $\pm$ 10	75 $\pm$ 5	65 $\pm$ 5	25 $\pm$ 10	60 $\pm$ 10	20 $\pm$ 5	35 $\pm$ 5
π_0 + Registers	75 $\pm$ 10	45 $\pm$ 10	75 $\pm$ 5	25 $\pm$ 5	75 $\pm$ 10	65 $\pm$ 5	30 $\pm$ 15	65 $\pm$ 5	25 $\pm$ 5	60 $\pm$ 10
π_0 + Cropping	65 $\pm$ 10	40 $\pm$ 15	60 $\pm$ 10	25 $\pm$ 10	70 $\pm$ 10	70 $\pm$ 5	35 $\pm$ 15	65 $\pm$ 10	30 $\pm$ 5	50 $\pm$ 15
AtVLA (Full)	80$\pm$10	65$\pm$5	80$\pm$5	40$\pm$5	75$\pm$10	80$\pm$5	50$\pm$10	70$\pm$5	35$\pm$5	70$\pm$10

connection, and row-normalize:

$$\widetilde{\mathbf{M}}^l = \text{RowNorm} \left(\mathbf{I} + \frac{1}{|\mathcal{H}||\mathcal{Q}|} \sum_{m \in \mathcal{H}} \sum_{q \in \mathcal{Q}} \mathbf{M}^{l,m,q} \right) \quad (6)$$

Attention rollout propagates token influence through the action expert:

$$\mathbf{M}^{\text{roll}} = \widetilde{\mathbf{M}}^L \widetilde{\mathbf{M}}^{L-1} \dots \widetilde{\mathbf{M}}^1 \quad (7)$$

We average the entries from the first h action-token rows to the base image-token columns and reshape them into a 16×16 saliency map $\mathbf{S}_t$. Register columns are excluded from spatial localization since registers provide global context, whereas only patch tokens retain a fixed image-grid correspondence. The saliency map is bilinearly upsampled to the input resolution. We search a predefined set of square windows and select the region whose average internal attention is most distinctive from its surrounding ring:

$$b_t^* = \arg \max_{b \in \mathcal{B}} \left[\frac{1}{|b|} \sum_{\mathbf{u} \in b} S_t(\mathbf{u}) - \frac{1}{|\rho(b) \setminus b|} \sum_{\mathbf{u} \in \rho(b) \setminus b} S_t(\mathbf{u}) \right] \quad (8)$$

where $\rho(b)$ is a context-expanded version of b . This contrastive criterion discourages both diffuse full-image crops and small windows centered on isolated attention peaks.

The selected region is cropped from $\mathbf{I}_t$, resized to 224×224 , and encoded by the same register-augmented vision encoder. The crop-side register outputs are discarded because the base registers already summarize global context; only the $N_c = 256$ crop patch features $\mathbf{P}_t^c$ are retained. To preserve the crop’s position in the original image, we compute

$$\mathbf{e}_b = \text{MLP} \left(\frac{x_1}{W}, \frac{y_1}{H_I}, \frac{x_2}{W}, \frac{y_2}{H_I} \right) \quad (9)$$

and add it to every projected crop token. The augmented prefix is

$$\mathbf{C}_t^+ = [\mathbf{C}_t^b; \Pi(\mathbf{P}_t^c) + \mathbf{1}_{N_c} \mathbf{e}_b^\top]. \quad (10)$$

Only the newly appended crop segment is prefetched; the key-value cache of the base image, instruction, and state is reused. Action expert is then rerun under $\mathbf{C}_t^+$ to produce the refined action chunk. Consequently, confident steps incur no crop encoding, while uncertain steps pay for one additional vision encoding and one augmented action generation.

Training Objective and Paradigm

Our model is initialized from a pretrained π_0 policy and retains its original vision-language backbone and action-generation formulation. We therefore use the standard π_0 action objective, denoted by $\mathcal{L}_{\pi_0}$, without modifying its action representation or generation process. Training focuses

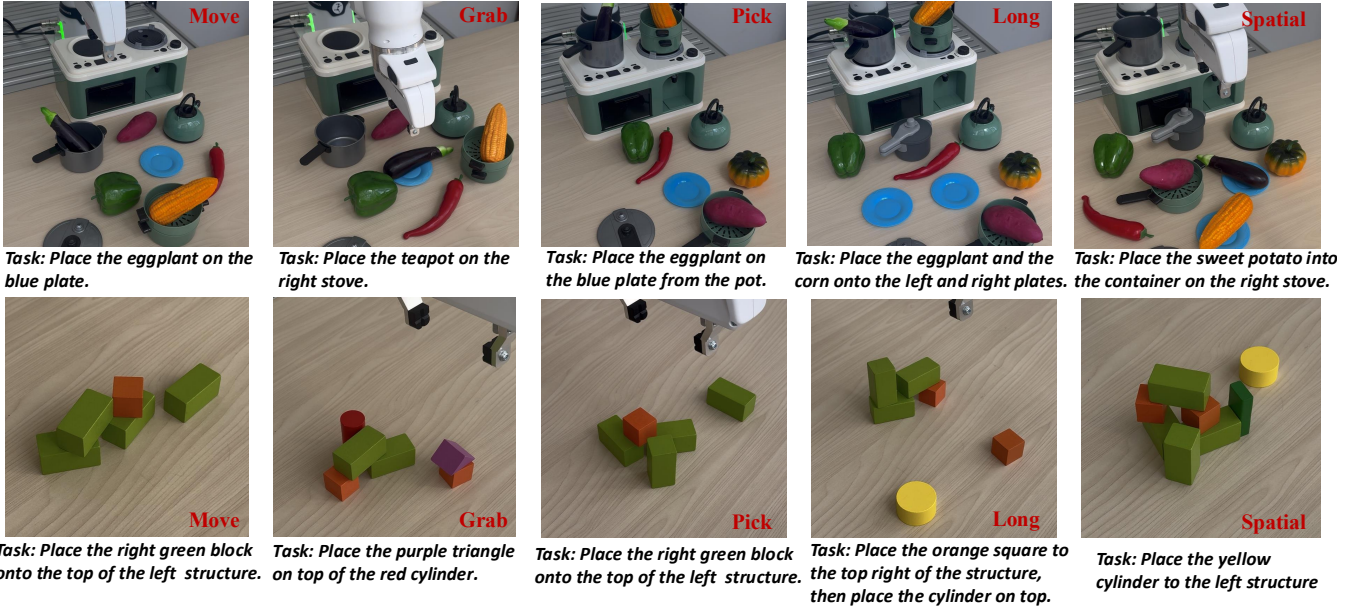


Figure 3: Real-world evaluation benchmark. The KITCHEN suite (top) evaluates visual grounding and reasoning in cluttered household scenes, while BUILDING BLOCKS (bottom) tests small-object stacking, spatial relations, and long-horizon construction.

on integrating the newly introduced register tokens, crop-position encoding, and attention-guided localization while preserving the pretrained policy capabilities.

We adopt a three-stage post-training paradigm. First, we adapt the register tokens to embodied observations using the original action supervision, initially updating only the registers and subsequently unfreezing the last few layers of the visual encoder. Second, we introduce ground-truth crops and train the crop-position encoder and bounding-box predictor while keeping the pretrained visual representation fixed. Finally, we jointly optimize action prediction, crop localization, and action-conditioned attention grounding. During this stage, training progressively transitions from ground-truth crops to crops generated by model’s own attention rollout, while crop dropout exposes the policy to both the base-only and crop-augmented inference paths. The final objective is

$$\mathcal{L} = \mathcal{L}_{\pi_0} + \lambda_{cp}\mathcal{L}_{cp} + \lambda_{ag}\mathcal{L}_{ag}, \quad (11)$$

where $\mathcal{L}_{cp}$ supervises the predicted crop coordinates and $\mathcal{L}_{ag}$ encourages action-to-image attention to concentrate inside the task-relevant object region. We use $\lambda_{cp} = 0.1$ and $\lambda_{ag} = 1.0$. Detailed optimization schedules and parameter configurations are provided in the Appendix.

Experiments

Experimental Setup

Evaluation. We evaluate *AtVLA* on two public manipulation benchmarks, LIBERO (Liu et al. 2023) and SimplerEnv (Li et al. 2024a), together with a real-world benchmark constructed on a Franka Research 3 robot.

LIBERO. We evaluate on the four standard LIBERO suites: SPATIAL, OBJECT, GOAL, and LONG-10, which respectively assess spatial-relation generalization, object generalization, instruction and goal understanding, and temporally

consistent execution in multi-stage tasks. We follow the standard training and evaluation splits and report mean task success rates, with standard deviations when available.

SimplerEnv. We evaluate the Google Robot suite of SimplerEnv under its official protocol, covering *Pick Coke Can*, *Move Near*, and *Open/Close Drawer*. These tasks assess pose-robust grasping, object-relative spatial reasoning, and articulated-object interaction. We omit the WidowX suite since it requires BridgeData-specific training and embodiment adaptation, which would confound visual improvements with embodiment transfer; its tabletop settings are also covered by our more challenging real-world benchmark.

Real-world evaluation. Our real-world benchmark comprises two suites, KITCHEN and BUILDING BLOCKS. KITCHEN evaluates visual grounding, contact-point localization, and spatial reasoning in cluttered household scenes. BUILDING BLOCKS emphasizes small-object grasping, stacking, and structure construction, where similar appearances and single-view depth ambiguity demand implicit 3D reasoning and precise placement. Both suites include long-horizon tasks that test persistent planning and behavioral consistency.

Model and implementation details. All *AtVLA* variants are initialized from the same pretrained π_0 checkpoint and retain its original action representation. The base policy contains a 3B PaliGemma model, comprising a SigLIP-So400m visual encoder and a Gemma-2B language backbone, together with a 300M-parameter action expert. Four 1152-dimensional register embeddings add only 4,608 parameters, while the crop-position MLP and auxiliary bounding-box head are also lightweight relative to the backbone.

Both full images and cropped regions are resized to 224×224 . We use four register tokens and rank-32 LoRA adapters. Register adaptation runs for 20K, followed by 10K steps of

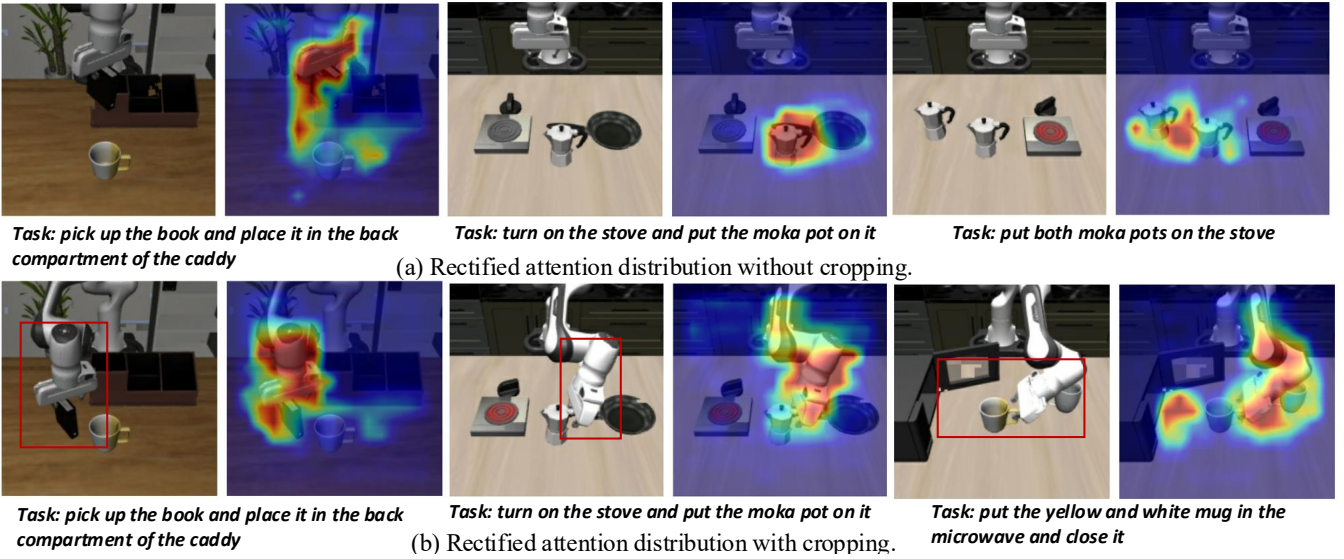


Figure 4: Qualitative effects of attention rectification and adaptive visual refinement. (a) Register-enhanced encoding produces clean attention aligned with task-relevant objects. (b) When uncertainty triggers refinement, attention rollout selects the interaction-critical region, whose high-resolution re-encoding sharpens perception around the target and contact area.

crop alignment and 40K steps of joint refinement. Training is distributed over eight NVIDIA RTX 6000 Ada GPUs. All real-world policies are deployed on a NVIDIA RTX 4090 GPU with 24 GB memory and Franka Research 3 robot with a single third-person Intel RealSense D435i camera.

Baselines and variants. We select representative generalist VLAs and fine-tuning methods listed in Table. 1. For real-world evaluation, all locally evaluated methods use the same camera observation, task demonstrations, and are fine-tuned with comparable steps. We further compare three controlled π_0 variants: registers only, cropping only, and the complete model. These variants share the same initialization and training data, isolating the contribution of each component.

Results and Analysis

Benchmark evaluation. As shown in Table 1-2, *AtVLA* achieves the best performance across all four LIBERO suites, leads on two SimplerEnv tasks, and remains competitive on *Open/Close Drawer*. It also obtains the strongest performance across all real-world tasks. The gains are particularly evident on object-centric tasks, including LIBERO-OBJECT and Kitchen GRAB/PICK, as well as spatially demanding tasks LIBERO-SPATIAL and Building Blocks SPATIAL/GRAB. Fig. 4 and the Appendix further show that *AtVLA* consistently attends to task-relevant regions and invokes cropping near fine-grained interaction areas. These results confirm that rectified attention improves perception, while RoI refinement recovers local details required for precise manipulation.

Both controlled variants also improve over the original π_0 . π_0 + Registers performs particularly well on spatial reasoning and object localization, consistent with its cleaner attention maps. π_0 + Cropping improves several fine-grained and long-horizon tasks, although its gains depend strongly on crop quality. We next analyze the four questions introduced above.

Q1: Does attention rectification work in embodied policies, and can the repaired attention reliably guide cropping?

Fig. 1 shows that adding register tokens largely removes the high-norm artifacts observed in Fig. 1 and redirects attention toward objects and regions relevant to action generation. The resulting maps also provide reliable localization signals for cropping. This demonstrates that attention artifacts can be corrected through embodied post-training, without additional vision-only pretraining or generic visual supervision. We also experimented with mixing ImageNet and CC3M datasets for separate visual adaptation; this introduced additional cost and noticeably disrupted capabilities acquired from robot demonstrations. We therefore train the registers entirely with embodied data and action supervision.

Q2: How much embodied task information is captured by register tokens?

We use linear probes to measure task-relevant spatial information contained in the CLS token, spatial patch features, and register tokens. As shown in Fig. 5, registers consistently provide the strongest probe performance for object localization, depth, and surface-normal prediction, with all three scores exceeding 0.70. This supports our hypothesis that embodied training introduces spatial and geometric information beyond the capacity of the original global token. Without dedicated storage slots, this information spills into patch tokens and produces attention artifacts; registers instead absorb and preserve it as structured context.

Removing the learned registers from π_0 + Registers causes a substantial degradation across all LIBERO suites, indicating that they do not merely suppress artifacts but retain task-relevant embodied knowledge.

Q3: Which tasks benefit from cropping?

Beyond the expected gains in fine-grained perception, Tables 1–2 reveal several additional effects of cropping. First, the crops used by π_0 + Cropping are generated by an external VLM with-



Figure 5: Probing embodied spatial information in visual tokens. Independent linear probes predict object location, depth, and surface normals from the CLS token, mean-pooled patch tokens, or register tokens; bars report normalized held-out scores. Register features consistently retain the richest task-relevant spatial information.

Table 3: Ablation of the learned register tokens on LIBERO. Results are success rates (%); the final column reports the average task-level change.

Variant	Spatial	Object	Goal	Long-10	Avg. Δ
w/o REGs	93.2	92.1	92.2	81.3	-4.45

out embodied post-training. Qualitative inspection shows that these crops often fail to isolate the interaction-critical region, which is consistent with their slightly lower performance than full *AtVLA* and further highlights the importance of embodied supervision for learning decision-relevant visual grounding. Second, cropped observations improve LIBERO-LONG-10 and both real-world long-horizon categories. We attribute this gain to the additional visual context provided for subsequent decisions, suggesting that cropping can support not only local precision but also temporally extended planning. In contrast, the *SimplerEnv Open/Close Drawer* scene is largely occupied by the cabinet, causing most crops to preserve nearly the entire original image rather than resolve the handle or contact point, and thus yielding suboptimal performance. Overall, additional task-relevant visual context is beneficial, but the remaining results of π_0 + Cropping also show that inaccurate crops can distort the policy input, reduce decision accuracy, and increase action uncertainty when no clean attention signal is available to guide them.

Q4: What is the system cost of adaptive cropping? Let C_{base} denote one visual encoding and prefix prefill, C_A one action-expert sampling pass, C_{crop} the incremental crop encoding and prefill, K the number of action samples, r the crop-trigger rate, and N the number of replanning steps. The approximate task-level computation is

$$C_{\pi_0} = N(C_{\text{base}} + C_A), \quad (12)$$

$$C_{\text{AtVLA}} = N(C_{\text{base}} + KC_A + r(C_{\text{crop}} + C_A)). \quad (13)$$

The attention rollout itself adds little cost because it reuses attention computed during action sampling, while the base prefix KV cache is retained when crop tokens are appended. Under a representative setting of $K = 4$ and $r \approx 0.3$, and assuming that one expert pass and crop refinement cost approximately 10–15% and 20–25% of a full π_0 replanning

pass, respectively, *AtVLA* requires roughly $1.4\text{--}1.6\times$ the total computation of π_0 for the same number of steps. The exact latency and trigger-dependent cost are reported using measurements on the deployment RTX 4090.

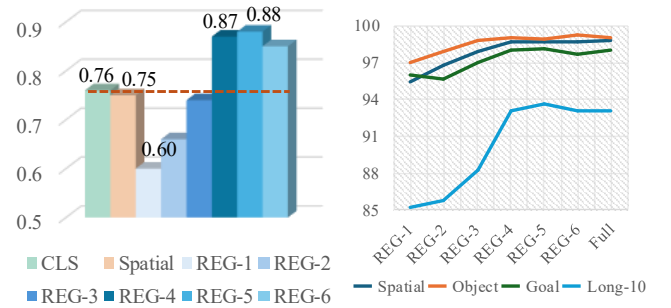


Figure 6: Effect of register-token capacity. **Left:** probe scores for the CLS token, patch tokens, and different numbers of registers. **Right:** success rates in LIBERO suites.

Number of register tokens. As shown in Fig. 6, using only a small number of register tokens can introduce additional interference rather than improve performance. We attribute this to incomplete absorption of the attention artifacts: the remaining corrupted patch features disrupt the coordination established between the vision encoder and the LLM backbone during embodied post-training, causing task performance to drop, in some cases even below the π_0 baseline. Performance saturates when the number of registers reaches four, while the amount of spatial information measured by linear probing also ceases to increase. We therefore adopt four register tokens as the smallest sufficient capacity.

Conclusion

We presented *AtVLA*, which enhances visual perception in VLA visual encoders by reorganizing embodied spatial information into register tokens and selectively restoring missing local detail through uncertainty-gated, attention-guided cropping. Across simulated and single-view real-world benchmarks, *AtVLA* substantially improves precise manipulation with modest additional computation.

References

- Bendikakis, R.; Dijkman, D.; Peschl, M.; Haresh, S.; and Mazzaglia, P. 2025. Focusing on What Matters: Object-Agent-centric Tokenization for Vision Language Action models. *ArXiv*, abs/2509.23655.
- Black, K.; Brown, N.; Driess, D.; Esmail, A.; Equi, M.; Finn, C.; Fusai, N.; Groom, L.; Hausman, K.; Ichter, B.; Jakubczak, S.; Jones, T.; Ke, L.; Levine, S.; Li-Bell, A.; Mothukuri, M.; Nair, S.; Pertsch, K.; Shi, L. X.; Tanner, J.; Vuong, Q.; Walling, A.; Wang, H.; and Zhilinsky, U. 2024. π 0: A Vision-Language-Action Flow Model for General Robot Control. *ArXiv*, abs/2410.24164.
- Brohan, A.; Brown, N.; Carbajal, J.; Chebotar, Y.; Chen, X.; Choromanski, K.; Ding, T.; Driess, D.; Dubey, A.; Finn, C.; Florence, P.; Fu, C.; Arenas, M. G.; Gopalakrishnan, K.; Han, K.; Hausman, K.; Herzog, A.; Hsu, J.; Ichter, B.; Irpan, A.; Joshi, N.; Julian, R.; Kalashnikov, D.; Kuang, Y.; Leal, I.; Lee, L.; Lee, T.-W. E.; Levine, S.; Lu, Y.; Michalewski, H.; Mordatch, I.; Pertsch, K.; Rao, K.; Reymann, K.; Ryoo, M.; Salazar, G.; Sanketi, P.; Sermanet, P.; Singh, J.; Singh, A.; Soricut, R.; Tran, H.; Vanhoucke, V.; Vuong, Q.; Wahid, A.; Welker, S.; Wohlhart, P.; Wu, J.; Xia, F.; Xiao, T.; Xu, P.; Xu, S.; Yu, T.; and Zitkovich, B. 2023. RT-2: Vision-Language-Action Models Transfer Web Knowledge to Robotic Control. *arXiv*:2307.15818.
- Carvalho, M.; Dias, H.; and Martins, B. 2026. CropVLM: Learning to Zoom for Fine-Grained Vision-Language Perception. *arXiv*:2511.19820.
- Darcet, T.; Oquab, M.; Mairal, J.; and Bojanowski, P. 2023. Vision Transformers Need Registers. *ArXiv*, abs/2309.16588.
- Deng, S.; Yan, M.; Wei, S.; Ma, H.-L.; Yang, Y.; Chen, J.; Zhang, Z.; Yang, T.; Zhang, X.; Cui, H.; Zhang, Z.; and Wang, H. 2025. GraspVLA: a Grasping Foundation Model Pre-trained on Billion-scale Synthetic Action Data. *ArXiv*, abs/2505.03233.
- Hanyu, T.; Chung, N.; Le, H.; Nguyen, T.; Ikebe, Y.; Gunderman, A.; Minh, D. N. H.; Vo, K. T.; Kieu, T.; Yamazaki, K.; Rainwater, C.; Nguyen, A.; and Le, N. 2025. SlotVLA: Towards Modeling of Object-Relation Representations in Robotic Manipulation. *ArXiv*, abs/2511.06754.
- Intelligence, P.; Black, K.; Brown, N.; Darpinian, J.; Dhabalia, K.; Driess, D.; Esmail, A.; Equi, M.; Finn, C.; Fusai, N.; Galliker, M. Y.; Ghosh, D.; Groom, L.; Hausman, K.; Ichter, B.; Jakubczak, S.; Jones, T.; Ke, L.; LeBlanc, D.; Levine, S.; Li-Bell, A.; Mothukuri, M.; Nair, S.; Pertsch, K.; Ren, A. Z.; Shi, L. X.; Smith, L.; Springenberg, J. T.; Stachowicz, K.; Tanner, J.; Vuong, Q.; Walke, H. R.; Walling, A.; Wang, H.; Yu, L.; and Zhilinsky, U. 2025. π 0.5: a Vision-Language-Action Model with Open-World Generalization. *ArXiv*, abs/2504.16054.
- Jiang, Z.; Chen, J.; Zhu, B.; Luo, T.; Shen, Y.; and Yang, X. 2024. Devils in Middle Layers of Large Vision-Language Models: Interpreting, Detecting and Mitigating Object Hallucinations via Attention Lens. *2025 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 25004–25014.
- Kachaev, N.; Kolosov, M.; Zelezetsky, D.; Kovalev, A. K.; and Panov, A. I. 2025. Don't Blind Your VLA: Aligning Visual Representations for OOD Generalization. *ArXiv*, abs/2510.25616.
- Kaduri, O.; Bagon, S.; and Dekel, T. 2024. What's in the Image? A Deep-Dive into the Vision of Vision Language Models. *2025 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 14549–14558.
- Kim, M. J.; Finn, C.; and Liang, P. 2025. Fine-Tuning Vision-Language-Action Models: Optimizing Speed and Success. *ArXiv*, abs/2502.19645.
- Kim, M. J.; Pertsch, K.; Karamcheti, S.; Xiao, T.; Balakrishna, A.; Nair, S.; Rafailov, R.; Foster, E. P.; Lam, G.; Sanketi, P. R.; Vuong, Q.; Kollar, T.; Burchfiel, B.; Tedrake, R.; Sadigh, D.; Levine, S.; Liang, P.; and Finn, C. 2024. OpenVLA: An Open-Source Vision-Language-Action Model. *ArXiv*, abs/2406.09246.
- Li, C.; Wen, J.; Peng, Y.; Peng, Y.; Feng, F.; and Zhu, Y. 2025a. PointVLA: Injecting the 3D World into Vision-Language-Action Models. *ArXiv*, abs/2503.07511.
- Li, X.; Heng, L.; Liu, J.; Shen, Y.; Gu, C.; Liu, Z.; Chen, H.; Han, N.; Zhang, R.; Tang, H.; Zhang, S.; and Dong, H. 2025b. 3DS-VLA: A 3D Spatial-Aware Vision Language Action Model for Robust Multi-Task Manipulation. In Lim, J.; Song, S.; and Park, H.-W., eds., *Proceedings of The 9th Conference on Robot Learning*, volume 305 of *Proceedings of Machine Learning Research*, 2344–2359. PMLR.
- Li, X.; Hsu, K.; Gu, J.; Pertsch, K.; Mees, O.; Walke, H. R.; Fu, C.; Lunawat, I.; Sieh, I.; Kirmani, S.; Levine, S.; Wu, J.; Finn, C.; Su, H.; Vuong, Q. H.; and Xiao, T. 2024a. Evaluating Real-World Robot Manipulation Policies in Simulation. In *Conference on Robot Learning*.
- Li, X.; Li, P.; Qian, L.; Liu, M.; Wang, D.; Liu, J.; Kang, B.; Ma, X.; Wang, X.; Guo, D.; Kong, T.; Zhang, H.; and Liu, H. 2024b. What matters in building vision-language-action models for generalist robots. *Nature Machine Intelligence*, 8: 158 – 172.
- Li, Z.; Ren, L.; Yang, J.; Zhao, Y.; Wu, X.; Xu, Z.; Bai, X.; and Zhao, H. 2024c. VIP: Vision Instructed Pre-training for Robotic Manipulation.
- Liu, B.; Zhu, Y.; Gao, C.; Feng, Y.; Liu, Q.; Zhu, Y.; and Stone, P. 2023. LIBERO: Benchmarking Knowledge Transfer for Lifelong Robot Learning. *ArXiv*, abs/2306.03310.
- Liu, Z.; Dong, Y.; Rao, Y.; Zhou, J.; and Lu, J. 2024. Chain-of-Spot: Interactive Reasoning Improves Large Vision-Language Models. *ArXiv*, abs/2403.12966.
- Qu, D.; Song, H.; Chen, Q.; Yao, Y.; Ye, X.; Ding, Y.; Wang, Z.; Gu, J.; Zhao, B.; Wang, D.; and Li, X. 2025. SpatialVLA: Exploring Spatial Representations for Visual-Language-Action Model. *ArXiv*, abs/2501.15830.
- Shen, H.; Zhao, K.; Zhao, T.; Xu, R.; Zhang, Z.; Zhu, M.; and Yin, J. 2024. ZoomEye: Enhancing Multimodal LLMs with Human-Like Zooming Capabilities through Tree-Based Image Exploration. In *Conference on Empirical Methods in Natural Language Processing*.

Song, W.; Zhou, Z.; Zhao, H.; Chen, J.; Ding, P.; Yan, H.; Huang, Y.; Tang, F.; Wang, D.; and Li, H. 2025. ReconVLA: Reconstructive Vision-Language-Action Model as Effective Robot Perceiver. In *AAAI Conference on Artificial Intelligence*.

Team, O. M.; Ghosh, D.; Walke, H. R.; Pertsch, K.; Black, K.; Mees, O.; Dasari, S.; Hejna, J.; Kreiman, T.; Xu, C.; Luo, J.; Tan, Y. L.; Sanketi, P. R.; Vuong, Q.; Xiao, T.; Sadigh, D.; Finn, C.; and Levine, S. 2024. Octo: An Open-Source Generalist Robot Policy. *ArXiv*, abs/2405.12213.

Wu, X.-M.; Fan, B.; Liao, K.; Jiang, J.-J.; Yang, R.; Luo, Y.; Wu, Z.; Zheng, W.; and Loy, C. C. 2026. VLANeXt: Recipes for Building Strong VLA Models. *ArXiv*, abs/2602.18532.

Zawalski, M.; Chen, W.; Pertsch, K.; Mees, O.; Finn, C.; and Levine, S. 2024. Robotic Control via Embodied Chain-of-Thought Reasoning. In *Conference on Robot Learning*.

Zhang, J.; Khayatkhoei, M.; Chhikara, P.; and Ilievski, F. 2024. Towards Perceiving Small Visual Details in Zero-shot Visual Question Answering with Multimodal LLMs. *arXiv:2310.16033*.

Zhang, J.; Khayatkhoei, M.; Chhikara, P.; and Ilievski, F. 2025. MLLMs Know Where to Look: Training-free Perception of Small Visual Details with Multimodal LLMs. *ArXiv*, abs/2502.17422.

Zhao, Q.; Lu, Y.; Kim, M. J.; Fu, Z.; Zhang, Z.; Wu, Y.; Li, Z.; Ma, Q.; Han, S.; Finn, C.; Handa, A.; Liu, M.-Y.; Xiang, D.; Wetzstein, G.; and Lin, T.-Y. 2025. CoT-VLA: Visual Chain-of-Thought Reasoning for Vision-Language-Action Models. *2025 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 1702–1713.

Zheng, R.; Liang, Y.; Huang, S.; Gao, J.; Daum’e, H.; Kolobov, A.; Huang, F.; and Yang, J. 2024. TraceVLA: Visual Trace Prompting Enhances Spatial-Temporal Awareness for Generalist Robotic Policies. *ArXiv*, abs/2412.10345.

Zhong, L.; Rosenthal, F.; Sicking, J.; Hüger, F.; Bagdonat, T.; Gottschalk, H.; and Schwinn, L. 2025. FOCUS: Internal MLLM Representations for Efficient Fine-Grained Visual Question Answering. *arXiv:2506.21710*.

Training Data

All reported models are post-trained exclusively on robot demonstrations. For LIBERO, we train a single unified policy on the mixture of the four standard suites: SPATIAL, OBJECT, GOAL, and LONG-10. Each suite contains ten tasks with 50 expert demonstrations per task, resulting in 40 tasks and 2,000 trajectories in total.

Each demonstration contains RGB observations, a language instruction, proprioceptive states, and continuous action sequences. For crop-related training, each observation is additionally associated with an annotated task-relevant region used to construct ground-truth crops and supervise action-conditioned attention. An episode-disjoint subset of the training demonstrations is held out for uncertainty-threshold calibration.

Training Paradigm

Rather than training the complete policy from scratch, we adopt a staged post-training procedure on top of pretrained π_0 . The design follows two principles. First, newly introduced visual components are aligned before being jointly optimized with the policy, preventing unstable feature shifts from disrupting the pretrained vision-language representation. Second, the crop-input distribution is progressively aligned with inference, where crop regions are generated from the model’s own action-conditioned attention rather than from annotations.

Let $\mathcal{L}_{\pi_0}$ denote the original action-training objective of π_0 . We retain this objective throughout all stages. During joint refinement, we additionally supervise the action-to-image attention:

$$\mathcal{L}_{\text{ag}} = -\log \frac{\sum_{p \in \Omega(\mathbf{b}^{\text{gt}})} A_p + \epsilon}{\sum_p A_p + \epsilon}, \quad (14)$$

where A_p denotes the aggregated attention assigned by the near-term action tokens to base-image patch p , and $\Omega(\mathbf{b}^{\text{gt}})$ is the set of patch centers inside the annotated task-relevant region. This objective encourages the attention used for crop extraction to concentrate on regions relevant to the current manipulation decision.

Stage 0: Register Adaptation

The first stage adapts the randomly initialized register tokens to embodied visual observations. All training samples use the base view only, and the crop branch is disabled. The pretrained PaliGemma backbone, visual projector, and action expert remain frozen. The standard $\mathcal{L}_{\pi_0}$ objective propagates task-level supervision through the frozen policy to the trainable visual parameters.

Stage 0 spans 20K optimization steps and is divided into two consecutive phases. During the first 4K steps, only the four register embeddings are updated:

$$\min_{\theta_{\text{reg}}} \mathbb{E}_{(\mathbf{o}, \ell, \mathbf{s}, \mathbf{a}) \sim \mathcal{D}} [\mathcal{L}_{\pi_0}]. \quad (15)$$

This warm-up allows the registers to acquire useful global-information storage behavior without immediately perturbing the pretrained image features.

For the remaining 16K steps, the last four SigLIP transformer blocks are additionally unfrozen:

$$\min_{\theta_{\text{reg}}, \theta_{\text{vis}}^{\text{last}}} \mathbb{E}_{\mathcal{D}} [\mathcal{L}_{\pi_0}]. \quad (16)$$

The earlier visual blocks and all downstream pretrained components remain fixed. This gradual unfreezing enables the upper visual layers to reorganize embodied global information into the register slots while limiting drift in low-level visual representations. We use learning rates of 1×10^{-4} for the register-only phase and 2×10^{-5} after unfreezing the final visual blocks.

Stage 1: Ground-Truth Crop Alignment

After register adaptation, we introduce the crop-augmented input format. Each training sample contains the base observation together with a high-resolution crop extracted from

the annotated task-relevant region. Ground-truth crops are used exclusively in this stage, and crop dropout is disabled.

The complete SigLIP encoder, register embeddings, visual projector, and pretrained backbone weights remain frozen. We optimize the crop-position encoder and rank-32 LoRA adapters inserted into the language and action components using the original action objective:

$$\mathcal{L}_{\text{align}} = \mathcal{L}_{\pi_0}. \quad (17)$$

This stage teaches the policy to interpret the additional crop tokens and their position in the original image without altering the register-specialized visual encoder. The crop-position encoder maps the normalized crop coordinates $(x_1/W, y_1/H, x_2/W, y_2/H)$ to the multimodal hidden dimension and adds the resulting embedding to every crop-view token. We train this stage for 10K steps with a learning rate of 1×10^{-4} .

Action-Conditioned Attention Grounding

The crop used at inference is generated from action-to-image attention. Optimizing only the action objective does not guarantee that this attention identifies the task-relevant interaction region; it may instead concentrate on visually salient backgrounds or persistent positional sinks. We therefore activate $\mathcal{L}_{\text{ag}}$ from the first step of the final joint-training stage.

Attention grounding is not trained as an isolated continuation stage. Instead, action prediction, visual adaptation, and attention calibration co-adapt throughout the same optimization trajectory, avoiding abrupt changes in the objective or learning-rate schedule.

Stage 2: Joint Refinement and Inference Alignment

The final stage jointly adapts the complete AtVLA policy. The base weights of SigLIP, Gemma, and the action expert remain frozen, while rank-32 LoRA adapters in all three components are trainable. The register embeddings, visual projector, and crop-position encoder are optimized directly.

The joint objective is

$$\mathcal{L}_{\text{joint}} = \mathcal{L}_{\pi_0} + \lambda_{\text{ag}} \mathcal{L}_{\text{ag}}, \quad \lambda_{\text{ag}} = 1.0. \quad (18)$$

The original action objective preserves control quality, while $\mathcal{L}_{\text{ag}}$ calibrates the internal attention used for local refinement.

To reduce the mismatch between training with annotated crops and inference with attention-derived crops, we employ a three-phase crop curriculum over the 40K-step joint-training schedule. Let α denote the probability of using a rollout-derived crop instead of a ground-truth crop.

Stable alignment phase. During the first 40% of joint training, all crops are extracted from ground-truth regions:

$$\alpha = 0, \quad p_{\text{drop}} = 0. \quad (19)$$

This phase stabilizes multimodal fusion and prevents inaccurate early attention maps from corrupting crop inputs.

Mixed transition phase. From 40% to 90% of joint training, α is linearly increased from 0 to 1. For each non-dropped sample, the crop source is selected as

$$\mathbf{b}^{\text{crop}} = \begin{cases} \mathbf{b}^{\text{roll}}, & u < \alpha \text{ and } \text{Valid}(\mathbf{b}^{\text{roll}}), \\ \mathbf{b}^{\text{gt}}, & u \geq \alpha, \\ \emptyset, & u < \alpha \text{ and } \neg \text{Valid}(\mathbf{b}^{\text{roll}}), \end{cases} \quad u \sim \mathcal{U}(0, 1). \quad (20)$$

Here, $\emptyset$ denotes the base-only input. Thus, an invalid rollout does not fall back to a ground-truth crop; it skips crop refinement, matching the failure-handling behavior used at deployment.

Over the same interval, the crop-dropout probability is linearly increased from 0 to 0.3. Crop dropout removes the complete crop-view segment, forcing the policy to retain strong performance under the base-only input used by the confident inference path.

Inference-alignment phase. During the final 10% of training, all valid non-dropped crops are obtained from attention rollout:

$$\alpha = 1, \quad p_{\text{drop}} = 0.3. \quad (21)$$

If rollout localization is invalid, the crop segment is omitted and the sample follows the base-only path. The policy is therefore optimized under the same crop-generation and failure-handling mechanisms used at deployment.

Optimization Details

Stage 2 is trained for 40K steps with AdamW, a batch size of 4, and a constant learning rate of 1×10^{-4} . Together with the 20K-step register adaptation and 10K-step crop alignment, the complete post-training procedure contains 70K gradient updates.

Both base images and crop regions are resized to 224×224 . Training is distributed over eight NVIDIA RTX 6000 Ada GPUs. The same pretrained π_0 action representation, action normalization, prediction horizon, and flow-matching objective are retained across all stages. The procedure therefore introduces visual specialization and adaptive re-examination without changing the underlying action space or deployment interface of the base policy.

Uncertainty-Gated Refinement

At each action-chunk replanning step, the base visual and language prefix is computed once and stored in a reusable key-value cache. Conditioned on this shared prefix, the action expert generates $K = 4$ action chunks from independent Gaussian initializations. We use the same ten-step Euler solver and noise schedule for all samples.

Let $\mathbf{A}_{1:H}^{(k)}$ denote the k -th sampled action chunk, where H is the native action horizon of the underlying π_0 checkpoint. Uncertainty is computed over the first h actions, where h equals the number of low-level commands executed before the next policy query. Thus, the uncertainty estimate always covers exactly the near-term portion of the chunk that influences closed-loop execution.

Using the translational action dimensions $\mathcal{D}_{\text{tr}} = \{\Delta x, \Delta y, \Delta z\}$, we compute

$$U_t = \frac{1}{h|\mathcal{D}_{\text{tr}}|} \sum_{j=1}^h \sum_{d \in \mathcal{D}_{\text{tr}}} \sqrt{\frac{1}{K-1} \sum_{k=1}^K \left(A_{j,d}^{(k)} - \bar{A}_{j,d}\right)^2}, \quad (22)$$

where

$$\bar{A}_{j,d} = \frac{1}{K} \sum_{k=1}^K A_{j,d}^{(k)}. \quad (23)$$

When $U_t \leq \tau$, the mean sampled action chunk is executed directly. When $U_t > \tau$, attention-guided crop refinement is attempted. The refined path performs one additional crop encoding and one additional action generation rather than repeating all K samples.

Threshold Calibration

The uncertainty scale depends on the embodiment-specific action normalization and control interface. We therefore calibrate one threshold per embodiment rather than using a single threshold across robots. In particular, the same threshold is shared across all four LIBERO suites, while separate thresholds are used for the Google Robot and Franka embodiments.

For each sample in the episode-disjoint calibration set, we evaluate both the base and crop-augmented paths and measure the reduction in near-term translational action error:

$$\Delta e_t = e_t^{\text{base}} - e_t^{\text{crop}}. \quad (24)$$

We select the threshold that maximizes the expected benefit of refinement subject to an approximate 30% trigger-rate budget:

$$\tau^* = \arg \max_{\tau} \mathbb{E} [\Delta e_t | \mathcal{U}(U_t > \tau)], \quad \Pr(U_t > \tau) \leq 0.3. \quad (25)$$

In practice, the 70th percentile of the validation uncertainty distribution provides the initial threshold, which is then adjusted using the measured crop benefit.

Attention Rollout and Crop Extraction

Rollout Aggregation

We collect action-to-prefix attention from all 18 joint-attention layers of the action expert. Attention matrices are averaged over all heads and over Euler denoising steps

$$\mathcal{Q} = \{3, 6, 9\}. \quad (26)$$

These steps provide complementary early, intermediate, and late action-conditioned signals without storing attention from the complete denoising trajectory.

For layer l , we compute

$$\widetilde{\mathbf{M}}_l = \text{RowNorm} \left(\mathbf{I} + \frac{1}{|\mathcal{H}||\mathcal{Q}|} \sum_{m \in \mathcal{H}} \sum_{q \in \mathcal{Q}} \mathbf{M}_{l,m,q} \right), \quad (27)$$

where $\mathcal{H}$ denotes the set of attention heads. Attention is then propagated across layers:

$$\mathbf{M}_{\text{roll}} = \widetilde{\mathbf{M}}_L \widetilde{\mathbf{M}}_{L-1} \cdots \widetilde{\mathbf{M}}_1. \quad (28)$$

We average the rollout entries from the first h action-token rows to the 256 base-image patch columns and reshape them into a 16×16 saliency map. Register-token columns are excluded because registers encode global embodied context but do not retain a fixed image-grid correspondence. The saliency map is bilinearly upsampled to the original image resolution before window search.

For multiple camera views, rollout maps are computed independently for each view. We select the single view-window pair with the highest localization score, so an uncertain re-planning step introduces at most one additional crop encoding.

Contrastive Window Search

We search square candidate windows with side lengths

$$\mathcal{S} = \{84, 112, 140\} \text{ pixels} \quad (29)$$

on the 224×224 input image. Windows are evaluated using a 14-pixel stride, aligned with the SigLIP patch size.

For candidate window $\mathbf{b}$, let $\rho(\mathbf{b})$ denote the context window obtained by expanding its side length by a factor of 1.25. We select

$$\mathbf{b}^* = \arg \max_{\mathbf{b} \in \mathcal{B}} \left[\frac{1}{|\mathbf{b}|} \sum_{u \in \mathbf{b}} S_t(u) - \frac{1}{|\rho(\mathbf{b}) \setminus \mathbf{b}|} \sum_{u \in \rho(\mathbf{b}) \setminus \mathbf{b}} S_t(u) \right]. \quad (30)$$

The contrastive score favors regions whose internal attention is distinctive relative to their local surroundings, discouraging both diffuse full-image crops and isolated attention peaks.

The selected box is padded by 10% on each side, clipped to the image boundary, cropped from the original observation, and resized to 224×224 . Its normalized coordinates are passed through a two-layer crop-position MLP,

$$4 \rightarrow 256 \rightarrow d_{\text{LLM}}, \quad (31)$$

with a GELU activation. The resulting position embedding is added to every projected crop patch token.

Invalid Rollout Handling

A rollout is considered invalid if any of the following conditions holds:

- the saliency map contains non-finite values;
- its total attention mass is smaller than $\epsilon = 10^{-6}$;
- window search produces no finite candidate score;
- the selected coordinates are degenerate or lie outside the image after clipping; or
- the final crop has a side length smaller than 56 pixels.

For an invalid rollout, crop refinement is skipped and the policy executes the action prediction obtained from the base-view path. The same rule is used during joint training and deployment, preventing ground-truth fallbacks from introducing a train-test discrepancy.

Key Implementation Configuration

Key training and inference configurations are listed in Table. 4.

Configuration	Value
LIBERO training data	40 tasks, 2,000 trajectories
Register tokens	4
Input resolution	224×224
Register adaptation	20K steps: 4K register-only/16K SigLIP
Ground-truth crop alignment	10K steps
Joint refinement	40K steps
LoRA rank	32
Action samples for gating	$K = 4$
Flow integration	10-step Euler
Rollout denoising steps	$\{3, 6, 9\}$
Rollout layers	All 18 joint-attention layers
Candidate crop sizes	$\{84, 112, 140\}$ pixels
Window-search stride	14 pixels
Context expansion	$1.25\times$
Final crop padding	10%
Target trigger rate	Approximately 30% per embodiment

Table 4: Training and inference configuration for AtVLA.

More Demonstrations

Figure 7 provides additional qualitative rollouts illustrating how AtVLA combines global scene understanding with selective high-resolution perception. The full observation remains available throughout execution, allowing the policy to preserve the task instruction, workspace layout, and relationships among multiple objects. When the action prediction becomes uncertain near a grasp or placement event, the refinement branch concentrates additional visual capacity on the corresponding interaction region rather than repeatedly processing irrelevant background details.

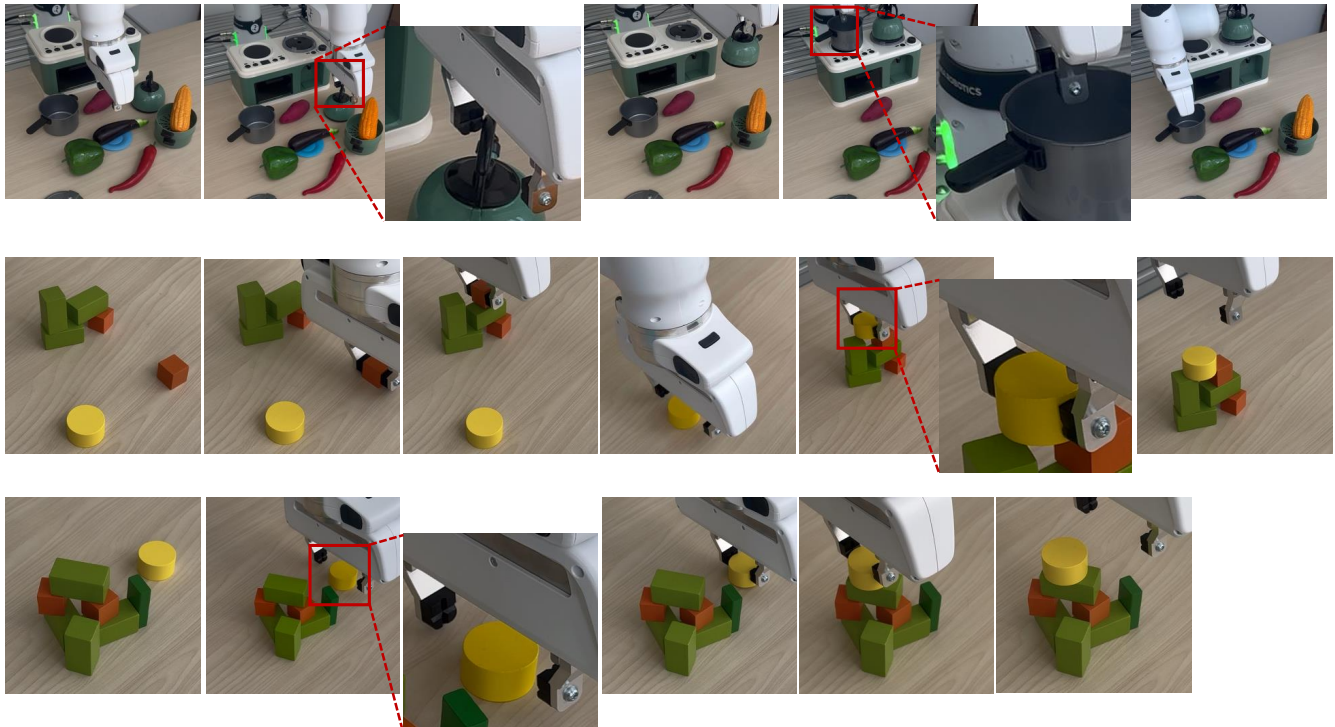


Figure 7: Additional real-world demonstrations of AtVLA. Each row presents a temporally ordered manipulation rollout.