

Similarity-Guided Curriculum Fine-Tuning of LLMs for Neural Architecture Synthesis

Anujaya Vijayakumar*, Radu Timofte, Dmitry Ignatov
Computer Vision Lab, CAIDAS & IFI, University of Würzburg, Germany

Abstract

We introduce a MinHash-based similarity scheduling framework that constructs a progressive curriculum over neural architecture code for LLM-based neural architecture search (NAS). Using 128-permutation MinHash signatures over normalised 7-gram source code shingles, we partition the reference pool into similarity bands and present them in increasing architectural heterogeneity, with the best LoRA adapter from each stage merged cumulatively into the backbone. We evaluate the framework on OlympicCoder-7B within the LEMUR benchmark on CIFAR-10 image classification, generating $N=15$ candidate architectures per epoch across six progressive fine-tuning steps. The curriculum achieves 60% peak success rate at the high-similarity level without post-processing repair. A 2×2 ablation at the most diverse level curriculum versus base model, with versus without partial interface repair reveals that without repair the base model (47% peak SR) substantially outperforms the curriculum model (7% SR), while adding partial repair brings both to 53% SR. This pattern is consistent with merge-level weight drift progressively erasing evaluator-interface priors, and suggests that interface repair and curriculum scheduling target distinct failure modes. We further report a cross-dataset transfer observation on SVHN, where direct base-model generation without curriculum warmup yields 27% peak SR at substantially lower accuracy (60.5%) than the CIFAR-10 equivalent, consistent with the increased synthesis difficulty of the `unq`-family anchor

architecture.

1 Introduction

Large language models (LLMs) have emerged as a viable alternative to classical neural architecture search (NAS) by reframing architecture design as a program synthesis problem. Instead of searching over predefined graph templates, an LLM can directly generate executable Python implementations of complete neural network classes. Frameworks such as NNGPT [1] and LEMUR [2, 3] have demonstrated this feasibility: when conditioned on prior successful architectures, a code-generating LLM can iteratively propose candidate models compiled, trained, and scored by an external evaluator.

A question that has received little attention in LLM-based NAS is *how the reference architectures should be ordered during fine-tuning*. Existing pipelines treat the reference pool as an unordered collection. Neural architecture code differs not only in downstream accuracy but also in module composition, parameter routing, residual connectivity, and tensor-shape conventions. Exposing all such structural variations simultaneously may destabilise the internal code priors the LLM must build to generate evaluator-compatible designs reliably.

We investigate whether ordering references by structural similarity during fine-tuning affects generation reliability. We introduce a MinHash-based similarity scheduling framework that partitions the reference pool into bands of increasing architectural heterogeneity and presents them progressively, with sequential LoRA adapter merging to preserve

*Corresponding author: anujaya.vijayakumar@stud-mail.uni-wuerzburg.de

coding conventions across stages. A 2×2 ablation examines how progressive ordering interacts with post-generation interface repair, revealing that the two components address distinct failure modes in evaluator-compatible code generation.

This paper makes three contributions:

1. A code-level structural similarity pipeline implementing MinHash signature computation over normalised 7-gram source code shingles, integrated into the LEMUR database, enabling sub-second pairwise similarity retrieval across 13,023 CIFAR-10 neural architecture implementations.
2. A MinHash-based curriculum scheduling framework that uses these signatures to partition the reference pool into similarity bands of increasing architectural heterogeneity, with a systematic viability analysis across six LEMUR datasets.
3. A 2×2 ablation characterising the interaction between interface repair and curriculum warmup in evaluator-compatible neural architecture generation.

We note upfront that the single-seed, single-model, single-dataset experimental scope limits the generality of our conclusions. The findings reported here are preliminary empirical observations rather than statistically validated claims, and we treat them as such throughout.

2 Related Work

2.1 LLM-Based Neural Architecture Search

Recent work combines LLMs with automated model design in two broad directions. Optimization by Prompting (OPRO) [4] uses a frozen LLM as a natural-language optimiser iteratively refining candidates via scalar feedback; FunSearch [5] extends this to program discovery. These approaches use the LLM as a proposal engine without fine-tuning and do not address reference scheduling.

EvoPrompting [6] formulates NAS as source-code generation with the LLM as a mutation operator.

ReEvo [7] incorporates reflection-based refinement. The NNGPT and LEMUR pipelines demonstrate that repeated fine-tuning on successful generations gradually improves architectural quality. LLMatic [8] and GPT-NAS [9] explore structured prompting strategies. None of these systems explicitly control the structural difficulty of the supervision signal over time, which is the focus of this work.

2.2 Curriculum Learning

Bengio et al. [10] showed that presenting training samples in meaningful order can improve optimisation and generalisation. Self-paced learning [11] and automatic curriculum generation [12] followed; anti-curriculum studies show the benefit of ordering is task-dependent [13].

In code generation, curricula have mostly been applied to programming-task complexity or staged reasoning supervision. The present setting differs: difficulty lies in the *architectural heterogeneity of target code* rather than task complexity, motivating a similarity-based difficulty measure over source code structure.

2.3 Code Similarity and Retrieval

MinHash and Jaccard-based hashing provide efficient large-scale near-duplicate detection [14]. Alternative measures include token-level edit distance, AST-based structural comparison [15], and neural code embeddings such as CodeBERT [16]. We compare these strategies in Section 3.2 and justify the MinHash choice for the curriculum context.

2.4 Parameter-Efficient Continual Tuning

LoRA-based fine-tuning [17] has become standard for updating large code models under limited GPU budgets. Sequential adapter merging, as employed here, is related to model merging literature model soups [18], TIES-merging [19], and DARE [20] but serves curriculum-continuity rather than ensemble combination.

3 Methodology

3.1 Problem Formulation

Let $\mathcal{D} = \{(c_i, a_i)\}_{i=1}^{|\mathcal{D}|}$ denote the LEMUR repository, where c_i is the executable Python implementation of model i and a_i its observed validation accuracy. Given a pre-trained code LLM M_0 , we seek an adapted generator M^* whose outputs: (1) are accepted by the LEMUR evaluator without structural failure, and (2) achieve competitive downstream accuracy.

At curriculum stage t , a subset $\mathcal{R}_t \subset \mathcal{D}$ of structurally related references is embedded into the prompt context. The current model M_t generates $N=15$ candidates evaluated through the LEMUR API. Evaluator-valid generations become supervised fine-tuning examples from which a LoRA adapter Δ_t is learned. After convergence, Δ_t is merged into the backbone to form M_{t+1} .

3.2 MinHash-Based Reference Retrieval

Retrieval strategy. Three reference retrieval approaches are relevant for LLM-based NAS. **Accuracy-based retrieval** selects references by performance rank; the top- k by accuracy may all belong to the same architectural family, providing no structural diversity signal. **Embedding-based retrieval** (e.g., CodeBERT) offers richer structural discrimination but requires an encoder inference pass per candidate computationally prohibitive at the 13,023-architecture corpus scale across repeated curriculum epochs. **MinHash-based retrieval** approximates Jaccard similarity over normalised 7-gram code token sets using 128-permutation signatures computed once during corpus preprocessing.

3.2.1 Signature Computation and Storage

Source code is first tokenised using a regex-based lexer that extracts alphanumeric identifiers and punctuation tokens. From the token sequence, overlapping 7-gram shingles are constructed and encoded as UTF-8 strings. A

128-permutation MinHash signature is computed from these shingles using the `datasketch` library (`NNAnalysisSimilarity.py`) and stored in the LEMUR database at model registration time. Each signature is serialised to a compact 512-byte binary BLOB using `struct.pack('<128I', *hashvalues)` and written to the `nn_minhash` table:

```
CREATE TABLE nn_minhash (
  nn          TEXT PRIMARY KEY,
  hashvalues  BLOB NOT NULL,  -- 512-byte struct-packed
  num_perm    INTEGER NOT NULL, -- 128
  shingle_n   INTEGER NOT NULL, -- 7
  created_at  TEXT NOT NULL
)
```

Signatures are batch-upserted at corpus ingestion time via `upsert_minhash_batch()` and individually upserted for each newly evaluated model via `upsert_minhash()`. This design means similarity computation incurs zero overhead during fine-tuning epochs, all vectors are pre-computed and stored. The `nn_similarity` table defined in the schema is not populated during curriculum runs. So no $O(N^2)$ pre-computation of pairwise similarities is performed.

3.2.2 On-Demand Similarity via SQLite Scalar UDF

A critical architectural decision distinguishes this implementation from the standard `datasketch` MinHashLSH workflow: **no Python-side LSH index is constructed at query time**. Instead, Jaccard similarity is computed entirely within the SQLite engine via a registered scalar user-defined function (UDF), `jaccard_blobs`, registered on the connection at initialisation.

The UDF takes two stored BLOBs, deserialises each into its 128-permutation hashvalue vector, and returns the MinHash Jaccard estimate as the fraction of matching permutation values:

$$\hat{J}(A, B) = \frac{1}{128} \sum_{i=1}^{128} \mathbf{1}[h_i(A) = h_i(B)] \quad (1)$$

where $h_i(A)$ is the i -th permutation hashvalue of architecture A , stored as a `uint32` in the BLOB. The

returned value is the MinHash approximation to the true Jaccard coefficient $J(S_A, S_B) = |S_A \cap S_B| / |S_A \cup S_B|$, where S_A and S_B are the 7-gram shingle sets of architectures A and B respectively. **This is an approximation throughout the pipeline** the 128-permutation estimator has expected variance

$$\text{Var}[\hat{J}] = \frac{J(1-J)}{128}, \quad (2)$$

which is below 0.002 at all band boundaries used in this work.

The Jaccard coefficient over normalised code tokens has a direct structural interpretation: $J = 0.95$ indicates that 95% of 7-gram token sequences are shared between two implementations, corresponding to near-identical module compositions. This interpretability distinguishes MinHash from learned embedding distances (e.g. CodeBERT) for curriculum band construction the band boundaries carry a verifiable structural meaning rather than being defined in an opaque latent space.

3.2.3 Anchor-Band Retrieval Query

Band-constrained retrieval is implemented in `_anchor_band_db()` (`Query.py`) as a single SQL pass. The anchor architecture’s BLOB is extracted from a materialised temporary candidate table (`_prepare_anchor_candidates()`), and the UDF is called per candidate row within a CTE.

The candidate table is a temporary table created per query session, joining `stat` with `nn_minhash` and retaining only the best epoch per unique NN. Band filtering is therefore a SQL predicate rather than a post-processing step, and the SQLite query planner applies it inline during the CTE scan. This architecture achieves sub-second retrieval across the full stored corpus without any Python-side index construction overhead.

3.3 Dataset viability.

MinHash curriculum construction requires a structurally dense reference database with models spanning multiple similarity bands. Table 1 reports this analysis across LEMUR datasets.

Dataset	Models	Best acc.	Max J	Viable
CIFAR-10	13,023	0.9717	0.98	✓
SVHN	4,568	0.9651	0.82 [‡]	✗
CelebA-Gender	3,719	0.9847	0.99 [†]	✗
MNIST	3,315	0.9976	0.23	✗
CIFAR-100	3,170	0.7286		✗
ImageNette	2,804	0.9720	0.15	✗

Table 1: Dataset viability for MinHash curriculum construction. Viable = all three curriculum bands achievable (≥ 2 unique models each). [†]CelebA’s 166 high- J models are repeated evaluations of a single architecture (**ga-352**). [‡]SVHN reaches $J=0.82$ with a **unq**-family anchor but lacks high and medium bands; only L3-equivalent generation is possible.

CIFAR-10 is the only fully viable dataset: its 13,023 procedurally generated **rl-bb-init** architectures span $J=0.30$ – 0.98 , enabling all three curriculum bands. These are properties of the current database state, not of the method itself.

3.3.1 Band Construction and Curriculum Schedule

Similarity bands are defined as named ranges in `SIM_BANDS` (`Query.py`) and enforced directly in the SQL WHERE clause via the `jaccard_blobs` UDF. Five bands are defined; the intermediate low band ($J = 0.60$ – 0.85) is merged with the very-low-near band to form a unified Level 3 band spanning $[0.30, 0.85)$, providing a richer retrieval pool without requiring extreme structural contrasts:

- **L1 — High similarity:** $J \in [0.95, 0.98)$, $k = 2$
- **L2 — Medium similarity:** $J \in [0.85, 0.95)$, $k = 2$ then $k = 3$
- **L3 — Merged low / very-low-near:** $J \in [0.30, 0.85)$, $k = 2$, $k = 3$, and $k = 4$

3.3.2 Automatic Anchor Selection

With 13,000+ models it is impractical to supply `anchor_nn` manually. `_resolve_anchor()`

(`Query.py`) selects the anchor automatically: it iterates candidate architectures in descending accuracy order and selects the first model that has at least k neighbours in the requested similarity band, verified by running the `jaccard_blobs` UDF via a `COUNT` subquery. The `anchor_nn` parameter in `JoinConf` is therefore optional; when absent, the auto-selected anchor is recorded in `curriculum_meta` alongside `auto_anchor: true` for reproducibility. All curriculum experiments use anchor `rl-bb-init-9afa16ef`, selected automatically as the highest-accuracy CIFAR-10 architecture with sufficient neighbours across all three similarity bands.

3.4 Prompt Design Across Curriculum Levels

Generation uses a constrained XML-style interface with three mandatory output regions: neural architecture code, hyperparameter specification, and data transform definition. Prompts are constructed by `NNGenPromptCurriculum.py` in TALL selection mode: the prompt contains the anchor architecture as primary reference and k nearest neighbours retrieved via the anchor-band UDF query. Constraints are tightened across levels in response to observed failure modes:

- **Level 1** prompts emphasise stable module scaffolding and forward-pass structure, addressing the dominant L1 failure of incorrect constructor declarations.
- **Level 2** prompts add backbone usage restrictions and variable naming consistency.
- **Level 3** prompts add dimension-inference and feature-map routing constraints to address tensor shape mismatches that first appear at this diversity level.

Proven CIFAR-10 prompts are stored as JSON configuration files (`CurriculumL*.json`) and adapted for cross-dataset experiments by substituting only the dataset name, transform, input size, and architecture-specific constraints. The anchor selection and band-filtered reference retrieval operate identically across datasets.

3.5 Sequential Adapter Merging

For level t , we select the best epoch by composite score:

$$S_t = \frac{|V_t|}{N} \times \max_{i \in V_t} a_i,$$

where V_t is the evaluator-valid generation set. We then merge the corresponding adapter into the backbone before the next level.

Quantization and precision. OlympicCoder-7B is loaded in 4-bit NF4 during generation and fine-tuning; adapters are maintained in bfloat16. At each merge step, base weights are dequantized to float16, the adapter is applied as $W_{\text{merged}} = W_{\text{base}} + \Delta W$, and the result saved as float16. Subsequent levels re-quantize to NF4 on load. This dequantize–merge–requantize cycle introduces $\approx 0.1\text{--}0.3\%$ relative quantization error per step. The procedure is identical across all experimental conditions.

Direct weight-space comparison between the 4-bit base and float16 merged model is uninformative due to the format difference; behavioural evidence evaluator acceptance rates across levels serves as the primary indicator of whether earlier coding conventions are retained.

4 Experiments

4.1 Experimental Setup

All experiments were conducted on a single NVIDIA GeForce RTX 4090 (24 GB VRAM). Both LLM adaptation and CNN evaluation share the GPU, motivating the sequential evaluation design.

Base language model. OlympicCoder-7B [21]: Qwen2-based, 7B parameters, 32k context window. Loaded in 4-bit NF4; fine-tuning in bfloat16.

LoRA configuration. Rank $r=32$, $\alpha=32$, dropout 0.05, applied to all attention and MLP projections across transformer layers 0–23. `paged_adamw_8bit`, learning rate 10^{-6} , batch size 1, gradient accumulation 4 steps, cosine scheduling.

Generation. $N=15$ candidates per epoch; temperature 1.0, top- $k=50$, top- $p=0.9$, maximum 16,384 decoding tokens. Candidates are submitted directly to the LEMUR evaluator. Primary experiments use no post-processing repair; the 2×2 ablation additionally tests a two-step partial repair (injecting missing `supported_hyperparameters()` and `train_setup()` declarations when absent).

Evaluator-side training. CIFAR-10 classification under `norm_256_flip`, one training epoch, SGD with LLM-proposed hyperparameters, batch size capped at 16, 8-minute execution limit per candidate. We retain the sequential `NNEval.py` path over the multi-processing worker-pool, which introduced GPU memory conflicts on a single RTX 4090.

4.2 Evaluation Criteria

Composite score.

$$S = \frac{|V|}{N} \times \max_{i \in V} a_i, \quad S=0 \text{ if } V=\emptyset. \quad (3)$$

This jointly captures search efficiency (via $SR = |V|/N$) and architectural quality (via peak accuracy). We additionally report mean accuracy of valid generations. With $N=15$, differences in composite score below 0.05 are treated as within-noise given the small sample size. Wilson 95% confidence intervals are reported for SR; sliding-window t -distribution CIs for composite scores and accuracy trajectories.

Statistical scope. All curriculum results are from a single experimental seed (seed 2). We do not report multi-seed means or significance tests, as the computational budget permits only one trajectory per condition. Results should be interpreted as single-run observations rather than statistically validated findings.

5 Results

5.1 Curriculum Progression on CIFAR-10

Table 2 reports best-epoch results per curriculum level; per-epoch trajectories are shown in Figures 1–3.

Level 1. With references constrained to $J \in [0.95, 0.98]$, both references belong to the same `rl-bb-init` family. The L1 prompt emphasises evaluator interface internalisation correct hyperparameter declaration and `learn()` structure rather than architectural diversity. Without any repair, we observe 60% SR at epoch A1 (score 0.578, accuracy 96.30%) and 40% mean SR across 9 epochs. This establishes that evaluator-compatible generation from high-similarity references is feasible without post-processing intervention.

Level 2. Moving to $J \in [0.85, 0.95]$ after the L1 merge, the prompt adds backbone usage restrictions. At $k=2$, SR is 33% best and 23% mean over 9 epochs. At $k=3$, we observe 40% best SR at A1 (score 0.388, accuracy 96.97%) with 27% mean SR over 7 epochs. Accuracy of valid generations at both k values (96.2–96.97%) remains high relative to the reference accuracy ceiling (97.17%), suggesting L1 coding priors persist into the medium-diversity stage.

Level 3. At L3 the curriculum first encounters the `rl-back-init` architecture family, which uses qualitatively different training loop conventions. Without repair, the first three L3 $k=2$ epochs produce 7% SR (1/15 valid per epoch). Error analysis of epoch A1 shows that 40% of the 14 failures per epoch are interface-level missing `train_setup` or absent `supported_hyperparameters` consistent with progressive forgetting of L1 boilerplate across merge steps, though alternative explanations (prompt ambiguity, reference family shift) cannot be excluded from behavioural evidence alone.

The $k=3$ and $k=4$ configurations, run without repair from the merged model, stabilise at 27–33% SR (best scores 0.322 and 0.321). The $k=4$ run shows

Level	Band	k	Epochs	Best ep.	Best acc.	Best SR	Mean SR	Score
L1	High (0.95–0.98)	2	9	A1	0.9630	60%	40%	0.578
L2	Medium (0.85–0.95)	2	9	A1	0.9676	33%	23%	0.323
L2	Medium (0.85–0.95)	3	7	A1	0.9697	40%	27%	0.388
L3	Low/VL-near (0.30–0.85)	2	4	A1*	0.9673	53%	37%	0.516
L3	Low/VL-near (0.30–0.85)	3	8	A2/A6	0.9673	33%	25%	0.322
L3	Low/VL-near (0.30–0.85)	4	8	A4	0.9643	33%	20%	0.321

Table 2: Best-epoch results per curriculum level on CIFAR-10, $N=15$, single seed, no post-processing repair unless noted. *L3 $k=2$ uses two-step partial repair (Section 5.2). Score = SR $\times$ best accuracy (Eq. 3). Adapters merged cumulatively from OlympicCoder-7B.

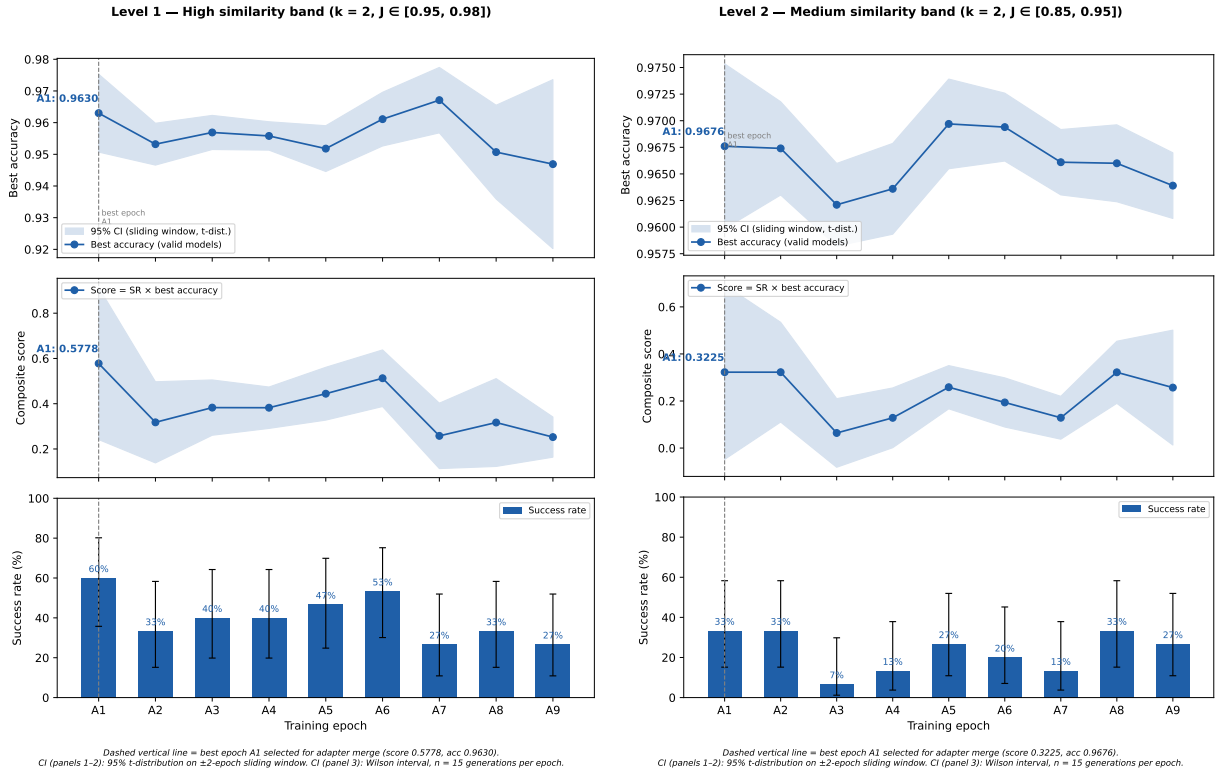


Figure 1: Level 1 $k=2$ (left) and Level 2 $k=2$ (right) per-epoch trajectories. Top: accuracy with 95% CI. Middle: SR with Wilson 95% CI. Bottom: composite score with sliding-window CI. Dashed vertical line = epoch selected for adapter merge.

a collapse at epoch A3 (accuracy 77.6%, SR 7%) attributable to a pathologically misconfigured hyperparameter generation, before recovering to 33% SR at A4. The scores at $k=3$ and $k=4$ are statistically indistinguishable given $N=15$.

5.2 Repair–Curriculum Interaction

Table 3 presents the 2×2 ablation at Level 3 $k=2$. All conditions use the same reference pool, prompts, and generation budget ($N=15$, single seed per condition).

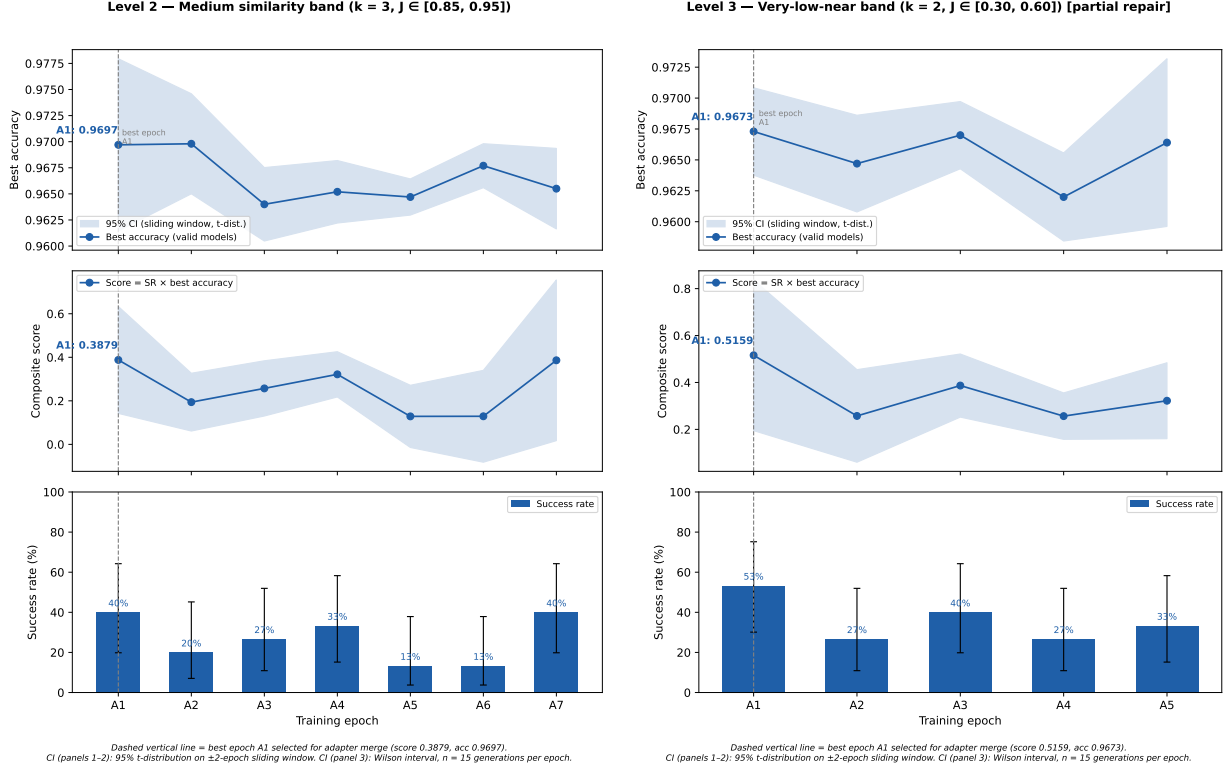


Figure 2: Level 2 $k=3$ (left) and Level 3 $k=2$ (right). L3 $k=2$ uses partial repair; dashed vertical line = merge epoch.

Model	Repair	Best SR	Mean SR	Score
Base	✗	47%	26%	0.450
Curriculum	✗	7%	7%	0.064
Base	✓	53%	—	0.516
Curriculum	✓	53%	37%	0.516

Table 3: 2×2 ablation at Level 3 $k=2$ on CIFAR-10. Repair = two-step partial `fix_param_usage`. All conditions: $N=15$, identical references, single seed. Mean SR for Base+repair is not reported (single epoch observed).

Without repair, the base model (47% best SR, 26% mean SR) substantially outperforms the curriculum model (7% SR across all epochs). This pattern is consistent with merge-level drift: the three sequential merge steps preceding L3 may shift backbone

weights away from the evaluator interface patterns learned at L1. The base model, whose weights have not undergone this drift, retains the original interface knowledge. These observations are behavioural; the underlying weight-space changes cannot be directly measured due to the 4-bit NF4/float16 format difference between base and merged models.

With partial repair, both conditions reach 53% best SR and score 0.516. Repair equalises the two models in this single-seed comparison. The finding that curriculum and base model perform equivalently under repair suggests that, within this configuration, the accumulated L1/L2 architectural priors provide no measurable advantage at Level 3 once the interface problem is addressed. Whether this holds across seeds, different diversity levels, or different base LLMs is an open question that multi-seed ex-

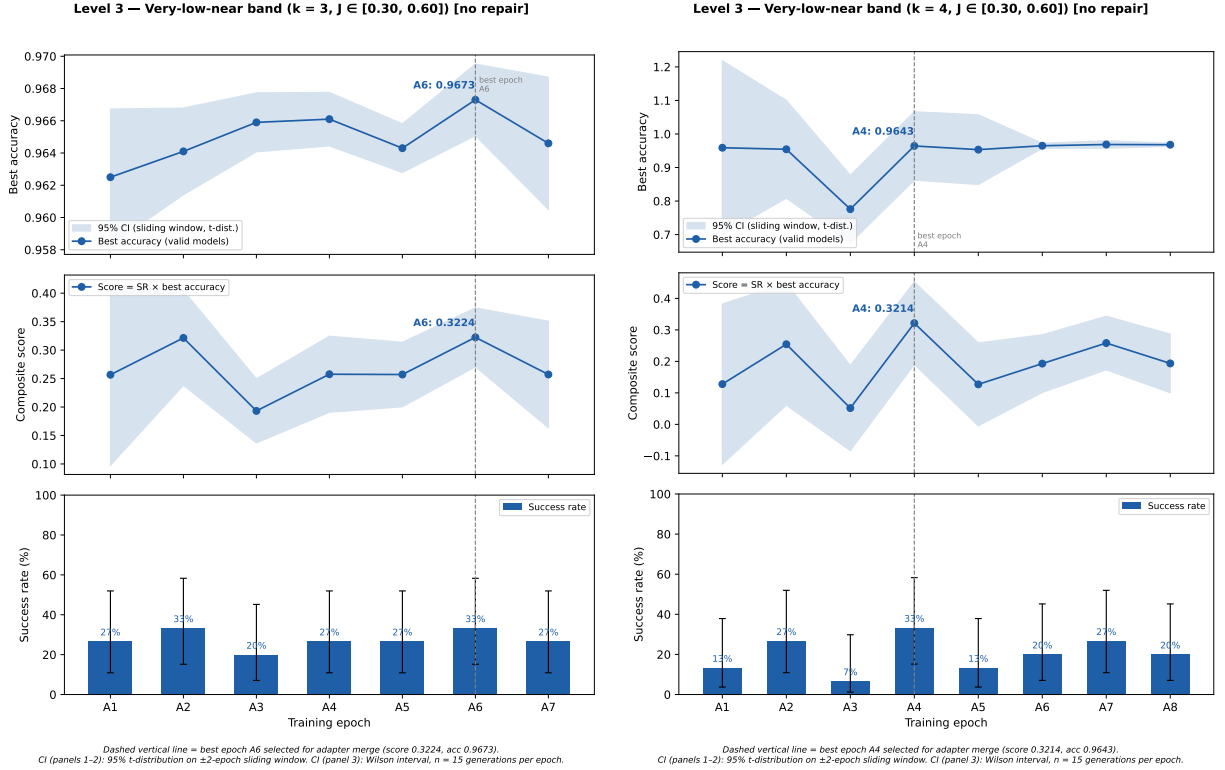


Figure 3: Level 3 $k=3$ (left) and Level 3 $k=4$ (right). Both without repair; dashed vertical line = merge epoch.

periments would need to address.

5.3 Structural Similarity Between Generated and Reference Architectures

To examine whether the curriculum produces genuine architectural synthesis rather than direct reference reproduction, the structural similarity between each generated model and the fixed anchor architecture is measured. The anchor, `rl-bb-init-9afa16ef`, is the same highest-accuracy CIFAR-10 architecture used to define the similarity bands throughout curriculum construction, providing a stable structural reference frame across all levels.

Similarity is computed using the same MinHash representation employed during curriculum construc-

tion: 128-permutation signatures over 7-gram shingles extracted from tokenised source code. Using a consistent representation for both curriculum definition and post-training analysis allows the generated architectures to be evaluated within the same structural space used to organise the curriculum. Table 4 summarises the mean and maximum Jaccard similarity between generated models and the anchor, together with the mean downstream accuracy at each curriculum level.

Generated architectures remain structurally distinct from the anchor, and increasingly so as the curriculum progresses. At Level 1, where training references are drawn from the high-similarity band relative to the anchor, generated architectures achieve a mean similarity of 0.513 to the anchor itself.

This indicates that the model does not simply reproduce the anchor architecture even when trained on its closest neighbours; instead, generated architectures occupy a related but structurally distinct position. A similar pattern holds at Level 2, where medium-band training yields generations with mean anchor similarity of 0.461 ($k=2$) and 0.450 ($k=3$).

Similarity to the anchor decreases across the curriculum. Mean similarity between generated architectures and the anchor decreases from 0.513 at Level 1 to between 0.236 and 0.266 at Level 3. The largest reduction occurs during the transition from the medium-similarity stage to the very-low-near stage ($0.450 \rightarrow 0.266$), corresponding to the point at which the curriculum introduces structurally distant reference families. Within Level 3 itself, similarity to the anchor is essentially flat across $k=2$, $k=3$, and $k=4$ (0.266, 0.236, 0.236), indicating that once the curriculum reaches the very-low-near band, further increases in reference-set diversity (k) do not produce additional anchor-relative divergence in the generations themselves. The overall decline from Level 1 to Level 3 is nonetheless substantially steeper than the corresponding gap between training references at each band, suggesting that the curriculum does not merely cause generations to mirror the diversity already present in the reference set, but actively shifts the generator toward progressively less anchor-dependent outputs as training references diversify.

Structural novelty does not reduce downstream performance. The lowest similarity values are observed at Level 3, where mean accuracy remains high and stable: 94.97% at $k=2$, 93.19% at $k=3$, and 94.18% at $k=4$. Despite producing the most structurally distinct generations relative to the anchor, with mean similarity less than half that of Level 1, Level 3 models match or exceed the mean accuracy achieved at Levels 1 and 2 (93.40% and 94.27–94.58% respectively). This indicates that the curriculum does not force a trade-off between architectural novelty and evaluator performance: as the curriculum progresses, the model generates architec-

tures that diverge substantially from the anchor while still preserving the structural properties necessary for strong CIFAR-10 performance.

Consistent anchor selection across curriculum levels. All curriculum stages use the same anchor model, `r1-bb-init-9afa16ef`, selected automatically by the retrieval procedure as the highest-accuracy CIFAR-10 architecture in the LEMUR database with sufficient neighbours across all similarity bands. Using a fixed anchor across levels provides a stable structural reference frame throughout the curriculum, so changes in similarity statistics reflect differences in reference diversity and generator behaviour rather than changes in the local neighbourhood of the anchor itself.

Case study: anchor reference and generated architecture. Figure 4 compares the anchor reference model, `r1-bb-init-9afa16ef`, with the highest-scoring architecture generated at Level 3 with $k=4$, `13-k4-46846dc6` (epoch A8, score 0.581, accuracy 96.79%). The generated model achieves a mean MinHash Jaccard similarity of $\bar{j} = 0.545$ relative to its reference set, placing it within the intended very-low-near band.

The two architectures share several high-level design elements associated with the `r1-bb-init` family: both combine a FractalNet-style module with pretrained TorchVision backbones and merge the resulting feature streams through concatenation before the final classifier. They also retain common implementation patterns, including the `FractalUnit` structure, `MaxPool2d(2,2)` downsampling, adaptive pooling and flattening utilities, gradient clipping at 3.0, and the required LEMUR interface functions.

The generated model introduces four structural changes not present in the training references. First, whereas the reference uses a three-branch parallel fusion design, the generated architecture adopts a partially sequential topology: features extracted by `backbone_b` (EfficientNet-B1) are passed into the FractalNet module rather than processed independently. Second, the convolutional blocks differ: the reference uses a single convolution layer with

Level	Band	k	Mean j	Max j	Mean Acc.	N
L1	High	2	0.513	0.648	93.40%	110
L2	Medium	2	0.461	0.484	94.27%	85
L2	Medium	3	0.450	0.484	94.58%	84
L3	Very-low-near	2	0.266	0.484	94.97%	225
L3	Very-low-near	3	0.236	0.258	93.19%	62
L3	Very-low-near	4	0.236	0.250	94.18%	67

Table 4: Mean and maximum Jaccard similarity between generated architectures and the fixed anchor model, together with mean generation accuracy and the number of evaluated generations (N) per level. Similarity is computed using 128-permutation MinHash signatures over 7-gram code shingles. The anchor model is `r1-bb-init-9afa16ef` across all curriculum levels.

GELU, dropout, and ReLU, while the generated model employs three consecutive convolution layers followed by GELU and dropout without ReLU. Third, `ShuffleNet-V2-x2.0` is replaced by a second EfficientNet-B1 branch, creating a homogeneous backbone pairing. Fourth, an explicit spatial resizing step using `F.interpolate` to enforce a minimum feature resolution of 14×14 is introduced — a robustness mechanism absent from all training references.

Overall, the generated architecture preserves the broader design vocabulary of the reference family while introducing nontrivial changes in topology, backbone selection, and feature routing. The model recombines learned architectural components into new configurations rather than reproducing the training references directly.

5.4 Cross-Dataset Transfer: SVHN

To probe whether base-model generation reliability transfers across datasets, we run one single-level generation experiment on SVHN using the `unq`-family anchor (`unq-af2a3d5f`), which achieves $J=0.31\text{--}0.82$ similarity coverage within the SVHN database sufficient for L3-equivalent generation but not for a full curriculum (Table 1).

SVHN generation yields substantially lower SR (27% best, 10% mean) and best accuracy (60.5%) compared to the CIFAR-10 base-model condition (47% best SR, 96.5% accuracy). Three collapse epochs (SR = 0%) suggest the `unq` architecture

Dataset	Model	Best SR	Mean SR	Best acc.
CIFAR-10	Base, no repair	47%	26%	0.9651
SVHN	Base, no repair	27%	10%	0.6045

Table 5: Cross-dataset comparison at L3-equivalent generation. CIFAR-10: `r1-bb-init` anchor, 7 epochs. SVHN: `unq`-family anchor, 9 epochs. Datasets, anchor families, and reference distributions differ; this comparison is observational, not controlled.

family presents a harder synthesis target than `r1-bb-init`. Since the two conditions differ in dataset, anchor family, and reference distribution, we cannot attribute the difference to any single factor; we report this as a preliminary cross-dataset transfer observation rather than a controlled finding.

5.5 Ordering vs. Random Baseline

To directly examine whether ordering is the active variable, Table 6 compares the curriculum against a randomised ordering of the identical reference pool, the same base model, the same prompts, and the same sequential merging strategy. For seed 42, the curriculum steps were executed in the randomised order L3 $k=4$, L2 $k=2$, L3 $k=2$, L2 $k=3$, L3 $k=3$, with each step fine-tuning from the model produced by the previous step exactly as in the curriculum runs.

Step	Best score		Mean score		Best Acc. (rand.)
	Curriculum	Random	Curriculum	Random	
L2 $k=2$	0.322	0.258	0.215	0.142	0.9675
L2 $k=3$	0.388	0.387	0.265	0.282	0.9676
L3 $k=2$	0.516	0.516	0.368	0.322	0.9683
L3 $k=3$	0.322	0.387	0.254	0.287	0.9680
L3 $k=4$	0.33	0.387	0.20	0.161	0.9678

Table 6: Best-epoch and mean-epoch composite score under curriculum ordering versus a single randomised ordering (seed 42) of the same five steps. Mean accuracy at the best epoch is also reported. Random ordering at L2 $k=2$ includes one epoch with zero successful generations (accuracy undefined), which is reflected in its lower mean score.

Method	FT	Curr.	Repair	1-GPU	NAS
OPRO [4]	✗	✗	✗	✓	✗
FunSearch [5]	✗	✗	✗	✗	✗
EvoPrompting [6]	✗	✗	✗	✓	✓
ReEvo [7]	✗	✗	✗	✗	✗
NNGPT / LEMUR	✓	✗	✗	✓	✓
This work	✓	✓	✓	✓	✓

Table 7: Qualitative comparison. FT = LLM fine-tuning; Curr. = similarity-scheduled curriculum; 1-GPU = feasible on one consumer GPU; NAS = targets architecture search.

NAS targeting. A quantitative comparison against a no-curriculum single-stage baseline and the LEMUR-database best architecture is an important missing piece; this is deferred to future work alongside multi-seed runs.

5.7 Limitations

Statistical scope. All curriculum results are single-seed, single-model, single-anchor observations with $N=15$ generations per epoch. No significance tests are reported because the sample sizes and number of trajectories do not support them. Differences in composite score < 0.05 should not be interpreted as meaningful. Multi-seed experiments with $N \geq 30$ and paired significance testing (e.g., Wilcoxon signed-rank) are required to validate the observed trends.

Single base model and anchor. All results use OlympicCoder-7B and anchor `rl-bb-init-9afa16ef`. Generalisation to other

base LLMs (e.g., Qwen2.5-Coder, DeepSeek-Coder) and other anchors is entirely open. The curriculum effect observed here may be specific to this model-anchor combination.

Repair confound at Level 3. The `fix_param_usage` repair module has a larger effect on generation reliability than any curriculum manipulation at Level 3 (lifting SR from 7% to 53% for the curriculum model, and from 47% to 53% for the base model). A complete characterisation requires reporting the fraction of accepted generations that required non-trivial repair, and running a repair-only baseline on a random generator.

Random baseline incomplete. The central claim that ordering is the active ingredient rests on Table 6, which compares best-epoch and mean-epoch composite scores under curriculum ordering against a single randomised ordering (seed 42) of the same five steps. Because random ordering matches curriculum

peak performance at most steps tested, running random ordering under two to three additional seeds is necessary before the variance claim can be considered statistically supported.

Evaluation budget. The 8-minute, single-epoch evaluation limit favours architectures converging rapidly and limits conclusions about absolute accuracy. Best-epoch model selection on the evaluation set inflates reported scores; a held-out test set for final reporting would be preferable.

Dataset scope. CIFAR-10 is the only viable LEMUR dataset for full curriculum construction (Table 1). The SVHN cross-dataset experiment is observational and not directly comparable to the CIFAR-10 conditions. The framework is dataset-agnostic and will extend naturally as LEMUR database coverage grows.

Missing quantitative baseline. We do not report the accuracy of the best architecture in the LEMUR database, a random-search baseline over the database, or the unmodified OlympicCoder-7B without any fine-tuning, against which our results should ultimately be positioned.

6 Conclusion

We have introduced a MinHash-based curriculum scheduling framework for LLM-based neural architecture synthesis and reported four empirical observations on CIFAR-10 with OlympicCoder-7B. First, progressive similarity scheduling achieves 60% peak SR at the high-similarity level and 33–53% at the most diverse level in single-seed runs with $N=15$. Second, a 2×2 ablation at Level 3 shows that without repair the base model (47% SR) substantially outperforms the curriculum model (7% SR), while with partial repair both reach 53% SR a pattern consistent with merge-level drift progressively erasing interface priors. Third, structural similarity analysis relative to the fixed anchor architecture shows that generated models grow progressively less similar to the anchor as the curriculum advances (mean Jaccard $j=0.513$

at Level 1 to $j=0.236$ – 0.266 at Level 3), while downstream accuracy remains stable or improves, indicating that the curriculum drives genuine architectural divergence from the anchor without sacrificing evaluator performance. Fourth, SVHN base-model generation yields substantially lower SR and accuracy than the CIFAR-10 equivalent, suggesting that cross-dataset transfer of interface knowledge is imperfect and that the `unq` architecture family presents a harder synthesis target.

These findings are preliminary: they rest on single-seed trajectories with small generation batches, and the random-ordering comparison that would directly validate the curriculum hypothesis is not yet complete. Future work should address multi-seed statistical validation, extension to additional base LLMs and anchors, completion of the random-ordering baseline, and replacement of rule-based interface repair with a learned correction mechanism.

References

- [1] R. Kochnev, W. Khalid, T. A. Uzun, X. Zhang, Y. S. Dhameliya, F. Qin, C. Vysyaraju, R. Duvvuri, A. Goyal, D. Ignatov, and R. Timofte, “NNGPT: Rethinking AutoML with large language models,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition Workshops (CVPRW)*, 2026, to appear. 1
- [2] A. T. Goodarzi, R. Kochnev, W. Khalid, F. Qin, T. A. Uzun, Y. S. Dhameliya, Y. K. Kathiriya, Z. A. Bentyn, D. Ignatov, and R. Timofte, “LEMUR neural network dataset: Towards seamless AutoML,” *arXiv preprint*, vol. arXiv:2504.10552, 2025. 1
- [3] T. A. Uzun, W. Khalid, S. U. Din, S. R. Mulukledu, A. Singh, C. Vysyaraju, R. Duvvuri, A. Goyal, Y. R. Lukhi, A. Hussain, K. Jesani, U. Shrestha, Y. Mittal, R. Kochnev, P. Kadam, M. Ikram, H. R. Moradiya, A. Arslanian, D. Ignatov, and R. Timofte, “LEMUR 2: Unlocking neural network diversity for AI,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition Workshops (CVPRW)*, 2026, to appear. 1
- [4] C. Yang, X. Wang, Y. Lu, H. Liu, Q. V. Le, D. Zhou, and X. Chen, “Large language models as optimizers,” *arXiv preprint arXiv:2309.03409*, 2023. 2, 13

- [5] B. Romera-Paredes, M. Barekatin, A. Novikov, M. Balog, M. P. Kumar, E. Dupont, F. J. R. Ruiz, J. S. Ellenberg, P. Wang, O. Fawzi, P. Kohli, and A. Fawzi, “Mathematical discoveries from program search with large language models,” *Nature*, vol. 625, pp. 468–475, 2024. 2, 13
- [6] A. Chen, D. Dohan, and D. So, “EvoPrompting: Language models for code-level neural architecture search,” in *Advances in Neural Information Processing Systems (NeurIPS)*, vol. 36, 2023. 2, 13
- [7] H. Ye, J. Wang, Z. Cao, F. Berto, C. Hua, H. Kim, J. Park, and G. Song, “ReEvo: Large language models as hyper-heuristics with reflective evolution,” *arXiv preprint arXiv:2402.01145*, 2024. 2, 13
- [8] M. Zheng, X. Peng, and M. Alber, “LLMatic: Neural architecture search via large language models and quality-diversity optimization,” in *Proceedings of the Genetic and Evolutionary Computation Conference (GECCO)*, 2024. 2
- [9] M. U. Nasir, J. Wan, M. Rashid, S. Khan, and F. Chollet, “GPTNAS: Large language models as neural architecture searchers,” *arXiv preprint arXiv:2405.18143*, 2024. 2
- [10] Y. Bengio, J. Louradour, R. Collobert, and J. Weston, “Curriculum learning,” in *Proceedings of the 26th International Conference on Machine Learning (ICML)*, 2009, pp. 41–48. 2
- [11] M. P. Kumar, B. Packer, and D. Koller, “Self-paced learning for latent variable models,” in *Advances in Neural Information Processing Systems (NeurIPS)*, vol. 23, 2010. 2
- [12] A. Graves, M. G. Bellemare, J. Menick, R. Munos, and K. Kavukcuoglu, “Automated curriculum learning for neural networks,” in *Proceedings of the 34th International Conference on Machine Learning (ICML)*, 2017, pp. 1311–1320. 2
- [13] G. Hacohen and D. Weinshall, “On the power of curriculum learning in training deep networks,” in *Proceedings of the 36th International Conference on Machine Learning (ICML)*, 2019, pp. 2535–2544. 2
- [14] A. Z. Broder, “On the resemblance and containment of documents,” in *Proceedings of the Compression and Complexity of Sequences*, 1997, pp. 21–29. 2
- [15] J. Zhang, X. Wang, H. Zhang, H. Sun, K. Wang, and X. Liu, “A novel neural source code representation based on abstract syntax tree,” in *Proceedings of the 41st International Conference on Software Engineering (ICSE)*, 2019, pp. 783–794. 2
- [16] Z. Feng, D. Guo, D. Tang, N. Duan, X. Feng, M. Gong, L. Shou, B. Qin, T. Liu, D. Jiang, and M. Zhou, “CodeBERT: A pre-trained model for programming and natural languages,” in *Findings of the Association for Computational Linguistics (EMNLP)*, 2020, pp. 1536–1547. 2
- [17] E. J. Hu, Y. Shen, P. Wallis, Z. Allen-Zhu, Y. Li, S. Wang, L. Wang, and W. Chen, “LoRA: Low-rank adaptation of large language models,” *arXiv preprint arXiv:2106.09685*, 2021. 2
- [18] G. Ilharco, M. T. Ribeiro, M. Wortsman, L. Schmidt, H. Hajishirzi, and A. Farhadi, “Editing models with task arithmetic,” in *International Conference on Learning Representations (ICLR)*, 2023. 2
- [19] P. Yadav, D. Tam, L. Choshen, C. Raffel, and M. Bansal, “TIES-merging: Resolving interference when merging models,” in *Advances in Neural Information Processing Systems (NeurIPS)*, vol. 36, 2023. 2
- [20] L. Yu, B. Yu, H. Yu, F. Huang, and Y. Li, “Language models are super Mario: Absorbing abilities from homologous models as a free lunch,” *arXiv preprint arXiv:2311.03099*, 2023. 2
- [21] Open-Reasoner Team, “OlympicCoder: A challenging benchmark for code generation with competitive programming problems,” *arXiv preprint arXiv:2503.14941*, 2025. [Online]. Available: <https://huggingface.co/open-r1/OlympicCoder-7B> 5