

Rethinking Synthetic Scenario Realism: Compatibility, Not Fidelity, Drives Hedging Performance

Ryuji Hashimoto

The University of Tokyo; and Preferred Networks, Inc.
Tokyo, Japan
hashimoto-ryuji419@g.ecc.u-tokyo.ac.jp

Ryota Ozaki

Preferred Networks, Inc.
Tokyo, Japan
ryota55ozaki@preferred.jp

Masanori Hirano

Preferred Networks, Inc.
Tokyo, Japan
research@mhirano.jp

Kentaro Imajo

Preferred Networks, Inc.
Tokyo, Japan
imos@preferred.jp

Abstract

Deep hedging is a data-driven approach to learn hedging strategies. It relies on synthetic price paths generator, as real market data is often limited for training. Existing approaches primarily evaluate such generators based on realism, i.e., how well they capture statistical properties of real markets, but the relationship between realism and hedging performance remains unclear. In this work, we introduce a decision-centric perspective on synthetic data for deep hedging based on the notion of compatibility. Compatibility measures the extent to which strategies trained on synthetic scenarios remain effective in the true market. We theoretically show that 1) hedging performance decomposes into learning error and a compatibility gap, and 2) realism and compatibility can diverge. Empirically, we find that hedging performance is governed not by realism alone, but by the alignment between the generator and the hedger, together with task structure. Taken together, this work provides a principled basis for designing synthetic data in finance aligned with decision tasks.¹

Keywords

Deep hedging, Synthetic scenario generator, Compatibility, Realism

1 Introduction

Hedging is a fundamental task for financial institutions, playing a central role in risk management. In derivatives markets, where exposures evolve dynamically over time, constructing effective hedging strategies constitutes a complex sequential decision-making problem under uncertainty.

In recent years, deep hedging [4], a data-driven approach that leverages deep learning for hedging strategies, has gained attention. In this framework, neural networks are used to directly optimize hedging policies, enabling flexible treatment of path-dependent price dynamics, complex payoff structures, and realistic trading constraints that are often analytically intractable in traditional frameworks. In deep hedging, the limited availability of real market data typically leads to a reliance on scenario generators, which simulate synthetic underlying price paths for training [13].

Despite its central role, the design principles of scenario generators remain poorly understood. In the literature on synthetic data in finance, evaluation is predominantly based on the extent to

which generated price paths reproduce statistical properties of real markets, i.e., realism [12, 23]. Underlying this practice is the implicit assumption that more realistic scenarios necessarily lead to better outcomes. In high-stakes financial settings, however, a critical question is whether hedging strategies trained on synthetic data remain effective after deployment in real markets. Yet, whether increasing the realism of scenario generators indeed leads to improved hedging performance remains an open question.

We reformulate the design of scenario generators not as a problem of fidelity to real-world price dynamics, but as one of optimizing their alignment with a given class of hedging strategies. To this end, we introduce the notion of *compatibility*, defined as the extent to which a hedging strategy learned under synthetic scenarios remains effective under the true market environment. Under this formulation, we first show that the degradation in hedging performance in deep hedging can be decomposed into i) the learning error arising from finite data and optimization, and ii) the compatibility gap induced by the mismatch between the true and synthetic distributions. Importantly, compatibility is not an intrinsic property of the scenario generator alone, but depends on the interaction between the scenario generator and the hedging model used for training. As a consequence, we further prove that compatibility and realism need not be aligned, and can in fact diverge structurally.

To empirically validate our perspective, we conduct a comprehensive study across diverse scenario generators, hedging models, and task settings. We evaluate each scenario generator along three axes: (i) the realism of generated price paths, (ii) the learnability of hedgers in terms of stability and generalization, and (iii) the resulting hedging performance. We find that improvements in realism do not monotonically translate into better performance: changing the hedger class or the option setting leads to substantial reordering of generator rankings. These results indicate that performance is governed not by properties of the generator in isolation, but by the alignment between the generator and the hedger, i.e., how the data structures induced by the generator match the inductive biases of the hedger. Furthermore, option characteristics such as path dependency and transaction costs determine the structural requirements imposed on the generator, thereby shaping performance outcomes.

2 Related Work

Research on deep hedging [4] can be broadly categorized into two directions: the design of hedger learning mechanisms and that

¹This work was conducted at Preferred Networks, Inc.

of scenario generators. On the hedger side, prior work has explored a wide range of learning mechanisms, including reinforcement learning [15, 16, 20], adversarial training frameworks that avoid explicit price process modeling [11], transformer-based architectures for capturing path dependencies [22], efficient learning frameworks [14, 19], and interpretable hedging based on market-prototype [6]. On the scenario generator side, prior work has explored extensions of classical stochastic models, such as rough volatility models [13] and agent-based models [8], as well as deep generative models, including GANs [3] and diffusion models [21]. These methods aim to produce realistic price dynamics for training, typically focusing on the faithful reproduction of statistical properties observed in financial time series [5]. In contrast, some approaches dispense with explicit scenario generation altogether and instead learn hedging strategies directly from historical data [18].

Despite these advances, the two lines of research remain largely disconnected. While the design of hedging models is driven by decision performance, scenario generators are typically evaluated based on their fidelity to real-world data. As a result, it remains unclear how the properties of a scenario generator influence the hedging performance. In this work, we bridge this gap by reformulating the design of scenario generators as a decision-centric problem.

3 Problem Formulation

Market Environment. We consider a hedging problem for a single underlying asset. Let Ω denote the set of possible price paths, and let $\mathcal{P}(\Omega)$ denote the set of probability measures on Ω . A price path is denoted by $\omega = (S_0, \dots, S_T) \in \Omega$, where $S_t \in \mathbb{R}_+$ denotes the spot price at time t . Let $P \in \mathcal{P}(\Omega)$ be the true probability law of price paths. P represents the real market dynamics.

Hedging Strategies. Let $\mathcal{Y}_t$ denote the observation space available at time t . The hedger observes a process $Y_t = \psi_t(\omega)$, $t = 0, \dots, T$, where $\psi_t : \Omega \rightarrow \mathcal{Y}_t$ is a measurable observation map. A hedging strategy is a sequence of measurable decision rules $\mathbf{h} = (h_0, \dots, h_{T-1}) \in \mathcal{H}$, where $h_t : \mathcal{I}_t \rightarrow \mathbb{R}$ determines the position in the underlying asset at time t , and $\mathcal{H}$ denotes the set of admissible hedging strategies.

Hedging Loss and Risk Functional. Let $C(\omega, \mathbf{h})$ denote the terminal profit-and-loss incurred by hedging strategy $\mathbf{h}$ along path ω . Assume that $C : \Omega \times \mathcal{H} \rightarrow \mathbb{R}$ is measurable. Let $\rho : L^0(\Omega) \times \mathcal{P}(\Omega) \rightarrow \mathbb{R}$ be a risk functional used to evaluate hedging performance. For any probability measure μ on Ω , define the population risk $\rho_\mu(\mathbf{h}) := \rho_\mu(C(\omega, \mathbf{h}))$, where the subscript indicates that the expectation underlying ρ is taken with respect to μ . The objective of hedging problem is therefore to select the hedging strategy that minimizes the risk of its resulting profit-and-loss distribution under the true market dynamics: $\min_{\mathbf{h} \in \mathcal{H}} \rho_P(\mathbf{h})$.

Training Hedgers with Scenario Generator. Define the optimal hedger under the true environment:

$$\mathbf{h}_P^* := \arg \min_{\mathbf{h} \in \mathcal{H}} \rho_P(\mathbf{h}). \quad (1)$$

$\mathbf{h}_P^*$ represents the best available strategy within $\mathcal{H}$ under the true market dynamics. However, in practice, the true process P is unknown. Instead, a scenario generator is used to produce training paths. Let $Q_\theta \in \mathcal{P}(\Omega)$ denote the price-path distribution induced

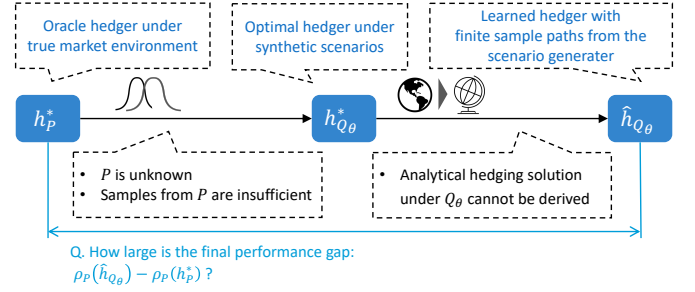


Figure 1: Two-layered approximation in deep hedging. The optimal hedger under the true distribution P , $\mathbf{h}_P^*$, is approximated via (i) replacing P with the generator-induced Q_θ to obtain $\mathbf{h}_{Q_\theta}^*$, and (ii) learning $\hat{\mathbf{h}}_{Q_\theta}$ from finite samples.

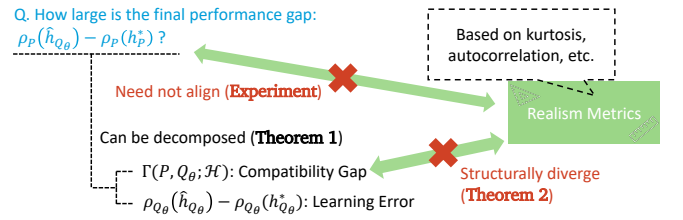


Figure 2: Schematic summary of the relationships among the main results of this paper. The performance gap decomposes into compatibility and learning error, and commonly used realism metrics can structurally diverge from compatibility and need not align with performance in practice.

by a generator parametrized by θ . Training then minimizes the risk under Q_θ :

$$\mathbf{h}_{Q_\theta}^* := \arg \min_{\mathbf{h} \in \mathcal{H}} \rho_{Q_\theta}(\mathbf{h}). \quad (2)$$

Our goal is therefore to obtain a hedger $\mathbf{h}_{Q_\theta}^*$ that achieves performance close to the optimal hedger $\mathbf{h}_P^*$. This requires that training under generator-induced distribution Q_θ provide a risk landscape similar to that under P over the hedger class $\mathcal{H}$. We refer to this property as *generator-hedger compatibility*, and define it as

$$\Gamma(P, Q_\theta; \mathcal{H}) := \sup_{\mathbf{h} \in \mathcal{H}} |\rho_P(\mathbf{h}) - \rho_{Q_\theta}(\mathbf{h})|. \quad (3)$$

Moreover, deriving the optimal hedging strategy under Q_θ can become computationally challenging in high-dimensional settings with realistic trading constraints and path-dependent features. Consequently, in practice, training the hedger under Q_θ produces an estimator $\hat{\mathbf{h}}_{Q_\theta}$ obtained from a finite sample of training paths. Let $\hat{\rho}_{Q_\theta}(\mathbf{h})$ denote the empirical estimate of the risk, computed from a finite sample of paths $\{\omega_i\}_{i=1}^n \sim Q_\theta$. In general, this corresponds to evaluating the risk functional on the empirical measure. The hedger actually obtained in practice is given by

$$\hat{\mathbf{h}}_{Q_\theta} := \arg \min_{\mathbf{h} \in \mathcal{H}} \hat{\rho}_{Q_\theta}(\mathbf{h}). \quad (4)$$

This formulation highlights that hedging entails two layers of approximation: (i) a distributional approximation, where the true law P is approximated by the generator-induced law Q_θ , and (ii) an optimization approximation, where the population minimizer $\mathbf{h}_{Q_\theta}^*$

is approximated by the empirical minimizer $\hat{\mathbf{h}}_{Q_\theta}$. As shown in Figure 1, final performance gap is measured under the true distribution as $\rho_P(\hat{\mathbf{h}}_{Q_\theta}) - \rho_P(\mathbf{h}_P^*)$. In the following sections (Figure 2), we decompose this gap into the compatibility gap and the learning error, show that compatibility and realism can structurally diverge, and demonstrate that they need not align in practice.

4 Theoretical Insights for Generator Design

4.1 Decomposition of Hedger's Failure

To understand how the use of a scenario generator affects the performance of the learned hedger, we decompose the excess risk under the true distribution P into contributions from empirical optimization and distributional mismatch.

THEOREM 1 (DECOMPOSITION OF THE TRUE PERFORMANCE GAP). *Let $\mathbf{h}_P^*$, $\mathbf{h}_{Q_\theta}^*$, and $\hat{\mathbf{h}}_{Q_\theta}$ be defined as above. Then, the excess risk under the true distribution P satisfies*

$$\rho_P(\hat{\mathbf{h}}_{Q_\theta}) - \rho_P(\mathbf{h}_P^*) = \underbrace{(\rho_{Q_\theta}(\hat{\mathbf{h}}_{Q_\theta}) - \rho_{Q_\theta}(\mathbf{h}_{Q_\theta}^*))}_{\text{learning error}} + \underbrace{2\Gamma(P, Q_\theta; \mathcal{H})}_{\text{compatibility gap}}. \quad (5)$$

PROOF. By adding and subtracting $\rho_P(\mathbf{h}_{Q_\theta}^*)$, we obtain

$$\rho_P(\hat{\mathbf{h}}_{Q_\theta}) - \rho_P(\mathbf{h}_P^*) = \rho_P(\mathbf{h}_{Q_\theta}^*) - \rho_P(\mathbf{h}_P^*) + \rho_P(\hat{\mathbf{h}}_{Q_\theta}) - \rho_P(\mathbf{h}_{Q_\theta}^*). \quad (6)$$

Thus, the proof reduces to bounding the difference between the optimal risks under P and Q_θ . In particular, it suffices to show that

$$\rho_P(\mathbf{h}_{Q_\theta}^*) - \rho_P(\mathbf{h}_P^*) \leq 2\Gamma(P, Q_\theta; \mathcal{H}). \quad (7)$$

Adding and subtracting $\rho_{Q_\theta}(\mathbf{h}_{Q_\theta}^*)$ gives

$$\rho_P(\mathbf{h}_{Q_\theta}^*) = \rho_{Q_\theta}(\mathbf{h}_{Q_\theta}^*) + \rho_P(\mathbf{h}_{Q_\theta}^*) - \rho_{Q_\theta}(\mathbf{h}_{Q_\theta}^*). \quad (8)$$

By the definition of $\mathbf{h}_{Q_\theta}^*$,

$$\rho_{Q_\theta}(\mathbf{h}_{Q_\theta}^*) \leq \rho_{Q_\theta}(\mathbf{h}_P^*). \quad (9)$$

Using optimality and the compatibility definition,

$$\rho_P(\mathbf{h}_{Q_\theta}^*) - \rho_{Q_\theta}(\mathbf{h}_{Q_\theta}^*) \leq \Gamma(P, Q_\theta; \mathcal{H}). \quad (10)$$

Applying them to Eq. (8) gives:

$$\rho_P(\mathbf{h}_{Q_\theta}^*) \leq \rho_{Q_\theta}(\mathbf{h}_P^*) + \Gamma(P, Q_\theta; \mathcal{H}). \quad (11)$$

Similarly,

$$\rho_{Q_\theta}(\mathbf{h}_P^*) \leq \rho_P(\mathbf{h}_P^*) + \Gamma(P, Q_\theta; \mathcal{H}). \quad (12)$$

Combining Eqs. (11,12) yields

$$\rho_P(\mathbf{h}_{Q_\theta}^*) \leq \rho_P(\mathbf{h}_P^*) + 2\Gamma(P, Q_\theta; \mathcal{H}). \quad (13)$$

This establishes Eq. (7), completing the proof. $\square$

The Theorem 1 reveals that the final hedging performance is governed by two effects: the learning error arising from finite data and optimization, and the compatibility gap induced by replacing P with Q_θ . This decomposition implies that a generator need not approximate P globally; rather, it suffices that Q_θ preserves the risk evaluation of strategies in $\mathcal{H}$. In other words, what matters is not global realism, but *decision-relevant realism*, i.e., the extent to which Q_θ induces a risk landscape aligned with that of P over $\mathcal{H}$.

Moreover, the Theorem 1 suggests a more subtle trade-off: even if using Q_θ introduces a compatibility gap, it may still lead to superior final performance if the induced simplification reduces the learning error sufficiently. This highlights that an appropriate generator can outperform a more realistic one when it better balances compatibility and learnability for the given hedger class.

4.2 Mismatch of Realism and Compatibility

A central question regarding Theorem 1 is whether improving the realism of Q_θ necessarily leads to better hedging performance. By conceptually fixing the learnability of Q_θ for the hedger, this question can be reformatted as: Does reducing the discrepancy between P and Q_θ in terms of realism necessarily reduce the compatibility gap $\Gamma(P, Q_\theta; \mathcal{H})$? This asks whether realism and compatibility are aligned notions, or even identical. To address this question, we distinguish between these two concepts. Realism is a property of the generator Q_θ relative to the true process P , typically defined in terms of distributional proximity. In contrast, compatibility is defined relative to a hedger class $\mathcal{H}$, and measures only those discrepancies between P and Q_θ that are relevant to $\mathcal{H}$. In other words, compatibility depends on how the difference between P and Q_θ is seen through the function class $\mathcal{H}$.

Below, we first show that, under strong assumptions, these two notions coincide, so that improving realism is sufficient to improve hedging performance. However, once these assumptions are relaxed, the two notions diverge: there exist generators that are highly realistic yet incompatible.

We specialize the risk functional to the expectation case: $\rho_\mu(\mathbf{h}) := \mathbb{E}_{\omega \sim \mu}[C(\omega, \mathbf{h})]$. Accordingly, the compatibility gap becomes:

$$\Gamma(P, Q_\theta; \mathcal{H}) = \sup_{\mathbf{h} \in \mathcal{H}} |\mathbb{E}_P[C(\omega, \mathbf{h})] - \mathbb{E}_{Q_\theta}[C(\omega, \mathbf{h})]|. \quad (14)$$

Realism and Compatibility as Integral Probability Metrics.

We express both realism and compatibility within a unified framework based on integral probability metrics (IPMs). Let $\mathcal{F}_{\text{real}}$ be a class of bounded measurable functions $f : \Omega \rightarrow \mathbb{R}$. The associated realism discrepancy between P and Q_θ is defined by

$$\Delta_{\text{real}}(P, Q_\theta; \mathcal{F}_{\text{real}}) := \sup_{f \in \mathcal{F}_{\text{real}}} |\mathbb{E}_P[f(\omega)] - \mathbb{E}_{Q_\theta}[f(\omega)]|. \quad (15)$$

Typically, each function f extracts a particular feature or statistic of the outcome ω , and Δ_{real} measures the largest discrepancy between P and Q_θ over all such feature class $\mathcal{F}_{\text{real}}$. Similarly, define the hedging loss class:

$$\mathcal{F}_{\mathcal{H}} := \{f_{\mathbf{h}} : \Omega \rightarrow \mathbb{R} \mid f_{\mathbf{h}}(\omega) = C(\omega, \mathbf{h}), \mathbf{h} \in \mathcal{H}\}. \quad (16)$$

Intuitively, each function $f_{\mathbf{h}}$ in this class corresponds to the loss induced by a particular hedging strategy $\mathbf{h}$, mapping each price path ω to its resulting hedging cost. Then the compatibility gap can be written as the IPM over $\mathcal{F}_{\mathcal{H}}$:

$$\Gamma(P, Q_\theta; \mathcal{H}) = \sup_{f \in \mathcal{F}_{\mathcal{H}}} |\mathbb{E}_P[f(\omega)] - \mathbb{E}_{Q_\theta}[f(\omega)]|. \quad (17)$$

Thus, compatibility is also an IPM, but over the decision-relevant loss function class $\mathcal{F}_{\mathcal{H}}$, rather than over the set of test functions capturing distributional features used in realism evaluation $\mathcal{F}_{\text{real}}$.

PROPOSITION 1 (A SUFFICIENT CONDITION FOR REALISM-COMPATIBILITY ALIGNMENT). *If $\mathcal{F}_{\mathcal{H}} \subseteq \mathcal{F}_{\text{real}}$, then,*

$$\forall P, Q_{\theta} \quad \Gamma(P, Q_{\theta}; \mathcal{H}) \leq \Delta_{\text{real}}(P, Q_{\theta}; \mathcal{F}_{\text{real}}). \quad (18)$$

PROOF. Since $\mathcal{F}_{\mathcal{H}} \subseteq \mathcal{F}_{\text{real}}$,

$$\sup_{f \in \mathcal{F}_{\mathcal{H}}} |\mathbb{E}_P[f(\omega)] - \mathbb{E}_{Q_{\theta}}[f(\omega)]| \leq \sup_{f \in \mathcal{F}_{\text{real}}} |\mathbb{E}_P[f(\omega)] - \mathbb{E}_{Q_{\theta}}[f(\omega)]|. \quad (19)$$

This exactly shows the proposition from the definitions (Eqs. (15,17)). $\square$

The Proposition 1 shows that, if the set of functions used to evaluate realism $\mathcal{F}_{\text{real}}$ includes all loss functions induced by any hedging strategies, then realism upper-bounds compatibility. However, this is a strong condition: the test functions $\mathcal{F}_{\text{real}}$ typically consists of functions capturing summary statistics, such as moments and tail measures, rather than those representing expected hedging losses over a constrained strategy class.

THEOREM 2 (SMALL REALISM DOES NOT IMPLY COMPATIBILITY). *Assume that $\mathcal{F}_{\text{real}}$ is a finite-dimensional linear subspace of bounded measurable functions on Ω . Assume further that there exists some strategy $\mathbf{h}^{\dagger} \in \mathcal{H}$ such that*

$$f_{\mathbf{h}^{\dagger}}(\omega) = C(\omega, \mathbf{h}^{\dagger}) \notin \mathcal{F}_{\text{real}} + \text{span}\{1\}. \quad (20)$$

Then, there exist probability measures $P, Q_{\theta} \in \mathcal{P}(\Omega)$ such that

$$\Delta_{\text{real}}(P, Q_{\theta}; \mathcal{F}_{\text{real}}) = 0, \quad \Gamma(P, Q_{\theta}; \mathcal{H}) > 0. \quad (21)$$

PROOF. Let $\{\phi_1, \dots, \phi_m\}$ be a basis of $\mathcal{F}_{\text{real}}$, and define $g := f_{\mathbf{h}^{\dagger}}$. By assumption, $g \notin \text{span}\{1, \phi_1, \dots, \phi_m\}$. Hence the $m+2$ functions $1, \phi_1, \dots, \phi_m, g$ are linearly independent. Therefore, there exist points $\omega_1, \dots, \omega_{m+2} \in \Omega$ such that the matrix

$$A = \begin{pmatrix} 1 & \cdots & 1 \\ \phi_1(\omega_1) & \cdots & \phi_1(\omega_{m+2}) \\ \vdots & \ddots & \vdots \\ \phi_m(\omega_1) & \cdots & \phi_m(\omega_{m+2}) \\ g(\omega_1) & \cdots & g(\omega_{m+2}) \end{pmatrix} \in \mathbb{R}^{(m+2) \times (m+2)}. \quad (22)$$

has full rank $m+2$. Now let $B \in \mathbb{R}^{(m+1) \times (m+2)}$ be the submatrix consisting of the first $m+1$ rows of A , i.e.,

$$B = \begin{pmatrix} 1 & \cdots & 1 \\ \phi_1(\omega_1) & \cdots & \phi_1(\omega_{m+2}) \\ \vdots & \ddots & \vdots \\ \phi_m(\omega_1) & \cdots & \phi_m(\omega_{m+2}) \end{pmatrix}. \quad (23)$$

Since B has more columns than rows, there exists a nonzero vector

$$\mathbf{a} = {}^T(a_1 \quad \dots \quad a_{m+2}) \in \ker(B). \quad (24)$$

Moreover, because A has full rank, $\mathbf{a}$ satisfies

$$\sum_{i=1}^{m+2} a_i g(\omega_i) \neq 0. \quad (25)$$

Define the signed measure

$$\mu := \sum_{i=1}^{m+2} a_i \delta_{\omega_i}. \quad (26)$$

Since $\mathbf{a} \in \ker(B)$,

$$\mu(\Omega) = \sum_{i=1}^{m+2} a_i = 0, \quad \forall f \in \mathcal{F}_{\text{real}} \quad \int f d\mu = 0, \quad \int g d\mu \neq 0. \quad (27)$$

Write the Jordan decomposition of μ as $\mu = \mu^+ - \mu^-$. Since $\mu(\Omega) = 0$, we have

$$\mu^+(\Omega) = \mu^-(\Omega) =: c > 0. \quad (28)$$

Define probability measures

$$P := \frac{\mu^+}{c}, \quad Q := \frac{\mu^-}{c}. \quad (29)$$

Then,

$$\Delta_{\text{real}}(P, Q_{\theta}; \mathcal{F}_{\text{real}}) = 0, \quad (30)$$

since for all $f \in \mathcal{F}_{\text{real}}$,

$$\mathbb{E}_P[f] - \mathbb{E}_{Q_{\theta}}[f] = \frac{1}{c} \int f d\mu = 0. \quad (31)$$

On the other hand,

$$\mathbb{E}_P[g] - \mathbb{E}_{Q_{\theta}}[g] = \frac{1}{c} \int g d\mu \neq 0. \quad (32)$$

Since $g = f_{\mathbf{h}^{\dagger}}$, we obtain

$$\Gamma(P, Q_{\theta}; \mathcal{H}) \geq |\mathbb{E}_P[f_{\mathbf{h}^{\dagger}}] - \mathbb{E}_{Q_{\theta}}[f_{\mathbf{h}^{\dagger}}]| > 0. \quad (33)$$

This proves the claim. $\square$

Theorem 2 shows that the gap between realism and compatibility is not merely conceptual, but structural. Whenever the realism function class fails to span the loss-relevant directions, one can explicitly construct generators that are indistinguishable under the realism metric, yet induce different hedging risks. Importantly, this is not a tautological statement that *mismatch leads to mismatch*, but a constructive one: even arbitrarily small realism discrepancy does not preclude large differences in hedging performance. In this sense, a generator may systematically distort the loss landscape perceived by the hedger, despite reproducing stylized facts.

4.3 Implication for Generator Design

Theorems 1 and 2 together suggest that generator design should not be guided solely by realism metrics. Instead, two complementary requirements must be satisfied. First, the generator should be structured so as to avoid inducing large learning error; that is, it should admit stable and accurate optimization of strategies under practical constraints such as finite data, limited model capacity, and restricted training procedures. Second, instead of being realistic, the generator should be compatible with the intended strategy class, meaning that it should preserve the loss landscape induced by admissible strategies, taking into account market frictions such as transaction costs and execution constraints.

From this perspective, the quality of a scenario generator is inherently hedger-dependent. Rather than aiming to faithfully reproduce all aspects of the data-generating process, an effective generator is designed to be both learnable and decision-compatible for the target class of strategies. This shifts the objective from unconditional realism to task-dependent compatibility, where the relevant notion of closeness is determined by the downstream decision problem.

5 Experiment

We examine whether learnability and compatibility indeed govern the usefulness of synthetic scenario generators for deep hedging in practice. To this end, we prepare four scenario generators with different levels of statistical structure, four task configurations with different hedging difficulty, and three hedgers with different inductive biases and model capacities. We first assess the realism of each generator by comparing the stylized facts of generated paths with those of the target market, and then estimate learnability through training stability and generalization-related diagnostics. Finally, for every combination of generator, option, and hedger, we train hedging models and compare their out-of-sample performance using real data. Through this design, we investigate whether increasing realism consistently improves hedging performance, or whether performance depends critically on the interaction between the scenario generator, the hedger class, and the task setting.

Scenario Generators. We consider four scenario generators Q_θ for modeling underlying price process.

- Geometric Brownian Motion (GBM)
- Merton Jump Process (Merton) [17]
- Heston’s Stochastic Volatility Model (Heston) [9]
- Variational AutoEncoder (VAE)

For GBM and Merton, the drift term is fixed to zero. For Heston, price paths are generated using Andersen’s Quadratic-Exponential discretization scheme [1]. For the VAE, both the encoder and decoder are implemented as three-layer multilayer perceptrons (MLP) with 16 hidden units per layer, and the latent dimension is set to 16. We use ReLU activations for all hidden layers, while the decoder output layer uses an identity activation.

Task Configurations. We consider four task configurations defined by the combination of:

- Option Type: European call option, Lookback call option
- Transaction Cost Levels: 1.000×10^{-4} , 1.000×10^{-3}

The initial asset price is set to 1.000, with a maturity of 20 days (i.e., 20 decision steps), and the strike price is fixed at 1.000. In the following, we denote each task by the format: Option Type (Transaction Cost). For example, European (10^{-4}) refers to the hedging task of a European call option under a transaction cost level of 1.000×10^{-4} .

Hedging Models. We consider the following three types of stationary hedger classes $\mathcal{H}$:

- Linear Hedger (LinearHedger)
- No-Transaction Band Network (NTBNet) [14]
- MLP-based Hedger (MLPHedger)

The LinearHedger determines the position h_t as a linear combination of input features. The NTBNet predicts a no-transaction band using a neural network and updates the position only when the previous position h_{t-1} lies outside the band, adjusting it to fall within the predicted region. The MLPHedger directly outputs h_t using a four-layer MLP with 32 hidden units per layer. We use ReLU activations for all hidden layers and an identity activation for the output layer, with layer normalization applied to intermediate layers. The NTBNet shares the same network architecture. For input features, the Linear and MLP hedgers use four features: log-moneyness, time-to-expiry, realized volatility of previous 10 days,

and previous position. The NTBNet uses Black–Scholes delta [2] and previous position as inputs. The hedgers are trained by minimizing one of the following risk measures: Entropic Risk Measure (ERM; ρ_μ^{ERM}) and Conditional Value-at-Risk (CVaR; ρ_μ^{CVaR}).

$$\rho_\mu^{\text{ERM}}(\mathbf{h}; \lambda) = \frac{1}{\lambda} \log \mathbb{E} [\exp (\lambda C(\boldsymbol{\omega}, \mathbf{h}))], \quad (34)$$

$$\rho_\mu^{\text{CVaR}}(\mathbf{h}; \alpha) = \mathbb{E} [C(\boldsymbol{\omega}, \mathbf{h}) | C(\boldsymbol{\omega}, \mathbf{h}) \geq \text{VaR}_\alpha(C)]. \quad (35)$$

We independently train three hedgers by minimizing ERM with $\lambda = 1$, ERM with $\lambda = 50$, and CVaR with $\alpha = 0.90$, respectively.

Data and Calibration. We calibrate the scenario generators using daily data of the Nikkei 225 index (N225). The calibration period spans from January 1, 2018 to December 31, 2022 (1,218 trading days), while the test period covers January 1, 2023 to February 28, 2026 (771 trading days). For training the VAE, we augment the dataset with additional assets over the same period². For GBM, Merton, and Heston, calibration is performed by minimizing the *stylized facts distance* [7], which is defined as the discrepancy between various descriptive statistics computed from real and synthetic data. Specifically, we first initialize parameters via moment matching between synthetic and empirical return series. We then refine the parameters using the L-BFGS-B algorithm to numerically minimize the stylized facts distance.

Evaluation Metrics. We evaluate the scenario generators along three dimensions: 1)realism, 2)learnability, and 3)hedger performance. For **realism**, we assess how closely the synthetic data reproduces the statistical properties of real data using the following eight metrics.

- Kolmogorov–Smirnov distance between return distributions (KS)
- Absolute difference in the mean absolute return (MeanAbsRet)
- Absolute difference in kurtosis (Kurt)
- Absolute difference in skewness (Skew)
- Average absolute difference in Hill tail indices [10] computed from the top 5% of absolute, negative, and positive returns (Hill (Avg))
- Mean absolute deviation of the autocorrelation function (ACF) of returns over lags 1–9 (ACF (Raw))
- Mean absolute deviation of the ACF of absolute returns over lags 1–9 (ACF (Abs))
- Absolute difference in the Hurst exponent of absolute returns (Hurst (Abs))

Regarding **learnability**, since the learning error in Eq. 5 is not directly observable, we approximate the relative learnability of each scenario generator through proxies based on generalization and training stability. Specifically, we use the training and validation losses obtained during hedger training, focusing on epochs $e \geq 100$. We define the *generalization gap* at epoch e as

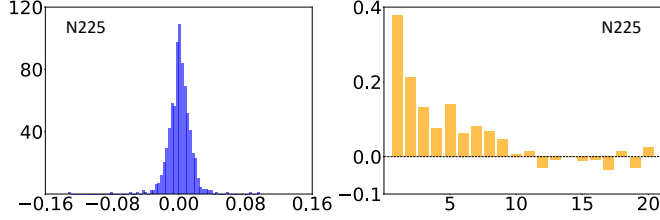
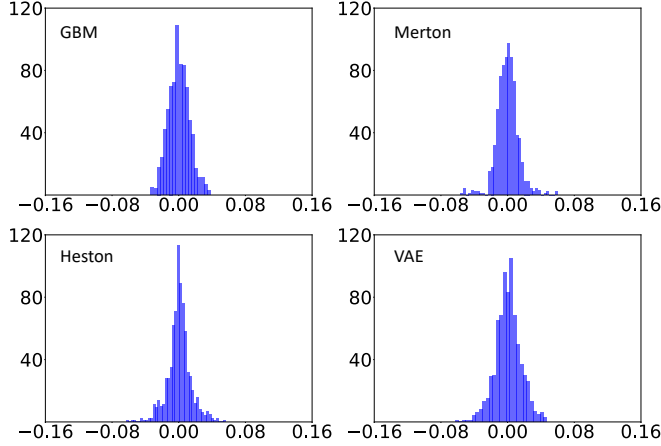
$$\text{GenGap}_e = \frac{L_{\text{valid}}(e) - L_{\text{train}}(e)}{L_{\text{valid}}(e)}, \quad (36)$$

where $L_{\text{train}}(e)$ and $L_{\text{valid}}(e)$ denote the training and validation losses, respectively. To capture training stability, we measure the

²The ticker codes used for training the VAE are: N225, GSPC, DJI, IXIC, RUT, FTSE, GDAXI, FCHI, STOXX, HSI, KS11, NSEI, AXJO, SPY, QQQ, XLF, XLK, VIX, TNX, NQ=F, JPY=X, EURUSD=X, BTC-USD, and ETH-USD.

Table 1: Realism metrics for the four scenario generators (lower is better). Bold indicates the best value in each column.

	KS ($\times 10^{-2}$)	MeanAbsRet ($\times 10^{-4}$)	Kurt	Skew ($\times 10^{-1}$)	Hill (Avg)	ACF (Raw) ($\times 10^{-2}$)	ACF (Abs) ($\times 10^{-1}$)	Hurst (Abs) ($\times 10^{-1}$)
GBM	8.619	17.084	16.032	8.619	4.047	4.172	1.875	1.331
Merton	7.992	12.170	12.752	7.401	0.237	4.250	1.946	1.239
Heston	4.315	3.444	13.876	6.527	1.963	5.153	0.809	0.789
VAE	7.227	1.120	15.145	6.399	2.533	1.773	1.028	0.678

**Figure 3: Test data visualization (N225, 2023/01/01–2026/02/28). The left panel shows the histogram of returns, while the right panel shows the ACF of absolute returns.****Figure 4: Histograms of returns generated by the four scenario generators (GBM, Merton, Heston, and VAE).**

temporal variation of the validation loss, defined as

$$\text{Stability}_e = |L_{\text{valid}}(e) - L_{\text{valid}}(e-1)|. \quad (37)$$

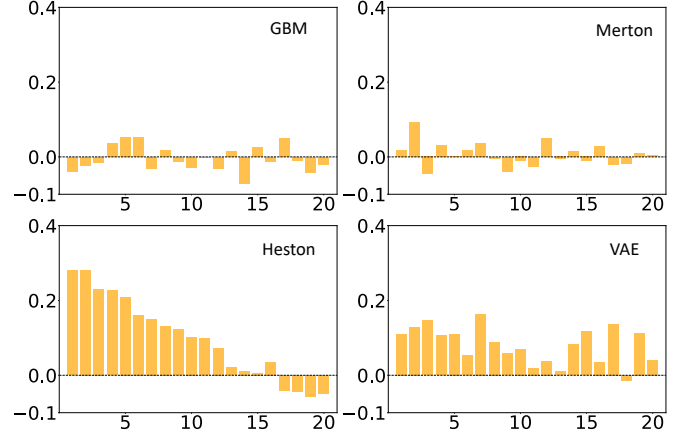
We summarize these quantities over epochs $e \geq 100$ to assess the generalizability and stability of the learned hedging strategies.

We evaluate the resulting **hedger performance** using the same risk measure and parameter employed during training. Specifically, hedgers trained with ERM(1), ERM(50), and CVaR(0.90) are evaluated using ERM(1), ERM(50), and CVaR(0.90), respectively.

6 Results and Discussions

6.1 Realism and Learnability of Generators

Figure 3 illustrates the stylized facts of daily returns in the test period. The left panel shows the return distribution, characterized by heavy tails and negative skewness (kurtosis: 15.943, Hill index of

**Figure 5: ACF of absolute returns generated by the four scenario generators (GBM, Merton, Heston, and VAE).**

absolute returns: 2.557, skewness: -0.733). The right panel presents the ACF of absolute returns, demonstrating persistent positive autocorrelation (Hurst exponent: 0.642). Table 1 reports eight realism metrics for the four scenario generators, while Figures 4 and 5 provide their corresponding return distributions and autocorrelation structures. GBM performs the worst across almost all metrics, reflecting its simplifying assumptions of Gaussianity and independent increments. It fails to capture both heavy tails and temporal dependencies observed in real data. Merton improves the tail behavior by incorporating jump components, achieving better performance in tail-related metrics (e.g., Kurt). Heston provides a more balanced representation by introducing stochastic volatility, which enables it to capture both distributional properties and temporal dynamics to a certain extent. This is reflected in its relatively strong performance in both ACF-based and distributional metrics (e.g., KS). VAE, as a data-driven generative model, shows strength in capturing long-range dependencies, leading to improved performance in metrics related to temporal structure (e.g., Hurst exponent). Overall, these results highlight that different generators specialize in different aspects of realism such as distributional features and temporal dependence, suggesting that realism is inherently multi-dimensional and cannot be captured by a single metric.

Table 2 reports the learnability proxies, namely the GenGap and Stability, for each generator–hedger pair. Across hedger classes, GBM consistently exhibits the best learnability, achieving the lowest GenGap and Stability. This suggests that its simple structure makes it easier for hedgers to approximate the optimal strategy under the

Table 2: Learnability metrics (lower is better). Each cell reports mean (std). Bold values indicate the best score within each hedger class.

	LinearHedger				NTBNet				MLPHedger			
	GBM	Merton	Heston	VAE	GBM	Merton	Heston	VAE	GBM	Merton	Heston	VAE
GenGap _e ($\times 10^{-2}$)	2.847 (± 0.031)	7.296 (± 0.111)	3.599 (± 0.038)	3.552 (± 0.030)	7.782 (± 0.787)	19.627 (± 1.339)	11.354 (± 0.593)	15.425 (± 1.375)	4.295 (± 0.049)	4.398 (± 0.048)	4.496 (± 0.054)	4.579 (± 0.070)
Stability _e ($\times 10^{-4}$)	0.219 (± 0.164)	0.379 (± 0.280)	0.256 (± 0.187)	0.275 (± 0.196)	0.385 (± 0.426)	0.546 (± 0.549)	0.471 (± 0.370)	0.433 (± 0.381)	0.309 (± 0.218)	0.378 (± 0.209)	0.296 (± 0.223)	0.354 (± 0.278)

Table 3: Best generator–hedger pair for each task configuration. For each task, the pair that achieves the best average performance over ERM(1), ERM(50) and CVaR(0.90) among all generator–hedger combinations is reported.

Task (Option(Cost))	Best Generator–Hedger
European (10^{-4})	Merton–MLPHedger
European (10^{-3})	GBM–LinearHedger
Lookback (10^{-4})	Heston–MLPHedger
Lookback (10^{-3})	GBM–NTBHedger

synthetic distribution. In contrast, the other generators show comparable performance to each other. Notably, for the MLPHedger, the performance gap between GBM and the other generators becomes less pronounced. This suggests that the higher representational capacity of the MLPHedger allows it to absorb structural differences across generators, reducing the impact of generator complexity on learnability. Overall, these results indicate that learnability is jointly determined by the complexity of the generator and the expressive power of the hedger, rather than by the generator alone.

Taken together, these results indicate a trade-off between realism and learnability. While GBM is unrealistic in terms of stylized facts, it exhibits high learnability due to its structural simplicity. In contrast, the other models capture different aspects of realism such as tail behavior, stochastic volatility, and temporal dependence, but do not consistently improve learnability.

6.2 Hedger Performance across Tasks

Table 3 reports the best-performing generator–hedger pair for each task configuration. As shown in the table, no single scenario generator or hedger consistently achieves the top performance across all tasks, indicating that there is no globally optimal choice independent of the task setting.

Table 4 reports the generator rankings for each hedger–task setting, where each task is defined by the option type and transaction cost. The tasks are ordered by increasing difficulty: European options with low and high costs, followed by path-dependent Lookback options with low and high costs. For the LinearHedger, GBM consistently performs best in low- to moderate-difficulty settings, including European options and Lookback options with lower complexity. This strong performance is achieved despite its low realism. This suggests that, for simple hedger–task combinations, the lack of distributional fidelity does not necessarily impair compatibility: the structural simplicity of the generator remains sufficiently aligned with the hedger and the task, resulting in a small compatibility

gap. Combined with its high learnability, this allows the hedger to effectively approximate and transfer the optimal strategy, ultimately leading to superior resulting hedger performance. However, in the most challenging setting (Lookback with high transaction cost), VAE achieves the best performance. This indicates that as the task complexity increases and the induced risk landscape becomes more intricate, the compatibility of simple generators such as GBM deteriorates. Although GBM remains easy to learn, its simplified distribution fails to capture the structural features relevant for the task, leading to a larger compatibility gap. In contrast, more expressive generators such as VAE provide a better approximation of the decision-relevant aspects of the true distribution, thereby improving compatibility and resulting hedger performance. Across all tasks, Heston consistently outperforms Merton, suggesting that incorporating stochastic volatility is more beneficial than jump-based tail modeling for this hedger class.

For NTBNet, the relative performance between GBM and VAE is largely reversed compared to the LinearHedger, with VAE frequently achieving top ranks. Moreover, the consistent advantage of Heston over Merton observed in the LinearHedger case diminishes. This indicates that the notion of compatibility is not invariant across hedger classes, but depends on the underlying function class induced by the architecture. In the case of NTBNet, which is designed to represent band-like policies with threshold-based trading under transaction costs, compatibility is defined over a restricted class of piecewise and sparse decision rules. This introduces decision-relevant structures, such as threshold-crossing dynamics, that were not essential for the LinearHedger, leading to a reorganization of the generator ranking.

For the MLP hedger, the preferred generator varies significantly with task difficulty. While simpler generators such as GBM and Merton perform well in easier settings (e.g., European options with low cost), more complex generators such as VAE and Heston become dominant in harder settings (e.g., Lookback options with high cost). This trend can be understood in light of the reduced learnability advantage of GBM observed in the LinearHedger case. As the expressive capacity of the hedger increases, the optimization difficulty associated with more complex generators becomes less restrictive, diminishing the relative benefit of simple distributions such as GBM. Instead, the limiting factor shifts toward the richness of the data distribution itself. In this regime, generators that provide more informative and structured signals such as VAE and Heston become increasingly advantageous, especially for complex tasks that require capturing path-dependence and higher-order dynamics. Consequently, as task difficulty increases, the performance becomes

Table 4: Generator ranking (lower is better) for each hedger–task setting. Each cell reports the average rank over ERM(1), ERM(50) and CVaR(0.90). Bold values indicate the best (lowest) rank within each hedger–task setting.

Task (Option(Cost))	LinearHedger				NTBNet				MLPHedger			
	GBM	Merton	Heston	VAE	GBM	Merton	Heston	VAE	GBM	Merton	Heston	VAE
European (10^{-4})	1.33	3.50	1.67	3.50	2.00	3.00	4.00	1.00	2.00	1.00	3.00	4.00
European (10^{-3})	1.67	4.00	3.00	1.33	4.00	3.00	1.33	1.67	4.00	2.00	3.00	1.00
Lookback (10^{-4})	1.00	4.00	2.00	3.00	3.00	2.00	4.00	1.00	4.00	3.00	1.00	2.00
Lookback (10^{-3})	2.00	4.00	3.00	1.00	1.00	2.00	3.50	3.50	4.00	3.00	2.00	1.00

more sensitive to the expressive power of the generator, leading to a preference for more complex models.

Overall, the rankings exhibit non-monotonicity across generators, hedgers, and tasks. These results indicate that the *best* generator is not universal, but depends on the interaction between the generator, the hedger architecture, and the task characteristics.

7 Conclusion

We reconsider the role of scenario generators in deep hedging and shift the evaluation paradigm from realism-centric to decision-centric. Challenging the common assumption that higher realism improves hedging performance, we theoretically show that the degradation in hedging performance is decomposed into learning error and a compatibility gap, and that realism and compatibility need not align. Furthermore, we empirically find that performance is governed not by the generator alone, but by its interaction with the hedger and the task. These findings provide an implication to the question of what constitutes a *good* scenario generator: rather than maximizing realism, a generator should balance learnability and compatibility, which requires a risk structure aligned with the target hedger class and task.

Our study also has limitations. In particular, compatibility is difficult to measure directly in practice, and must be assessed through indirect proxies. Addressing this challenge remains an important direction for future work. A promising avenue for future research is the development of compatibility-aware deep hedging, where scenario generation and hedging are jointly designed to optimize decision performance. This perspective opens a new direction for generative finance beyond fidelity-driven approaches.

References

- [1] Leif B. G. Andersen. 2008. Simple and efficient simulation of the Heston stochastic volatility model. *The Journal of Computational Finance* 11, 3 (2008), 1–42. doi:10.21314/jcf.2008.189
- [2] Fischer Black and Myron Scholes. 1973. The pricing of options and corporate liabilities. *Journal of Political Economy* 81, 3 (1973), 637–654. doi:10.1142/9789814759588_0001
- [3] Nicolas Boursin, Carl Remlinger, and Joseph Mikael. 2023. Deep generators on commodity markets application to deep hedging. *Risks* 11, 1 (2023). doi:10.3390/risks11010007
- [4] Hans Buehler, Lukas Gonon, Josef Teichmann, and Ben Wood. 2019. Deep hedging. *Quantitative Finance* 19, 8 (2019), 1271–1291. doi:10.1080/14697688.2019.1571683
- [5] Rama Cont. 2001. Empirical properties of asset returns: Stylized facts and statistical issues. *Quantitative Finance* 1, 2 (2001), 223–236. doi:10.1080/713665670
- [6] Lisa Faloughi, Ce Guo, and Wayne Luk. 2025. ProtoHedge: Interpretable hedging with market prototypes. In *Proceedings of the ACM International Conference on AI in Finance*. 202–210. doi:10.1145/3768292.3770347
- [7] Kang Gao, Perukrishnen Vytelingum, Wayne Luk, Stephen Weston, and Ce Guo. 2022. Understanding intra-day price formation process by agent-based financial market simulation: Calibrating the extended Chiarella model. *Wilmott* 2022, 119 (2022), 22–38. doi:10.54946/wilm.11014
- [8] Kang Gao, Stephen Weston, Perukrishnen Vytelingum, Namid Stillman, Wayne Luk, and Ce Guo. 2023. Deeper hedging: A new agent-based model for effective deep hedging. In *Proceedings of the ACM International Conference on AI in Finance*. 270–278. doi:10.1145/3604237.3626913
- [9] Steven L. Heston. 1993. A closed-form solution for options with stochastic volatility with applications to bond and currency options. *The Review of Financial Studies* 6, 2 (1993), 327–343. doi:10.1093/rfs/6.2.327
- [10] Bruce M. Hill. 1975. A simple general approach to inference about the tail of a distribution. *The Annals of Statistics* 3, 5 (1975), 1163–1174. doi:10.1214/aos/1176343247
- [11] Masanori Hirano, Kentaro Minami, and Kentaro Imajo. 2023. Adversarial deep hedging: Learning to hedge without price process modeling. In *Proceedings of the ACM International Conference on AI in Finance*. 19–26. doi:10.1145/3604237.3626846
- [12] Duc Quang Hoang, Tran Khanh Dang, and Van Tam Nguyen. 2026. Evaluation of synthetic data generation for time series: Privacy, security, and applications in finance. In *Proceedings of the Future Data and Security Engineering*. doi:10.1007/978-981-95-4724-1_9
- [13] Blanka Horvath, Josef Teichmann, and Žan Žurič. 2021. Deep hedging under rough volatility. *Risks* 9, 7 (2021). doi:10.3390/risks9070138
- [14] Shota Imaki, Kentaro Imajo, Katsuya Ito, Kentaro Minami, and Kei Nakagawa. 2023. No-transaction band network: A neural network architecture for efficient deep hedging. *The Journal of Financial Data Science* 5, 2 (2023), 84–99. doi:10.3905/jfds.2023.1.125
- [15] Parvin Malekzadeh, Zissis Poulos, Jacky Chen, Zeyu Wang, and Konstantinos N Platanotis. 2024. EX-DRL: Hedging against heavy losses with extreme distributional reinforcement learning. In *Proceedings of the ACM International Conference on AI in Finance*. 370–378. doi:10.1145/3677052.3698668
- [16] Saeed Marzban, Erick Delage, and Jonathan Yu-Meng Li. 2023. Deep reinforcement learning for option pricing and hedging under dynamic expectile risk measures. *Quantitative Finance* 23, 10 (2023), 1411–1430. doi:10.1080/14697688.2023.2244531
- [17] Robert C. Merton. 1976. Option pricing when underlying stock returns are discontinuous. *Journal of Financial Economics* 3, 1 (1976), 125–144. doi:10.1016/0304-405X(76)90022-2
- [18] Oskari Mikkilä and Juho Kanninen. 2023. Empirical deep hedging. *Quantitative Finance* 23, 1 (2023), 111–122. doi:10.1080/14697688.2022.2136037
- [19] Konrad Mueller, Amira Akkari, Lukas Gonon, and Ben Wood. 2024. Fast deep hedging with second-order optimization. In *Proceedings of the ACM International Conference on AI in Finance*. 319–327. doi:10.1145/3677052.3698604
- [20] Phillip Murray, Ben Wood, Hans Buehler, Magnus Wiese, and Mikko Pakkanen. 2022. Deep hedging: Continuous reinforcement learning for hedging of general portfolios across multiple risk aversions. In *Proceedings of the ACM International Conference on AI in Finance*. 361–368. doi:10.1145/3533271.3561731
- [21] Yuki Tanaka, Ryuji Hashimoto, Takehiro Takayanagi, Zhe Piao, Yuri Murayama, and Kiyoshi Izumi. 2025. CoFinDiff: Controllable financial diffusion model for time series generation. In *Proceedings of the International Joint Conference on Artificial Intelligence*. 9357–9365. doi:10.24963/ijcai.2025/1040
- [22] Anh Tong, Thanh Nguyen-Tang, Dongun Lee, Toan M Tran, and Jaesik Choi. 2023. SigFormer: Signature transformers for deep hedging. In *Proceedings of the ACM International Conference on AI in Finance*. 1240–132. doi:10.1145/3604237.3626841
- [23] Svitlana Vyetrenko, David Byrd, Nick Petosa, Mahmoud Mahfouz, Danial Derovic, Manuela Veloso, and Tucker Balch. 2021. Get real: Realism metrics for robust limit order book market simulations. In *Proceedings of the ACM International Conference on AI in Finance*. Article 2. doi:10.1145/3383455.3422561