

Overcoming Rank Collapse in Feedback Alignment

Gauthier Boeshertz
Department of Bioengineering
Imperial College London

Razvan Pascanu*
Mila

Claudia Clopath*
Department of Bioengineering
Imperial College London

Abstract

Backpropagation (BP) is widely viewed as biologically implausible, in part because it requires feedback weights to be the transpose of forward weights for error propagation. Interestingly, when training a network with fixed random feedback weights to circumvent this issue, learning aligns the forward weights with the feedback weights, leading the backpropagated error signal to become an approximation of the standard gradient used by BP. This process, called feedback alignment (FA), occurs in MLPs and very shallow CNNs but does not scale well to deeper architectures. In this work, we first investigated differences between BP and FA models, trained on CIFAR10, specifically focusing on the effective rank of the signal. We found that the FA error has a considerably lower rank and hence is constrained to a lower-dimensional subspace compared to BP, limiting exploration of the parameter space. Motivated by this observation, we evaluated two mechanisms for increasing the effective dimensionality of FA: Muon, an optimiser that orthogonalises weight updates; and hidden activity normalisation, which promotes activation orthogonality. Across larger architectures and benchmarks, we find that these methods consistently improve over FA baselines, for example, on CIFAR100 with a Resnet-18, accuracy increases by 9 percentage points. Our results identify low-dimensional gradient dynamics as a key obstacle to scaling FA and suggest that inducing higher-dimensional update geometry is a promising route toward scaling alternatives to backpropagation.

1 Introduction

Most neural networks are trained using error backpropagation (BP) [Rumelhart et al., 1986]. This method performs credit assignment by computing the gradient of a loss function for every parameter inside the network. A biological view of this process says that the neurons project an error signal backwards, using synapses that share the same weights as the synapses projecting upwards. Sharing the weight between the forward and backward connections has been one of the main issues with regard to the biological plausibility of BP [Crick, 1989, Lillicrap et al., 2016, 2020]. However, [Lillicrap et al., 2016] has shown that it is possible to train networks with random feedback projections and achieve results similar to BP on simple tasks. They observed that throughout training, the forward weights would align to the random feedback, allowing a meaningful error to be backpropagated, as quantified by the alignment of the gradients with the random feedback and gradients obtained with weight sharing. While the error signal propagated in feedback alignment (FA) is not a gradient of the loss, we will refer to it as a gradient to be consistent with prior works.

This observation created a vast literature on making more biological training methods using random feedback projections. Direct feedback alignment (DFA) [Nøkland, 2016] showed that it is possible to directly feed the error signal from the output to any hidden layer using feedback projections of the appropriate size. Building on this idea, [Frenkel et al., 2021] showed that even the error can be replaced by the target itself.

*Co-senior Authors

However all of these methods fail to scale to more difficult tasks [Liao et al., 2016, Xiao et al., 2018, Moskovitz et al., 2018, Launay et al., 2019, Bartunov et al., 2018]. For example, [Launay et al., 2019] reported that convolutional neural networks (CNNs) trained with DFA do not perform better than chance on CIFAR100. In general, FA methods have been found to perform much worse than BP even in shallow CNNs. The reason behind this difference in performance was attributed to the lack of flexibility of convolutional layers due to weight sharing [Refinetti et al., 2021, Launay et al., 2019]. To mitigate this lack of flexibility, several methods use the signs of the forward weights to set the signs of the feedback [Liao et al., 2016, Xiao et al., 2018, Moskovitz et al., 2018], and achieved performance closer to that of BP. Instead of imposing a shared structure, some methods start with random feedback and train the feedback along with the forward weights [Akrouit et al., 2019, Kunin et al., 2020, Hanut and Kadmon, 2025], and reach performance even closer to BP.

In this work, we focus on FA networks that do not impose any relation between the forward and feedback weights, nor do we consider adapting the feedback weights. Our objective is not to completely close the gap between BP and FA. Rather, it is to explain what stops alignment from happening. Through our attempt of understanding FA, we provide new perspectives on optimisation techniques that differ from those usually obtained in BP, since the FA gradients have data-independent terms induced by the fixed feedback matrices. To pursue this objective, we investigated the differences in the geometry of the gradients in networks trained using BP and FA. We find that when the weights start aligning, there is a marked decrease in the effective rank [Roy and Vetterli, 2007] of gradients in FA networks. This means that the gradients will have a few directions that dominate the others, which may not allow the alignment process to continue, since the parameter updates have to explore much smaller subspaces. We therefore try two different methods aimed at increasing the dimensionality of the gradients. When writing dimensionality, we mean the effective dimensionality or rank. First, we used a recently proposed optimiser, Muon [Bernstein and Newhouse, 2024, Bernstein, 2025, Jordan et al., 2024]. Muon differs from standard SGD with momentum by adding an orthogonalisation step to the momentum update. This means setting every singular value to 1. The second approach is to normalise the activity of the layers using Batch Normalization (BN), as it was shown to increase their dimensionality [Daneshmand et al., 2020, 2021]. First, we test these methods on the CIFAR10 [Krizhevsky, 2009] dataset and find that they improved the performance of FA models considerably. Using these methods, the effective dimensionality of the gradients did not exhibit the marked decrease observed before, which supports the claim that FA requires gradients to have large rank for alignment to happen. We then measured the impact of the two methods when using Resnets [He et al., 2016], and Alexnet [Krizhevsky et al., 2012] on STL-10 [Coates et al., 2011], CIFAR100 [Krizhevsky, 2009], Tiny Imagenet [Russakovsky et al., 2015], and again found better performance. While both methods separately bring benefits, using them together increases the accuracy on the three benchmarks.

2 Optimisation with Feedback Alignment

2.1 Backpropagation and Feedback Alignment

Backpropagation computes gradients by traversing the computation graph from the output layer back to the input, propagating error signals layer by layer through the transpose of the forward weights. For a standard MLP network with L layers:

$$a^\ell = W^\ell h^{\ell-1} + b^\ell, \quad h^\ell = \phi(a^\ell) \quad (1)$$

where a^ℓ is the pre-activation vector, h^ℓ is the post-activation vector, W^ℓ is the weight matrix, b^ℓ is the bias vector, and $\phi(\cdot)$ is the activation function, for layer $\ell = 1, \dots, L$. Using the loss computed at the output of the network, BP computes the error for each layer recursively:

$$\delta^L = \frac{\partial E}{\partial a^L}, \quad \delta^l = ((W^{l+1})^\top \delta^{l+1}) \odot \phi'(a^l) \quad \text{for } l = L-1, \dots, 1. \quad (2)$$

where $\odot$ denotes the Hadamard product, ϕ' is the derivative of the activation function. Then the errors are multiplied by the activity of the layer the weights project from to make the gradient:

$$\frac{\partial E}{\partial W^\ell} = \delta^\ell (h^{\ell-1})^\top, \quad \frac{\partial E}{\partial b^\ell} = \delta^\ell. \quad (3)$$

where we set h^0 to be the input to the network.

The use of the transposed weight in Eq. 2 is the core of the Weight Transport problem. Training a network with random feedback connections replaces the transpose with a weight B^ℓ , usually sampled from the same distribution as the forward weights, and keeping it fixed during training, such that the error computation results in:

$$\delta^l = (B^{\ell+1} \delta^{\ell+1}) \odot \phi'(a^l) \quad \text{for } l = L - 1, \dots, 1. \quad (4)$$

Although we wrote the equations for an MLP, the same ideas apply to CNNs. In convolutional layers, backpropagation still propagates errors backward and forms gradients from error signals and layer activations, but the linear maps are convolutional operators with shared weights across spatial locations rather than dense matrices. Accordingly, the backward pass uses the adjoint convolution operator, and feedback alignment replaces this operator with a fixed random feedback map of compatible shape.

2.2 Optimisation

Once gradients have been computed, their use is determined by the optimiser, which is separate from the choice of learning rule used to obtain them. FA can therefore use any optimiser that works for BP. We will especially be interested in a recently proposed optimiser, called Muon [Bernstein and Newhouse, 2024, Bernstein, 2025, Jordan et al., 2024]. This optimiser first received attention because it leads to faster convergence under mild additional computational costs [Jordan et al., 2024], and recently because it leads to lower loss for the same compute budget in large language models [Liu et al., 2025]. It works similarly to SGD with momentum, where β is the momentum parameter, but adds an orthogonalisation step:

$$M_t = \beta M_{t-1} + (1 - \beta) \frac{\partial E}{\partial W^\ell} \quad W_{t+1} = W_t^\ell - \eta \text{Orth}(M_t^\ell), \quad (5)$$

The orthogonalisation function Orth computes the closest orthogonal matrix to its input, which can be written in terms of the SVD of the input, $X = U\Sigma V^\top$, then the orthogonalised matrix is given by $\text{Orth}(X) = UV^\top$. This operation is usually done with the Newton-Schulz approximation [Jordan et al., 2024], which is quicker than computing the singular vectors. An intuitive explanation of the orthogonalisation is given in [Jordan et al., 2024], which we rely on for our results. It states that updates in standard optimisers have low rank, and orthogonalising the update will make the lesser explored directions more relevant. As the non-matrix parameters can not have their updates orthogonalised and need to use SGD or AdamW [Loshchilov and Hutter, 2017], we use a version of Muon that scales the updates to have a similar RMS norm to AdamW [Liu et al., 2025], which allows the reuse of the learning rate across parameters trained with AdamW and Muon.

3 Pathologies of FA

We first explored the effects of FA in deep networks to understand why it performs substantially worse than BP in deep CNNs. We trained CNNs with depth varying from 1 to 4 before the classifier. Each convolutional layer had 64 channels, a 3x3 kernel, and was followed by 2x2 max-pooling; on the CIFAR10 [Krizhevsky, 2009] dataset. Using more channels leads to a decrease of the gap between FA and BP [Boopathy and Fiete, 2022]; however, in sufficiently deep networks, this gap remains large, leading us to focus on the settings in which FA fails. We use 64 as it strikes a balance between too narrow and too wide networks, and because it usually is the number of channels in the first layer of deep CNNs, for example, Resnets [He et al., 2016]. We used ReLU activations, as it is the activation used in these deep networks. For the optimiser, we used both SGD with momentum and AdamW [Loshchilov and Hutter, 2017], to show that the results do not depend on what type of momentum is used. The weights of the convolutional and linear layers were initialised using the Kaiming uniform initialisation as in [Frenkel et al., 2021]. We also found that it was the one that worked best for FA networks, which heavily depended on having the right initialisation. We first measured the effect of depth on accuracy, and then turned to alignment, gradient dimensionality, and feature dimensionality to diagnose the source of the gap (Figure 1).

Consistent with earlier studies [Cheon et al., 2024, Launay et al., 2019], we found that the accuracy of the FA models decreases with depth (Figure 1 A). To understand this failure of FA, we turned our attention to networks with 4 convolutional layers. We found that FA models train much more

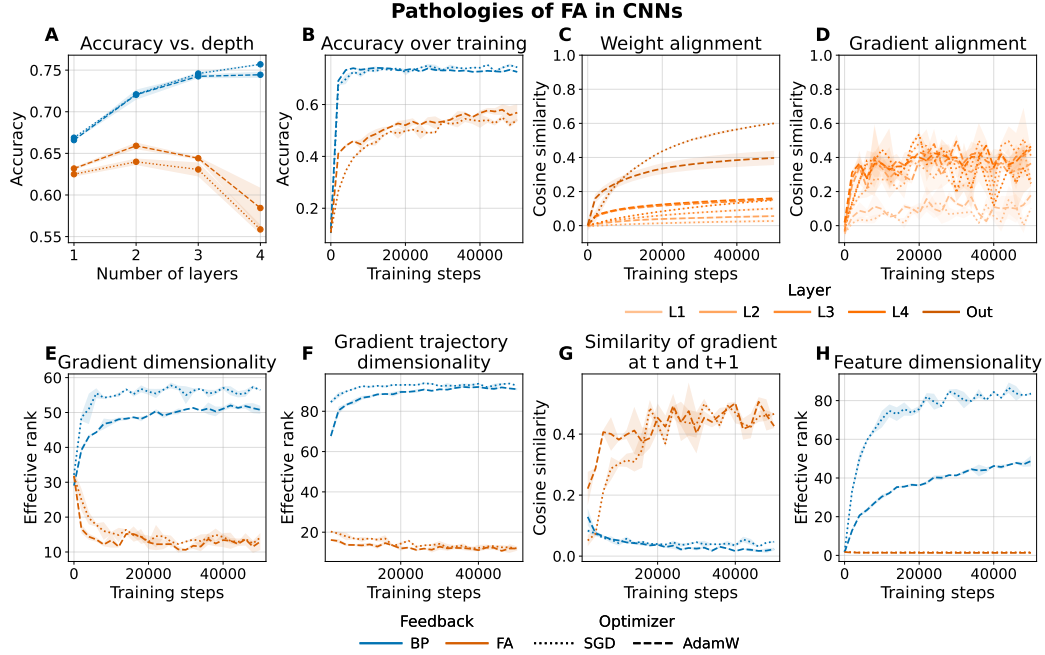


Figure 1: **FA suffers from low dimensional gradients.** **A** Increasing the number of layers results in lower performance in FA networks. **B-H** Metrics for the 4 convolutional layer model. **B** The process of feedback alignment makes the FA network converge much later than BP networks. **C** Weight alignment measured by the cosine similarity of the forward and feedback weights. The upper layers align, but the bottom layers do not. **D** Gradient alignment measured by the cosine similarity of the gradient obtained using the feedback weight and the transpose of the forward weights for the feedback projections. Again, the upper layers align, but the bottom layers do not. **E** Rank of the gradient in the last convolutional layer. The FA networks have much lower dimensionality. **F** Effective rank of the Gram matrix of the gradients. Again, FA networks have much lower dimensionality. **G** Cosine similarity of the gradients at step t and $t+1$. FA networks have similar gradients, which explains the low-dimensional gradient trajectory. **H** Possibly due to the low-dimensional gradients, the feature dimensionality is much lower than for the BP models.

slowly than BP models (Figure 1 B). Although the FA models have a tiny jump in accuracy at first, they slowly converge to their maximum. Similarly, the alignment of the forward weights with the feedback weights, measured by the cosine similarity between the flattened weights, slowly increases throughout training (Figure 1 C). However, these small increases in weight alignment do not translate to increases in gradient alignment (Figure 1 D), quantified by the cosine similarity of the gradients obtained using the feedback weights and when using the transpose forward weights as done in BP. Since the gradient alignment is small, the FA gradient will not follow the true gradient of the error, which explains why the accuracy changes slowly. To explain why FA gradient alignment does not increase much after an initial bump, we analysed the geometry of the updates of FA models.

Guided by the intuition that FA makes optimisation happen in lower-dimensional subspaces, where the forward weights have aligned to the feedback, we first measured the dimensionality of the gradients by computing the effective rank of the gradients (Figure 1 E). The effective rank is a continuous approximation to the rank of the matrix. It is computed by taking the exponentiated entropy of the normalised singular values of the matrix: $\text{erank}(M) = \exp(-\sum_{i=1}^r p_i \log p_i)$, with $p_i = \frac{\sigma_i}{\sum_{j=1}^r \sigma_j}$ where σ_i are the singular values. We found that the dimensionality of the gradients of FA networks is always lower than that of similar BP networks (Figure 1 E). We then looked at how the gradients change throughout training. We measured the dimensionality of the trajectory of the gradients (Figure 1 F). At each training step, we computed the gradient on 100 samples, making the highest possible rank 100, and computed the effective rank of the Gram matrix of the stacked gradients flattened into a vector. The Gram matrix is the covariance of the normalised gradient, letting h_i denote the gradient at timestep i , $G_{ij} = \tilde{h}_i^\top \tilde{h}_j$, $\tilde{h}_i = \frac{h_i}{\|h_i\|}$. A lower-rank Gram matrix

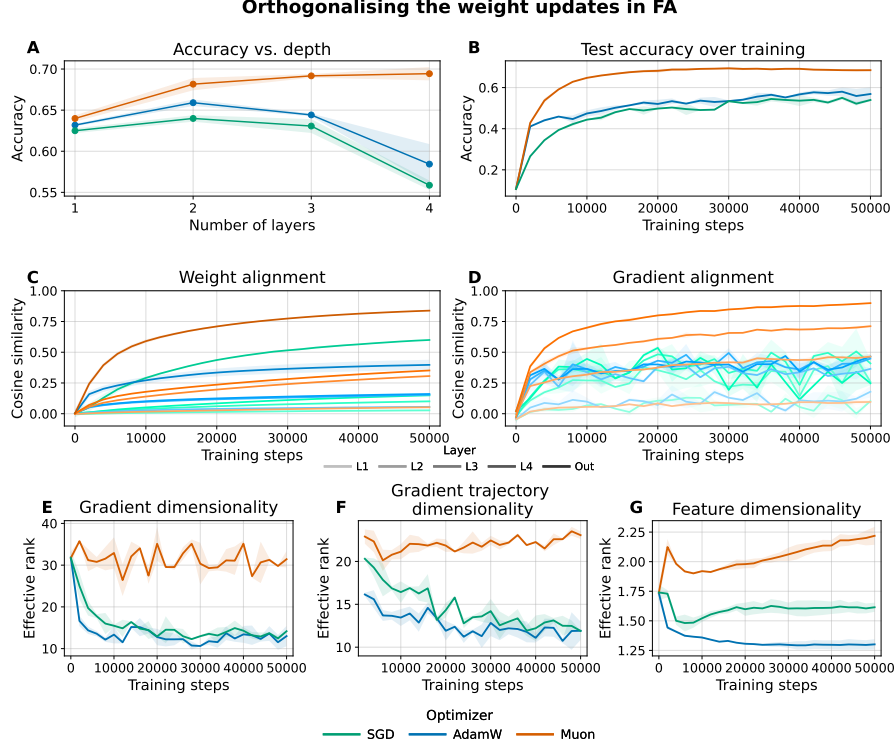


Figure 2: **Orthogonalising the updates results in better FA.** **A** Adding layers on the accuracy of FA networks. The accuracy of models trained with standard optimisers decreases, while it increases with Muon. **B-G** Metrics for the 4 convolutional layer model. **B** Models trained with Muon converge earlier and with a smoother curve. **C** Models trained with Muon have higher weight alignment. **D** Models trained with Muon have higher and smoother gradient alignment. **E** The gradients of models trained with Muon have higher dimensionality. **F** The trajectory of the gradients is also higher for models trained with Muon. **G** The dimensionality of the activations is also higher for models trained with Muon.

indicates that the gradients are more aligned with one another. In other words, the gradients span a lower-dimensional subspace, so the parameter updates are confined to fewer directions. In this regime, the training explores only a limited region of parameter space, which may be insufficient to produce meaningful alignment. In agreement with our hypothesis, the dimensionality of the trajectory of FA networks decreases early, and stays much lower than that of the BP networks (Figure 1 F). Indeed, while the BP trajectory dimensionality almost reaches its maximum rank, 100, the FA one is stuck under 20, and ends at 12. To better explain this, we looked at the entries next to the diagonal of the Gram matrix, which are the cosine similarity of gradients adjacent in the trajectory. We computed the mean of this value across the whole matrix and found high cosine similarity for the FA network where it is almost zero for the BP networks (Figure 1 G). The trajectory of the gradients will be higher for BP as it uses updated weights to propagate the error, which may increase the dimensionality when keeping other parts of the gradient equal. FA by construction can not do this, however, it is not the only reason for the lower trajectory dimensionality, as we show in the next section.

One of the effects of low-dimensional gradients could be that the representations will be low-dimensional too. To measure this, we computed the Gram matrix using the activations that feed into the classifier. We then computed the effective rank of this matrix, as done in [Huh et al., 2021]. As expected, the features of the FA networks are much lower-dimensional than those of BP networks, which may be due to the small subspace spanned by the gradients. While low-dimensional features have been found to be beneficial for generalisation [Valle-Perez et al., 2018, Huh et al., 2021, Andriushchenko et al., 2023], we argue here that the small feature dimensionality may result from limited exploration of the parameter space, which limits the alignment of the weights.

Together, these results suggest that the poor performance of FA in deeper CNNs is not only due to imperfect alignment with BP, but also to the geometry of the updates themselves. In particular, FA appears to restrict learning to a low-dimensional subspace, producing highly correlated gradients and low-dimensional features that may be insufficient for discriminating between classes.

4 Higher-dimensional updates enable better FA

The previous section suggests a direct intervention: if the failure mode of FA is caused by updates that are too low-dimensional, then methods that increase the dimensionality of the updates or of the intermediate representations should improve FA training. Therefore, we tried different ways of increasing the dimensionality of the updates, using the same setup as in the previous sections.

Using orthogonalised updates First, we used the Muon optimiser [Jordan et al., 2024]. We showed above that the effective rank of the FA gradient, computed using the entropy of the singular values of the gradient matrix, is much lower compared to what it is in BP. Therefore, there may be many directions associated with low singular values that will not be explored. Muon directly acts on this by setting every singular value of the momentum that is not 0 to 1, thereby increasing the effective rank of the update. As highlighted above, FA only changes how the gradients are computed; we can use any optimiser we want to perform the actual updates. Therefore, we can simply swap SGD or AdamW with Muon. This simple change proved to be quite effective (Figure 2). The accuracy of the shallow models is a bit better when using Muon than with standard optimisers like AdamW or SGD. More importantly, the accuracy of the FA models trained using Muon does not decrease with depth (Figure 2 A), in networks with 4 convolutional layers, Muon has 69.5% test accuracy, whereas AdamW has 59.5%. We again looked at the dynamics during training for the 4 convolutional layer model. The accuracy also converges to its maximum quicker (Figure 2 B). The weight alignment is also higher for every layer of the network (Figure 2 C). Importantly, the gradient alignment is also much higher for the models trained with Muon, and have much smoother curves (Figure 2 D). Coming back to the geometry analysis, we found that models trained with Muon have higher-dimensional gradients (Figure 2 E), gradient trajectories (Figure 2 F), and features (Figure 2 G).

Given that an optimiser that increases the dimensionality of the update improves the performance of FA models. We investigated how an optimiser that does the opposite affects FA. To do so, we replaced the orthogonalisation function in Muon with the rank r approximation of the momentum matrix using the SVD of the momentum. We used the rank 2 and rank 5 approximation (Figure 3) and found that while BP models are not so affected, the effect on FA models is catastrophic.

Taken together, these results show that orthogonalised updates substantially mitigate the main failure mode of FA by increasing the dimensionality of the optimisation trajectory. This, in turn, improves alignment, accelerates convergence, and largely removes the degradation in performance with depth.

Normalising the activities A second way to increase the dimensionality of the updates is to act directly on the activities of the network. As the gradient is the dot product of the error signal and the previous activation, increasing the dimensionality of the activation may increase the dimensionality of the gradients. BN has been shown to promote more orthogonal hidden representations [Ioffe and Szegedy, 2015, Daneshmand et al., 2020, 2021], suggesting that it may prevent the collapse of the representations onto low-dimensional subspaces. Since our previous results indicate that FA fails partly because its gradients and features become too low-dimensional, we added BN layers after each convolutional layer, using the same experimental setup as above.

Effects of changing dimensionality of updates in SGD

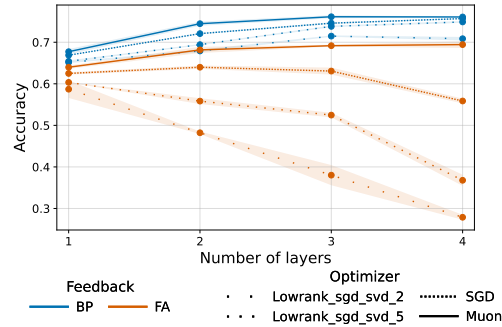


Figure 3: **Using the top-K directions as the opposite of Muon.** Using low-rank SGD results in much worse performance with FA, whereas the effect is not so large with BP.

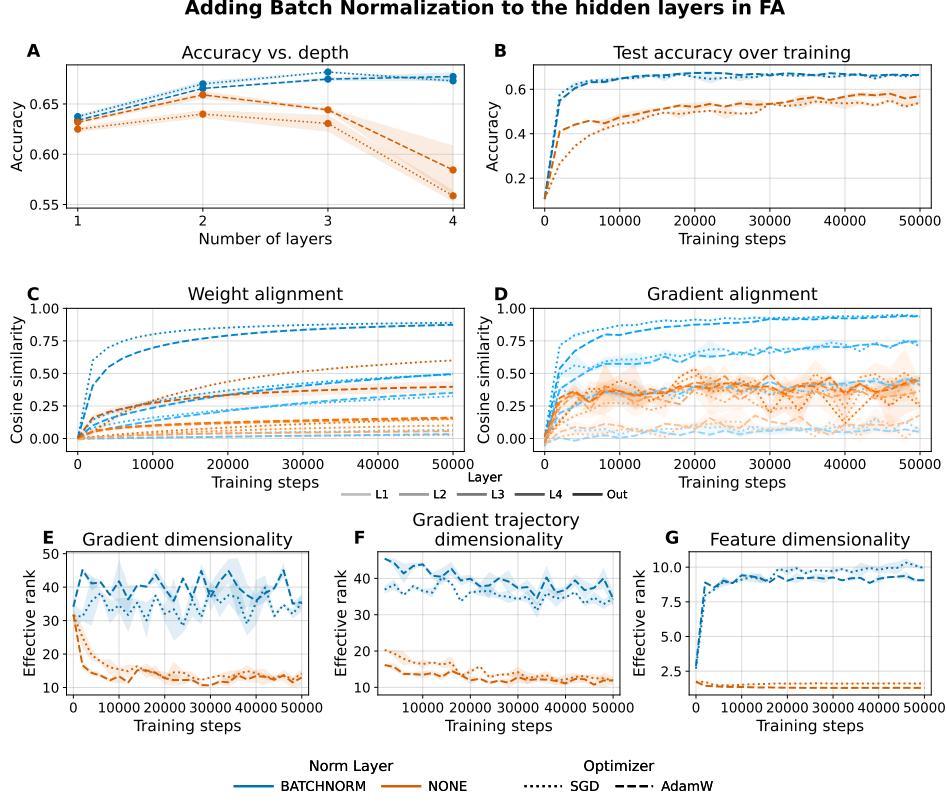


Figure 4: **Optimising FA networks with BN results in better FA.** **A** Effect of adding batch normalisation layers on the accuracy of FA networks. The accuracy of models trained without optimisers decreases, while the accuracy of models trained with BN does not. **B-G** Metrics for the 4 convolutional layer model. **B** Models with BN layers converge earlier and with a smoother curve. **C** Models with BN layers have higher weight alignment. **D** Models with BN layers have higher and smoother gradient alignment. **E** The gradients of models with BN have higher dimensionality. **F** The trajectory of the gradients is also higher for models with BN. **G** The dimensionality of the activations is also higher for models with BN.

The results were very similar to those obtained with Muon (Figure 4). BN substantially reduced the degradation in accuracy with depth (Figure 4 A), accelerated convergence (Figure 4 B), and increased both weight and gradient alignment (Figure 4 C-D). Consistent with our hypothesis, it also increased the dimensionality of the gradients (Figure 4 E), the gradient trajectory (Figure 4 F), and the final features (Figure 4 G). Thus, improving the geometry of the representations can mitigate the main pathologies of FA, further supporting the view that the poor performance of FA in deep CNNs is not only an alignment problem, but also a dimensionality problem.

Together, these results may explain why BN and Muon produce similar improvements in FA: both help maintain a richer set of directions through which alignment and learning can continue. Conversely, forcing updates to be low-rank severely harms FA, confirming that higher-dimensional optimisation is crucial for robust FA training.

5 Scaling to deeper models

Given that Muon and BN improved the trainability of FA networks in our previous setting, we next asked whether these interventions also scaled to harder datasets and more realistic architectures. We trained AlexNet [Krizhevsky et al., 2012] and ResNet-18 [He et al., 2016] on three image-classification benchmarks of increasing difficulty: STL-10 [Coates et al., 2011], CIFAR-100 [Krizhevsky, 2009], and Tiny ImageNet, a 200-class subset of ImageNet rescaled to 64x64 [Russakovsky et al., 2015].

Table 1: **Scaling FA to deeper architectures and harder datasets.** Test accuracy of AlexNet and ResNet-18 trained with BP or FA on STL-10, CIFAR-100, and Tiny ImageNet. For each feedback method, we compare a baseline setting with BN, Muon, and their combination. BN and Muon substantially improve FA performance across datasets and architectures, with the combined Muon+BN condition giving the best FA results in all settings

Feedback	Dataset Network Setting	STL-10		CIFAR-100		Tiny ImageNet	
		AlexNet	ResNet-18	AlexNet	ResNet-18	AlexNet	ResNet-18
BP	Baseline	74.8 $\pm$ 0.4	71.1 $\pm$ 0.3	69.9 $\pm$ 0.4	71.9 $\pm$ 0.2	52.6 $\pm$ 0.1	40.0 $\pm$ 0.0
	BN	79.6 $\pm$ 0.2	77.2 $\pm$ 0.3	71.9 $\pm$ 0.3	76.8 $\pm$ 0.2	56.7 $\pm$ 0.1	50.0 $\pm$ 0.1
	Muon	85.1 $\pm$ 0.0	80.0 $\pm$ 0.6	65.2 $\pm$ 0.5	70.0 $\pm$ 0.5	52.7 $\pm$ 0.1	37.5 $\pm$ 0.1
	Muon + BN	85.2 $\pm$ 0.1	81.7 $\pm$ 0.4	70.3 $\pm$ 0.4	75.2 $\pm$ 0.2	56.1 $\pm$ 0.4	46.2 $\pm$ 0.6
FA	Baseline	34.2 $\pm$ 0.4	14.5 $\pm$ 2.9	9.9 $\pm$ 0.2	1.4 $\pm$ 0.0	6.4 $\pm$ 0.0	0.7 $\pm$ 0.0
	BN	60.5 $\pm$ 0.8	55.8 $\pm$ 0.4	31.6 $\pm$ 0.4	37.1 $\pm$ 0.1	28.1 $\pm$ 0.3	21.6 $\pm$ 0.8
	Muon	57.7 $\pm$ 0.2	52.6 $\pm$ 0.7	33.5 $\pm$ 0.5	25.3 $\pm$ 1.2	23.4 $\pm$ 2.1	12.3 $\pm$ 0.2
	Muon + BN	67.5 $\pm$ 0.4	64.2 $\pm$ 1.3	38.1 $\pm$ 0.3	46.1 $\pm$ 0.9	32.1 $\pm$ 0.3	24.3 $\pm$ 0.7

For each dataset and architecture, we compared standard BP and FA under four settings: the baseline optimiser, BN, Muon, and Muon combined with BN (Table 1).

Consistent with the results from the previous section, baseline FA performed poorly in deeper models. The degradation was especially severe for ResNet-18, where baseline FA reached only 14.5% on STL-10, 1.4% on CIFAR-100, and 0.7% on Tiny ImageNet. These results show that the failure mode of FA becomes more pronounced as both the model and the task become more difficult. In contrast, both BN and Muon substantially improved FA performance across architectures and datasets. On STL-10, for example, AlexNet trained with baseline FA reached 34.2%, whereas adding BN increased performance to 60.5%, Muon to 57.7%, and Muon+BN to 67.5%. A similar pattern was observed for ResNet-18, where Muon+BN improved performance from 14.5% to 64.2%.

The same trend held on the harder benchmarks. On CIFAR-100, baseline FA reached 9.9% with AlexNet and 1.4% with ResNet-18. Adding either BN or Muon produced gains, and the combination of Muon+BN gave the best performance, reaching 38.1% for AlexNet and 46.1% for ResNet-18. On Tiny ImageNet, where the baseline FA models again performed poorly, Muon+BN improved AlexNet from 6.4% to 32.1% and ResNet-18 from 0.7% to 24.3%. Thus, although a large gap remains between FA and BP on the most difficult settings, the combination of higher-dimensional updates and normalised representations allows FA to train models that would otherwise fail almost completely.

Interestingly, Muon and BN were complementary in the FA setting. In most cases, each method alone produced a large improvement over baseline FA, but their combination gave the strongest performance. This suggests that they act through related but non-identical mechanisms. Muon directly modifies the geometry of the parameter update by flattening the spectrum of the momentum, whereas BN acts on the forward representations and changes the geometry of the gradients. When combined, they appear to preserve a richer set of learning directions throughout training, making it possible for alignment to emerge even in deeper architectures and harder tasks.

The effect of these methods was more modest and less systematic under BP. BN generally improved BP, especially for ResNet-18 and the harder datasets, whereas Muon alone did not consistently improve performance outside of STL-10. This contrast further supports the idea that FA is especially sensitive to the dimensionality of the optimisation trajectory. Whereas BP already provides informative, high-dimensional gradients, FA requires additional mechanisms to prevent its updates and representations from collapsing onto a small number of directions.

Overall, these scaling experiments show that the geometric interventions identified in the previous section are not limited to small convolutional networks. Increasing the dimensionality of updates with Muon, increasing the dimensionality of representations with BN, and especially combining the two, improves FA across datasets, architectures, and task difficulty. These results support our observation that FA needs high-dimensional updates.

6 Discussion

While feedback alignment was surprisingly shown to work in shallow MLP [Lillicrap et al., 2016], the fact that it did not scale well to deeper architectures raised doubts on whether the brain could be functioning on this principle. Indeed, even though convolutional networks are not biologically plausible due to neurons sharing exact weights, although they are inspired by the visual system [Bartunov et al., 2018, Pogodin et al., 2021], this weight sharing is what makes optimisation easier with backpropagation. Therefore, it would be desirable that an approximation to BP also performs well with such architectures. In this work, we presented ways of making FA work in deeper CNNs. Indeed, using a different optimiser or by normalising the activities, we found that FA did not have such a steep decrease in accuracy when adding layers as it does when using standard methods. While we did not investigate why alignment happens, as previous work already investigated this question [Lillicrap et al., 2016, Refinetti et al., 2021], we focused on why it seemingly stops after a period of early alignment, and explained how to allow alignment to continue after this period.

Biological plausibility directly motivates the study of FA, but the interventions used here should not be interpreted as biologically plausible learning algorithms in their current form. In particular, Muon requires orthogonalising a matrix-valued momentum update, which depends on coordinated information about the spectrum of an entire weight-update matrix rather than on purely synapse-local quantities. Although local plasticity rules such as Oja-like mechanisms can extract principal directions [Oja, 1982, Sanger, 1989], our implementation of Muon should be viewed as a probe of an alternative rule for updates, not as a direct model of synaptic plasticity.

The other mechanism we investigated was normalising the activities, in our case by using BN [Ioffe and Szegedy, 2015]. Beyond its original motivation as a way of reducing internal covariate shift, BN can be understood as helping deep networks preserve high-dimensional representations across layers. In unnormalised deep networks, the activity matrix over a batch can progressively collapse to a low-rank representation [Huh et al., 2021, Daneshmand et al., 2020]. By contrast, BN counteracts this rank collapse and helps maintain multiple active directions of variation in the hidden activities [Daneshmand et al., 2020, 2021]. In addition, BN often makes training less sensitive to initialisation, permits the use of larger learning rates, and improves gradient propagation [Ioffe and Szegedy, 2015, Santurkar et al., 2018]. While we did not explicitly control for these factors, the fact that the performance of FA with either Muon or BN is similar in Table 1 supports our claim that the dimensionality of the gradient is an important aspect of FA. Although standard BN is not strictly biologically plausible because it relies on batch-level statistics and global normalisation across examples, normalisation mechanisms are widespread in biological neural systems [Carandini and Heeger, 2012]. In particular, divisive normalisation and homeostatic regulation [Wen and Turrigiano, 2024, Shen et al., 2021] could provide more local approximations that similarly stabilise activity scales and prevent representational collapse. Transformations of neural activity at the population level have been studied in the visual cortex [Failor et al., 2025], and are thought to be behind its high dimensionality [Rigotti et al., 2013, Fusi et al., 2016, Stringer et al., 2019, Failor et al., 2025].

Beyond biological plausibility, feedback alignment may be useful as a distinct optimisation system from standard backpropagation. Because FA uses fixed random feedback, it follows different parameter-space trajectories and can expose how optimisation techniques behave when the learning signal is only approximate. This makes FA a useful testbed for studying whether methods such as normalisation or update orthogonalisation improve learning by better conditioning BP gradients specifically, or by more generally shaping update geometry. Moreover, alternative credit-assignment rules can affect loss-landscape exploration [Pascanu et al., 2025], for example, FA could use structured feedback that guides learning to different solutions than what BP would reach. For instance, FA has been shown to allow better continual learning [Folchini et al., 2025].

Acknowledgments and Disclosure of Funding

This work was supported by Wellcome Trust 200790/Z/16/Z, Simons Foundation 564408 and EPSRC EP/R035806/1.

References

- Mohamed Akrouf, Collin Wilson, Peter Humphreys, Timothy Lillicrap, and Douglas B Tweed. Deep learning without weight transport. *Advances in neural information processing systems*, 32, 2019.
- Maksym Andriushchenko, Dara Bahri, Hossein Mobahi, and Nicolas Flammarion. Sharpness-aware minimization leads to low-rank features. *Advances in Neural Information Processing Systems*, 36: 47032–47051, 2023.
- Adrien Bardes, Jean Ponce, and Yann LeCun. Vicreg: Variance-invariance-covariance regularization for self-supervised learning. *arXiv preprint arXiv:2105.04906*, 2021.
- Sergey Bartunov, Adam Santoro, Blake Richards, Luke Marris, Geoffrey E Hinton, and Timothy Lillicrap. Assessing the scalability of biologically-motivated deep learning algorithms and architectures. *Advances in neural information processing systems*, 31, 2018.
- Jeremy Bernstein. Deriving muon, 2025. URL <https://jeremybernste.in/writing/deriving-muon>.
- Jeremy Bernstein and Laker Newhouse. Old optimizer, new norm: An anthology. *arXiv preprint arXiv:2409.20325*, 2024.
- Akhilan Boopathy and Ila Fiete. How to train your wide neural network without backprop: An input-weight alignment perspective. In *International Conference on Machine Learning*, pages 2178–2205. PMLR, 2022.
- Matteo Carandini and David J Heeger. Normalization as a canonical neural computation. *Nature reviews neuroscience*, 13(1):51–62, 2012.
- Jeonghwan Cheon, Sang Wan Lee, and Se-Bum Paik. Pretraining with random noise for fast and robust learning without weight transport. *Advances in Neural Information Processing Systems*, 37: 13748–13768, 2024.
- Adam Coates, Andrew Ng, and Honglak Lee. An analysis of single-layer networks in unsupervised feature learning. In *Proceedings of the fourteenth international conference on artificial intelligence and statistics*, pages 215–223. JMLR Workshop and Conference Proceedings, 2011.
- Michael Cogswell, Faruk Ahmed, Ross Girshick, Larry Zitnick, and Dhruv Batra. Reducing overfitting in deep networks by decorrelating representations. *arXiv preprint arXiv:1511.06068*, 2015.
- Francis Crick. The recent excitement about neural networks. *Nature*, 337(6203):129–132, 1989.
- Hadi Daneshmand, Jonas Kohler, Francis Bach, Thomas Hofmann, and Aurelien Lucchi. Batch normalization provably avoids ranks collapse for randomly initialised deep networks. *Advances in Neural Information Processing Systems*, 33:18387–18398, 2020.
- Hadi Daneshmand, Amir Joudaki, and Francis Bach. Batch normalization orthogonalizes representations in deep random networks. *Advances in Neural Information Processing Systems*, 34: 4896–4906, 2021.
- Samuel W Failor, Matteo Carandini, and Kenneth D Harris. Visual experience orthogonalizes visual cortical stimulus responses via population code transformation. *Cell Reports*, 44(2), 2025.
- Sara Folchini, Viplove Arora, and Sebastian Goldt. Exploring the potential of direct feedback alignment for continual learning. *Transactions on Machine Learning Research*, 2025.
- Charlotte Frenkel, Martin Lefebvre, and David Bol. Learning without feedback: Fixed random learning signals allow for feedforward training of deep neural networks. *Frontiers in neuroscience*, 15:629892, 2021.
- Stefano Fusi, Earl K Miller, and Mattia Rigotti. Why neurons mix: high dimensionality for higher cognition. *Current opinion in neurobiology*, 37:66–74, 2016.
- Maher Hanut and Jonathan Kadmon. Training large neural networks with low-dimensional error feedback. *arXiv preprint arXiv:2502.20580*, 2025.

- Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 770–778, 2016.
- Minyoung Huh, Hossein Mobahi, Richard Zhang, Brian Cheung, Pulkit Agrawal, and Phillip Isola. The low-rank simplicity bias in deep networks. *arXiv preprint arXiv:2103.10427*, 2021.
- J. D. Hunter. Matplotlib: A 2d graphics environment. *Computing in Science & Engineering*, 9(3): 90–95, 2007. doi: 10.1109/MCSE.2007.55.
- Sergey Ioffe and Christian Szegedy. Batch normalization: Accelerating deep network training by reducing internal covariate shift. In *International conference on machine learning*, pages 448–456. pmlr, 2015.
- Keller Jordan, Yuchen Jin, Vlado Boza, Jiacheng You, Franz Cesista, Laker Newhouse, and Jeremy Bernstein. Muon: An optimizer for hidden layers in neural networks, 2024. URL <https://kellerjordan.github.io/posts/muon/>.
- Alex Krizhevsky. Learning multiple layers of features from tiny images. Technical report, University of Toronto, 2009.
- Alex Krizhevsky, Ilya Sutskever, and Geoffrey E Hinton. Imagenet classification with deep convolutional neural networks. *Advances in neural information processing systems*, 25, 2012.
- Daniel Kunin, Aran Nayebi, Javier Sagastuy-Brena, Surya Ganguli, Jonathan Bloom, and Daniel Yamins. Two routes to scalable credit assignment without weight symmetry. In *International Conference on Machine Learning*, pages 5511–5521. PMLR, 2020.
- Julien Launay, Iacopo Poli, and Florent Krzakala. Principled training of neural networks with direct feedback alignment. *arXiv preprint arXiv:1906.04554*, 2019.
- Qianli Liao, Joel Leibo, and Tomaso Poggio. How important is weight symmetry in backpropagation? In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 30, 2016.
- Timothy P Lillicrap, Daniel Cownden, Douglas B Tweed, and Colin J Akerman. Random synaptic feedback weights support error backpropagation for deep learning. *Nature communications*, 7(1): 13276, 2016.
- Timothy P Lillicrap, Adam Santoro, Luke Marris, Colin J Akerman, and Geoffrey Hinton. Backpropagation and the brain. *Nature Reviews Neuroscience*, 21(6):335–346, 2020.
- Jingyuan Liu, Jianlin Su, Xingcheng Yao, Zhejun Jiang, Guokun Lai, Yulun Du, Yidao Qin, Weixin Xu, Enzhe Lu, Junjie Yan, et al. Muon is scalable for llm training. *arXiv preprint arXiv:2502.16982*, 2025.
- Ilya Loshchilov and Frank Hutter. Decoupled weight decay regularization. *arXiv preprint arXiv:1711.05101*, 2017.
- Theodore H Moskovitz, Ashok Litwin-Kumar, and LF Abbott. Feedback alignment in deep convolutional networks. *arXiv preprint arXiv:1812.06488*, 2018.
- Arild Nøkland. Direct feedback alignment provides learning in deep neural networks. *Advances in neural information processing systems*, 29, 2016.
- Erkki Oja. Simplified neuron model as a principal component analyzer. *Journal of mathematical biology*, 15(3):267–273, 1982.
- Razvan Pascanu, Clare Lyle, Ionut-Vlad Modoranu, Naima Elosegui Borrás, Dan Alistarh, Petar Velickovic, Sarath Chandar, Soham De, and James Martens. Optimizers qualitatively alter solutions and we should leverage this. *arXiv preprint arXiv:2507.12224*, 2025.
- Adam Paszke, Sam Gross, Francisco Massa, Adam Lerer, James Bradbury, Gregory Chanan, Trevor Killeen, Zeming Lin, Natalia Gimelshein, Luca Antiga, et al. Pytorch: An imperative style, high-performance deep learning library. *Advances in neural information processing systems*, 32, 2019.

- Roman Pogodin, Yash Mehta, Timothy Lillicrap, and Peter E Latham. Towards biologically plausible convolutional networks. *Advances in neural information processing systems*, 34:13924–13936, 2021.
- Maria Refinetti, Stéphane d’Ascoli, Ruben Ohana, and Sebastian Goldt. Align, then memorise: the dynamics of learning with feedback alignment. In *International Conference on Machine Learning*, pages 8925–8935. PMLR, 2021.
- Mattia Rigotti, Omri Barak, Melissa R Warden, Xiao-Jing Wang, Nathaniel D Daw, Earl K Miller, and Stefano Fusi. The importance of mixed selectivity in complex cognitive tasks. *Nature*, 497(7451):585–590, 2013.
- Olivier Roy and Martin Vetterli. The effective rank: A measure of effective dimensionality. In *2007 15th European signal processing conference*, pages 606–610. IEEE, 2007.
- David E Rumelhart, Geoffrey E Hinton, and Ronald J Williams. Learning representations by back-propagating errors. *nature*, 323(6088):533–536, 1986.
- Olga Russakovsky, Jia Deng, Hao Su, Jonathan Krause, Sanjeev Satheesh, Sean Ma, Zhiheng Huang, Andrej Karpathy, Aditya Khosla, Michael Bernstein, et al. Imagenet large scale visual recognition challenge. *International journal of computer vision*, 115(3):211–252, 2015.
- Terence D Sanger. Optimal unsupervised learning in a single-layer linear feedforward neural network. *Neural networks*, 2(6):459–473, 1989.
- Shibani Santurkar, Dimitris Tsipras, Andrew Ilyas, and Aleksander Madry. How does batch normalization help optimization? *Advances in neural information processing systems*, 31, 2018.
- Yang Shen, Julia Wang, and Saket Navlakha. A correspondence between normalization strategies in artificial and biological neural networks. *Neural computation*, 33(12):3179–3203, 2021.
- Zakhar Shumaylov, Nathaël Da Costa, Peter Zaika, Bálint Mucsányi, Alex Massucco, Yoav Gelberg, Carola-Bibiane Schönlieb, Yarin Gal, and Philipp Hennig. Muon is not that special: Random or inverted spectra work just as well. *arXiv preprint arXiv:2605.11181*, 2026.
- Carsen Stringer, Marius Pachitariu, Nicholas Steinmetz, Matteo Carandini, and Kenneth D Harris. High-dimensional geometry of population responses in visual cortex. *Nature*, 571(7765):361–365, 2019.
- Guillermo Valle-Perez, Chico Q Camargo, and Ard A Louis. Deep learning generalizes because the parameter-function map is biased towards simple functions. *arXiv preprint arXiv:1805.08522*, 2018.
- Wei Wen and Gina G Turrigiano. Keeping your brain in balance: homeostatic regulation of network function. *Annual review of neuroscience*, 47, 2024.
- Will Xiao, Honglin Chen, Qianli Liao, and Tomaso Poggio. Biologically-plausible learning algorithms can scale to large datasets. *arXiv preprint arXiv:1811.03567*, 2018.
- Omry Yadan. Hydra - a framework for elegantly configuring complex applications. Github, 2019. URL <https://github.com/facebookresearch/hydra>.

A Reproducibility

For sections 3 and 4, we trained all models with 2 random seeds on the CIFAR10 [Krizhevsky, 2009] dataset. The results were stable enough not to require using more seeds. We used the cross-entropy loss, mini-batch size 64 for 50,000 steps, the configured optimiser (SGD, AdamW, Muon, or low-rank SGD), while periodically evaluating train/test loss, and gradient-trajectory metrics at fixed intervals with early stopping for convergence or failed runs.

For unbiased results, for both FA and BP, we optimised each models’ hyperparameter separately using a grid search over network depths (1,2,3,4), normalisation in (None, Batch Normalisation), SGD with learning rates (10^{-1} , 10^{-2} , 10^{-3} , 10^{-4}), momentum (0, 0.9, 0.95), and weight decay (0 , 5×10^{-4}), Muon with the same learning-rate and momentum grid and weight decay (0 , 10^{-3}), and AdamW with learning rates (10^{-2} , 10^{-3} , 10^{-4}) and weight decay (0 , 10^{-3}).

For section 5, we used the standard epoch-based training pipeline for vision models. For the three datasets, i.e STL-10, CIFAR100, and TinyImagenet, we trained the models for 90 epochs and with a batch size of 256 with 2 random seeds. Again, the results were stable enough not to require using more seeds. We used automatic mixed precision and casted tensors to float16 to halve the training time. We used a cosine-annealing learning-rate schedule. We again performed independent grid searches for each model and dataset. For both FA and BP, using the same grid as before. We used the standard train and test splits defined for each dataset.

Experiments were run in PyTorch [Paszke et al., 2019] on a workstation equipped with two NVIDIA RTX PRO 4000 Blackwell GPUs, with Hydra [Yadan, 2019] used to manage model, optimiser, data, and training configurations across grid-search runs. The resulting accuracy and loss curves were visualized using Matplotlib [Hunter, 2007]. One full run on the CIFAR10 dataset with 50,000 steps took approximately 10 minutes. One full run on STL10 and CIFAR10 took 10 minutes; on TinyImagenet, one run took 30 minutes.

B Using a local loss to increase dimensionality

We also tried adding a local loss at each layer, which aimed at making the activity dimensionality higher. Specifically, we used a loss introduced in [Cogswell et al., 2015] that minimises the covariance of the channels inside a layer; we did not backpropagate the loss of one layer to the previous layers. We followed the formulation used in [Bardes et al., 2021]:

$$\mathcal{L}_{\text{decor}}(X) = \frac{1}{D} \sum_{\substack{i,j=1 \\ i \neq j}}^D \left[\frac{1}{B-1} \sum_{b=1}^B (x_{bi} - \bar{x}_i)(x_{bj} - \bar{x}_j) \right]^2, \bar{x}_i = \frac{1}{B} \sum_{b=1}^B x_{bi} \quad (6)$$

It minimises the off-diagonal components of the covariance of the activity in a given layer for one batch. The goal of this loss is to make the dimensionality higher by reducing the redundancies of the representations inside a layer. It is related to a lower bound approximation to the rank of a matrix introduced in [Daneshmand et al., 2020] $r(X) = \frac{\text{Tr}(M(X))^2}{\|M(X)\|_F^2}$, $M(X) = \frac{X^\top X}{N}$, as minimising the off diagonal components of the covariance will have a similar objective to maximising the ratio of the squared trace to the squared frobenius norm of the covariance. We add the gradient of this loss weighted by λ to the gradient of the cross-entropy loss used for classification. We optimised the network using SGD and AdamW [Loshchilov and Hutter, 2017].

We ran the same analysis as the one we did on Muon, and the results appear similar (Figure 5). The accuracy does not decrease much when adding layers (Figure 5 A). When looking at the 4 convolutional layers network, we also see better behavior (Figure 5 B-G). The network trains faster and has a smoother curve (Figure 5 B). The weights align much more (Figure 5 C), and importantly, the gradients are more aligned, and the alignment is more stable (Figure 5 D). The geometry of the updates is also better behaved. The gradients are higher-dimensional (Figure 5 E), and their trajectory is also higher-dimensional (Figure 5 F). The features also exhibit higher dimensionality (Figure 5 G), which is due to the local loss we added. This increase in activity dimensionality allows higher-dimensional gradients, which means the optimisation will not get stuck in the lower-dimensional space that FA networks get trapped in.

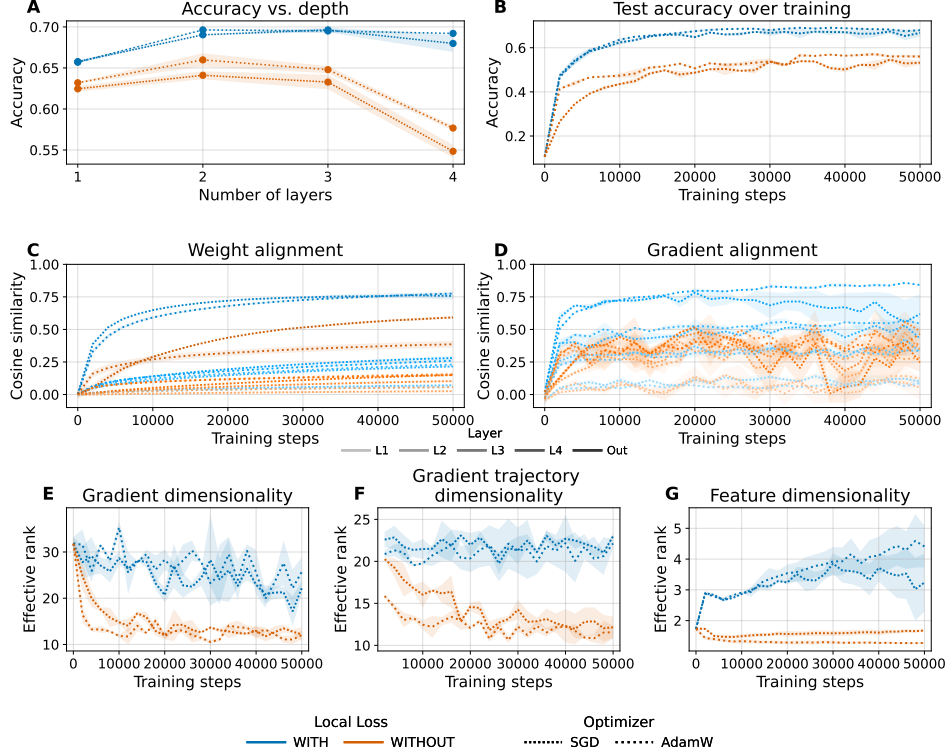


Figure 5: **Adding a local loss to the FA gradients.** **A** Adding layers on the accuracy of FA networks. The accuracy of models trained with standard optimisers decreases, while those trained with the local loss **B-G** Metrics for the 4 convolutional layer model. **B** Models trained with the local loss converge earlier and with a smoother curve. **C** Models trained with local loss have higher weight alignment. **D** Models trained with the local loss have higher and smoother gradient alignment. **E** The gradients of models trained with the local loss have higher dimensionality. **F** The trajectory of the gradients is also higher for models trained with the local loss. **G** The dimensionality of the activations is also higher for models trained with the local loss.

Unfortunately, preliminary experiments seemed to suggest that it would not scale to the larger networks. More careful tuning of the loss might make it scale better.

C Interpolating between SGD and Muon

To better understand how the distribution of the singular values of the updates impacts the performance of the network, we used the Freon optimiser [Shumaylov et al., 2026], which transforms the momentum matrix M to: $U \text{diag}\left(\left(\frac{\sigma}{\|M\|_q}\right)^{q-1}\right) V^\top$, where $U \text{diag}(\sigma) V^\top$ is the SVD of M . The exponent $c = 1 - q/2$ controls the transformation of the singular values. With $c = 0$, the update is equivalent to SGD, and directions with large singular values dominate the update. As c increases, the spectrum of the update becomes progressively flatter, giving more weight to directions that would otherwise contribute very little. Using $c = 0.5$ corresponds to Muon, where all non-zero singular directions are weighted equally. Using $c > 0.5$ scales up the smaller singular values and scales down the bigger ones. This interpolation is relevant for our work since c controls the dimensionality of the updates, similarly to what we did in Figure 3. When applied to FA models, performance improves as the Freon exponent is increased from the SGD regime toward the Muon regime (Figure 6), supporting the claim that making the update higher-dimensional improves FA.

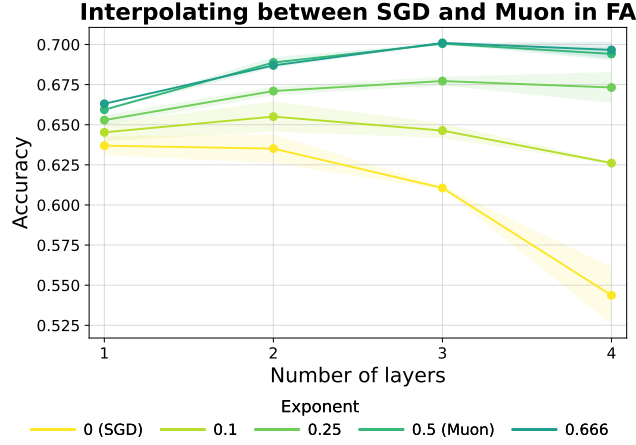


Figure 6: **A more balanced singular value spectrum improves performance.** Increasing the exponent in Freon optimiser [Shumaylov et al., 2026], which, until 0.5, flattens the spectrum of the updates, then makes it skew the other way, increases the performance of the FA networks.

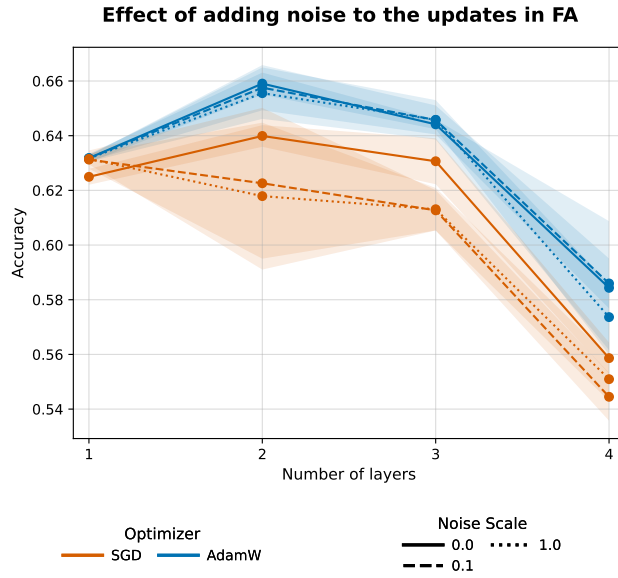


Figure 7: **Adding noise to the updates does not make the FA models better.** We added Gaussian noise to the parameter updates, matching their norm or 0.1 of their norm. SGD deteriorates with even small noise compared to updates, whereas AdamW is not so affected.

D Full rank updates by adding noise

The improvement from Muon and normalisation could be explained simply by increasing the dimensionality of the update, rather than by preserving useful update directions. We tested this by adding an isotropic update-noise control. After each SGD or Adam update, we measured the actual parameter change and added Gaussian noise rescaled to match the norm of that change or 0.1 of the norm:

$$W_{t+1} = W_t + \Delta_t + \lambda \frac{\|\Delta_t\|_2}{\|\xi_t\|_2} \xi_t, \quad \xi_t \sim \mathcal{N}(0, I). \quad (7)$$

Where Δ_t is the update obtained using the optimiser, λ is the scale that we set to 1 or 0.1, and ξ_t is Gaussian noise. This produces high-dimensional perturbations with controlled magnitude while leaving the base optimiser and its state unchanged. In contrast to Muon and batch normalisation, adding isotropic update noise did not improve FA performance (Figure 7). This suggests that higher dimensionality alone is not sufficient: the additional directions must remain aligned with the learning signal. Thus, the benefit of Muon is better interpreted as preserving or reweighting useful update directions, rather than merely injecting arbitrary high-rank motion.

E Additional update metrics

In Sections 3 and 4, we showed the update metrics only for the network with depth 4, and for the last convolutional layer. Here, we show that the same qualitative effects are present across the other convolutional layers and across different depths. These results support the view that the low-dimensionality of FA updates is a general property of the training dynamics, rather than an artifact of a single layer or architecture depth.

E.1 Additional metrics for BP vs FA

Across layers, FA produces gradients with lower effective rank than BP, and this difference becomes more pronounced as depth increases (Figure 8). The same pattern is visible in the dimensionality of the gradient trajectory, indicating that FA explores a more restricted set of update directions throughout training (Figure 9).

E.2 Additional metrics for different optimisers in FA

The improvement obtained with Muon is also visible across layers. Compared with standard optimisers, Muon increases both the dimensionality of the gradients (Figure 10) and the dimensionality of the gradient trajectory (Figure 11).

E.3 Additional metrics when adding Batch Norm in FA

Adding BN produces a similar effect to Muon, but through the activities rather than directly through the optimiser. Across layers, BN increases the effective rank of both the gradients (Figure 12) and their trajectories (Figure 13), suggesting that more balanced representations help maintain higher-dimensional updates in FA networks.

Gradient dimensionality over training in BP and FA

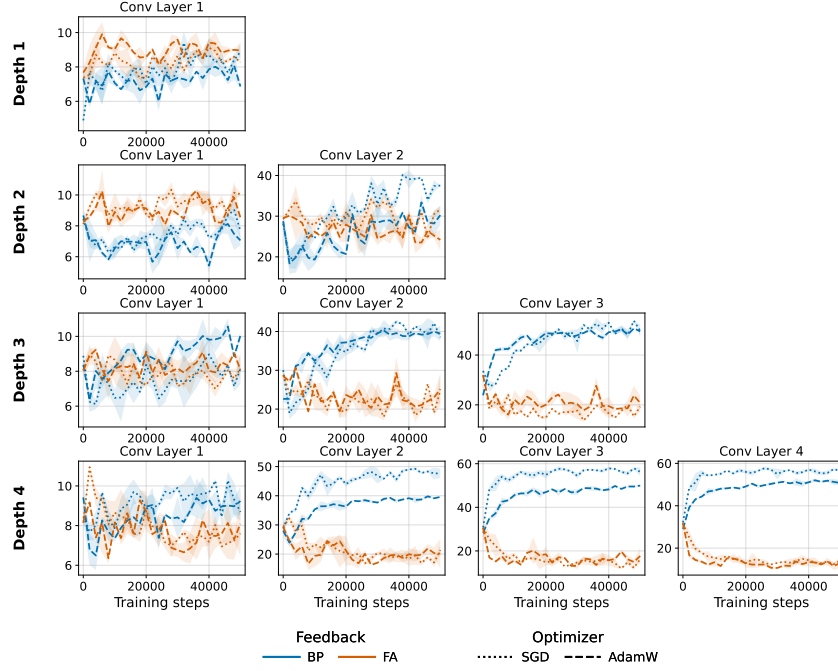


Figure 8: **FA has lower gradient dimensionality across layers and depths.** Effective rank of the gradients for BP and FA networks with different depths. The reduction in gradient dimensionality is visible beyond the last convolutional layer and becomes stronger in deeper networks.

Gradient trajectory dimensionality over training in BP and FA

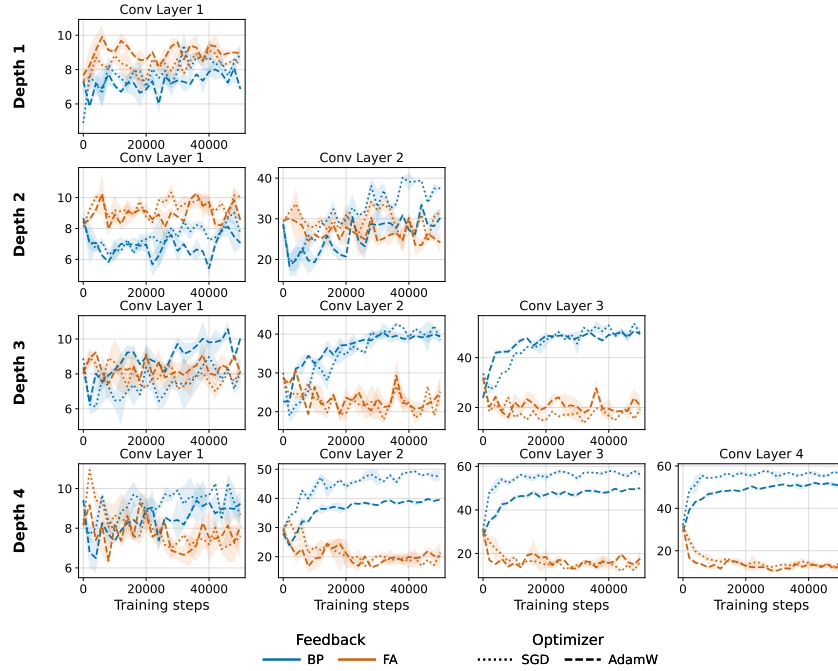


Figure 9: **FA has lower-dimensional gradient trajectories across layers and depths.** Effective rank of the Gram matrix of the gradient trajectory for BP and FA networks. Compared with BP, FA gradients span a smaller subspace during training, especially in deeper networks.

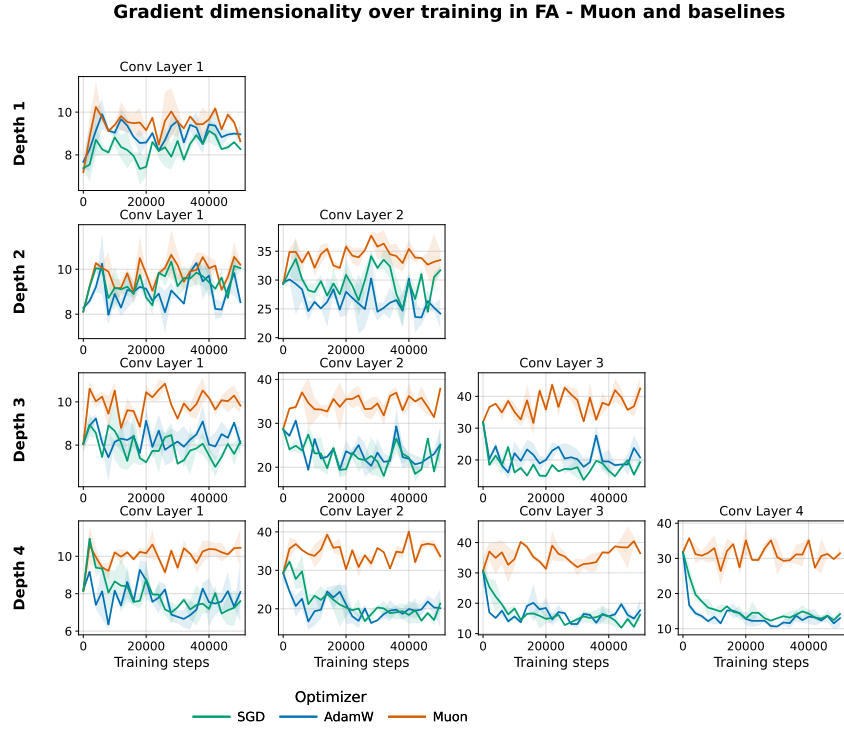


Figure 10: **Muon increases the gradient dimensionality of FA networks across layers and depths.** Effective rank of the gradients for FA networks trained with different optimisers. Orthogonalised updates lead to higher-dimensional gradients, particularly in deeper networks where standard FA suffers most.

Gradient trajectory Dimensionality over Training in FA - Muon and baselines

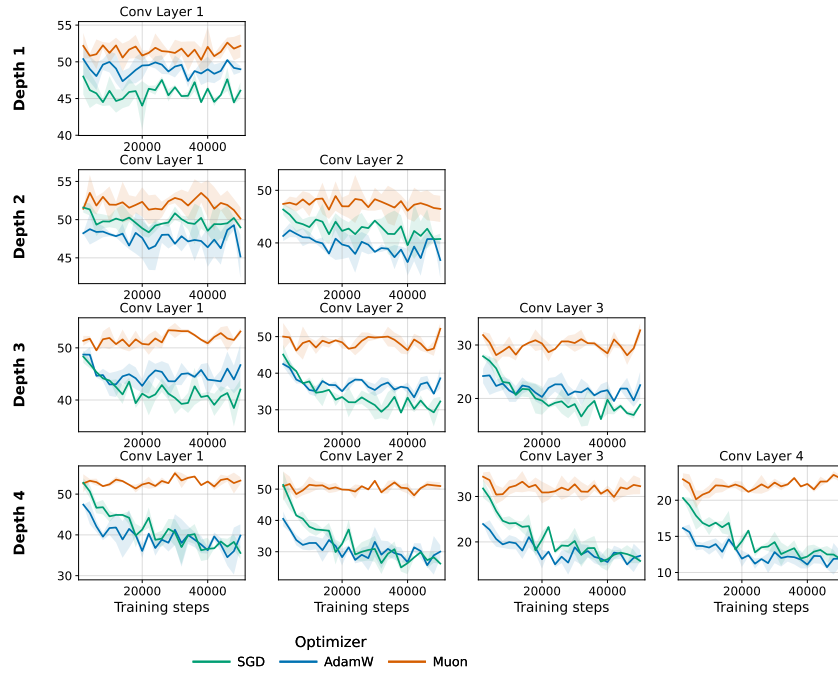


Figure 11: **Muon increases the dimensionality of the FA gradient trajectory.** Effective rank of the Gram matrix of the gradient trajectory for FA networks trained with different optimisers. Muon prevents the trajectory from collapsing onto a small number of directions, resulting in richer update dynamics across layers.

Gradient dimensionality over training in FA - Batch Norm and baselines

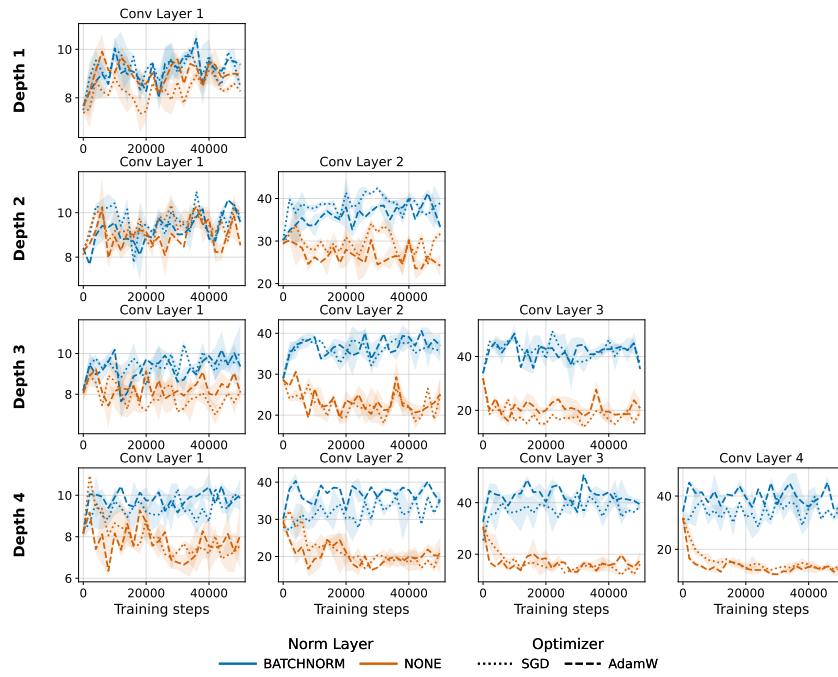


Figure 12: **BN increases the gradient dimensionality of FA networks across layers and depths.** Effective rank of the gradients for FA networks trained with and without BN. Normalising the activities helps prevent the gradients from becoming overly low-dimensional, especially in deeper models.

Gradient Trajectory dimensionality over training in FA - Batch Norm and baselines

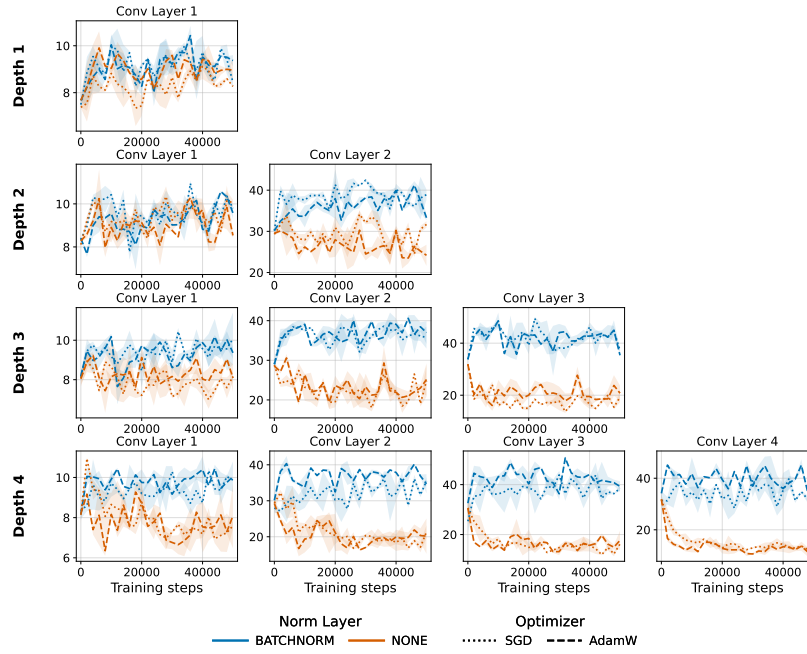


Figure 13: BN increases the dimensionality of the FA gradient trajectory. Effective rank of the Gram matrix of the gradient trajectory for FA networks trained with and without BN. The higher trajectory dimensionality indicates that BN helps FA explore a richer set of update directions during training.

NeurIPS Paper Checklist

1. Claims

Question: Do the main claims made in the abstract and introduction accurately reflect the paper’s contributions and scope?

Answer: [\[Yes\]](#)

Justification: In the abstract and introduction, we summarized our work and explained its contributions, and did not claim anything further.

Guidelines:

- The answer [\[N/A\]](#) means that the abstract and introduction do not include the claims made in the paper.
- The abstract and/or introduction should clearly state the claims made, including the contributions made in the paper and important assumptions and limitations. A [\[No\]](#) or [\[N/A\]](#) answer to this question will not be perceived well by the reviewers.
- The claims made should match theoretical and experimental results, and reflect how much the results can be expected to generalize to other settings.
- It is fine to include aspirational goals as motivation as long as it is clear that these goals are not attained by the paper.

2. Limitations

Question: Does the paper discuss the limitations of the work performed by the authors?

Answer: [\[Yes\]](#)

Justification: We discussed the limitations in the discussion section.

Guidelines:

- The answer [\[N/A\]](#) means that the paper has no limitation while the answer [\[No\]](#) means that the paper has limitations, but those are not discussed in the paper.
- The authors are encouraged to create a separate “Limitations” section in their paper.
- The paper should point out any strong assumptions and how robust the results are to violations of these assumptions (e.g., independence assumptions, noiseless settings, model well-specification, asymptotic approximations only holding locally). The authors should reflect on how these assumptions might be violated in practice and what the implications would be.
- The authors should reflect on the scope of the claims made, e.g., if the approach was only tested on a few datasets or with a few runs. In general, empirical results often depend on implicit assumptions, which should be articulated.
- The authors should reflect on the factors that influence the performance of the approach. For example, a facial recognition algorithm may perform poorly when image resolution is low or images are taken in low lighting. Or a speech-to-text system might not be used reliably to provide closed captions for online lectures because it fails to handle technical jargon.
- The authors should discuss the computational efficiency of the proposed algorithms and how they scale with dataset size.
- If applicable, the authors should discuss possible limitations of their approach to address problems of privacy and fairness.
- While the authors might fear that complete honesty about limitations might be used by reviewers as grounds for rejection, a worse outcome might be that reviewers discover limitations that aren’t acknowledged in the paper. The authors should use their best judgment and recognize that individual actions in favor of transparency play an important role in developing norms that preserve the integrity of the community. Reviewers will be specifically instructed to not penalize honesty concerning limitations.

3. Theory assumptions and proofs

Question: For each theoretical result, does the paper provide the full set of assumptions and a complete (and correct) proof?

Answer: [\[N/A\]](#)

Justification: There is no theoretical result.

Guidelines:

- The answer [N/A] means that the paper does not include theoretical results.
- All the theorems, formulas, and proofs in the paper should be numbered and cross-referenced.
- All assumptions should be clearly stated or referenced in the statement of any theorems.
- The proofs can either appear in the main paper or the supplemental material, but if they appear in the supplemental material, the authors are encouraged to provide a short proof sketch to provide intuition.
- Inversely, any informal proof provided in the core of the paper should be complemented by formal proofs provided in appendix or supplemental material.
- Theorems and Lemmas that the proof relies upon should be properly referenced.

4. Experimental result reproducibility

Question: Does the paper fully disclose all the information needed to reproduce the main experimental results of the paper to the extent that it affects the main claims and/or conclusions of the paper (regardless of whether the code and data are provided or not)?

Answer: [Yes]

Justification: We put the information in the appendix

Guidelines:

- The answer [N/A] means that the paper does not include experiments.
- If the paper includes experiments, a [No] answer to this question will not be perceived well by the reviewers: Making the paper reproducible is important, regardless of whether the code and data are provided or not.
- If the contribution is a dataset and/or model, the authors should describe the steps taken to make their results reproducible or verifiable.
- Depending on the contribution, reproducibility can be accomplished in various ways. For example, if the contribution is a novel architecture, describing the architecture fully might suffice, or if the contribution is a specific model and empirical evaluation, it may be necessary to either make it possible for others to replicate the model with the same dataset, or provide access to the model. In general, releasing code and data is often one good way to accomplish this, but reproducibility can also be provided via detailed instructions for how to replicate the results, access to a hosted model (e.g., in the case of a large language model), releasing of a model checkpoint, or other means that are appropriate to the research performed.
- While NeurIPS does not require releasing code, the conference does require all submissions to provide some reasonable avenue for reproducibility, which may depend on the nature of the contribution. For example
 - (a) If the contribution is primarily a new algorithm, the paper should make it clear how to reproduce that algorithm.
 - (b) If the contribution is primarily a new model architecture, the paper should describe the architecture clearly and fully.
 - (c) If the contribution is a new model (e.g., a large language model), then there should either be a way to access this model for reproducing the results or a way to reproduce the model (e.g., with an open-source dataset or instructions for how to construct the dataset).
 - (d) We recognize that reproducibility may be tricky in some cases, in which case authors are welcome to describe the particular way they provide for reproducibility. In the case of closed-source models, it may be that access to the model is limited in some way (e.g., to registered users), but it should be possible for other researchers to have some path to reproducing or verifying the results.

5. Open access to data and code

Question: Does the paper provide open access to the data and code, with sufficient instructions to faithfully reproduce the main experimental results, as described in supplemental material?

Answer: [Yes]

Justification: We provided anonymized code in the supplemental material.

Guidelines:

- The answer [N/A] means that paper does not include experiments requiring code.
- Please see the NeurIPS code and data submission guidelines (<https://neurips.cc/public/guides/CodeSubmissionPolicy>) for more details.
- While we encourage the release of code and data, we understand that this might not be possible, so [No] is an acceptable answer. Papers cannot be rejected simply for not including code, unless this is central to the contribution (e.g., for a new open-source benchmark).
- The instructions should contain the exact command and environment needed to run to reproduce the results. See the NeurIPS code and data submission guidelines (<https://neurips.cc/public/guides/CodeSubmissionPolicy>) for more details.
- The authors should provide instructions on data access and preparation, including how to access the raw data, preprocessed data, intermediate data, and generated data, etc.
- The authors should provide scripts to reproduce all experimental results for the new proposed method and baselines. If only a subset of experiments are reproducible, they should state which ones are omitted from the script and why.
- At submission time, to preserve anonymity, the authors should release anonymized versions (if applicable).
- Providing as much information as possible in supplemental material (appended to the paper) is recommended, but including URLs to data and code is permitted.

6. Experimental setting/details

Question: Does the paper specify all the training and test details (e.g., data splits, hyperparameters, how they were chosen, type of optimizer) necessary to understand the results?

Answer: [Yes]

Justification: Yes, we specified all of these details in the appendix.

Guidelines:

- The answer [N/A] means that the paper does not include experiments.
- The experimental setting should be presented in the core of the paper to a level of detail that is necessary to appreciate the results and make sense of them.
- The full details can be provided either with the code, in appendix, or as supplemental material.

7. Experiment statistical significance

Question: Does the paper report error bars suitably and correctly defined or other appropriate information about the statistical significance of the experiments?

Answer: [Yes]

Justification: We used 2 random seeds for each results, as we saw that the results were not noisy enough to necessitate more.

Guidelines:

- The answer [N/A] means that the paper does not include experiments.
- The authors should answer [Yes] if the results are accompanied by error bars, confidence intervals, or statistical significance tests, at least for the experiments that support the main claims of the paper.
- The factors of variability that the error bars are capturing should be clearly stated (for example, train/test split, initialization, random drawing of some parameter, or overall run with given experimental conditions).
- The method for calculating the error bars should be explained (closed form formula, call to a library function, bootstrap, etc.)
- The assumptions made should be given (e.g., Normally distributed errors).
- It should be clear whether the error bar is the standard deviation or the standard error of the mean.

- It is OK to report 1-sigma error bars, but one should state it. The authors should preferably report a 2-sigma error bar than state that they have a 96% CI, if the hypothesis of Normality of errors is not verified.
- For asymmetric distributions, the authors should be careful not to show in tables or figures symmetric error bars that would yield results that are out of range (e.g., negative error rates).
- If error bars are reported in tables or plots, the authors should explain in the text how they were calculated and reference the corresponding figures or tables in the text.

8. Experiments compute resources

Question: For each experiment, does the paper provide sufficient information on the computer resources (type of compute workers, memory, time of execution) needed to reproduce the experiments?

Answer: [Yes]

Justification: We provided this information in the appendix.

Guidelines:

- The answer [N/A] means that the paper does not include experiments.
- The paper should indicate the type of compute workers CPU or GPU, internal cluster, or cloud provider, including relevant memory and storage.
- The paper should provide the amount of compute required for each of the individual experimental runs as well as estimate the total compute.
- The paper should disclose whether the full research project required more compute than the experiments reported in the paper (e.g., preliminary or failed experiments that didn't make it into the paper).

9. Code of ethics

Question: Does the research conducted in the paper conform, in every respect, with the NeurIPS Code of Ethics <https://neurips.cc/public/EthicsGuidelines>?

Answer: [Yes]

Justification: We followed strictly the code of ethics.

Guidelines:

- The answer [N/A] means that the authors have not reviewed the NeurIPS Code of Ethics.
- If the authors answer [No], they should explain the special circumstances that require a deviation from the Code of Ethics.
- The authors should make sure to preserve anonymity (e.g., if there is a special consideration due to laws or regulations in their jurisdiction).

10. Broader impacts

Question: Does the paper discuss both potential positive societal impacts and negative societal impacts of the work performed?

Answer: [N/A]

Justification: We do not expect any societal impact from this work. It is mainly about understanding alternatives to backpropagation, which is useful for neuroscience, but will not currently advance machine learning capabilities.

Guidelines:

- The answer [N/A] means that there is no societal impact of the work performed.
- If the authors answer [N/A] or [No], they should explain why their work has no societal impact or why the paper does not address societal impact.
- Examples of negative societal impacts include potential malicious or unintended uses (e.g., disinformation, generating fake profiles, surveillance), fairness considerations (e.g., deployment of technologies that could make decisions that unfairly impact specific groups), privacy considerations, and security considerations.

- The conference expects that many papers will be foundational research and not tied to particular applications, let alone deployments. However, if there is a direct path to any negative applications, the authors should point it out. For example, it is legitimate to point out that an improvement in the quality of generative models could be used to generate Deepfakes for disinformation. On the other hand, it is not needed to point out that a generic algorithm for optimizing neural networks could enable people to train models that generate Deepfakes faster.
- The authors should consider possible harms that could arise when the technology is being used as intended and functioning correctly, harms that could arise when the technology is being used as intended but gives incorrect results, and harms following from (intentional or unintentional) misuse of the technology.
- If there are negative societal impacts, the authors could also discuss possible mitigation strategies (e.g., gated release of models, providing defenses in addition to attacks, mechanisms for monitoring misuse, mechanisms to monitor how a system learns from feedback over time, improving the efficiency and accessibility of ML).

11. Safeguards

Question: Does the paper describe safeguards that have been put in place for responsible release of data or models that have a high risk for misuse (e.g., pre-trained language models, image generators, or scraped datasets)?

Answer: [N/A]

Justification: Our work does not pose any risk of misuse.

Guidelines:

- The answer [N/A] means that the paper poses no such risks.
- Released models that have a high risk for misuse or dual-use should be released with necessary safeguards to allow for controlled use of the model, for example by requiring that users adhere to usage guidelines or restrictions to access the model or implementing safety filters.
- Datasets that have been scraped from the Internet could pose safety risks. The authors should describe how they avoided releasing unsafe images.
- We recognize that providing effective safeguards is challenging, and many papers do not require this, but we encourage authors to take this into account and make a best faith effort.

12. Licenses for existing assets

Question: Are the creators or original owners of assets (e.g., code, data, models), used in the paper, properly credited and are the license and terms of use explicitly mentioned and properly respected?

Answer: [Yes]

Justification: We cited appropriately previous work, and code we used.

Guidelines:

- The answer [N/A] means that the paper does not use existing assets.
- The authors should cite the original paper that produced the code package or dataset.
- The authors should state which version of the asset is used and, if possible, include a URL.
- The name of the license (e.g., CC-BY 4.0) should be included for each asset.
- For scraped data from a particular source (e.g., website), the copyright and terms of service of that source should be provided.
- If assets are released, the license, copyright information, and terms of use in the package should be provided. For popular datasets, paperswithcode.com/datasets has curated licenses for some datasets. Their licensing guide can help determine the license of a dataset.
- For existing datasets that are re-packaged, both the original license and the license of the derived asset (if it has changed) should be provided.

- If this information is not available online, the authors are encouraged to reach out to the asset’s creators.

13. **New assets**

Question: Are new assets introduced in the paper well documented and is the documentation provided alongside the assets?

Answer: [N/A]

Justification: We did not release new assets.

Guidelines:

- The answer [N/A] means that the paper does not release new assets.
- Researchers should communicate the details of the dataset/code/model as part of their submissions via structured templates. This includes details about training, license, limitations, etc.
- The paper should discuss whether and how consent was obtained from people whose asset is used.
- At submission time, remember to anonymize your assets (if applicable). You can either create an anonymized URL or include an anonymized zip file.

14. **Crowdsourcing and research with human subjects**

Question: For crowdsourcing experiments and research with human subjects, does the paper include the full text of instructions given to participants and screenshots, if applicable, as well as details about compensation (if any)?

Answer: [N/A]

Justification: Our work did not involve crowdsourcing experiments.

Guidelines:

- The answer [N/A] means that the paper does not involve crowdsourcing nor research with human subjects.
- Including this information in the supplemental material is fine, but if the main contribution of the paper involves human subjects, then as much detail as possible should be included in the main paper.
- According to the NeurIPS Code of Ethics, workers involved in data collection, curation, or other labor should be paid at least the minimum wage in the country of the data collector.

15. **Institutional review board (IRB) approvals or equivalent for research with human subjects**

Question: Does the paper describe potential risks incurred by study participants, whether such risks were disclosed to the subjects, and whether Institutional Review Board (IRB) approvals (or an equivalent approval/review based on the requirements of your country or institution) were obtained?

Answer: [N/A]

Justification: Our work did not involve crowdsourcing experiments nor research with human subjects.

Guidelines:

- The answer [N/A] means that the paper does not involve crowdsourcing nor research with human subjects.
- Depending on the country in which research is conducted, IRB approval (or equivalent) may be required for any human subjects research. If you obtained IRB approval, you should clearly state this in the paper.
- We recognize that the procedures for this may vary significantly between institutions and locations, and we expect authors to adhere to the NeurIPS Code of Ethics and the guidelines for their institution.
- For initial submissions, do not include any information that would break anonymity (if applicable), such as the institution conducting the review.

16. Declaration of LLM usage

Question: Does the paper describe the usage of LLMs if it is an important, original, or non-standard component of the core methods in this research? Note that if the LLM is used only for writing, editing, or formatting purposes and does *not* impact the core methodology, scientific rigor, or originality of the research, declaration is not required.

Answer: [N/A]

Justification: Our work did not involve LLMs used in any novel, important or non standard way.

Guidelines:

- The answer [N/A] means that the core method development in this research does not involve LLMs as any important, original, or non-standard components.
- Please refer to our LLM policy in the NeurIPS handbook for what should or should not be described.