
First-Order Trajectory Matching: Fast Ensemble Predictions of Chaotic, Turbulent, Stochastic Systems

Shreya Jha

Courant Institute of Mathematical Sciences, New York University

Timo Schorlepp

Courant Institute of Mathematical Sciences, New York University

Nicholas Geissler

Courant Institute of Mathematical Sciences, New York University

Jules Berman

Courant Institute of Mathematical Sciences, New York University

Benjamin Peherstorfer

Courant Institute of Mathematical Sciences, New York University

Abstract

We introduce First-Order Trajectory Matching (FTM), a surrogate-modeling method that learns the first-order local transport of probability mass from trajectories of stochastic systems. By matching the symmetric first-order motion of trajectories, FTM learns the probability current velocity, whose flow preserves time marginals to match ensemble averages, while also capturing current-like trajectory quantities such as fluxes, circulations, and barrier-crossing currents. FTM learns the current velocity directly from trajectories, avoiding drift, diffusion, and score estimation. Our stability analysis separates discretization error from sampling variance and shows that the one-step simulation-free FTM loss is stable when temporal resolution and sample size are properly balanced. Across stochastic dynamical systems and PDE examples, we empirically demonstrate that FTM provides trajectory-aware ensemble predictions at low, deterministic-rollout cost.

1 Introduction

Overview: Fast ensemble predictions of physical systems Many dynamical systems in scientific applications are stochastic, or effectively so, because of chaos, coarse graining, partial observation, or unresolved degrees of freedom. Numerical high-fidelity simulators for such systems are often available, but repeated traditional numerical simulation is too costly for outer-loop tasks such as design, inverse problems, control, and uncertainty quantification. This motivates fast surrogate models trained from trajectory data. In the setting of (effectively)

stochastic systems, however, the surrogate should not merely predict a single trajectory; it should rapidly propagate ensembles of trajectories and estimate their statistics, which describe the range of possible outcomes [13, 30, 53].

Operator learning and best forecasting predictions that collapse to the conditional mean Neural operators and related surrogate models [39, 37] are typically trained on state-transition data with a mean-squared error loss, which means that the optimal operator-learning map is the conditional expectation of the next state given the current one. This gives a fast model, but the resulting map is a point predictor. As a consequence, intrinsic variability is averaged out so that multiple possible future states from the same observed current state are mapped to a single mean outcome; see Figure 1. Thus, such models fail to represent the transport of probability mass that determines ensemble statistics of stochastic systems [29, 16, 42].

Population dynamics match the evolution of time marginals only Population-dynamics methods infer a flow that matches the evolution of time marginals, which ensures that the right amount of probability mass is present in the right regions of the state space at each time. Examples include action matching [44, 6], the discrete inverse continuity equation method [7], and JKO/Wasserstein-gradient-flow and optimal transport-based methods [59, 14, 58]. Matching time marginals is sufficient to approximate ensemble averages but it is insufficient to determine ensemble dynamics, because it does not specify how mass flows over time. For example, a statistically stationary nonequilibrium system may have fixed time marginals while probability mass circulates persistently, which is not captured by matching time marginals alone; see Figure 1.

Conditional diffusion- and flow-based models and their inference costs An alternative is to model the full conditional transition law using conditional diffusion- and flow-based generative models [56, 38, 2, 16, 34]. Such models represent a distribution over future states rather than a single deterministic prediction, and therefore can capture stochastic variability and martingale-dominated quantities. This expressivity comes at a computational cost, typically requiring multiple neural-network evaluations or numerical solver steps to generate each next state. In autoregressive rollouts, these costs are incurred at every physical time step. Recent approaches such as consistency, mean-flow, and other distillation models aim to reduce costs; however, these methods have been developed primarily for static generative modeling and in practice often still trade off sample quality against the number of inference steps [55, 63, 26, 8, 21]. Furthermore, representing the underlying dynamic measure transport with a robust one-step map is intrinsically limited [60].

Our approach: First-Order Trajectory Matching (FTM) We propose First-Order Trajectory Matching (FTM) which learns the local probability mass transport describing how probability mass moves through the state space. As illustrated in Figure 1, FTM learns a deterministic velocity field that transports ensembles in the right way both globally and locally. Globally, its flow matches the evolution of the time marginals, so probability mass is placed in the correct regions of state space. Locally, it matches the trajectory-induced transport of mass, preserving currents such as circulations or barrier-crossing fluxes. Computationally, FTM leads to a surrogate model based on an ordinary differential equation (ODE), so

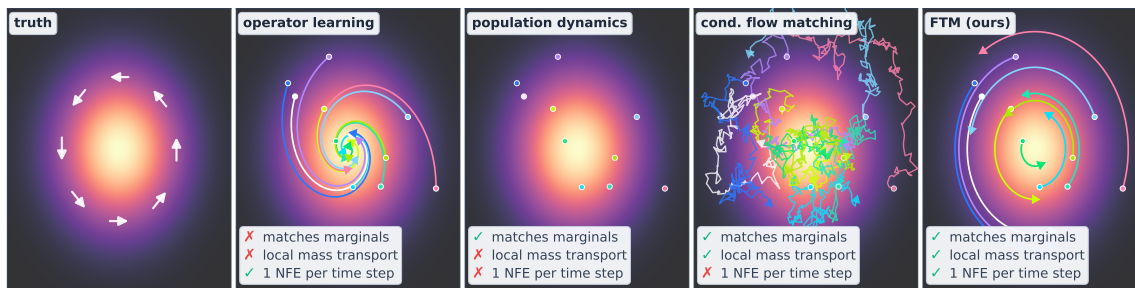


Figure 1: Statistically stationary process where probability mass circulates. A learned operator model leads to trajectories that spiral inward, collapsing to the mean. Population dynamics (marginal matching) match time marginals but with zero velocity (for minimum kinetic energy) and so miss the rotation. Conditional generative modeling such as conditional flow matching reproduces the mass transport but typically requires multiple solver steps per physical time step. FTM preserves time marginals while capturing the first-order rotational current with one neural network evaluation (NFE = 1) per time step. Details in Appendix A.

ensembles can be propagated by fast deterministic rollouts. At the same time, this focus on a deterministic surrogate means that FTM is not intended to reproduce martingale-dominated path statistics such as hitting-time distributions or temporal correlations.

FTM matches local mass transport by using both directions of the observed trajectories: Looking forward asks where trajectories go next and gives a one-sided forecasting velocity; looking backward asks where they came from. Combining these incoming and outgoing views gives the symmetric first-order motion of probability mass through a space-time point. In the infinitesimal limit, this is the probability current velocity, which is the learning target of FTM.

The probability current velocity can be learned directly from stochastic trajectories, making FTM a fully trajectory-based surrogate-modeling approach. FTM uses a Stratonovich identity to turn current-velocity regression into a pathwise objective whose empirical form depends only on observed trajectory increments and evaluations of the candidate velocity field. We make this objective scalable by avoiding full-trajectory averaging, which is too expensive for long rollouts and minibatch training. We therefore introduce a chunked loss that can balance between full-trajectory averaging and one-step local training, and prove a bound that separates the effects of time discretization, chunk length, and sample size. This analysis justifies the simple one-step FTM loss used in our experiments when time resolution and sample sizes are balanced. The one-step loss is local in time, cheap to evaluate, avoids separate drift/diffusion/score estimation, and remains stable when sufficiently many trajectories are available with respect to the time resolution.

Literature review *Probability current velocity in generative modeling* Probability-flow ODEs and probability current velocities also appear in diffusion- and flow-based generative modeling [56, 38, 2, 1, 43], where they describe the auxiliary sampling-time transport

from a reference law to a target law and often provide faster alternatives to SDE samplers [15]. In contrast, we are given physical-time trajectories of a stochastic system and seek the probability current velocity induced by those trajectories, not the velocity of an artificial path prescribed by a noising process or a stochastic interpolant. Thus, unlike standard score-matching or conditional flow-matching objectives, our objective learns the physical-time probability current directly from observed paths.

Probability current velocity in statistical physics and stochastic thermodynamics

Probability currents are classical objects in stochastic mechanics and nonequilibrium diffusion theory [45, 17, 49]. Recent works in machine learning have used them in two main ways. First, in high-dimensional Fokker–Planck solvers, the probability current velocity is constructed from known drift-diffusion information together with an estimated score and then used to evolve particles along the probability flow [41, 9, 10]. Second, in stochastic thermodynamics, there are methods for learning probability current velocities or related thermodynamic force fields, primarily for entropy-production diagnostics [54, 35, 24, 11, 40, 20]. Most of this literature, which is also based on the Stratonovich identity (11), operates in the stationary regime, which excludes our setting of evolving $\rho(t)$. The work [24] gives a detailed analysis of trajectory length in this stationary regime, showing how longer averages reduce statistical error relative to the number of basis functions in linear approximations. Recent work relaxes stationarity [40, 20], but remains diagnostic, which means that the learned field is used to quantify or localize irreversibility and not integrated in time for predicting ensemble evolution. FTM instead develops a loss for learning a time-dependent velocity for predicting the evolution of a law $\rho(t)$. In particular, our analysis shows that, in this transient regime, finite-sample and discrete-time effects become central. We therefore introduce a chunk length that controls a statistical averaging scale, which in turn determines whether the empirical FTM loss provides a stable training signal for rollout.

Learning SDEs Classical SDE learning aims to estimate drift and diffusion coefficients, a long-standing problem that is difficult from finite, discretely observed trajectories and in high dimensions [46, 18, 12, 52]. Recent neural and latent SDEs parameterize these coefficients with neural networks [61, 36, 31, 19, 62, 4]. We bypass the challenge of SDE identification by learning the probability current velocity directly from trajectories, without separately estimating drift, diffusion, or score.

Contributions (a) Formulate ensemble prediction as learning local probability mass transport rather than conditional means or marginal-matching flows, identifying the probability current velocity as the deterministic surrogate for preserving marginals and first-order trajectory transport.

(b) Derive and analyze a scalable, one-step, and simulation-free loss function to learn the current velocity directly from trajectories, bypassing drift, diffusion, and score estimation.

(c) Show across stochastic and turbulent systems that FTM matches ensemble statistics and trajectory-based transport QoIs, while requiring only one neural-network evaluation per physical time step.

2 Setup, preliminaries, and problem formulation

Setup Let $(X(t))_{t \in [0, T]}$ be a stochastic process with state space $\mathbb{R}^d$, described by an SDE

$$dX(t) = b(t, X(t))dt + A(t)dW(t), \quad X(0) \sim \rho(0), \quad (1)$$

with an initial probability density $\rho(0): \mathbb{R}^d \rightarrow [0, \infty)$, a sufficiently smooth drift vector field $b: [0, T] \times \mathbb{R}^d \rightarrow \mathbb{R}^d$, a sufficiently smooth diffusion matrix $A(t) \in \mathbb{R}^{d \times d}$ that does not depend on $X(t)$ (“additive noise”), and a standard Wiener process $(W(t))_{t \in [0, T]}$ on $\mathbb{R}^d$. For all theoretical statements, we will further assume uniform boundedness of the drift and diffusion matrix: $\|b(t, x)\|_2 \leq b_{\max}$ for all $t \in [0, T], x \in \mathbb{R}^d$, and $\Sigma(t) := A(t)A(t)^\top \preceq \sigma_{\max} I_d$ for all $t \in [0, T]$. We denote the density of $X(t)$ as $\rho(t): \mathbb{R}^d \rightarrow [0, \infty)$. In the following, we are given a data set

$$\mathcal{X} = \{X^{(i)}(t_k) \mid i = 1, \dots, N, k = 0, \dots, K\} \subset \mathbb{R}^d, \quad (2)$$

of $i = 1, \dots, N$ independent realizations of trajectories of (1) with K time steps $0 = t_0 < t_1 < \dots < t_K = T$ over the time interval $[0, T]$ and time-step size $h > 0$, assumed equidistant for simplicity (all of the following extends to data that are irregularly sampled in time).

Problem formulation Given the trajectory data (2), we seek a deterministic velocity field $u: [0, T] \times \mathbb{R}^d \rightarrow \mathbb{R}^d$ whose induced ODE

$$\frac{d}{dt}\hat{x}(t) = u(t, \hat{x}(t)), \quad \hat{x}(0) \sim \rho(0), \quad (3)$$

can be used as a fast surrogate for ensemble prediction under the stochastic dynamics (1). The basic requirement for such a surrogate is marginal consistency with the stochastic process (1), i.e., if $\hat{x}(0) \sim \rho(0)$, then the ODE should satisfy $\hat{x}(t) \sim \rho(t)$ for $t \in [0, T]$. Marginal consistency is necessary for ensemble prediction because it ensures that the learned flow places probability mass in the correct regions of state space at each time. We seek a deterministic velocity field whose flow matches the time marginals of the stochastic process and additionally generates trajectories that are first-order consistent with sample paths of the SDE (1).

3 First-order trajectory matching (FTM)

With FTM, we do not only match where probability mass is globally but also how probability mass moves locally. Matching time marginals only ensures that the right amount of mass is globally present in the right regions of state space at each time. FTM additionally asks that, locally in space and time, the instantaneous transport of this mass agrees with that induced by the stochastic trajectories.

3.1 From global to local mass transport

FTM seeks a velocity that describes how probability mass, up to first order, passes through each space-time point (t, x) , rather than only where the mass is located at time t .

Describing local mass transport with forward, backward, and symmetric increments A forward increment describes the first-order approximation of where trajectories currently at x move mass next,

$$\vec{b}_h(t, x) = \mathbb{E}_{\omega \sim \mathbb{P}} [h^{-1} (X_\omega(t+h) - X_\omega(t)) | X_\omega(t) = x] , \quad (4)$$

where $h > 0$ is a time-step size and $(X_\omega(t))_{t \in [0, T]}$ denotes a sample path of the SDE (1). In the limit, under suitable regularity, the expected forward increment $\vec{b}_h(t, x)$ converges point-wise to the drift of (1), $\vec{b}(t, x) := \lim_{h \downarrow 0} \vec{b}_h(t, x) = b(t, x)$ [32]. However, local mass transport through (t, x) is not only an outgoing quantity, it also depends on where the mass arriving at (t, x) came from. The backward increment captures this incoming mass transport,

$$\tilde{b}_h(t, x) = \mathbb{E}_{\omega \sim \mathbb{P}} [h^{-1} (X_\omega(t) - X_\omega(t-h)) | X_\omega(t) = x] , \quad (5)$$

which converges to $\tilde{b}(t, x) := \lim_{h \downarrow 0} \tilde{b}_h(t, x) = b(t, x) - \Sigma(t) \nabla \log \rho(t, x)$ under suitable regularity assumptions [45, 3, 27]. With FTM, we aim to learn the velocity that describes the net flux of mass, which is obtained by combining the incoming and outgoing mass through the symmetric increment,

$$v_h(t, x) = \mathbb{E}_{\omega \sim \mathbb{P}} [(2h)^{-1} (X_\omega(t+h) - X_\omega(t-h)) | X_\omega(t) = x] . \quad (6)$$

Combining the limits of $\vec{b}_h$ and $\tilde{b}_h$ for $h \downarrow 0$ shows the limit of the expected symmetric increment $\lim_{h \downarrow 0} v_h(t, x) = \frac{1}{2}(\vec{b}(t, x) + \tilde{b}(t, x))$ [45].

Probability current velocity Using the forward and backward limits above, the limit velocity $\frac{1}{2}(\vec{b}(t, x) + \tilde{b}(t, x))$ is

$$v(t, x) = b(t, x) - \frac{1}{2} \Sigma(t) \nabla \log \rho(t, x), \quad (7)$$

which is the probability current velocity of the SDE (1); see, e.g., [48, Chapter 4].

The importance of v is that the same velocity selected locally by the trajectories also transports the marginals globally. Indeed, using (7), the Fokker–Planck equation for (1) can be written as

$$\partial_t \rho(t, x) = -\nabla \cdot (b(t, x) \rho(t, x)) + \frac{1}{2} \Sigma(t) : \nabla^2 \rho(t, x) = -\nabla \cdot (\rho(t, x) v(t, x)) . \quad (8)$$

Equivalently, ρv is the probability current of the stochastic process (1). Thus, if $\hat{x}(0) \sim \rho(0)$ and $\hat{x}(t)$ evolves according to (3) with $u = v$, then the law of $\hat{x}(t)$ follows the same marginals as the SDE.

Therefore the probability current velocity satisfies exactly the two requirements we imposed. It matches the time marginals, so probability mass is globally in the correct places. It also arises as the symmetric first-order motion of the stochastic trajectories, so probability mass moves locally as it does under the SDE. We discuss further properties of and intuition for v in Appendices A and B, and also refer to the large body of literature that uses the probability current velocity [24, 56, 9, 40, 11]. FTM learns the probability current velocity rather than an arbitrary marginal-matching velocity.

3.2 A scalable loss function for learning the current velocity from trajectory data

At the core of FTM is the task of learning the probability current velocity v directly from trajectory data. This is not a standard regression problem, because values of $v(t, x)$ are unavailable in the data set (2). Although v can be represented as (7), estimating v through separately learning drift, diffusion, and score is typically challenging and unreliable; see Section 4. Instead, we are interested in a loss function whose minimizer is v , but whose empirical estimator uses only sample trajectories as given in the training data (2).

An inaccessible regression objective Let us consider the parametrized velocity field $v_\theta : [0, T] \times \mathbb{R}^d \rightarrow \mathbb{R}^d$. If the current velocity v were known, we would have a standard regression objective

$$\min_{\theta \in \mathbb{R}^p} \mathbb{E}_{t \sim \mathcal{U}([0, T]), X(t) \sim \rho(t)} [\|v(t, X(t)) - v_\theta(t, X(t))\|_2^2] \quad (9)$$

over the parameters $\theta \in \mathbb{R}^p$, where times t are uniformly sampled $\mathcal{U}([0, T])$ and $X(t)$ is a sample of the time marginal $\rho(t)$. We expand the norm in (9) and drop the constant term to see that it is sufficient to minimize

$$J(\theta) = \mathbb{E}_{t \sim \mathcal{U}([0, T]), X(t) \sim \rho(t)} [\|v_\theta(t, X(t))\|_2^2 - 2\langle v(t, X(t)), v_\theta(t, X(t)) \rangle] . \quad (10)$$

The quadratic term $\|v_\theta(t, X(t))\|_2^2$ can be directly estimated from data. The difficulty is the linear term $\langle v(t, X(t)), v_\theta(t, X(t)) \rangle$ because it contains the current velocity v , which is unknown.

A pathwise loss via the Stratonovich identity The key observation is that we do not need to evaluate v pointwise to estimate the linear term in the objective (10). Instead, it is sufficient to be able to estimate its action on the parametrized velocity v_θ . This action can be estimated directly from SDE trajectories through the Stratonovich integral identity

$$\mathbb{E}_{\omega \sim \mathbb{P}} \left[\int_0^T \langle v_\theta(t, X_\omega(t)), v(t, X_\omega(t)) \rangle dt \right] = \mathbb{E}_{\omega \sim \mathbb{P}} \left[\int_0^T v_\theta(t, X_\omega(t)) \circ dX_\omega(t) \right] \quad (11)$$

where $\circ$ denotes the Stratonovich dot product (see Appendix C.1 for a proof of this standard result for completeness, and, e.g., [24, 11, 40] where it is used for loss functions). The resulting objective is

$$J(\theta) = J_T(\theta) = \mathbb{E}_{\omega \sim \mathbb{P}} \left[\frac{1}{T} \int_0^T \|v_\theta(t, X_\omega(t))\|_2^2 dt - \frac{2}{T} \int_0^T v_\theta(t, X_\omega(t)) \circ dX_\omega(t) \right] , \quad (12)$$

which does not depend on the unknown probability current velocity v anymore. The objective has the same minimizer as the inaccessible regression loss (9) but now depends only on trajectories.

A pathwise loss with chunks The loss (12) depends on the entire trajectory over the time interval $[0, T]$, which can become intractable for long trajectories. We therefore introduce a chunk length τ with $h \leq \tau \leq T$, and train on trajectory segments or chunks of length τ . The chunked objective is

$$J_\tau(\theta) = \mathbb{E}_{t,\omega} \left[\frac{1}{\tau} \int_t^{t+\tau} \|v_\theta(s, X_\omega(s))\|_2^2 ds - \frac{2}{\tau} \int_t^{t+\tau} v_\theta(s, X_\omega(s)) \circ dX_\omega(s) \right], \quad (13)$$

with $t \sim \mathcal{U}([0, T - \tau])$, which still has the same minimizers as $J(\theta)$. Given trajectories (2) sampled at discrete time points of time-step size $h > 0$, we set $\tau = K_\tau h$ for an integer K_τ and approximate the Stratonovich integral, e.g., by the composite trapezoidal rule to obtain the empirical loss

$$\hat{J}_{h,\tau}(\theta) = \frac{1}{N\tau} \sum_{i=1}^N \sum_{j=0}^{K_\tau-1} \left[\|v_\theta(s_{i,j}, X^{(i)}(s_{i,j}))\|_2^2 h - \left\langle v_\theta(s_{i,j+1}, X^{(i)}(s_{i,j+1})) + v_\theta(s_{i,j}, X^{(i)}(s_{i,j})), X^{(i)}(s_{i,j+1}) - X^{(i)}(s_{i,j}) \right\rangle \right], \quad (14)$$

where $s_{i,j} = t_{m_i+j}$ for uniformly sampled chunk start indices $m_i \in \{0, \dots, K - K_\tau\}$.

Scalable one-step FTM loss when time discretization and sample size are balanced

The objective $\hat{J}_{h,\tau}$ depends on two time scales: the data time step h and the chunk length τ . The step size h controls the bias from approximating the time integrals, while the chunk length τ controls how much stochastic path noise is averaged for one loss sample. The next bound makes this precise.

Proposition 1. *Suppose $v_\theta: [0, T] \times \mathbb{R}^d \rightarrow \mathbb{R}^d$ is uniformly bounded, such that there exists $V > 0$ with $\|v_\theta(t, x)\|_2 \leq V$ for all $t \in [0, T]$ and $x \in \mathbb{R}^d$, and uniformly Lipschitz continuous, such that $C_{div} := \sup_{t,x} \frac{1}{2} |\text{Tr}(\Sigma(t) \nabla v_\theta(t, x))| < \infty$. Then there exist constants $C, \tilde{C} > 0$ (related to the discretization error for the integrals) such that we have*

$$\mathbb{E} \left[(\hat{J}_{h,\tau}(\theta) - J_\tau(\theta))^2 \right] \leq 2 \left(V^4 + 12 \left(V^2 b_{\max}^2 + \frac{\sigma_{\max} V^2}{\tau} + C_{div}^2 \right) + \tilde{C}h \right) \frac{1}{N} + 4C^2 V^2 h^2. \quad (15)$$

Proof in Appendix C.2. The bound separates the effect of the discretization scale h from the effect of the averaging scale τ . The last term in the bound is the squared time-discretization bias. It decreases as the data are sampled more finely in time. The remaining terms are variance terms and scale like $1/N$ with the number of data samples N . Within this variance term, the contribution $\sigma_{\max} V^2 / (N\tau)$ is the stochastic contribution from the diffusive part of the trajectories. Increasing τ averages the noise over a longer trajectory chunk; increasing N averages over more independent samples. Thus, stability (which means keeping the variance under control) is governed by both N and τ . In particular, for fixed τ , the variance remains bounded as $h \downarrow 0$. Thus, for a fixed τ , the discretization bias can be reduced by taking smaller time steps h without the variance growing unbounded. The variance-minimizing choice is $\tau = T$, but is often impractical because every training step requires processing full trajectories, which is expensive for long time horizons and limits minibatching.

We are therefore interested in $\tau \approx h$, which couples the averaging scale τ to the discretization scale h , and leads to the scalable, one-step FTM loss

$$\hat{J}_{\text{FTM}}(\theta) = \frac{1}{Nh} \sum_{i=1}^N \left[\|v_\theta(s_i, X^{(i)}(s_i))\|_2^2 h - \langle v_\theta(s_i, X^{(i)}(s_i)), X^{(i)}(s_i+h) - X^{(i)}(s_i-h) \rangle \right], \quad (16)$$

for uniformly sampled times $s_1, \dots, s_N \in \{t_1, \dots, t_{K-1}\}$. Here, we used the midpoint rule on chunks of size $\tau = 2h$ in (13), instead of the trapezoidal rule; see Appendix C.3 for further discussion and the relation of this loss to (6). The variance of the loss now behaves as $\sigma_{\max} V^2 / (Nh)$. Hence, if N is fixed, the estimator becomes unstable as $h \downarrow 0$. However, the bound in (15) shows that this instability is more nuanced. The variance of the one-step FTM loss (16) remains controlled whenever Nh is sufficiently large.

The one-step FTM loss is the most scalable one and we use it in our experiments. It is local in time, simulation-free, requires only adjacent states and a single neural-network evaluation per minibatch data point, and avoids estimating drift, diffusion, or scores. Its variance scales like $1/(Nh)$, so it is appropriate when the time-step size h and the sample size N are balanced.

3.3 Time-marginal versus path-dependent inference errors

At inference time, we generate samples by solving the ODE (3) with the learned $u = v_\theta$. We denote by $(\hat{\rho}_\theta(t))_t$ the marginal laws of the $(\hat{x}_\theta(t))_t$ trajectories generated via v_θ . There are two inference errors of interest. First, the marginal-matching error, which measures how close $\hat{\rho}_\theta(t)$ is to the true $\rho(t)$, and therefore whether ensemble averages of “time-local” quantities of interests (QoIs) are accurately estimated. Second, the error for *path-dependent QoIs*, which instead allows us to measure how accurately the learned ODE captures the path behavior of the SDE (1).

Marginal matching inference error The following proposition about the marginal-matching error is based on a standard Grönwall argument and shows that uniform approximation of the current velocity implies Wasserstein control of the generated ensemble. A similar proposition holds for learning *any* ODE (3) for some $u \neq v$ that produces the correct time marginals.

Proposition 2 (cf. e.g. [2, 5, 25]). *Suppose that the true probability current velocity v is uniformly Lipschitz-continuous with Lipschitz constant $L_v > 0$, and $\|v_\theta(t, x) - v(t, x)\|_2 \leq \epsilon$ for all $t \in [0, T]$, $x \in \mathbb{R}^d$ for the learned velocity v_θ . Then $W_2^2(\hat{\rho}_\theta(t), \rho(t)) \leq \exp((2L_v + 1)t) t \epsilon^2$.*

The proof is included in Appendix C.4 for completeness. Proposition 2 immediately gives bounds for time-local QoIs that depend only on the marginal distribution. If $\phi : \mathbb{R}^d \rightarrow \mathbb{R}$ is a scalar QoI, which is Lipschitz with constant L_ϕ , then $|\mathbb{E}_{X(t) \sim \rho(t)}[\phi(X(t))] - \mathbb{E}_{\hat{x}_\theta(t) \sim \hat{\rho}_\theta(t)}[\phi(\hat{x}_\theta(t))]| \leq L_\phi \exp((L_v + \frac{1}{2})t) \sqrt{t} \epsilon$ (cf. Appendix C.4). Thus, if v_θ approximates the probability current velocity v well, then the learned ODE produces accurate ensemble averages of local QoIs.

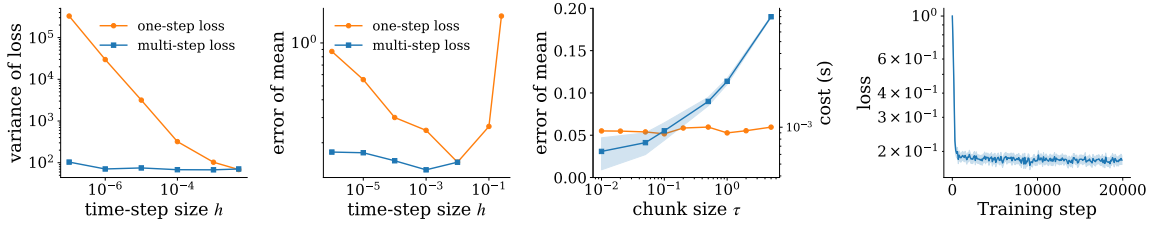


Figure 2: The one-step FTM loss is stable in the practically relevant time-resolution/sample-size balanced regime: longer chunks sizes τ are necessary only at very small time-step sizes h to reduce variance (a)–(b), but otherwise add substantial cost per training step and provide little accuracy gain at realistic resolutions (here for Duffing oscillator example) (c). FTM trains robustly (d).

Path-dependent QoI inference error Marginal errors only measure where probability mass is located. By learning the current velocity, FTM also aims to match how probability mass moves, which means that sample trajectories generated with the learned ODE also approximate those of the SDE to first-order in the induced rate of change of probability mass; see, e.g., [10] where this is used for capturing entropy production rates. The following proposition shows an error bound for path-dependent QoIs $\Phi(X) = \Phi((X(t))_{t \in [0, T]}) := \int_0^T \phi(t, X(t)) \circ dX(t)$ for $\phi: [0, T] \times \mathbb{R}^d \rightarrow \mathbb{R}^d$ again under uniform v_θ error control; see Appendix C.5 for a proof using standard arguments. *This* proposition is specific to FTM and the probability current velocity. In other words, targeting any other velocity field u for (3) with the same time-marginals does not permit control over the error in Φ , as is evident from the population dynamics example in Figure 1.

Proposition 3. *Under the same assumptions as Proposition 2, suppose further that v_θ and ϕ are bounded, $\|v_\theta(t, x)\|_2 \leq B_{v_\theta}$ and $\|\phi(t, x)\|_2 \leq B_\phi$ for all $t \in [0, T]$, $x \in \mathbb{R}^d$, and Lipschitz on $\mathbb{R}^d$ with Lipschitz constants L_{v_θ} and L_ϕ , respectively. Then, with $C = (L_\phi B_{v_\theta} + L_{v_\theta} B_\phi)/(L_v + \frac{1}{2})$:*

$$|\mathbb{E}[\Phi(X)] - \mathbb{E}[\Phi(\hat{x}_\theta)]| \leq \left(\int_0^T \|\phi(t, \cdot)\|_{L^2(\rho(t))} dt + C \exp((L_v + \frac{1}{2})T) \sqrt{T} \right) \epsilon. \quad (17)$$

The first term accounts for the local-in-time first-order range of change error. The second term is the marginal rollout error, which appears because the QoI is evaluated along samples from $\hat{\rho}(t)$ rather than $\rho(t)$, and is controlled by the Wasserstein bound of Proposition 2. The bound shows that models learned with FTM control both the quantities of interest under the learned ensemble and their first-order range of change, capturing fluxes and circulations that are ignored by marginal matching.

4 Experiments

Examples We consider the following examples; see Appendix D for details. **1. Duffing oscillator.** Samples evolve in phase space based on a double-well potential. A Brownian

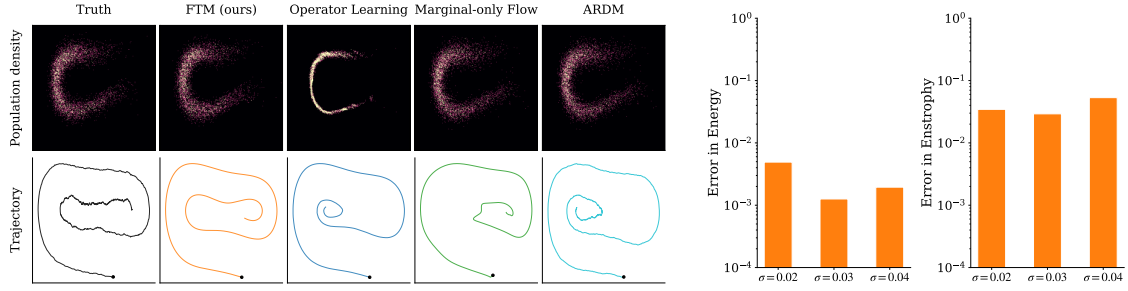


Figure 3: Duffing oscillator (left): FTM matches the evolving ensemble and generates physically meaningful trajectories. Stochastic Burgers (right): FTM is robust to increasing noise levels (σ).

forcing is applied to the oscillator’s acceleration equation. **2. Chaotic Rayleigh–Bénard convection.** This is a stochastically forced nine-mode model of Rayleigh–Bénard convection introduced in [50]. The system is of dimension nine and chaotic due to the thermal convection; all state variables are Brownian forced. **3. Stochastically forced Burgers.** This system serves as a simplified model of turbulence, capturing nonlinear advective transport, viscous dissipation, and the formation of sharp gradients. The stochastic forcing is given by a 10-mode Fourier expansion driven by independent Brownian motions. **4. Stochastically forced turbulence.** This system is governed by the two-dim. incompressible Navier–Stokes equation; Brownian forcing acts on the first ten Fourier modes.

The FTM loss is stable and robust to train Figure 2 shows on the example of the Duffing oscillator that the one-step FTM loss is a principled scalable estimator, in agreement with Proposition 1. Panel (a)–(b) show that for chunk size $\tau = h$, the variance/error grows only when h becomes very small; fixing the chunk size $\tau = 0.1 \gg h$ removes this small- h blow-up. Crucially, Panel (c) shows that in the time-resolution/sample-size balanced regime of our experiments (here for the Duffing oscillator), accuracy is nearly insensitive to τ ; as shown in Proposition 1. Thus, longer chunks buy little accuracy in this balanced regime but incur substantially higher cost, whereas our one-step FTM loss retains a stable training signal at minimal expense. Finally, Panel (d) shows that this stability carries over to optimization. Across 100 random neural-network initializations, one-step FTM trains consistently and robustly. (The loss does not approach zero because (10) drops the constant from (9).)

FTM captures trajectory-based transport beyond ensemble statistics Figure 3 (top row) and Table 1 (distribution error W_2) show that FTM accurately matches time marginals and is competitive to marginal-only flows and explicit marginal-matching methods such as DICE [7]. FTM additionally matches local mass transport: The bottom row of Figure 3 shows that FTM follows the local motion of the stochastic trajectories, whereas marginal-only transport produces paths that do not resemble the stochastic dynamics. To quantify this, we consider trajectory-based quantities of interest (QoI): for Duffing, we measure the barrier-crossing current, and for Rayleigh–Bénard the rotational current (Appendix D). FTM gives the smallest trajectory-based QoI error averaged over time in Table 1.

Table 1: FTM matches the ensemble distribution and additionally gives the smallest trajectory-QoI errors, showing that FTM captures transport information missed by marginal-only methods.

	Duffing oscillator		Rayleigh–Bénard convection	
	dist. err. (W_2)	traj. QoI err.	dist. err. (W_2)	traj. QoI err.
T. stepper [47]	0.348($\pm 2.0\text{e-}01$)	1.630($\pm 8.4\text{e-}03$)	2.690($\pm 1.6\text{e+}00$)	1.650($\pm 3.8\text{e-}03$)
DICE [7]	0.340($\pm 5.0\text{e-}01$)	2.510($\pm 7.6\text{e-}03$)	0.200($\pm 1.2\text{e-}01$)	0.882($\pm 3.8\text{e-}03$)
Marginal [28]	0.081($\pm 2.5\text{e-}02$)	0.564($\pm 8.3\text{e-}03$)	0.111($\pm 6.1\text{e-}02$)	1.270($\pm 3.8\text{e-}02$)
SDE learning [23]	0.083($\pm 2.8\text{e-}02$)	0.263($\pm 7.9\text{e-}03$)	0.054 ($\pm 2.3\text{e-}02$)	0.053($\pm 4.8\text{e-}03$)
SDE matching [4]	0.549($\pm 2.0\text{e-}01$)	0.178($\pm 7.2\text{e-}03$)	0.227($\pm 1.3\text{e-}01$)	0.612($\pm 4.4\text{e-}03$)
Plug-in v (E)	0.507($\pm 1.7\text{e-}01$)	1.150($\pm 6.1\text{e-}03$)	0.374($\pm 1.8\text{e-}01$)	0.566($\pm 5.0\text{e-}03$)
FTM (ours)	0.075 ($\pm 4.9\text{e-}02$)	0.020 ($\pm 5.7\text{e-}03$)	0.060($\pm 2.5\text{e-}02$)	0.027 ($\pm 4.6\text{e-}03$)

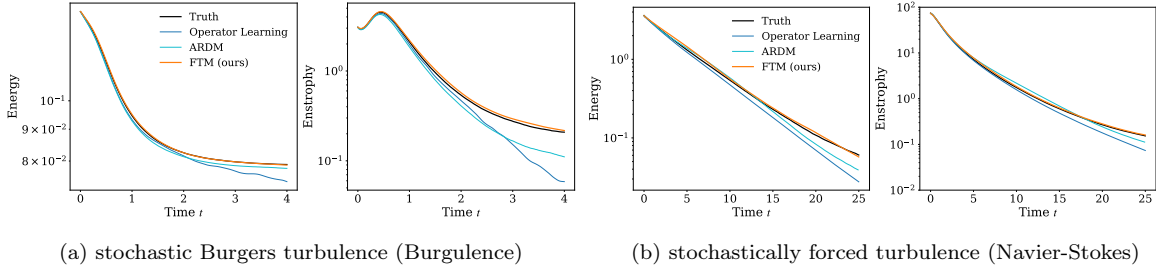


Figure 4: FTM predicts ensembles with accurate energy and enstrophy statistics of solution trajectories of the stochastic Burgers (left panel) and stochastically forced turbulence (right panel) example. (See Figure 7 in appendix for plots that include the standard deviation.)

Table 2: FTM gives the best reported errors while using only one neural-network function evaluation (NFE) per time step. More extensive results are provided in the appendix in Table 4.

	Stochastic Burgers		Forced turbulence (Navier–Stokes)	
	error in energy	NFE	error in energy	NFE
Operator learning [57]	2.21e-2($\pm 1.54\text{e-}2$)	1	2.13e-1($\pm 1.52\text{e-}1$)	1
ARDM 50 [34]	1.46e-2($\pm 3.39\text{e-}3$)	50	3.14e-1($\pm 1.47\text{e-}1$)	50
ARDM 75 [34]	1.36e-2($\pm 3.49\text{e-}3$)	75	2.75e-1($\pm 1.40\text{e-}1$)	75
ARDM 100 [34]	1.24e-2($\pm 3.12\text{e-}3$)	100	1.16e-1($\pm 1.09\text{e-}1$)	100
AR-CFM [2, 38]	2.71e-3($\pm 1.96\text{e-}3$)	20	2.09e-1($\pm 1.81\text{e-}1$)	100
FTM (ours)	1.95e-3 ($\pm 1.93\text{e-}3$)	1	3.43e-2 ($\pm 2.47\text{e-}2$)	1

Table 3: Stoch. Burgers: FTM vs. distilled CFM (MeanFlow [26])

	err. energy	NFE
AR-CFM [2, 38]	2.71e-3	20
MeanFlow-10 [26]	2.06e-2	10
MeanFlow-5 [26]	3.41e-2	5
MeanFlow-1 [26]	8.22e-1	1
FTM (ours)	1.95e-3	1

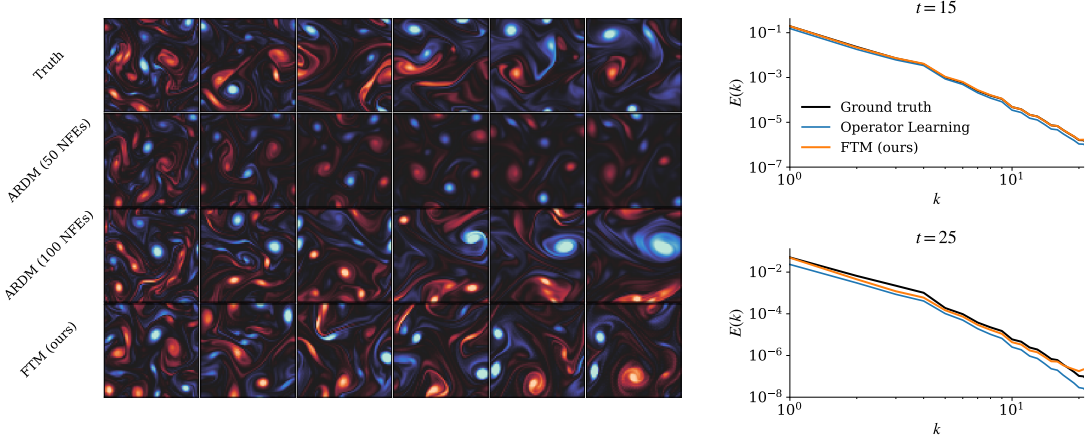


Figure 5: On stochastically forced turbulence, FTM produces accurate rollouts with one NFE per physical time step, while ARDM uses up to 100 inner sampling steps in our experiments (left). FTM also matches the energy spectrum decay well (right).

FTM scales to stochastic PDEs with one NFE per physical time step We next demonstrate in Figures 4 and 5 and Table 2 that FTM remains effective for the stochastic Burgers and stochastically forced turbulence (Navier-Stokes) example, where each state is a high-dimensional discretized field. Operator learning is included to verify that these benchmarks contain non-negligible stochastic variability. Indeed, operator learning damps the ensemble and underestimates both the energy and enstrophy. An auto-regressive diffusion model (ARDM) [34] avoids this collapse by learning the full transition law, but rollout then requires solving an inner generative sampling problem at every physical time step, with 100 neural-network evaluations (NFEs) per time step in our experiments. FTM instead propagates ensembles with a single neural-network evaluation per physical time step while matching the mean and standard deviation of energy and enstrophy closely; see Figure 4 (and Figure 7 for standard deviation). We also report the energy spectrum decay in Figure 5, which shows that FTM captures it accurately. We further compare to a distilled auto-regressive conditional flow matching (ARCFM) model [2, 38] using mean-flow modeling [26]; see Tables 3 and 5. While closer in terms of costs to FTM, this distillation leads to at least one order of magnitude higher error than FTM.

5 Conclusions and limitations

By learning the probability current velocity directly from trajectories, FTM captures how probability mass moves locally, not just where it is globally. This lets the FTM deterministic surrogate model predict trajectory-based QoIs, including first-order transport structures such as fluxes and circulations, in addition to preserving ensemble statistics. As a result, FTM has the rollout cost of deterministic operator learning while avoiding collapse to the mean, and is faster than typical autoregressive generative models that require inner sampling at every physical time step. The numerical experiments demonstrate that this makes FTM a practical route to fast ensemble predictions.

Limitations (i) FTM is designed to preserve time marginals and first-order trajectory transport, not the full stochastic path law. Thus, FTM can accurately capture current-like path-dependent QoIs, as shown in the experiments, but it should not be expected to reproduce martingale-dominated statistics such as hitting-time distributions and temporal autocorrelations. This is the key tradeoff: when the quantities of interest are ensemble statistics or current-like transport observables, FTM can provide trajectory-aware predictions at deterministic-rollout costs, instead of paying the often much higher cost of autoregressive generative modeling. (ii) The theory in this work establishes the estimator behavior for finite-dimensional additive-noise SDEs and clarifies the time-resolution/sample-size tradeoff of the one-step loss. These results, obtained using standard techniques, clarify the qualitative behavior of the estimator but they do not fully apply to the high-dimensional PDE/SPDE examples used in the empirical experiments. Extending the guarantees to broader the PDE/SPDE settings remains an important direction for future work.

References

- [1] M. Albergo, N. M. Boffi, and E. Vanden-Eijnden. Stochastic interpolants: A unifying framework for flows and diffusions. *Journal of Machine Learning Research*, 26(209):1–80, 2025.
- [2] M. S. Albergo and E. Vanden-Eijnden. Building normalizing flows with stochastic interpolants. *arXiv preprint arXiv:2209.15571*, 2022.
- [3] B. D. Anderson. Reverse-time diffusion equation models. *Stochastic Processes and their Applications*, 12(3):313–326, 1982.
- [4] G. Bartosh, D. Vetrov, and C. A. Naesseth. SDE Matching: Scalable and Simulation-Free Training of Latent Stochastic Differential Equations. In *Proceedings of the 42nd International Conference on Machine Learning*, volume 267 of *Proceedings of Machine Learning Research*, pages 3054–3070. PMLR, 2025.
- [5] J. Benton, G. Deligiannidis, and A. Doucet. Error bounds for flow matching methods. *arXiv preprint arXiv:2305.16860*, 2023.
- [6] J. Berman, T. Blickhan, and B. Peherstorfer. Parametric Model Reduction of Mean-Field and Stochastic Systems via Higher-Order Action Matching. In *Advances in Neural Information Processing Systems*, 2024.

- [7] T. Blickhan, J. Berman, A. Stuart, and B. Peherstorfer. DICE: Discrete inverse continuity equation for learning population dynamics, 2025.
- [8] N. M. Boffi, M. S. Albergo, and E. Vanden-Eijnden. How to build a consistency model: Learning flow maps via self-distillation. In *The Thirty-ninth Annual Conference on Neural Information Processing Systems*, 2025.
- [9] N. M. Boffi and E. Vanden-Eijnden. Probability flow solution of the Fokker–Planck equation. *Machine Learning: Science and Technology*, 4(3):035012, jul 2023.
- [10] N. M. Boffi and E. Vanden-Eijnden. Deep learning probability flows and entropy production rates in active matter. *Proceedings of the National Academy of Sciences*, 121(25):e2318106121, 2024.
- [11] N. M. Boffi and E. Vanden-Eijnden. Model-Free Learning of Probability Flows: Elucidating the Nonequilibrium Dynamics of Flocking. *Phys. Rev. Lett.*, 135:238301, Dec 2025.
- [12] L. Boninsegna, F. Nüske, and C. Clementi. Sparse learning of stochastic dynamical equations. *The Journal of chemical physics*, 148(24), 2018.
- [13] S. L. Brunton, B. R. Noack, and P. Koumoutsakos. Machine Learning for Fluid Mechanics. *Annual Review of Fluid Mechanics*, 52(Volume 52, 2020):477–508, 2020.
- [14] C. Bunne, L. Meng-Papaxanthos, A. Krause, and M. Cuturi. Proximal Optimal Transport Modeling of Population Dynamics. *arXiv preprint arXiv:2106.06345*, 2022.
- [15] S. Chen, S. Chewi, H. Lee, Y. Li, J. Lu, and A. Salim. The probability flow ODE is provably fast. *Advances in Neural Information Processing Systems*, 36:68552–68575, 2023.
- [16] Y. Chen, M. Goldstein, M. Hua, M. S. Albergo, N. M. Boffi, and E. Vanden-Eijnden. Probabilistic Forecasting with Stochastic Interpolants and Föllmer Processes. In *Proceedings of the 41st International Conference on Machine Learning*, volume 235 of *Proceedings of Machine Learning Research*, pages 6728–6756. PMLR, 21–27 Jul 2024.
- [17] R. Chetrite and K. Gawędzki. Eulerian and Lagrangian pictures of non-equilibrium diffusions. *Journal of Statistical Physics*, 137(5):890–916, 2009.
- [18] F. Comte and V. Genon-Catalot. Nonparametric drift estimation for i.i.d. paths of stochastic differential equations. *The Annals of Statistics*, 48(6):3336 – 3365, 2020.
- [19] K. Course and P. B. Nair. Amortized Reparametrization: Efficient and Scalable Variational Inference for Latent SDEs. In *Advances in Neural Information Processing Systems*, volume 36, 2023.
- [20] B. Das and S. K. Manikandan. Localizing entropy production along non-equilibrium trajectories. *arXiv preprint arXiv:2503.20427*, 2025.
- [21] M. Deng, H. Li, T. Li, Y. Du, and K. He. Generative Modeling via Drifting, 2026.

- [22] G. Dresdner, D. Kochkov, P. Norgaard, L. Zepeda-Núñez, J. A. Smith, M. P. Brenner, and S. Hoyer. Learning to correct spectral methods for simulating turbulent flows. 2022.
- [23] N. Dridi, L. Drumetz, and R. Fablet. Learning stochastic dynamical systems with neural networks mimicking the Euler–Maruyama scheme. In *2021 29th European Signal Processing Conference (EUSIPCO)*, pages 1990–1994, Dublin, Ireland, Aug. 2021. IEEE.
- [24] A. Frishman and P. Ronceray. Learning Force Fields from Stochastic Trajectories. *Phys. Rev. X*, 10:021009, Apr 2020.
- [25] K. Fukumizu, T. Suzuki, N. Isobe, K. Oko, and M. Koyama. Flow matching achieves almost minimax optimal convergence. *arXiv preprint arXiv:2405.20879*, 2024.
- [26] Z. Geng, M. Deng, X. Bai, J. Z. Kolter, and K. He. Mean Flows for One-step Generative Modeling. In *The Thirty-ninth Annual Conference on Neural Information Processing Systems*, 2025.
- [27] U. G. Haussmann and E. Pardoux. Time Reversal of Diffusions. *The Annals of Probability*, 14(4):1188–1205, Oct 1986.
- [28] J. Ho, A. Jain, and P. Abbeel. Denoising diffusion probabilistic models. In *Advances in Neural Information Processing Systems*, volume 33, 2020.
- [29] R. Jiang, P. Y. Lu, E. Orlova, and R. Willett. Training neural operators to preserve invariant measures of chaotic attractors. In *Thirty-seventh Conference on Neural Information Processing Systems*, 2023.
- [30] G. E. Karniadakis, I. G. Kevrekidis, L. Lu, P. Perdikaris, S. Wang, and L. Yang. Physics-informed machine learning. *Nature Reviews Physics*, 3(6):422–440, Jun 2021.
- [31] P. Kidger, J. Foster, X. Li, and T. Lyons. Efficient and Accurate Gradients for Neural SDEs. In *Advances in Neural Information Processing Systems*, volume 34, pages 18747–18761, 2021.
- [32] P. E. Kloeden and E. Platen. *Numerical Solution of Stochastic Differential Equations*. Stochastic Modelling and Applied Probability. Springer, Berlin, Heidelberg, 1 edition, 1992. Springer-Verlag Berlin Heidelberg (1992); eBook ISBN 978-3-662-12616-5 (2013 reprint).
- [33] D. Kochkov, J. A. Smith, A. Alieva, Q. Wang, M. P. Brenner, and S. Hoyer. Machine learning–accelerated computational fluid dynamics. *Proceedings of the National Academy of Sciences*, 118(21), 2021.
- [34] G. Kohl, L.-W. Chen, and N. Thuerey. Benchmarking autoregressive conditional diffusion models for turbulent flow simulation. *Neural Networks*, 199:108641, 2026.
- [35] J. Li, J. M. Horowitz, T. R. Gingrich, and N. Fakhri. Quantifying dissipation using fluctuating currents. *Nature communications*, 10(1):1666, 2019.

- [36] X. Li, T.-K. L. Wong, R. T. Q. Chen, and D. Duvenaud. Scalable Gradients for Stochastic Differential Equations. In *Proceedings of the Twenty Third International Conference on Artificial Intelligence and Statistics*, volume 108 of *Proceedings of Machine Learning Research*, pages 3870–3882. PMLR, 2020.
- [37] Z. Li, N. Kovachki, K. Azizzadenesheli, B. liu, K. Bhattacharya, A. Stuart, and A. Anandkumar. Fourier Neural Operator for Parametric Partial Differential Equations. In *International Conference on Learning Representations*, 2021.
- [38] Y. Lipman, R. T. Q. Chen, H. Ben-Hamu, M. Nickel, and M. Le. Flow matching for generative modeling. In *The Eleventh International Conference on Learning Representations*, 2023.
- [39] L. Lu, P. Jin, G. Pang, Z. Zhang, and G. E. Karniadakis. Learning nonlinear operators via DeepONet based on the universal approximation theorem of operators. *Nature Machine Intelligence*, 3(3):218–229, Mar 2021.
- [40] J. Lyu, K. J. Ray, and J. P. Crutchfield. Learning Stochastic Thermodynamics Directly from Correlation and Trajectory-Fluctuation Currents. *arXiv*, 2504.19007, 2025.
- [41] D. Maoutsa, S. Reich, and M. Opper. Interacting Particle Solutions of Fokker–Planck Equations Through Gradient–Log–Density Estimation. *Entropy*, 22(8), 2020.
- [42] R. Molinaro, S. Lanthaler, B. Raonić, T. Rohner, V. Armegioiu, S. Simonis, D. Grund, Y. Ramic, Z. Y. Wan, F. Sha, S. Mishra, and L. Zepeda-Núñez. Generative AI for fast and accurate statistical computation of fluids. 2025.
- [43] K. Na, J. Lee, S.-Y. Yun, and S. Lim. Probability-flow ODE in infinite-dimensional function spaces. *arXiv preprint arXiv:2503.10219*, 2025.
- [44] K. Neklyudov, R. Brekelmans, D. Severo, and A. Makhzani. Action Matching: Learning Stochastic Dynamics from Samples. In *Proceedings of the 40th International Conference on Machine Learning*, volume 202 of *Proceedings of Machine Learning Research*, pages 25858–25889. PMLR, 2023.
- [45] E. Nelson. *Dynamical theories of Brownian motion*. Princeton University Press, 1967.
- [46] J. N. Nielsen, H. Madsen, and P. C. Young. Parameter estimation in stochastic differential equations: an overview. *Annual Reviews in Control*, 24:83–94, 2000.
- [47] K. Otness, A. Gjoka, J. Bruna, D. Panozzo, B. Peherstorfer, T. Schneider, and D. Zorin. An extensible benchmark suite for learning to simulate physical systems. In *Thirty-fifth Conference on Neural Information Processing Systems Datasets and Benchmarks Track (Round 1)*, 2021.
- [48] G. A. Pavliotis. *Stochastic Processes and Applications: Diffusion Processes, the Fokker-Planck and Langevin Equations*, volume 60 of *Texts in Applied Mathematics*. Springer New York, New York, NY, 2014.

- [49] L. Peliti and P. Muratore-Ginanneschi. R. Fürth’s 1933 paper “On certain relations between classical statistics and quantum mechanics” [“Über einige Beziehungen zwischen klassischer Statistik und Quantenmechanik”, *Zeitschrift für Physik*, 81 143–162]. *The European Physical Journal H*, 48(1):4, May 2023.
- [50] P. Reiterer, C. Lainscsek, F. Schürer, C. Letellier, and J. Maquet. A nine-dimensional Lorenz system to study high-dimensional chaos. *Journal of Physics A: Mathematical and General*, 31(34):7121, aug 1998.
- [51] L. Rey-Bellet and K. Spiliopoulos. Irreversible Langevin samplers and variance reduction: a large deviations approach. *Nonlinearity*, 28(7):2081–2103, 2015.
- [52] T. Ryder, A. Golightly, A. S. McGough, and D. Prangle. Black-Box Variational Inference for Stochastic Differential Equations. In *Proceedings of the 35th International Conference on Machine Learning*, volume 80 of *Proceedings of Machine Learning Research*, pages 4423–4432. PMLR, 2018.
- [53] B. Sanderse, P. Stinis, R. Maulik, and S. E. Ahmed. Scientific machine learning for closure models in multiscale problems: A review. *Foundations of Data Science*, 7(1):298–337, 2025.
- [54] U. Seifert. Stochastic thermodynamics, fluctuation theorems and molecular machines. *Reports on progress in physics*, 75(12):126001, 2012.
- [55] Y. Song, P. Dhariwal, M. Chen, and I. Sutskever. Consistency models. *International conference on machine learning*, 2023.
- [56] Y. Song, J. Sohl-Dickstein, D. P. Kingma, A. Kumar, S. Ermon, and B. Poole. Score-Based Generative Modeling through Stochastic Differential Equations. In *International Conference on Learning Representations*, 2021.
- [57] K. Stachenfeld, D. B. Fielding, D. Kochkov, M. Cranmer, T. Pfaff, J. Godwin, C. Cui, S. Ho, P. Battaglia, and A. Sanchez-Gonzalez. Learned Coarse Models for Efficient Turbulence Simulation. In *International Conference on Learning Representations (ICLR 2021)*, 2021.
- [58] A. Terpin, N. Lanzetti, M. Gadea, and F. Dörfler. Learning Diffusion at Lightspeed. In *Advances in Neural Information Processing Systems*, 2024.
- [59] A. Tong, J. Huang, G. Wolf, D. van Dijk, and S. Krishnaswamy. TrajectoryNet: A Dynamic Optimal Transport Network for Modeling Cellular Dynamics. *arXiv preprint arXiv:2002.04461*, 2020.
- [60] P. Tsimpos, D. Sharp, and Y. Marzouk. One-Shot Generative Flows: Existence and Obstructions, 2026.
- [61] B. Tzen and M. Raginsky. Neural Stochastic Differential Equations: Deep Latent Gaussian Models in the Diffusion Limit. *arXiv preprint arXiv:1905.09883*, 2019.

- [62] X. Zhang, Y. Pu, Y. Kawamura, A. Loza, Y. Bengio, D. L. Shung, and A. Tong. Trajectory Flow Matching with Applications to Clinical Time Series Modeling. In *Advances in Neural Information Processing Systems*, volume 37, pages 107198–107224, 2024.
- [63] L. Zhou, S. Ermon, and J. Song. Inductive Moment Matching. *arXiv preprint arXiv:2503.07565*, 2025.

Appendix A. Illustrative examples, and gauge freedom for global mass transport

We first specify the SDE toy example shown in Figure 1 in the main text via Example 1.

Example 1. We consider a statistically stationary, rotating Ornstein–Uhlenbeck process in $d = 2$ dimensions. The SDE (1) satisfied by $(X(t))_{t \in [0, T]}$ is given by

$$\begin{aligned} dX(t) &= d \begin{pmatrix} X_1(t) \\ X_2(t) \end{pmatrix} = b(t, X(t))dt + A(t)dW(t) \\ &= -[\gamma X(t) + \Omega R X(t)]dt + \sqrt{2D}dW(t) = \begin{pmatrix} -\gamma & \Omega \\ -\Omega & -\gamma \end{pmatrix} \begin{pmatrix} X_1(t) \\ X_2(t) \end{pmatrix} dt + \sqrt{2D} \begin{pmatrix} dW_1(t) \\ dW_2(t) \end{pmatrix}. \end{aligned} \quad (18)$$

Here, $\gamma > 0$ denotes the constant friction coefficient, $\Omega \in \mathbb{R}$ the constant angular velocity, and $D > 0$ the constant diffusion coefficient. We write $R = \begin{pmatrix} 0 & -1 \\ 1 & 0 \end{pmatrix}$ in (18). As is easy to verify from the Fokker–Planck equation (8), the stationary distribution of the process is $\rho_\infty = \mathcal{N}(0, \frac{D}{\gamma} I_2)$. We initialize $X(0) \sim \rho(0) = \rho_\infty$, which then implies $X(t) \sim \rho(t) \equiv \rho_\infty$ for all $t \in [0, T]$. Concretely, we take $\gamma = 0.35$, $\Omega = 1$, $D = 0.35$, $T = 1.5$ for Figure 1, though the numerical values do not matter for the qualitative behavior illustrated in Figure 1.

We now discuss what is shown in Figure 1 in more detail, and separately comment on the five panels of Figure 1 from left to right. Note that this illustrative figure, similar to Figure 6 below, is generated based on analytically known results, without actually training on any data. All of the trajectories that are shown start from the *same random initial conditions* $X(0) = \hat{x}(0) \sim \rho_\infty$ across panels, in order to compare the pathwise behavior of the different methods.

1. **truth:** We show the constant marginal distribution $\rho(t) \equiv \rho_\infty$ of the process on $\mathbb{R}^2$ as a heatmap, with white arrows indicating the direction of the analytically known probability current velocity $v(x) = \Omega R x$ from (7), which circulates counterclockwise for $\Omega > 0$. This probability current corresponds to sample paths of (18) circulating in the same direction, while preserving their time marginal distribution. The same heatmap of ρ_∞ is repeated in all other panels as a visual aid.
2. **operator learning:** The target for operator learning is the drift vector field b in (18) via (4). Learning only the drift, and solving the ODE $\frac{d}{dt}\hat{x}(t) = b(\hat{x}(t))$ at inference, leads to trajectories that spiral inwards and collapse onto the mean 0 of ρ_∞ at large t . Hence, this does not preserve the correct time marginals.

3. **population dynamics:** The main goal of population dynamics is to match the correct time marginals, which are stationary here. These methods typically assume that only *unpaired* samples from $X(t)$ at different times t are available, without trajectory information (which, as we argue in the present work, is actually available in many problems and useful to train with). Additional conditions then have to be imposed to single out a particular velocity field u for the ODE (3) among all those that yield the correct time marginals for $(\hat{x}(t))_t$. A natural condition is to demand minimum kinetic energy, resulting in $u(t, x) \equiv 0$ in the present example, which trivially satisfies $\hat{x}(t) = \hat{x}(0) \sim \rho_\infty$. However, this misses the circulation and local mass transport of the SDE (18) which is relevant for path-dependent quantities of interest. The resulting ODE $\frac{d}{dt}\hat{x}(t) = 0$ is trivial to integrate in this particular example, but more generally the velocity is not zero and thus time stepping with population dynamics can require more than one neural-network evaluation per time step as in our experiments.
4. **conditional flow matching:** Conditional flow matching methods are capable of reproducing the correct transition law of $X(t+h) | X(t)$ of the SDE (18). In the figure, we hence show sample paths of the SDE (18) generated using the Euler–Maruyama method. By construction, these will have the correct time marginals $\rho(t) \equiv \rho_\infty$, and circulate counterclockwise according to the probability current. However, sampling from (approximations of) $X(t+h) | X(t)$ with conditional flow matching in each time step increases the computational cost at inference.
5. **FTM:** Here, we integrate the ODE $\frac{d}{dt}\hat{x}(t) = v(t, \hat{x}(t))$, which preserves the time marginals, can be done at low computational cost, and the resulting pure circulation at constant radius mimics the behavior of true sample paths of (18).

In order to illustrate and contextualize these points further, it is useful to provide a slightly more abstract view on Example 1 using general irreversible perturbations of reversible processes that retain the Boltzmann equilibrium distribution:

Example 2 (e.g. [51]). Consider an SDE (1) with a diffusion matrix $A(t) = \sqrt{2}I_d$ and drift $b(t, x) = -\nabla U(x) + \ell(x)$ for a (quasi-) potential $U: \mathbb{R}^d \rightarrow [0, \infty)$ such that $Z = \int_{\mathbb{R}^d} \exp(-U(x)) dx < \infty$. Here, $\ell: \mathbb{R}^d \rightarrow \mathbb{R}^d$ denotes the “orthogonal component” of the drift, and we suppose $\langle \nabla U(x), \ell(x) \rangle = 0$ and $\nabla \cdot \ell(x) = 0$ for all $x \in \mathbb{R}^d$. The vector field ℓ represents an irreversible perturbation of the SDE. Under the stated assumptions, the stationary distribution of the process $(X(t))$ is still the Boltzmann distribution $\rho_\infty(x) = Z^{-1} \exp(-U(x))$ as can be verified from the Fokker–Planck equation (8):

$$\begin{aligned} \nabla \cdot (b(x)\rho_\infty(x) - \nabla \rho_\infty(x)) &= Z^{-1} \nabla \cdot ([-\nabla U(x) + \ell(x)] \exp(-U(x))) \\ &= Z^{-1} \nabla \cdot (\ell(x) \exp(-U(x))) = \rho_\infty(x) (\nabla \cdot \ell(x) - \langle \ell(x), \nabla U(x) \rangle) = 0. \end{aligned}$$

If we set $X(0) \sim \rho(0) = \rho_\infty$, then $\rho(t) = \rho_\infty$ for all $t > 0$. The probability current velocity (7) in this case is

$$v(t, x) = b(t, x) - \nabla \log \rho(t, x) = -\nabla U(x) + \ell(x) + \nabla U(x) = \ell(x), \quad (19)$$

i.e., it corresponds to only the rotational or “swirling” component of the drift. Despite the time marginals $\rho(t) \equiv \rho_\infty$ being stationary, typical sample paths of the SDE (1) swirl

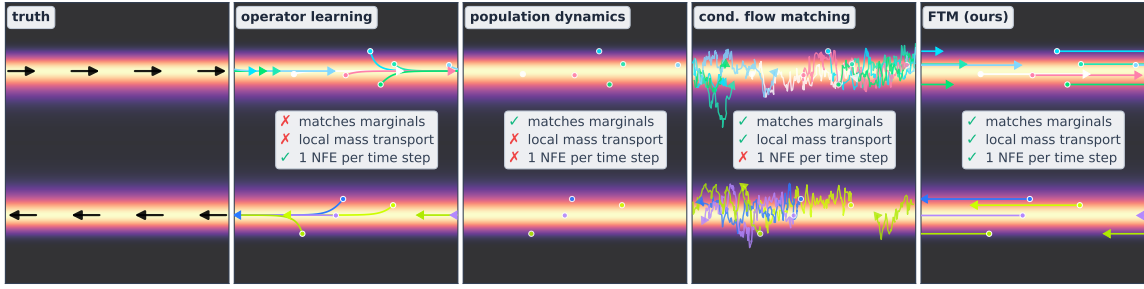


Figure 6: Statistically stationary “two-lane process” defined in Example 3.

according to ℓ , and this is correctly captured by the probability current velocity (19). The two-dimensional rotating Ornstein–Uhlenbeck process (18) as specified in Example 1 and shown in Figure 1 obviously falls exactly under the general class of examples introduced here: in this special case, we have $A(t) = \sqrt{2D}I_2$ and $b(t, x) = -\gamma x + \Omega R x$, such that $U(x) = \frac{\gamma}{2}\|x\|_2^2$ and $\ell(x) = v(x) = \Omega R x$. Evidently, $\langle \nabla U, \ell \rangle = 0$ and $\nabla \cdot \ell = 0$, such that $\rho_\infty \propto \exp(-U/D)$, and the probability current velocity corresponds to circulation with constant angular velocity Ω .

In view of the discussion above and in Section 3.1 in the main text, we remark that in general there is a “gauge freedom” in choosing a velocity field u for (3) with given time marginals. Indeed, as (8) shows, for any u that is a valid choice under the time marginal constraint, so is $u + w/\rho$ for $\nabla \cdot w = 0$. What we have argued in Section 3.1 in the main text based on the local probability mass transport of the SDE is that picking $u = v$ as the probability current velocity (7) is in some sense the canonical choice if we are given sample paths of the SDE (1).

Concretely, in the specific situation of Example 1 and more generally Example 2, picking any other velocity field $u = v + w/\rho$ with $\nabla \cdot w = 0$ for the probability flow ODE (3) that respects the time marginals would either introduce too much or too little swirl compared to the actual SDE (1). In particular, since in these examples the system is statistically stationary, $u \equiv 0$ is a valid choice for (3) with minimum kinetic energy and correct time marginals, such that $\hat{x}(t) \equiv \hat{x}(0) \sim \rho_\infty$ for all t , but this precisely misses the probability current that the actual SDE displays in its stationary state.

We provide a second illustrative example, similar to the rotating Ornstein–Uhlenbeck process (18) but on the domain $S^1 \times \mathbb{R}$ (which is not simply connected) in Example 3 and Figure 6.

Example 3. Consider the following statistically stationary “two-lane process” $(X(t))_{t \in [0, T]}$ on the infinite cylinder $S^1 \times \mathbb{R}$:

$$dX(t) = \begin{pmatrix} w(X_2(t)) \\ -U'(X_2(t)) \end{pmatrix} dt + \begin{pmatrix} \sqrt{2D_1} dW_1(t) \\ \sqrt{2D_2} dW_2(t) \end{pmatrix}. \quad (20)$$

Here, $U: \mathbb{R} \rightarrow [0, \infty)$ is a symmetric double well potential, concretely a quartic one $U(x_2) = \frac{\kappa}{4}(x_2^2 - a^2)^2$. The stationary distribution ρ_∞ of (20) is then uniform in x_1 and bimodal in x_2 : $\rho_\infty(x_1, x_2) = Z \exp(-U(x_2)/D_2)$. We again initialize $X(0) \sim \rho(0) = \rho_\infty$. The function $w: \mathbb{R} \rightarrow \mathbb{R}$ in (20) induces a horizontal probability current according to $v(x_1, x_2) =$

$(w(x_2), 0)^\top$. We choose w so that the current points to the right in the top well of U and to the left in the bottom well of U , concretely $w(x_2) = w_0 \tanh(x_2/l_0)$. Sample paths of the SDE (20) in the statistically stationary state then behave as two “lanes” moving in opposite directions, with rare vertical transitions depending on the barrier height. The behavior of different methods in this example is illustrated in Figure 6 and similar to Figure 1 and its discussion above. Note in particular that here, operator learning produces the correct horizontal movement but vertically collapses onto the modes of the two lanes, and that FTM does not show mode collapse, but cannot capture rare transitions of the true sample paths between the two wells. Numerical parameters in Figure 6 for concreteness: $\kappa = 2$, $a = 1$, $D_1 = 0.012$, $D_2 = 0.12$, $w_0 = 1.25$, $l_0 = 0.18$, $T = 3$, $x_1 \in [-L, L]/\sim$ for $L = 4$.

Appendix B. Further properties of the probability current velocity

Given the examples and discussion in Appendix A, one can ask in which situations the probability current velocity v corresponds to the minimum kinetic energy velocity field that generates the correct time marginals via the ODE (3). We have the following proposition:

Proposition 4. *Assume gradient drift $b(t, x) = -\nabla U(t, x)$, and that the diffusion matrix is isotropic, $\Sigma(t) = \sigma(t)^2 I_d$. Then:*

1. *the current velocity v is a gradient field,*

$$v(t, x) = -\nabla U(t, x) - \frac{\sigma(t)^2}{2} \nabla \log \rho(t, x) = -\nabla \left(U(t, x) + \frac{\sigma(t)^2}{2} \log \rho(t, x) \right).$$

2. *v is the unique minimizer of the kinetic energy functional*

$$\mathcal{K}(u) := \int_0^T \int_{\mathbb{R}^d} \rho(t, x) \|u(t, x)\|_2^2 \, dx \, dt,$$

among all velocity fields u satisfying the continuity equation

$$\partial_t \rho + \nabla \cdot (\rho u) = 0.$$

Hence, in this setting, the probability current velocity v coincides with the minimal kinetic energy velocity field associated with the prescribed marginal path $(\rho(t))_{t \in [0, T]}$.

Proof. Under the assumptions $b = -\nabla U$ and $\Sigma = \sigma^2 I_d$, we compute

$$\begin{aligned} v(t, x) &= b(t, x) - \frac{1}{2} \Sigma(t) \nabla \log \rho(t, x) = -\nabla U(t, x) - \frac{\sigma(t)^2}{2} \nabla \log \rho(t, x) \\ &= -\nabla \left(U(t, x) + \frac{\sigma(t)^2}{2} \log \rho(t, x) \right). \end{aligned}$$

Thus v is indeed a gradient field.

Next, v is admissible for the marginal-matching problem because it satisfies

$$\partial_t \rho + \nabla \cdot (\rho v) = 0.$$

We now show that among all admissible vector fields, there is at most one admissible gradient field. Suppose

$$u_1 = \nabla \phi_1, \quad u_2 = \nabla \phi_2$$

both satisfy

$$\partial_t \rho + \nabla \cdot (\rho u_i) = 0, \quad i = 1, 2.$$

Subtracting the two equations gives

$$\nabla \cdot (\rho(u_1 - u_2)) = 0.$$

Let

$$w := u_1 - u_2 = \nabla \psi, \quad \psi := \phi_1 - \phi_2.$$

Then

$$\nabla \cdot (\rho \nabla \psi) = 0.$$

Assuming standard decay at infinity (or, alternatively, no-flux boundary conditions on a bounded domain), we multiply by ψ and integrate:

$$0 = \int_{\mathbb{R}^d} \psi \nabla \cdot (\rho \nabla \psi) \, dx = - \int_{\mathbb{R}^d} \rho \|\nabla \psi\|_2^2 \, dx.$$

Hence

$$\nabla \psi = 0 \quad \text{a.e. on } \{\rho > 0\},$$

and therefore

$$u_1 = u_2 \quad \text{a.e. with respect to } \rho(t, x) \, dx \, dt.$$

So there is at most one admissible gradient field.

Finally, the minimizer of the kinetic energy functional

$$\mathcal{K}(u) = \int_0^T \int_{\mathbb{R}^d} \rho \|u\|_2^2 \, dx \, dt$$

subject to

$$\partial_t \rho + \nabla \cdot (\rho u) = 0$$

is known to be a gradient field. Since v is both admissible and a gradient field, and such a field is unique, it follows that v must coincide with the unique minimizer. Therefore v is exactly the minimal kinetic energy velocity field. $\square$

Remark 1. In general, one should *not* claim that v is smoother, or has a smaller Lipschitz constant, than the minimal kinetic energy field. In the isotropic gradient-drift setting, the correct statement is stronger: $v = u_{\min}$ where $u_{\min}$ denotes the minimal kinetic energy admissible velocity field. The equality holds because v is the unique admissible gradient field, not because it enjoys any a priori superior smoothness.

Remark 2. If $\Sigma(t)$ is a general anisotropic positive definite matrix, then even if

$$b(t, x) = -\nabla U(t, x),$$

the current velocity

$$v(t, x) = b(t, x) - \frac{1}{2}\Sigma(t)\nabla \log \rho(t, x)$$

need not be a Euclidean gradient field. Thus the implication

$$\text{gradient drift} \implies \text{gradient current velocity}$$

is automatic only in the isotropic case $\Sigma(t) = \sigma(t)^2 I_d$, or in special commutative situations. A natural anisotropic gradient-flow structure appears, however, when

$$b(t, x) = -\Sigma(t)\nabla U(t, x).$$

Then

$$v(t, x) = -\Sigma(t)\nabla \left(U(t, x) + \frac{1}{2} \log \rho(t, x) \right),$$

and v is the minimizer of the $\Sigma(t)^{-1}$ -weighted kinetic energy

$$\int_0^T \int_{\mathbb{R}^d} \rho(t, x) \langle u(t, x), \Sigma(t)^{-1} u(t, x) \rangle dx dt$$

subject to the same continuity equation constraint.

Remark 3. Therefore, if one studies a pure overdamped Langevin diffusion with isotropic noise,

$$dX(t) = -\nabla U(t, X(t)) dt + \sigma(t) dW(t),$$

then the current velocity field v and the minimal kinetic energy velocity field are the same object. In such an example, there is no principled distinction to visualize between the two. To obtain a visible difference, one needs a genuinely irreversible example, for instance by adding a rotational component to a gradient drift as in the examples of Appendix A.

Appendix C. Proofs

C.1 Proof of Stratonovich integral identity, and loss derivation

Here, for completeness, we show that the well-known identity (11) used in the main text holds. In order to show that

$$\mathbb{E} \left[\int_0^T v_\theta(t, X(t)) \circ dX(t) \right] = \mathbb{E} \left[\int_0^T \langle v_\theta(t, X(t)), v(t, X(t)) \rangle dt \right],$$

we first convert the Stratonovich integral on the left-hand side to an Itô integral, such that

$$\begin{aligned} \int_0^T v_\theta(t, X(t)) \circ dX(t) &= \int_0^T \langle v_\theta(t, X(t)), dX(t) \rangle + \frac{1}{2} \int_0^T \text{Tr} [\Sigma(t) \nabla v_\theta(t, X(t))] dt \\ &= \int_0^T \langle v_\theta(t, X(t)), b(t, X(t)) \rangle dt + \int_0^T \langle v_\theta(t, X(t)), A(t) dW(t) \rangle + \frac{1}{2} \int_0^T \text{Tr} [\Sigma(t) \nabla v_\theta(t, X(t))] dt. \end{aligned}$$

Taking the expectation over X on both sides then removes the second term on the right-hand side, since the Itô integral is non-anticipating. Finally, an integration by parts, supposing boundary terms are 0, yields

$$\begin{aligned}
\mathbb{E} \left[\int_0^T \text{Tr} [\Sigma(t) \nabla v_\theta(t, X(t))] dt \right] &= \int_0^T \int_{\mathbb{R}^d} \text{Tr} [\Sigma(t) \nabla v_\theta(t, x)] \rho(t, x) dx dt \\
&= \sum_{i,j=1}^d \int_0^T \int_{\mathbb{R}^d} \Sigma_{ij}(t) \partial_i v_{\theta,j}(t, x) \rho(t, x) dx dt = - \sum_{i,j=1}^d \int_0^T \int_{\mathbb{R}^d} \Sigma_{ij}(t) v_{\theta,j}(t, x) \underbrace{\partial_i \rho(t, x)}_{=\rho \partial_i \log \rho} dx dt \\
&= -\mathbb{E} \left[\int_0^T \langle v_\theta(t, X(t)), \Sigma(t) \nabla \log \rho(t, X(t)) \rangle dt \right],
\end{aligned}$$

which completes the proof.

We can hence write the objective (10) for the velocity field to be learned as

$$\begin{aligned}
J_T(\theta) &= \mathbb{E}_{t \sim \mathcal{U}([0,T]), X(t) \sim \rho(t)} [\|v_\theta(t, X(t))\|_2^2 - 2\langle v(t, X(t)), v_\theta(t, X(t)) \rangle] \\
&= \frac{1}{T} \left(\int_0^T \mathbb{E}_{X(t) \sim \rho(t)} [\|v_\theta(t, X(t))\|_2^2 - 2\langle v(t, X(t)), v_\theta(t, X(t)) \rangle] dt \right) \\
&= \frac{1}{T} \mathbb{E}_{\omega \sim \mathbb{P}} \left[\int_0^T \|v_\theta(t, X_\omega(t))\|_2^2 dt - 2 \int_0^T v_\theta(t, X_\omega(t)) \circ dX_\omega(t) \right],
\end{aligned}$$

and consider discretizations of the Stratonovich integral to obtain tractable estimators given trajectory data (2). For example, using the composite trapezoidal rule with step size $h > 0$ (such that $T/h = K$ and $t_j = jh$, $j = 0, \dots, K$) for the Stratonovich integral, and a left Riemann sum for the squared velocity field, we get

$$\begin{aligned}
J_{h,T}(\theta) &= \frac{1}{T} \mathbb{E}_{\omega \sim \mathbb{P}} \left[\sum_{j=1}^{K-1} \|v_\theta(t_j, X_\omega(t_j))\|_2^2 h \right. \\
&\quad \left. - 2 \frac{v_\theta(t_{j+1}, X_\omega(t_{j+1})) + v_\theta(t_j, X_\omega(t_j))}{2} (X_\omega(t_{j+1}) - X_\omega(t_j)) \right].
\end{aligned}$$

C.2 Proof of Proposition 1

We first want to remark here that the stated variance bound in (15) of the main text will often be overly pessimistic because of the last step in (22) below; since we deal with time averages, one could use ergodicity and mixing results to get much tighter variance bounds. We do not pursue this here since our simple, uniform-in-time bounds are enough to show that the variance of the objective $\hat{J}_{h,\tau}(\theta)$ remains bounded as $h \downarrow 0$ at fixed N , in contrast to the symmetric difference-based objective from Proposition 5 below.

Proof of Proposition 1. We split the mean squared error into variance plus bias squared, i.e.,

$$\mathbb{E} \left[\left(\hat{J}_{h,\tau}(\theta) - J_\tau(\theta) \right)^2 \right] = \underbrace{\mathbb{E} \left[\left(\hat{J}_{h,\tau}(\theta) - J_{h,\tau}(\theta) \right)^2 \right]}_{\leq (2V^4 + 24(V^2 b_{\max}^2 + \frac{\sigma_{\max} V^2}{\tau} + C_{\text{div}}^2) + 2\tilde{C}h) \frac{1}{N}} + \underbrace{(J_{h,\tau}(\theta) - J_\tau(\theta))^2}_{\leq 4C^2 V^2 h^2}, \quad (21)$$

where the indicated inequalities are what we want to show here. The bias arises from the discretization of the continuous time integrals. Under sufficient regularity of the drift b , diffusion matrix A , and velocity field v_θ , the trapezoidal approximation of the Stratonovich integral converges with weak order $O(h)$ [32]. Therefore, there exists a constant $C > 0$ such that the bias is bounded by $2CVh$ (note that the factor of 2 is introduced here by convention, to align with Proposition 5 below), and squaring this yields the quoted upper bound. The variance is

$$\mathbb{E} \left[\left(\hat{J}_{h,\tau}(\theta) - J_{h,\tau}(\theta) \right)^2 \right] = \frac{1}{N} \text{Var} \left(\hat{J}_{h,\tau}^{(1)}(\theta) \right) \leq \frac{1}{N} \mathbb{E} \left[\left(\hat{J}_{h,\tau}^{(1)}(\theta) \right)^2 \right]. \quad (22)$$

We want to approximate the right-hand side with the continuous-time form of the objective for simplicity. The error that we commit by using the continuous approximation

$$\hat{J}_\tau^{(1)}(\theta; t_1) := \frac{1}{\tau} \int_{t_1}^{t_1+\tau} \|v_\theta(s, X_\omega^{(1)}(s))\|_2^2 ds - \frac{2}{\tau} \int_{t_1}^{t_1+\tau} v_\theta(s, X_\omega^{(1)}(s)) \circ dX_\omega(s),$$

can be written as $\hat{J}_{h,\tau}^{(1)}(\theta) = \hat{J}_\tau^{(1)}(\theta; t_1) + E_h$, with mean squared approximation error of the trapezoidal rule $\mathbb{E}[E_h^2] \leq \tilde{C}h$ (strong convergence order 1/2 in general [32]; here, again, $\tilde{C}$ depends on b, A, v_θ and derivative bounds; and we could also get an $O(h^2)$ bound e.g. for commutative noise). Since $(a+b)^2 \leq 2a^2 + 2b^2$, we have $\mathbb{E} \left[\left(\hat{J}_{h,\tau}^{(1)}(\theta) \right)^2 \right] \leq 2\mathbb{E} \left[\left(\hat{J}_\tau^{(1)}(\theta; t_1) \right)^2 \right] + 2\tilde{C}h$. Then it remains to estimate the second moment of the continuous objective (again with $(a-b)^2 \leq 2a^2 + 2b^2$):

$$\begin{aligned} \mathbb{E} \left[\left(\hat{J}_\tau^{(1)}(\theta) \right)^2 \right] &\leq \underbrace{2\mathbb{E}_{t \sim \mathcal{U}([0, T-\tau]), X(t) \sim \rho(t)} \left[\left(\frac{1}{\tau} \int_t^{t+\tau} \|v_\theta(s, X(s))\|_2^2 ds \right)^2 \right]}_{\leq 2V^4} \\ &\quad + 8\mathbb{E}_{t \sim \mathcal{U}([0, T-\tau]), \omega \sim \mathbb{P}} \left[\left(\frac{1}{\tau} \int_t^{t+\tau} v_\theta(s, X_\omega(s)) \circ dX_\omega(s) \right)^2 \right]. \end{aligned}$$

To bound the expectation of the squared Stratonovich integral, fix t in the following, i.e., use the law of total expectation. Convert the Stratonovich integral back to an Itô integral:

$$\begin{aligned} \frac{1}{\tau} \int_t^{t+\tau} v_\theta(s, X_\omega(s)) \circ dX_\omega(s) &= \frac{1}{\tau} \int_t^{t+\tau} \langle v_\theta(s, X_\omega(s)), b(s, X_\omega(s)) \rangle ds \\ &\quad + \frac{1}{\tau} \int_t^{t+\tau} \langle v_\theta(s, X_\omega(s)), A(s) dW_\omega(s) \rangle + \frac{1}{2\tau} \int_t^{t+\tau} \text{Tr} [\Sigma(s) \nabla v_\theta(s, X_\omega(s))] ds. \end{aligned}$$

Using the inequality $(a+b+c)^2 \leq 3(a^2 + b^2 + c^2)$ (by Cauchy-Schwarz), we bound the expectations over ω of the individual terms squared:

1. Using the Cauchy-Schwarz inequality for integrals and the uniform bounds $\|b(t, x)\|_2 \leq b_{\max}$ and $\|v_\theta(t, x)\|_2 \leq V$, we get

$$\mathbb{E}_\omega \left[\left(\frac{1}{\tau} \int_t^{t+\tau} \langle v_\theta(s, X_\omega(s)), b(s, X_\omega(s)) \rangle ds \right)^2 \right] \leq V^2 b_{\max}^2.$$

2. Using the Itô isometry and the bound $\Sigma(t) = A(t)A(t)^\top \preceq \sigma_{\max} I_d$, we have

$$\begin{aligned} & \mathbb{E}_\omega \left[\left(\frac{1}{\tau} \int_t^{t+\tau} \langle v_\theta(s, X_\omega(s)), A(s) dW_\omega(s) \rangle \right)^2 \right] \\ &= \frac{1}{\tau^2} \mathbb{E}_\omega \left[\int_t^{t+\tau} \langle v_\theta(s, X_\omega(s)), \Sigma(s) v_\theta(s, X_\omega(s)) \rangle ds \right] \\ &\leq \frac{1}{\tau^2} \mathbb{E}_\omega \left[\int_t^{t+\tau} \sigma_{\max} \|v_\theta(s, X_\omega(s))\|_2^2 ds \right] \leq \frac{\sigma_{\max} V^2}{\tau}. \end{aligned}$$

3. Lastly, using the assumption $C_{\text{div}} = \sup_{t,x} \frac{1}{2} |\text{Tr} [\Sigma(t) \nabla v_\theta(t, x)]| < \infty$, we have

$$\mathbb{E}_\omega \left[\left(\frac{1}{2\tau} \int_t^{t+\tau} \text{Tr} [\Sigma(s) \nabla v_\theta(s, X_\omega(s))] ds \right)^2 \right] \leq C_{\text{div}}^2,$$

which completes the proof since all of these bounds are independent of $t \sim \mathcal{U}([0, T - \tau])$. $\square$

C.3 Variance of the one-step FTM loss as $h \downarrow 0$, and relation to symmetric differences

In this section, we discuss the one-step FTM objective (16) from the main text. We first note that the loss $J_{\text{FTM}}(\theta)$, prior to empiricalization, can be written as

$$\begin{aligned} J_{\text{FTM}}(\theta) &= h^{-1} \mathbb{E}_{t \sim \mathcal{U}([h, T-h]), \omega \sim \mathbb{P}} [\|v_\theta(t, X_\omega(t))\|_2^2 h - \langle v_\theta(t, X_\omega(t)), X_\omega(t+h) - X_\omega(t-h) \rangle] \\ &= \mathbb{E}_{t \sim \mathcal{U}([h, T-h]), \omega \sim \mathbb{P}} [\|v_\theta(t, X_\omega(t))\|_2^2 - 2 \langle Y_{h,\omega}(t), v_\theta(t, X_\omega(t)) \rangle], \end{aligned} \quad (23)$$

where we denote the symmetric finite difference of the SDE paths with step size h by

$$Y_{h,\omega}(t) := \frac{X_\omega(t+h) - X_\omega(t-h)}{2h}.$$

Indeed, while the one-step FTM objective (16) has been obtained from (13) in the main text in the limiting case $\tau = 2h$ and midpoint discretization of the Stratonovich integral, we can see from (23) that there is another, in some sense complementary way of viewing (16) based on the discussion in Section 3.1 of the main text: In (23), by the law of total expectation, we have

$$\mathbb{E}_{\omega \sim \mathbb{P}} [\langle Y_{h,\omega}(t), v_\theta(t, X_\omega(t)) \rangle] = \mathbb{E}_{\omega \sim \mathbb{P}} [\underbrace{\langle \mathbb{E}[Y_{h,\omega}(t) \mid X_\omega(t)], v_\theta(t, X_\omega(t)) \rangle}_{\stackrel{(6)}{=} v_h(t, X_\omega(t))}],$$

i.e., we recognize here the approximation of the probability current velocity via symmetric differences as in (6). For $h \downarrow 0$, this term converges to $\mathbb{E}_{\omega \sim \mathbb{P}} [\langle v(t, X_\omega(t)), v_\theta(t, X_\omega(t)) \rangle]$ by Section 3.1. In summary, as an alternative to the route to the FTM loss (16) via the Stratonovich integral identity (11) and subsequent discretization and $\tau = 2h$ as presented in the main text, we could hence have started directly from the intractable loss (10), approximated the true, unknown probability current velocity v by the symmetric difference v_h at finite $h > 0$, and then used the law of total expectation to arrive at (16). We chose to start from the Stratonovich integral identity (11) in the main text to closely connect the loss to the available literature in statistical physics and stochastic thermodynamics [24, 11, 40], and since chunking – which prevents the variance blowup as $h \downarrow 0$ at fixed N – is somewhat more natural in this setting. In hindsight, then, it is easy to realize that *averaging* the symmetric difference estimator over K_τ time steps is equivalent, up to negligible boundary terms for $K_\tau \gg 1$, to the chunked estimator (14).

Let us discuss the aforementioned variance blowup of the one-step FTM loss in more detail. While in principle, this is a special case of the “chunked” result in Proposition 1, up to the different choice of discretization rule, we prefer to present a separate analysis and further comments on it for clarity. We consider the discretized objective

$$J_h(\theta) = \mathbb{E}_{t \sim \mathcal{U}([h, T-h]), \omega \sim \mathbb{P}} [\|v_\theta(t, X_\omega(t))\|_2^2 - 2\langle Y_{h,\omega}(t), v_\theta(t, X_\omega(t)) \rangle],$$

and the corresponding empirical estimator

$$\hat{J}_h(\theta) = \frac{1}{N} \sum_{i=1}^N \|v_\theta(t_i, X^{(i)}(t_i))\|_2^2 - 2\langle Y_h^{(i)}(t_i), v_\theta(t_i, X^{(i)}(t_i)) \rangle, \quad (24)$$

which provides a practically tractable objective to replace $J(\theta)$ from (10) in the main text. In the following, we will make the two assumptions:

1. For fixed $\theta \in \mathbb{R}^p$, the velocity field v_θ is bounded in the sense that there exists $V > 0$ such that

$$\|v_\theta(t, x)\|_2 \leq V \quad \text{for all } t \in [0, T], x \in \mathbb{R}^d.$$

2. The symmetric increment (6) is first-order accurate in the sense

$$\|v_h(t, x) - v(t, x)\|_2 \leq Ch, \quad (25)$$

for a constant $C > 0$ and all $t \in [h, T-h]$, $x \in \mathbb{R}^d$. We formulate this as an assumption here for brevity, but such a bound can be derived by using standard weak Taylor arguments for the forward and reverse process [32].

We have the following upper bound on the mean-squared error of (24) under these assumptions:

Proposition 5. *We have*

$$\mathbb{E} [(\hat{J}_h(\theta) - J(\theta))^2] \leq 4C^2V^2h^2 + 6V^2d\sigma_{\max}(Nh)^{-1} + (3V^4 + 6b_{\max}^2V^2)N^{-1}. \quad (26)$$

The first term on the right-hand side of (26) bounds the squared bias $(J_h(\theta) - J(\theta))^2 \lesssim h^2$, and the other terms bound the variance $\mathbb{E}[(\hat{J}_h(\theta) - J_h(\theta))^2] \lesssim (Nh)^{-1}$ for small h , which diverges at fixed N as $h \downarrow 0$. This suggests that as the time step size h decreases, more and more samples N are necessary to keep the mean-squared error bounded. A possible choice is to balance the bias and variance by picking $h^2 \approx (Nh)^{-1}$, or $N \approx 1/h^3$ (ignoring constants). While Proposition 5 a priori only gives an upper bound on the mean-squared error, a matching lower bound $\gtrsim (Nh)^{-1}$ can be shown, e.g., when assuming uniform ellipticity $\Sigma(t) \succeq \sigma_{\min} I_d$ for all $t \in [0, T]$ and $\sigma_{\min} > 0$. We find it more instructive to instead present an explicit calculation of the mean-squared error of the symmetric finite difference objective for the special case of $(X(t))_{t \in [0, T]}$ a one-dimensional Brownian motion, which we formulate as a lemma.

Lemma 1. *Consider the $(d = 1)$ -dimensional SDE $dX(t) = dW(t)$, $X(0) \sim \mathcal{N}(0, 1)$, on the time interval $t \in [0, 1]$. Then we have the sharp asymptotic equivalence $\mathbb{E}[(\hat{J}_h(\theta) - J(\theta))^2] \sim c(Nh)^{-1}$ as $h \downarrow 0$ for a constant $c > 0$ (explicitly given by $c = 2 \int_0^1 \mathbb{E}_{Z \sim \mathcal{N}(0, 1)} [v_\theta(t, \sqrt{1+t}Z)^2] dt$ here).*

Intuitively, then, since at small h only the short-time behavior of the diffusion process matters also for more general SDEs driven by Brownian noise, this will remain true in higher dimensions and with nonlinear drift vector field and anisotropic diffusion matrix. Finally, as discussed further in the main text, we remark that constants do matter in practice, in the sense that the time step h in many applications may not actually be so small as to see the blow-up of the variance at fixed N as $h \downarrow 0$ of (24). In such cases, the objective (24) does provide a viable option for learning the probability current velocity.

Proof of Proposition 5. Decompose the difference $\hat{J}_h(\theta) - J(\theta)$ as

$$\hat{J}_h(\theta) - J(\theta) = (\hat{J}_h(\theta) - J_h(\theta)) + (J_h(\theta) - J(\theta)). \quad (27)$$

The first term in (27) has mean zero because $\hat{J}_h(\theta)$ is a Monte Carlo estimator of $J_h(\theta)$ with independent samples. We now use that $\mathbb{E}[(Z_1 + Z_2)^2] = \mathbb{E}[Z_1^2] + 2\mathbb{E}[Z_1 Z_2] + \mathbb{E}[Z_2^2]$ and identify Z_1 with the first term of (27) and Z_2 with the second term of (27). Notice that Z_2 (the second term of (27)) is deterministic so that

$$\mathbb{E}[(\hat{J}_h(\theta) - J(\theta))^2] = \mathbb{E}[(\hat{J}_h(\theta) - J_h(\theta))^2] + (J_h(\theta) - J(\theta))^2. \quad (28)$$

Let us first consider the squared bias term $(J_h(\theta) - J(\theta))^2$ in (28). With the linearity of the expectation, we obtain

$$J_h(\theta) - J(\theta) = -2\mathbb{E}_{t \sim \mathcal{U}([h, T-h]), \omega \sim \mathbb{P}} [\langle Y_{h,\omega}(t) - v(t, X_\omega(t)), v_\theta(t, X_\omega(t)) \rangle].$$

With the law of total probability, we obtain

$$\begin{aligned} \mathbb{E}[\langle Y_{h,\omega}(t) - v(t, X_\omega(t)), v_\theta(t, X_\omega(t)) \rangle] &= \mathbb{E}[\mathbb{E}[\langle Y_{h,\omega}(t) - v(t, X_\omega(t)), v_\theta(t, X_\omega(t)) \rangle | X_\omega(t)]] \\ &= \mathbb{E}[\langle \mathbb{E}[Y_{h,\omega}(t) - v(t, X_\omega(t)) | X_\omega(t)], v_\theta(t, X_\omega(t)) \rangle]. \end{aligned}$$

Now use (25) and the boundedness of v_θ to obtain with the Cauchy-Schwarz inequality

$$|J_h(\theta) - J(\theta)| \leq 2\mathbb{E} [\|\mathbb{E}[Y_{h,\omega}(t) - v(t, X_\omega(t))|X_\omega(t)]\|_2 \|v_\theta(t, X_\omega(t))\|_2] \leq 2ChV.$$

Let us now bound the first term of (28). Because $\widehat{J}_h(\theta)$ is an unbiased estimator of $J_h(\theta)$ and all samples in the estimator are independent and identically distributed, we obtain

$$\mathbb{E} \left[\left(\widehat{J}_h(\theta) - J_h(\theta) \right)^2 \right] = \frac{1}{N} \text{Var}_{t \in \mathcal{U}([h, T-h]), \omega \sim \mathbb{P}} [\|v_\theta(t, X_\omega(t))\|_2^2 - 2\langle Y_{h,\omega}(t), v_\theta(t, X_\omega(t)) \rangle].$$

It will be convenient to decompose the random variable

$$\begin{aligned} & \|v_\theta(t, X_\omega(t))\|_2^2 - 2\langle Y_{h,\omega}(t), v_\theta(t, X_\omega(t)) \rangle \\ &= \|v_\theta(t, X_\omega(t))\|_2^2 - 2\langle D_{h,\omega}(t), v_\theta(t, X_\omega(t)) \rangle - 2\langle \eta_{h,\omega}(t), v_\theta(t, X_\omega(t)) \rangle, \end{aligned} \quad (29)$$

where we decomposed $Y_{h,\omega}(t)$ into

$$Y_{h,\omega}(t) = D_{h,\omega}(t) + \eta_{h,\omega}(t), \quad \text{with} \quad \begin{cases} D_{h,\omega}(t) &= \frac{1}{2h} \int_{t-h}^{t+h} b(s, X_\omega(s)) ds, \\ \eta_{h,\omega}(t) &= \frac{1}{2h} \int_{t-h}^{t+h} A(s) dW_\omega(s). \end{cases}$$

Consider the term $\langle \eta_{h,\omega}(t), v_\theta(t, X_\omega(t)) \rangle$ in (29) first. For a fixed $h > 0$, this term is square integrable because the Cauchy-Schwarz inequality gives

$$|\langle \eta_{h,\omega}(t), v_\theta(t, X_\omega(t)) \rangle|^2 \leq \|\eta_{h,\omega}(t)\|^2 \|v_\theta(t, X_\omega(t))\|^2,$$

and with the boundedness of v_θ and diffusion matrix $\Sigma(t) \preceq \sigma_{\max} I_d$, we obtain via Itô isometry:

$$\mathbb{E}[|\langle \eta_{h,\omega}(t), v_\theta(t, X_\omega(t)) \rangle|^2] \leq V^2 \frac{d\sigma_{\max}}{h} < \infty.$$

Correspondingly, we bound the variance as

$$\text{Var}[-2\langle \eta_{h,\omega}(t), v_\theta(t, X_\omega(t)) \rangle] \leq \mathbb{E}[|2\langle \eta_{h,\omega}(t), v_\theta(t, X_\omega(t)) \rangle|^2] \leq 4V^2 \frac{d\sigma_{\max}}{2h}. \quad (30)$$

Let us now consider the term $-2\langle D_{h,\omega}(t), v_\theta(t, X_\omega(t)) \rangle$ of (29), and obtain

$$|-2\langle D_{h,\omega}(t), v_\theta(t, X_\omega(t)) \rangle| \leq 2\|D_{h,\omega}(t)\|_2 \|v_\theta(t, X_\omega(t))\|_2 \leq 2b_{\max} V,$$

where we used that the drift term b is upper bound by $b_{\max}$ and v_θ by V . The variance is then

$$\text{Var}[-2\langle D_{h,\omega}(t), v_\theta(t, X_\omega(t)) \rangle] \leq \mathbb{E}[|-2\langle D_{h,\omega}(t), v_\theta(t, X_\omega(t)) \rangle|^2] \leq 4b_{\max}^2 V^2. \quad (31)$$

Analogously, we bound

$$\text{Var}[\|v_\theta(t, X_\omega(t))\|_2^2] \leq \mathbb{E}[\|v_\theta(t, X_\omega(t))\|_2^4] \leq V^4. \quad (32)$$

Combining (30), (31), and (32) with $\text{Var}[Z_1 + Z_2 + Z_3] \leq 3(\text{Var}[Z_1] + \text{Var}[Z_2] + \text{Var}[Z_3])$ leads to (26). $\square$

Proof of Lemma 1. It suffices to consider the variance $\mathbb{E} \left[(\widehat{J}_h(\theta) - J_h(\theta))^2 \right]$, and, by independence of the samples in (24) and the law of total variance to condition on the time $t \sim \mathcal{U}([h, 1-h])$, to compute $\text{Var } \widehat{J}_h(\theta; t)$ for

$$\widehat{J}_h(\theta; t) := v_\theta(t, X_\omega(t))^2 - 2v_\theta(t, X_\omega(t))Y_{h,\omega}(t) \quad (33)$$

at a fixed time $t \in [h, 1-h]$. First, we characterize the joint distribution of $(X_\omega(t), Y_{h,\omega}(t))$. Clearly $X_\omega(t) \sim \mathcal{N}(0, 1+t)$, and

$$\begin{aligned} Y_{h,\omega}(t) &= \frac{X_\omega(t+h) - X_\omega(t-h)}{2h} = \frac{(X_\omega(t+h) - X_\omega(t)) + (X_\omega(t) - X_\omega(t-h))}{2h} \\ &= \frac{\Delta B_\omega(t) + \Delta B_\omega(t-h)}{2h} \sim \mathcal{N}\left(0, \frac{1}{2h}\right) \end{aligned}$$

marginally. Their correlation is then

$$\mathbb{E}[X_\omega(t)Y_{h,\omega}(t)] = \frac{1}{2h}\mathbb{E}[(X_\omega(t-h) + \Delta B_\omega(t-h))(\Delta B_\omega(t) + \Delta B_\omega(t-h))] = \frac{1}{2}$$

such that in total

$$\begin{pmatrix} X_\omega(t) \\ Y_{h,\omega}(t) \end{pmatrix} \sim \mathcal{N}\left(0, \begin{pmatrix} 1+t & 1/2 \\ 1/2 & 1/(2h) \end{pmatrix}\right).$$

We can hence also write

$$\begin{pmatrix} X_\omega(t) \\ Y_{h,\omega}(t) \end{pmatrix} \stackrel{d}{=} \begin{pmatrix} \sqrt{1+t}Z_1 \\ \frac{1}{2\sqrt{1+t}}Z_1 + \sqrt{\frac{1}{2h} - \frac{1}{4(1+t)}}Z_2 \end{pmatrix} \quad (34)$$

for Z_1, Z_2 iid $\mathcal{N}(0, 1)$. The other ingredient we need is that for any $k \geq 0$, by the law of total probability, we have

$$\mathbb{E}[v_\theta(t, X_\omega(t))^k Y_{h,\omega}(t)] = \mathbb{E}[v_\theta(t, X_\omega(t))^k \mathbb{E}[Y_{h,\omega}(t) | X_\omega(t)]] = \mathbb{E}[v_\theta(t, X_\omega(t))^k v_h(X_\omega(t), t)] \quad (35)$$

where $\lim_{h \rightarrow 0} v_h(t, x) = v(t, x)$ is the true probability current velocity of the process X . In the present example

$$v(t, x) = b(t, x) - \frac{1}{2}\Sigma(t)\nabla \log \rho(t, x) = \frac{x}{2(1+t)}.$$

With that, we can now compute

$$\begin{aligned} \text{Var } \widehat{J}_h(\theta; t) &= \underbrace{\text{Var}(v_\theta(t, X_\omega(t))^2)}_{=:V_1} + 4 \underbrace{\text{Var}(v_\theta(t, X_\omega(t))Y_{h,\omega}(t))}_{=:V_2} \\ &\quad - 4 \underbrace{\text{Cov}(v_\theta(t, X_\omega(t))^2, v_\theta(t, X_\omega(t))Y_{h,\omega}(t))}_{=:C_{12}}. \end{aligned}$$

The first term V_1 is a constant in h . The last term is

$$\begin{aligned} C_{12} &= \mathbb{E} [v_\theta(t, X_\omega(t))^3 Y_{h,\omega}(t)] - \mathbb{E} [v_\theta(t, X_\omega(t))^2] \mathbb{E} [v_\theta(t, X_\omega(t)) Y_{h,\omega}(t)] \\ &\stackrel{(35)}{=} \mathbb{E} [v_\theta(t, X_\omega(t))^3 v_h(t, X_\omega(t))] - \mathbb{E} [v_\theta(t, X_\omega(t))^2] \mathbb{E} [v_\theta(t, X_\omega(t)) v_h(t, X_\omega(t))] , \end{aligned}$$

which evidently converges to a well-defined limiting value as $h \rightarrow 0$. Lastly, for V_2 , we find

$$\begin{aligned} V_2 &= \mathbb{E} [v_\theta(t, X_\omega(t))^2 (Y_{h,\omega}(t))^2] - \mathbb{E} [v_\theta(t, X_\omega(t)) Y_{h,\omega}(t)]^2 \\ &\stackrel{(34),(35)}{=} \frac{1}{4(1+t)} \mathbb{E} [v_\theta(t, \sqrt{1+t} Z_1)^2 Z_1^2] + \left(\frac{1}{2h} - \frac{1}{4(1+t)} \right) \mathbb{E} [v_\theta(t, \sqrt{1+t} Z_1)^2] \\ &\quad - \mathbb{E} [v_\theta(t, X_\omega(t)) v_h(t, X_\omega(t))]^2 . \end{aligned}$$

Overall, because of the term $1/(2h)$ term, we hence have shown

$$\text{Var } \hat{J}_h(\theta; t) \stackrel{h \rightarrow 0}{\sim} \frac{c(t)}{h} ,$$

where the constant $c(t) > 0$ is explicitly given by $c(t) = 2\mathbb{E} [v_\theta(t, \sqrt{1+t} Z)^2]$ for $Z \sim \mathcal{N}(0, 1)$. $\square$

C.4 Proof of Proposition 2

We denote in this section by $(X(t))_{t \in [0, T]}$ sample paths of the SDE (1), by $(\hat{x}_\theta(t))_{t \in [0, T]}$ the trajectories of the ODE (3) with (learned) velocity field $u = v_\theta$, and by $(\hat{x}(t))_{t \in [0, T]}$ the trajectories of the ODE (3) with $u = v$ the true probability current velocity (7). We couple the distributions of these by picking *the same starting point* $X(0) = \hat{x}_\theta(0) = \hat{x}(0) \sim \rho(0)$, state pathwise errors in Lemma 2 and Lemma 3 via Grönwall's lemma, and conclude with the Wasserstein-2 bound of Proposition 2 as a corollary. As in the main text in Proposition 2, we suppose here that the probability current velocity v is uniformly Lipschitz on $\mathbb{R}^d$ for all times with Lipschitz constant $L_v > 0$. Then we have:

Lemma 2. $\mathbb{E} [\|\hat{x}(t) - X(t)\|_2^2] \leq \exp((2L_v + 1)t) \int_0^t (\text{Tr } \Sigma(s) + \mathbb{E} [\|\frac{1}{2}\Sigma(s)\nabla \log \rho(s, X(s))\|_2^2]) \, ds.$

Lemma 3. $\mathbb{E} [\|\hat{x}_\theta(t) - \hat{x}(t)\|_2^2] \leq \exp((2L_v + 1)t) \int_0^t \mathbb{E} [\|v_\theta(s, \hat{x}_\theta(s)) - v(s, \hat{x}_\theta(s))\|_2^2] \, ds.$

We remark that combining these two lemmas using the triangle inequality also provides an upper bound on the mean squared distance of $X(t)$ and $\hat{x}_\theta(t)$ if desired, though we come back to this problem in more detail in Proposition 3 and Appendix C.5. Now, since the time-marginal distributions $\rho(t)$ generated by $(\hat{x}(t))_{t \in [0, T]}$ are the true ones, and we have constructed a particular coupling of $\rho(t)$ and $\hat{\rho}_\theta(t)$ via the two ODEs with the same initial conditions, Lemma 3 directly implies Proposition 2:

$$W_2^2(\rho(t), \hat{\rho}_\theta(t)) = \inf_{\gamma \in \Gamma(\rho(t), \hat{\rho}_\theta(t))} \mathbb{E}_{(x, y) \sim \gamma} [\|x - y\|_2^2] \leq \mathbb{E} [\|\hat{x}_\theta(t) - \hat{x}(t)\|_2^2] ,$$

where $\Gamma(\rho(t), \hat{\rho}_\theta(t))$ denotes the set of all couplings of $\rho(t)$ and $\hat{\rho}_\theta(t)$. Finally, then, as mentioned in the main text, if $\phi: \mathbb{R}^d \rightarrow \mathbb{R}$ is a scalar QoI which is Lipschitz with constant L_ϕ , then we obtain by Kantorovich–Rubinstein duality for the W_1 metric, and $W_1 \leq W_2$:

$$|\mathbb{E}_{X(t) \sim \rho(t)} [\phi(X(t))] - \mathbb{E}_{\hat{x}_\theta(t) \sim \hat{\rho}_\theta(t)} [\phi(\hat{x}_\theta(t))]| \leq L_\phi W_1(\rho(t), \hat{\rho}_\theta(t)) \leq L_\phi W_2(\rho(t), \hat{\rho}_\theta(t)) ,$$

such that Proposition 2 also provides control over the error for time-local QoIs.

Proof of Lemma 2. Denote the difference of the ODE and SDE trajectory by $E(t) := \hat{x}(t) - X(t)$. By construction we have $E(0) = 0$, and E satisfies the SDE

$$\begin{aligned} dE(t) &= v(t, \hat{x}(t))dt - b(t, X(t))dt - A(t)dW(t) \\ &\stackrel{(7)}{=} [v(t, \hat{x}(t)) - v(t, X(t)) - q(t)]dt - A(t)dW(t), \end{aligned}$$

where we abbreviate $q(t) := \frac{1}{2}\Sigma(t)\nabla \log \rho(t, X(t))$. By Itô's lemma, we then have

$$d\|E(t)\|_2^2 = (2\langle E(t), v(t, \hat{x}(t)) - v(t, X(t)) - q(t) \rangle + \text{Tr } \Sigma(t))dt - 2\langle E(t), A(t)dW(t) \rangle,$$

and by taking expectations:

$$\frac{d}{dt}\mathbb{E}[\|E(t)\|_2^2] = 2\mathbb{E}[\langle E(t), v(t, \hat{x}(t)) - v(t, X(t)) \rangle] + 2\mathbb{E}[\langle E(t), q(t) \rangle] + \text{Tr } \Sigma(t).$$

Using the Cauchy–Schwarz inequality and Lipschitz property of v for the first term on the right-hand side and Young's inequality for the second term, we obtain

$$\frac{d}{dt}\mathbb{E}[\|E(t)\|_2^2] \leq (2L_v + 1)[\|E(t)\|_2^2] + \mathbb{E}[\|q(t)\|_2^2] + \text{Tr } \Sigma(t),$$

such that Grönwall's lemma, noting that $\mathbb{E}[\|E(0)\|_2^2] = 0$, finishes the proof. $\square$

Proof of Lemma 3. Define $e(t) = \hat{x}_\theta(t) - \hat{x}(t)$ with $\frac{d}{dt}e(t) = v_\theta(t, \hat{x}_\theta(t)) - v(t, \hat{x}(t)) = (v_\theta(t, \hat{x}_\theta(t)) - v(t, \hat{x}_\theta(t))) + (v(t, \hat{x}_\theta(t)) - v(t, \hat{x}(t)))$ and proceed analogously to the previous proof. $\square$

C.5 Proof of Proposition 3

For the reader's convenience, we state again all necessary assumptions for Proposition 3 in the following. Let $\rho(t)$ denote the law of the SDE (1), and let $\hat{\rho}_\theta(t)$ denote the law generated by the learned ODE

$$\frac{d}{dt}\hat{x}_\theta(t) = v_\theta(t, \hat{x}_\theta(t)), \quad \hat{x}_\theta(0) \sim \rho(0).$$

Assume that the probability current velocity v is uniformly Lipschitz in x with constant $L_v > 0$, and that we have pointwise error control

$$\|v_\theta(t, x) - v(t, x)\|_2 \leq \epsilon \quad \text{for all } t \in [0, T], \ x \in \mathbb{R}^d.$$

Let $\phi : [0, T] \times \mathbb{R}^d \rightarrow \mathbb{R}$ be a bounded and Lipschitz vector field:

$$\|\phi(t, x)\|_2 \leq B_\phi, \quad \|\phi(t, x) - \phi(t, y)\|_2 \leq L_\phi \|x - y\|_2 \quad \text{for all } t \in [0, T], \ x, y \in \mathbb{R}^d.$$

Assume similarly that v_θ is uniformly bounded and Lipschitz in x :

$$\|v_\theta(t, x)\|_2 \leq B_{v_\theta}, \quad \|v_\theta(t, x) - v_\theta(t, y)\|_2 \leq L_{v_\theta} \|x - y\|_2 \quad \text{for all } t \in [0, T], \ x, y \in \mathbb{R}^d.$$

Set $\tilde{C} := L_\phi B_{v_\theta} + B_\phi L_{v_\theta}$. We will show below that the error in the path-dependent QoI $\Phi(X) := \int_0^T \phi(t, X(t)) \circ dX(t)$ under the true SDE and the learned ODE rollout satisfies

$$|\mathbb{E}[\Phi(X)] - \mathbb{E}[\Phi(\hat{x}_\theta)]| \leq \int_0^T \left(\|v(t, \cdot) - v_\theta(t, \cdot)\|_{L^2(\rho(t))} \|\phi(t, \cdot)\|_{L^2(\rho(t))} + \tilde{C} W_2(\rho(t), \hat{\rho}_\theta(t)) \right) dt. \quad (36)$$

Using Proposition 2, this estimate directly implies Proposition 3. We also mention here (cf. (37) in the proof below) that the local transport term, i.e., the first term on the right-hand side of (36), can alternatively be controlled directly by the FTM excess risk

$$J(\theta) - J^* = \frac{1}{T} \int_0^T \|v_\theta(t, \cdot) - v(t, \cdot)\|_{L^2(\rho(t))}^2 dt,$$

where

$$\begin{cases} J(\theta) &= \frac{1}{T} \int_0^T \int_{\mathbb{R}^d} (\|v_\theta(t, x)\|_2^2 - 2\langle v(t, x), v_\theta(t, x) \rangle) \rho(t, x) dx dt, \\ J^* &:= \frac{1}{T} \int_0^T \int_{\mathbb{R}^d} (\|v(t, x)\|_2^2 - 2\|v(t, x)\|_2^2) \rho(t, x) dx dt \\ &= -\frac{1}{T} \int_0^T \int_{\mathbb{R}^d} \|v(t, x)\|_2^2 \rho(t, x) dx dt, \end{cases}$$

since by using Cauchy–Schwarz twice:

$$\begin{aligned} & \frac{1}{T} \int_0^T |\mathbb{E}_{X(t) \sim \rho(t)} [\langle \phi(t, X(t)), v(t, X(t)) - v_\theta(t, X(t)) \rangle]| dt \\ & \leq (J(\theta) - J^*)^{1/2} \left(\frac{1}{T} \int_0^T \|\phi(t, \cdot)\|_{L^2(\rho(t))}^2 dt \right)^{1/2}. \end{aligned}$$

Proof of Proposition 3. We first use the Stratonovich integral identity (11) for the SDE sample paths to simplify the difference of the path-dependent QoI expectations:

$$\begin{aligned} |\mathbb{E}[\Phi(X)] - \mathbb{E}[\Phi(\hat{x}_\theta)]| &= \left| \mathbb{E} \left[\int_0^T \phi(t, X(t)) \circ dX(t) - \int_0^T \langle \phi(t, \hat{x}_\theta(t)), \frac{d}{dt} \hat{x}_\theta(t) \rangle dt \right] \right| \\ &= \left| \mathbb{E} \left[\int_0^T \left(\langle \phi(t, X(t)), v(t, X(t)) \rangle - \langle \phi(t, \hat{x}_\theta(t)), v_\theta(t, \hat{x}_\theta(t)) \rangle \right) dt \right] \right| \\ &\leq \int_0^T |\mathbb{E} [\langle \phi(t, X(t)), v(t, X(t)) \rangle - \langle \phi(t, \hat{x}_\theta(t)), v_\theta(t, \hat{x}_\theta(t)) \rangle]| dt \end{aligned}$$

Adding and subtracting $\int_{\mathbb{R}^d} \langle \phi(t, x), v_\theta(t, x) \rangle \rho(t, x) dx$, we obtain

$$\begin{aligned} |\mathbb{E}[\Phi(X)] - \mathbb{E}[\Phi(\hat{x}_\theta)]| &\leq \int_0^T \left(\left| \int_{\mathbb{R}^d} \langle \phi(t, x), v(t, x) - v_\theta(t, x) \rangle \rho(t, x) dx \right| \right. \\ &\quad \left. + \left| \int_{\mathbb{R}^d} \langle \phi(t, x), v_\theta(t, x) \rangle (\rho(t, x) - \hat{\rho}_\theta(t, x)) dx \right| \right) dt. \quad (37) \end{aligned}$$

We bound the two terms separately. For the first term in (37), Cauchy–Schwarz gives

$$\begin{aligned} & \left| \int_{\mathbb{R}^d} \langle \phi(t, x), v(t, x) - v_\theta(t, x) \rangle \rho(t, x) \, dx \right| \\ & \leq \left(\int_{\mathbb{R}^d} \|v(t, x) - v_\theta(t, x)\|_2^2 \rho(t, x) \, dx \right)^{1/2} \left(\int_{\mathbb{R}^d} \|\phi(t, x)\|_2^2 \rho(t, x) \, dx \right)^{1/2} \\ & = \|v(t, \cdot) - v_\theta(t, \cdot)\|_{L^2(\rho(t))} \|\phi(t, \cdot)\|_{L^2(\rho(t))}. \end{aligned}$$

For the second term in (37), define, for fixed $t \in [0, T]$, $f_t(x) := \langle \phi(t, x), v_\theta(t, x) \rangle$. We show that f_t is Lipschitz with $\text{Lip}(f_t) \leq \tilde{C}$. For any $x, y \in \mathbb{R}^d$:

$$\begin{aligned} |f_t(x) - f_t(y)| &= |\langle \phi(t, x), v_\theta(t, x) \rangle - \langle \phi(t, y), v_\theta(t, y) \rangle| \\ &\leq |\langle \phi(t, x) - \phi(t, y), v_\theta(t, x) \rangle| + |\langle \phi(t, y), v_\theta(t, x) - v_\theta(t, y) \rangle| \\ &\leq \|\phi(t, x) - \phi(t, y)\|_2 \|v_\theta(t, x)\|_2 + \|\phi(t, y)\|_2 \|v_\theta(t, x) - v_\theta(t, y)\|_2 \\ &\leq L_\phi \|x - y\|_2 B_{v_\theta} + B_\phi L_{v_\theta} \|x - y\|_2 \\ &= \tilde{C} \|x - y\|_2. \end{aligned}$$

Then, by Kantorovich–Rubinstein duality and $W_1 \leq W_2$,

$$\begin{aligned} \left| \int_{\mathbb{R}^d} \langle \phi(t, x), v_\theta(t, x) \rangle (\rho(t, x) - \hat{\rho}(t, x)) \, dx \right| &= \left| \int_{\mathbb{R}^d} f_t(x) \rho(t, x) \, dx - \int_{\mathbb{R}^d} f_t(x) \hat{\rho}(t, x) \, dx \right| \\ &\leq \text{Lip}(f_t) W_1(\rho(t), \hat{\rho}(t)) \leq \tilde{C} W_2(\rho(t), \hat{\rho}(t)). \end{aligned}$$

This finishes the proof of (36) from (37). □

Appendix D. Details about experiments

We provide the details for the four benchmark systems used in Section 4. In all examples, FTM is trained from trajectory data using the one-step loss (16), except otherwise noted (in particular in Figure 2). At test time, we generate ensembles by integrating the learned ODE.

Trajectory-dependent probability-current QoIs We evaluate whether the learned model recovers trajectory-dependent probability currents. Given a smooth test function

$$\phi : [0, T] \times \mathbb{R}^d \rightarrow \mathbb{R}^d,$$

we define the Stratonovich path functional

$$Q_\phi = \mathbb{E} \left[\int_0^T \phi(t, X(t)) \circ dX(t) \right]. \quad (38)$$

For discrete trajectories $\{X^{(i)}(t_k)\}_{i=1, k=0}^{N, K}$, we estimate (38) using the midpoint Stratonovich rule

$$\hat{Q}_\phi = \frac{1}{N} \sum_{i=1}^N \sum_{k=0}^{K-1} \phi \left(\frac{t_k + t_{k+1}}{2}, \frac{X^{(i)}(t_k) + X^{(i)}(t_{k+1})}{2} \right)^\top (X^{(i)}(t_{k+1}) - X^{(i)}(t_k)). \quad (39)$$

The same estimator is applied to trajectories generated by each learned model, and the reported trajectory-QoI error is the absolute difference from the reference value computed on ground-truth trajectories.

D.1 Duffing oscillator

Dynamics We consider the stochastically forced Duffing oscillator

$$dX_1(t) = X_2(t) dt, \quad (40)$$

$$dX_2(t) = (-2\xi\omega X_2(t) + \omega^2 X_1(t) - \omega^2 \gamma X_1(t)^3) dt + \sigma dW(t), \quad (41)$$

with parameters

$$\xi = 0.2, \quad \gamma = 0.2, \quad \omega = 1, \quad \sigma = 0.5.$$

Equivalently, the deterministic force corresponds to a double-well potential of the form

$$V(x_1) = -\frac{1}{2}x_1^2 + \frac{1}{20}x_1^4,$$

up to the parameter scaling above. The random forcing acts only on the acceleration equation. Initial conditions are sampled as

$$X(0) \sim \mathcal{N}\left(\begin{bmatrix} 0 \\ -10 \end{bmatrix}, I_2\right).$$

Probability-current QoI The Duffing oscillator has two metastable wells separated by the barrier near $x_1 = 0$. To measure the net probability current across this barrier, we use the test function

$$\phi(x) = \begin{bmatrix} \frac{1}{\sqrt{2\pi}\epsilon} \exp\left(-\frac{x_1^2}{2\epsilon^2}\right) \\ 0 \end{bmatrix}, \quad \epsilon = 1. \quad (42)$$

This localizes the Stratonovich line integral near the separating surface $x_1 = 0$ and therefore measures the signed probability flux moving between the two wells. We estimate Q_ϕ using (39).

Training data generation We generate training trajectories by integrating the Duffing Oscillator SDE with the Euler–Maruyama scheme on a uniform time grid with step size $\Delta t = 0.01$ over the time interval $[0, 12]$. Initial conditions are drawn from the distribution specified above, and we generate 5000 training trajectories. For testing, we draw a new set of initial conditions from the same initial distribution and generate 5000 testing trajectories.

Reported metrics For the Duffing oscillator, we report both a distributional error between time marginals and the trajectory-dependent current error associated with (42). The distributional error is computed using a sliced Wasserstein-2 distance between generated and reference ensembles, averaged over the evaluated time points.

D.2 Stochastic Rayleigh–Bénard convection

Dynamics We use the nine-dimensional chaotic Rayleigh–Bénard convection model of [50]. The state is

$$X(t) = (X_1(t), \dots, X_9(t)) \in \mathbb{R}^9,$$

and the dynamics are given by

$$dX(t) = f_\mu(X(t)) dt + \sigma dW(t), \quad (43)$$

where f_μ is the deterministic nine-mode convection vector field and μ is the Rayleigh-type control parameter. In the experiments we use the chaotic regime with

$$\sigma = \frac{1}{20},$$

and treat μ as a control parameter that is varied across training and testing.

Rotational probability-current QoI The Rayleigh–Bénard dynamics exhibit persistent rotational motion in low-dimensional projections. To test whether a learned model reproduces this rotational current, we consider the projection

$$P : \mathbb{R}^9 \rightarrow \mathbb{R}^2, \quad Px = (x_1, x_2),$$

and the counterclockwise rotation matrix

$$R = \begin{bmatrix} 0 & -1 \\ 1 & 0 \end{bmatrix}.$$

We define

$$\phi(x) = P^\top R P x = (-x_2, x_1, 0, \dots, 0)^\top. \quad (44)$$

The corresponding quantity Q_ϕ measures the component of the probability current aligned with rotation in the (x_1, x_2) plane. As in the Duffing example, we estimate it by the discrete Stratonovich estimator (39).

Training data generation We generate training trajectories by integrating the Rayleigh–Bénard SDE (43) with the Euler–Maruyama scheme on a uniform time grid with step size $\Delta t = 0.01$ over the time interval $[0, 20]$. Initial conditions are drawn from an isotropic Gaussian with mean 0 and standard deviation 0.02 in each coordinate. For each training parameter value

$$\mu \in \{13.5, 13.6, 13.7, 13.8, 13.9, 14.0, 14.1, 14.2\},$$

we generate 20,000 training trajectories, and we evaluate the learned model at the held-out test value $\mu = 13.65$. For testing, we draw a new set of initial conditions from the same Gaussian distribution and generate 20,000 testing trajectories at $\mu = 13.65$.

Reported metrics We report a distributional error between generated and reference time marginals, together with the rotational-current error induced by (44). The latter distinguishes methods that reproduce the correct projected distribution from those that also reproduce the trajectory-induced circulation.

D.3 Stochastically forced Burgers turbulence

Dynamics We consider the one-dimensional stochastic Burgers equation on the periodic domain $[0, 1)$,

$$du(t, x) = (\nu \partial_{xx} u(t, x) - u(t, x) \partial_x u(t, x)) dt + \sigma dW(t, x), \quad x \in [0, 1), \quad (45)$$

with viscosity

$$\nu = 0.007.$$

The stochastic forcing is white in time and colored in space. Specifically, we use a truncated Fourier expansion on the first ten modes,

$$dW(t, x) = \sum_{\iota=1}^{10} \frac{1}{\iota} \left(a_{\iota}(x) dB_{\iota}^{(1)}(t) + b_{\iota}(x) dB_{\iota}^{(2)}(t) \right),$$

where a_{ι} and b_{ι} denote the corresponding sine and cosine modes, and the Brownian motions are independent. Unless otherwise stated, the noise amplitude is

$$\sigma = \frac{2}{50}.$$

Initial conditions Initial conditions are Gaussian bumps with additive colored perturbations,

$$u(0, x) = \exp(-c(x - 1/2)^2) + \eta(x), \quad (46)$$

where η is drawn from the same spatially colored Fourier family as the forcing, with perturbation strength $\sigma_0 = 0.015$. The constant c controls the width of the initial bump.

Training data generation We solve (45) using a method-of-lines discretization with second-order centered finite differences in space on a uniform grid of $N = 64$ points over the periodic domain $[0, 1)$, combined with an Euler–Maruyama scheme in time with step size $\Delta t = 5 \times 10^{-4}$ over the interval $[0, 4]$. Trajectories are subsampled to $T = 800$ uniformly spaced output times (output spacing $\Delta t_{\text{out}} = 5 \times 10^{-3}$). Initial conditions are drawn according to (46) with bump width $c = 20$. We generate 4,096 training trajectories and 4,096 testing trajectories, with testing initial conditions drawn independently from the same distribution.

Physical diagnostics For Burgers, the main evaluation metrics are the energy and enstrophy of the field,

$$E(t) = \frac{1}{2} \int_0^1 |u(t, x)|^2 dx, \quad (47)$$

$$Z(t) = \frac{1}{2} \int_0^1 |\partial_x u(t, x)|^2 dx. \quad (48)$$

On a uniform grid, these quantities are computed by the corresponding trapezoidal or periodic finite-difference approximations. We compare the ensemble mean and ensemble standard deviation of $E(t)$ and $Z(t)$ over generated and reference trajectories.

Noise-sensitivity experiment To test sensitivity to stochastic forcing, we repeat the Burgers experiment for multiple values of the forcing amplitude σ . This comparison is used to verify that the benchmark contains genuine stochastic variability: standard deterministic time-steppers trained with mean-squared error tend to collapse toward conditional-mean dynamics as σ increases, whereas FTM is evaluated by its ability to maintain accurate ensemble statistics.

D.4 Stochastically forced turbulence (Navier-Stokes)

Dynamics and numerical solver We consider two-dimensional incompressible Navier–Stokes flow on the periodic domain

$$\Omega = [0, 2\pi]^2.$$

The simulations are based on the spectral forced-turbulence example from JAX-CFD [33, 22], modified to include additive stochastic forcing in place of deterministic Kolmogorov forcing. We use the vorticity formulation

$$d\omega + (u \cdot \nabla \omega) dt = (\nu \Delta \omega - \alpha \omega) dt + f_{\text{sto}}(t, x) dt, \quad u = \nabla^\perp \Delta^{-1} \omega, \quad (49)$$

with viscosity $\nu = 10^{-3}$ and linear drag coefficient $\alpha = 0.1$.

Stochastic coarse-mode forcing The driving stochastic forcing acts on a finite set of low-frequency Fourier modes. In vorticity form, the stochastic forcing is

$$f_{\text{sto}}(t, x) dt = \sigma \sum_{\kappa \in \mathcal{K}_{\text{sto}}} w_\kappa \left(a_\kappa(x) dB_\kappa^{(1)}(t) + b_\kappa(x) dB_\kappa^{(2)}(t) \right), \quad (50)$$

where $\mathcal{K}_{\text{sto}}$ contains only coarse Fourier modes, a_κ and b_κ are the corresponding real sine and cosine Fourier basis functions, the Brownian motions are independent, and the spectral weights are $w_\kappa \propto |\kappa|^{-1/2}$. Thus the unresolved random forcing acts at large spatial scales, while the nonlinear Navier–Stokes dynamics transfer this variability across scales. In all our experiments, we set the stochastic forcing strength to be $\sigma = 0.3$.

Initial conditions Trajectories are initialized from filtered random velocity fields as in the JAX-CFD forced-turbulence setup, rescaled so that the maximum velocity magnitude is approximately 7. The combination of random initial conditions and stochastic coarse-mode forcing yields an ensemble of turbulent rollouts.

Training data generation Equation (49) is integrated on a 256×256 uniform grid over $[0, 2\pi]^2$ using a pseudo-spectral method with 2/3-rule dealiasing. Time integration is performed via an implicit–explicit scheme: the linear (viscous and drag) terms are treated implicitly with Crank–Nicolson, while advection and stochastic forcing are advanced explicitly with a five-stage low-storage Carpenter–Kennedy Runge–Kutta-4 scheme. We use an internal timestep $\Delta t_{\text{sim}} = 10^{-3}$ and integrate up to $T_{\text{end}} = 25$. Each trajectory is then subsampled in time to $T = 1000$ evenly-spaced snapshots and spectrally subsampled in space to a 64×64 output grid. We generate 2048 training trajectories and a separate set of 1024 test trajectories.

Physical diagnostics Same as for the Burgers example; see Appendix D.3.

D.5 Setup and details of numerical experiments

Architectures for FTM

Duffing oscillator. We use a 3-layer MLP with hidden dimension 128 and ReLU activations. Time is provided by concatenation to the input. Training uses Adam with learning rate 5×10^{-4} under a warmup-cosine-decay schedule, batch size 8192, for 10^5 steps.

Rayleigh-Bénard. We use a 7-layer MLP with hidden dimension 128 and ReLU activations. Time is provided by concatenation to the input. Training uses Adam with learning rate 5×10^{-4} under a warmup-cosine-decay schedule, batch size 8192, for 10^5 steps.

Stochastic Burgers. We use a 1D U-Net with channel widths [32, 64, 128], two residual blocks per scale, one middle residual block, and GeLU activations. Time is embedded via a 2-layer MLP of width 128 and injected into each residual block via a learned linear projection: the projected vector is added to the feature map both before the first convolution and before the second convolution, broadcast across the spatial dimension. Training uses Adam with learning rate 1×10^{-4} under a warmup-cosine-decay schedule, batch size 2048, for 2×10^5 steps.

Stochastic Navier-Stokes. We use a 2D U-Net with channel widths [128, 256, 512, 1024], two residual blocks per scale, one middle residual block, and GeLU activations, conditioned on three consecutive frames. Time is embedded via a 2-layer MLP of width 512 and injected into each residual block via a learned linear projection: the projected vector is added to the feature map both before the first convolution and before the second convolution, broadcast across the spatial dimensions. Training uses Adam with learning rate 1×10^{-4} under a warmup-cosine-decay schedule, batch size 128, for 10^6 steps.

Compute We train all models, including the other baselines, on compute nodes with H200 GPUs and 60GB of memory and 2TB of node main memory; and also use the same H200 GPUs for inference tasks. All runtime results are measured on H200 GPUs. Batch sizes are chosen so that they fit into the memory of the GPUs.

D.6 Additional description and details about experiments

Figure 2 The cost reported in panel (c) is the runtime of one loss evaluation, which has been averaged over 100 runs. The shaded area shows the standard deviation over these 100 runs. The time-step size $h = 10^{-2}$ and fixed over all τ , which is the setup used in the Duffing oscillator experiment.

Table 1 The W_2 error for the Duffing and Rayleigh-Benard convection is computed for each time step separately and then these errors are averaged, which is the reported number. The number in brackets is the standard deviation of the error over all time steps, which indicates how robustly the time marginals are matched over time. For the trajectory-based QoI error,

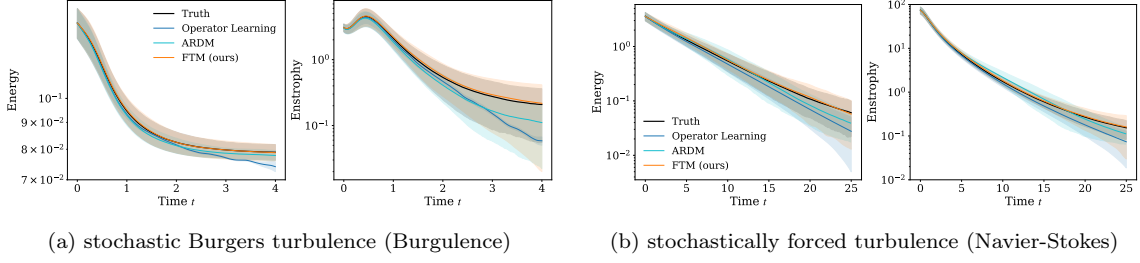


Figure 7: FTM predicts ensembles with accurate energy and enstrophy statistics of stochastic Burgers (left panel) and stochastically forced turbulence (right panel) solution trajectories.

the QoI is computed (Appendices D.1 and D.2) over all test trajectories. The reported number is the average relative error. The number in brackets is the standard deviation of the Monte Carlo estimator.

Table 2 and Table 4 For computing the energy and enstrophy estimates, see Appendix D.3. We report the relative error averaged over the whole time range. In brackets, we report the standard deviation of the errors over time.

Figure 3(right) The right panel shows the error of energy and enstrophy of FTM for the Burgers example for varying noise level σ .

Figure 5 The spectrum $E(k)$ shown in the plots on the right is computed by taking the Fourier decomposition of the generated field at times $t = 15$ and $t = 25$ and then plotting the coefficients.

D.7 Additional experiments

Table 4 shows more extensive results for the stochastic Burgers example and the stochastically forced turbulence example. Table 5 shows extensive results for using a distilled auto-regressive conditional flow matching (AR-CFM) model, using mean-flows [26] for distillation.

Figure 7 shows the mean and standard deviation of energy and enstrophy of the ensemble trajectories compared to the ground truth for stochastic Burgers and stochastic turbulence examples.

Appendix E. Baselines

All baselines are trained on the respective same data sets and comparable architectures as FTM to ensure a fair comparison.

Table 4: Comparison of methods on the stochastic Burgers equation and stochastically forced turbulence (two-dim. Navier-Stokes).

Stochastic Burgers			
Method	error energy	error enstrophy	NFEs/time step
Operator learning [57]	$2.21\text{e-}2 (\pm 1.54\text{e-}2)$	$2.55\text{e-}1 (\pm 2.34\text{e-}1)$	1
ARDM 50 steps [34]	$1.46\text{e-}2 (\pm 3.39\text{e-}3)$	$2.49\text{e-}1 (\pm 1.43\text{e-}1)$	50
ARDM 75 steps [34]	$1.36\text{e-}2 (\pm 3.49\text{e-}3)$	$2.30\text{e-}1 (\pm 1.26\text{e-}3)$	75
ARDM 100 steps [34]	$1.24\text{e-}2 (\pm 3.12\text{e-}3)$	$2.11\text{e-}1 (\pm 1.14\text{e-}1)$	100
CFM 20 steps [2, 38]	$2.71\text{e-}3 (\pm 1.96\text{e-}3)$	$1.53\text{e-}1 (\pm 1.28\text{e-}1)$	20
FTM (ours)	$1.95\text{e-}3 (\pm 1.93\text{e-}3)$	$5.32\text{e-}2 (\pm 2.23\text{e-}2)$	1
stochastically forced turbulence (2D Navier-Stokes)			
Method	error energy	error enstrophy	NFEs/time step
Operator learning [57]	0.213	0.192	1
ARDM 50 steps [34]	0.314 ± 0.1478	0.282 ± 0.0960	50
ARDM 75 steps [34]	0.275 ± 0.1403	0.171 ± 0.0939	75
ARDM 100 steps [34]	0.116 ± 0.1092	0.134 ± 0.0846	100
CFM 20 steps	0.261 ± 0.272	0.271 ± 0.326	20
MeanFlow 1 step	0.868 ± 0.763	1.230 ± 1.289	1
MeanFlow 2 steps	0.787 ± 0.677	0.665 ± 0.654	2
MeanFlow 4 steps	0.700 ± 0.624	0.588 ± 0.622	4
MeanFlow 8 steps	0.590 ± 0.517	0.485 ± 0.524	8
FTM (ours)	0.034 ± 0.025	0.033 ± 0.019	1

Neural time stepper We follow the standard learned-simulator baseline used in, e.g., [47] and fit a deterministic one-step map $f_\theta : (t_k, x_k) \mapsto x_{k+1}$ by minimizing the regression loss

$$\mathcal{L}_{\text{step}}(\theta) = \frac{1}{NK} \sum_{i=1}^N \sum_{k=0}^{K-1} \left\| f_\theta(t_k, X^{(i)}(t_k)) - X^{(i)}(t_{k+1}) \right\|_2^2.$$

At inference time, trajectories are generated autoregressively by setting $\hat{x}(t_{k+1}) = f_\theta(t_k, \hat{x}(t_k))$. For stochastic data, this baseline estimates the conditional mean of the next state under squared-error training analogous to operator learning, and therefore serves as a deterministic time-stepper baseline.

For each of the experiments, we use the same architecture and hyperparameter sets mentioned in Appendix D.

SDE learning We implement the neural Euler–Maruyama likelihood baseline of [23] for the Duffing and Rayleigh–Bénard problems. Two MLPs are trained jointly: a drift network $b_\theta(x, t)$ and a diffusion network $\sigma_\theta(t)$, the latter taking only time as input with a softplus output to enforce positivity. Given consecutive trajectory pairs (X_k, X_{k+1}) with step size Δt , the model minimizes the negative log-likelihood under the Euler–Maruyama Gaussian transition $X_{k+1} | X_k \sim \mathcal{N}(X_k + b_\theta(X_k, t_k), \Delta t, ; \sigma_\theta(t_k)^2, \Delta t \cdot I)$:

$$\mathcal{L} = \mathbb{E} \left[\log(\sigma_\theta^2, \Delta t) + \frac{|X_{k+1} - X_k - b_\theta, \Delta t|^2}{\sigma_\theta^2, \Delta t} \right].$$

After training, rollouts are generated by simulating the learned SDE with Euler–Maruyama. This baseline therefore learns a full stochastic model, rather than only the probability current velocity.

The hyperparameters for the MLPs for each of the experiments are the same as mentioned in Appendix Appendix D.

SDE matching We use the codebase published by the authors of the original paper [4] on GitHub. The model is trained in the state space, which is tractable for the Duffing oscillator and Rayleigh–Bénard convection. For the Duffing oscillator 128 hidden dimensions were used with 3 layers, and for the Rayleigh–Bénard problem 128 hidden dimensions with 7 layers was used. The learning rate for both was 5×10^{-4} , and the latent dimension for each was set to be equal to the state dimension (2 for Duffing oscillator, 9 for Rayleigh–Bénard convection). The Duffing oscillator was trained for 150,000 training steps and the Rayleigh–Bénard convection was trained for 300,000 training steps.

Direct (“plug-in”) estimation of v We estimate the drift and diffusion coefficient as in SDE learning (see paragraph above) and additionally estimate the score conditioned on time with [28] from the samples of the time marginals. The setup for estimating the drift and diffusion coefficient is the same as in the SDE learning (see paragraph above). For learning the score, we use denoising score matching. Concretely, we train a time-conditioned denoising network with the v -parametrization on $T = 1000$ diffusion steps with a linear β -schedule. At inference we query at a small diffusion step $t = 3$ and recover the score. The score network uses the same MLP backbone as the drift and diffusion networks.

DICE We directly used the code that comes with the paper [7]. For the duffing oscillator, we use an MLP backbone with 128 hidden dimensions and 5 layers with swish activation functions. We use learning rate 5×10^{-4} with a cosine scheduler, and batchsize 256×256 . For the Rayleigh–Bénard system, we use the same hyperparameters and architecture in the DICE paper.

Autoregressive conditional diffusion model (ARDM) For the Burgers equation example, we implement an ARDM baseline in the same spirit as [34]. The model learns the conditional transition law $X(t_{k+1})|X(t_k)$ rather than a deterministic one-step map. Concretely, we train a conditional score network with the denoising score-matching setup. At inference time, a next state is generated by initializing the sampler from the reference distribution and numerically integrating the learned reverse-time sampling dynamics conditioned on the current state x_k . Repeating this procedure autoregressively produces a trajectory. For the two-dimensional Navier–Stokes experiments in Appendix D.4, we directly use the codebase released with [34].

For the Burgers implementation, we used a 1D UNet with feature depths [64, 128, 256], four residual blocks per scale, one middle residual block, and GeLU activations. The noise schedule is the linear β -schedule with $T = 1000$ levels. The loss is the same as the denoising score matching via the v-parametrization. The optimizer used is Adam with learning rate 1×10^{-4} , with a warmup and then cosine decay. Training is done for 650,000 gradient steps. At inference, DDIM sampling is used with $\eta = 1.0$, thus making it stochastic.

For Navier Stokes, we use a 2D U-Net with ConvNext blocks and feature depths [42, 64, 128, 256], two ConvNext residual blocks per scale, and GELU activations. Each ConvNext block applies a depthwise 7×7 convolution followed by two 3×3 convolutions with GroupNorm and GELU. Linear attention is applied at each resolution level and full self-attention at the bottleneck. The network is conditioned on three consecutive vorticity frames (clean conditioning: conditioning frames are passed without noise during both training and inference); the noisy target frame is concatenated to the conditioning frames to form the 4-channel UNet input. Time is embedded via sinusoidal embeddings projected by a two-layer MLP (widths [64, 256] with GELU), and injected into each ConvNext block via a learned linear projection added to the feature map after the depthwise convolution, broadcast across spatial dimensions. The forward diffusion uses a linear noise schedule with $T=100$ steps ($\beta_0=5 \times 10^{-4}$, $\beta_T=0.1$, scaled from the standard 1000-step parametrisation). Training uses Adam with learning rate 1×10^{-4} , no weight decay, batch size 64, for 2,000,000 training steps. Inference is done in the same way as in Burgers.

Autoregressive conditional flow matching and mean-flow model Analogously to ARDM, we implement an autoregressive conditional generative baseline, but replace the reverse diffusion sampler by a conditional flow matching (CFM) ODE [2, 38]. We also implemented a mean-flow-style distillation baseline [26, 8], but we used a two-stage procedure. We first train the autoregressive CFM model and then distill its sampling-time flow into a model of the average velocity.

We train the CFM model to map the standard Gaussian to the target distribution, which is the conditional transition law. For each training pair (x_t, x_{t+1}) we draw $z \sim \mathcal{N}(0, I)$ and a

Table 5: Comparison of distillation with mean flow to FTM on the stochastic Burgers equation.

Method	error energy	error enstrophy	NFEs/time step
CFM 20 steps [2, 38]	2.71e−3 (± 1.96e−3)	1.53e−1 (± 1.28e−1)	20
MeanFlow 1 step[26]	8.22e−1 (± 2.88e−1)	359 (± 278)	1
MeanFlow 2 steps [26]	1.69e−1 (± 5.77e−2)	98.1 (± 80.5)	2
MeanFlow 5 steps [26]	3.41e−2 (± 2.22e−2)	3.15e−1 (± 1.81e−1)	5
MeanFlow 10 steps[26]	2.06e−2 (± 1.58e−2)	3.15e−1 (± 1.81e−1)	10
MeanFlow 20 steps [26]	9.71e−3 (± 2.91e−3)	2.46e−1 (± 2.57e−1)	20
FTM (ours)	1.95e−3 (± 1.93e−3)	5.32e−2 (± 2.23e−2)	1

flow time $\tau \sim \text{Uniform}(0, 1)$, construct the interpolant $x_\tau = \tau x_{t+1} + (1-\tau)z$, and regress the vector field onto the straight-line target $u_\tau = x_{t+1} - z$:

$$\mathcal{L}(\theta) = \mathbb{E}_{\tau, z, (x_t, x_{t+1})} [\|v_\theta(x_\tau, \tau \mid x_{\text{cond}}) - \text{sg}(u_\tau)\|^2]. \quad (51)$$

For the Stochastic Burgers experiments, we use a 1D U-Net with channel widths [96, 192, 384, 384], one residual block per encoder and decoder level, one bottleneck block, and SiLU activations; all convolutions apply circular padding to respect the periodic spatial domain, and skip connections are merged by concatenation. Time τ is embedded via a 128-dimensional sinusoidal encoding projected to dimension 512 through a two-layer MLP (Linear $\rightarrow$ SiLU $\rightarrow$ Linear). Training uses Adam with gradient clipping (global norm 1.0), a peak learning rate of 3×10^{-4} under a cosine decay schedule with a 1000-step linear warm-up, batch size 256, and runs for 500,000 gradient steps.

For Navier Stokes experiments, we use a 2D U-Net with channel widths [128, 256, 512, 512] (doubling per level, capped at $4 \times$ base), one residual block (SiLU, 3×3 convolution) per encoder and decoder level, and skip connections merged by channel concatenation. Time τ is embedded via a 128-dimensional sinusoidal encoding projected to dimension 512 through a two-layer MLP (Linear $\rightarrow$ SiLU $\rightarrow$ Linear), and conditioning is done by simple channel concatenation of the prior 3 frames; model parameters are maintained with an exponential moving average of decay 0.9999 and EMA weights are used at inference. Training uses Adam with gradient clipping (global norm 1.0), a peak learning rate of 3×10^{-4} under a cosine decay schedule with a 1000-step linear warm-up, batch size 256, and runs for 1,000,000 gradient steps.

We distill the trained CFM vector field v_θ into a mean-velocity network $u_\psi(x_r, r, t \mid x_{\text{cond}})$ following the ODE-regression formulation of [26]:

$$u_\psi(x_r, r, t) \approx \frac{\hat{x}_t - x_r}{t - r}, \quad (52)$$

where $\hat{x}_t$ is the endpoint obtained by integrating the *frozen* oracle v_θ forward from x_r over the interval $[r, t]$. At inference a single network evaluation suffices: $x_1 = z + u_\psi(z, 0, 1 \mid x_{\text{cond}})$, but one can do multiple evaluations uniformly along the $[0, 1]$ interval. The MeanFlow loss

is a regression task of the form:

$$\mathcal{L}(\psi) = \mathbb{E}_{r \leq t, z, (x_t, x_{t+1})} [\|u_\psi(x_r, r, t \mid x_{\text{cond}}) - \text{sg}(u_{\text{tgt}})\|^2]. \quad (53)$$

The network u_ψ shares the U-Net body of v_θ exactly. The only architectural change is the time-conditioning module: both interval endpoints r and t are embedded independently with the same sinusoidal encoding of dimension 128, concatenated to a 256-dimensional vector, and projected to 512 via a two-layer MLP. Training uses Adam with a peak learning rate of 10^{-4} under a cosine decay schedule with a 10000-step warm-up, batch size 256, and runs for 1,000,000 gradient steps.

Table 6: MeanFlow performance metrics across number of steps.

Steps	Energy Err (mean)	Energy Err (std)	Enstrophy Err (mean)	Enstrophy Err (std)	Gen Time (s)
1	0.8687	0.7632	1.2308	1.2885	84.5
2	0.7874	0.6770	0.6649	0.6539	143.8
4	0.7003	0.6239	0.5884	0.6219	266.2
8	0.5899	0.5171	0.4849	0.5235	514.4