

WarpMPC: Large-Batch MPC on GPU via ADMM with Unrolled $LDL^\top$ Factorization

Henrik Hose¹, Se Hwan Jeon², Charles Khazoom², Sangbae Kim², Sebastian Trimpe¹

Abstract—This paper introduces numerical optimizations for maximizing throughput on GPU when solving large batches (10 000 to over 100 000) of sequential quadratic programming (SQP) iterations, where all problems have the same structure. The optimizations are implemented in a toolbox WarpMPC for model-predictive control (MPC) in JAX and Warp. Based on the insight that all MPC problem instances in a batch share the same sparsity in time, cost, and constraints, we propose unrolling sparse linear factorizations and solves, which dominate alternating direction method of multipliers (ADMM) solver runtime. We avoid memory access bottlenecks and wasting computations via optimized memory layout, padding-reducing segmentation of the unrolled factorization, and dependency level scheduled backsolves, additionally accelerating sensitivity computation. We achieve throughputs of 8 000 to 250 000 SQP iterations per second on nonlinear cartpole, quadrotor, and humanoid robot benchmarks, outperforming baselines by $3\times$ to $25\times$. We illustrate practical usefulness by synthesizing a dataset and training a neural network approximation of an MPC in under 4 minutes that stabilizes a nano quadrotor in hardware experiments.

Index Terms—Optimization and Optimal Control; Software Tools for Robot Programming; Machine Learning for Robot Control

I. INTRODUCTION

Model-predictive control (MPC) is a popular method for controlling nonlinear systems subject to constraints [1]. Recently, there has been significant interest in integrating deep learning and MPC for robotics, which requires solving large batches of MPC problems, e.g., in reinforcement learning [2], [3], or imitation learning [4], [5]. Yet, most MPC toolboxes and solvers are optimized for single solve speed on CPU [6], [7] or GPU [8]–[12], or if batched on GPU can not handle general constraints [10], [13]–[16]. Therefore, learning applications resort to solving batches of MPC problems sequentially on CPU, which can take days or weeks [2], [17], or naively parallelize across many workers, which requires expensive infrastructure like high-performance computing clusters [5], [18]. We propose a solver that achieves high throughput when solving large batches of MPC problems on a single GPU, which enables MPC in machine learning pipelines.

Nonlinear MPC solves a numerical optimization over a finite prediction horizon at every control loop iteration. This can be done with sequential quadratic programming (SQP) [19],

which iteratively computes step directions by approximating the true nonlinear problem at the current iterate with a quadratic cost and linear constraints, which makes each step a quadratic program (QP). Resulting QPs are large, but very sparse ($<1\%$ structural nonzeros in the Karush-Kuhn-Tucker (KKT) system, see Fig. 1) and can be efficiently solved with Alternating Direction Method of Multipliers (ADMM) [7], [8], [10], [15], [20] and classic, sparsity exploiting $LDL^\top$ factorizations [21]. ADMM is particularly appealing, because every QP solve requires only one sparse factorization, followed by multiple backsolves. However, sparse linear GPU solvers outperforming CPU are rare (cf. [22], [23]), because GPUs struggle with branching, variable length loops, and irregular memory access. Hence, single-solve frameworks use iterative conjugate gradient (CG) methods that allow for parallelization [8], [10], [24] at the expense of accuracy and more arithmetic computations that limit throughput for large batches.

In this work, we present WarpMPC, a JAX toolbox with Warp backend for solving large batches of MPC problems in parallel using SQP and a filter line search (over 100 000 parallel solves on a single GPU) with a custom implementation of an operator splitting ADMM solver closely resembling OSQP [7], [8]. We avoid branching with problem-specific sparse $LDL^\top$ kernels that are fast on GPU by unrolling the factorization and backsolves (cf. [25], which uses CasADi’s $LDL^\top$). SQP data is computed sparsity-preserving and stage-wise with code automatically exported from CasADi. We propose several optimizations that yield additional throughput gains: batched memory layout, segmentation of subsequent columns in the $LDL^\top$ factorization into individual kernels to minimize padding, and parallelization across dependency levels in the backsolve. With these optimizations, we achieve superior SQP throughputs (8000 SQP iterations per second even on challenging problems such as whole-body MPC for humanoid locomotion). The additional factorization and backsolves for computing sensitivities (gradients) of the SQP step likewise benefit from the optimizations, making our toolbox attractive for machine learning applications requiring differentiable MPCs [13], [15]. In summary, we make the following contributions:

- 1) WarpMPC, an open-source JAX toolbox for solving large batches of MPCs in parallel using SQP and line search.
- 2) A custom CasADi to JAX translation for sparsity-preserving dynamics and cost implementation.
- 3) An ADMM and sparse $LDL^\top$ implementation that unrolls the factorization and backsolves into custom kernels for fixed sparsity patterns of the MPC problem.
- 4) Memory layout optimization, segmented kernels, and

This work is funded in part by the German Research Foundation (DFG): RTG 2236/2 (UnRAVeL).

¹ Institute for Data Science in Mechanical Engineering (DSME), RWTH Aachen University, Germany {hose.henrik, trimpe}@dsme.rwth-aachen.de

² Department of Mechanical Engineering, Massachusetts Institute of Technology, Cambridge MA, USA.

backsolve dependency level scheduled parallelization that significantly improve throughput of the unrolling.

We extensively benchmark the contributions against state-of-the-art libraries on GPU showing consistent throughput improvements of $3\times$ to $25\times$ for large batches, including three realistic, nonlinear MPCs for a cartpole, quadrotor, and humanoid robot. We illustrate practical relevance by distilling a neural network approximation from an MPC in under 5 min that stabilizes a nano quadrotor in hardware experiments. WarpMPC is published at github.com/hshose/warpmc and a video of our experiments is available at: youtu.be/PW0e2TkDLyM

A. Related Work

Many CPU based MPC toolboxes exist (e.g., [6], [26]–[28]), some even support batched solves [6]. Yet, direct integration with GPU machine learning frameworks is limited (cf. [29], [30]) and batch sizes are hundreds of parallel solves at most.

General purpose batched dense QP solvers for GPU exist (e.g., [31]), but sparse implementations for GPU are rare (cf. MPAX [32]). Interior-point method nonlinear solvers can be accelerated with GPUs [11], [33], but are difficult to warm start and require frequent factorizations compared to ADMM. SQP with ADMM and iterative LQR (iLQR) methods are popular choices for MPC specific solvers on GPU, as summarized in Table I. ADMM solvers introduced in [10], [15], [20] and iLQR [13], [14], [16] are fast on GPU, but can not handle hard inequality constraints that are essential for many applications. [16] implements a soft barrier penalty for inequality constraints. OSQP [7] style ADMM with operator splitting capable of general inequality constraints in the QP can be implemented on GPU [8], even for MPC [3], [24], [34]. In the case of [34], a dense reformulation is used with a custom linear solve that provides great speed ups due to pre-computed factorization, but requires fixed cost Hessian and constraint Jacobian and therefore does not apply to SQP. In [3], [24], NVIDIA cuDSS sparse linear algebra routines are used, which are fast for small batches, but are outperformed on large batches by the optimizations proposed in this paper. Further, [3] does not compute sensitivities, which we do.

TABLE I
GPU SOLVERS FOR TRAJECTORY OPTIMIZATION AND MPC

Paper	Outer Alg.	Linear Solver	Hard Ineq. Constraints	Sensitivity	Horizon Sparsity	Dynamics Sparsity
WarpMPC (ours)	SQP with ADMM	Unrolled sparse LDL^T	Yes	Yes	Yes	Yes
TurboMPC [24]	SQP with ADMM	cuDSS LDL^T , PCG	Yes	Yes	Yes	No
Jeon et al. [3]	SQP with ADMM	cuDSS LDL^T	Yes	No	Yes	Yes
DiffMPC [15]	SQP with ADMM	PCG	No	Yes	Yes	No
Kang et al. [12]	SDP with ADMM	CPU LDL^T	No	Yes	Yes	No
ReLU-QP [34]	Linear MPC, ADMM	Precomputed	Yes	No	No	No
MPCGPU [10], [20]	Direct TO	PCG	No	No	Yes	No
MPX [16]	iLQR, DDP	Parallel scan	No	No	Yes	Yes
npc.pytorch [13]	iLQR	Riccati recursion	No	Yes	Yes	No
Trajax [14]	iLQR	Riccati recursion	No	Yes	Yes	No

II. BACKGROUND

A. Nonlinear Model-Predictive Control

We write a nonlinear model-predictive control (MPC) problem over a horizon of N intervals in stage form. Let $z_k \in \mathbb{R}^{n_k}$ denote the decision variables at stage k , typically containing state and input components, and let $p_k \in \mathbb{R}^{r_k}$ collect stage

parameters such as references, measured initial state, time step, or mode data. A generic sparse stage formulation is

$$\begin{aligned} & \underset{z_0, \dots, z_N}{\text{minimize}} && \sum_{k=0}^{N-1} \ell_k(z_k, z_{k+1}, p_k) + \ell_N(z_N, p_N) \\ & \text{subject to} && l_k(p_k) \leq g_k(z_k, z_{k+1}, p_k) \leq u_k(p_k), \\ & && k = 0, \dots, N-1, \\ & && l_N(p_N) \leq g_N(z_N, p_N) \leq u_N(p_N). \end{aligned} \quad (1)$$

This notation includes the usual dynamics constraints by placing $x_{k+1} - f_k(x_k, u_k, p_k)$ in $g_k \in \mathbb{R}^{m_k}$ with equal lower and upper bounds. Initial state constraints, path constraints, control limits, and terminal constraints are represented by additional components of g_k and by their corresponding bounds. The important structural property is locality: nonterminal stage functions couple only neighboring decision blocks (z_k, z_{k+1}) . Consequently, the Jacobian of all constraints is block banded and the Hessian of the objective has nonzeros only inside the same neighboring stage blocks (see Fig. 1), which many solvers exploit (Tab. I, Horizon Sparsity). Additionally, many MPC formulations show sparsity within a single block (callouts in Fig. 1), which is less commonly exploited (Tab. I, Dynamics Sparsity). For high-dimensional systems and long-horizons typical in robotics, sparsity exploitation becomes advantageous compared to dense reformulations [1].

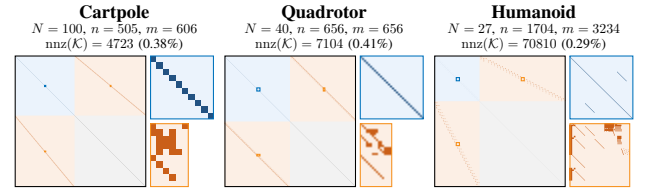


Fig. 1. Sparsity patterns of the full KKT systems $\mathcal{K}$ (■) that are factorized once per SQP iteration. Shown here are the cartpole, quadrotor, and humanoid robot. Dark pixels indicate nonzero entries. The cost Hessian H blocks (■) and constraint Jacobian J_g blocks (■) show the typical block-banded sparsity pattern that enables parallel linearization at the current SQP iterate. Callouts are a neighboring timesteps (z_k, z_{k+1}) block.

B. Sequential Quadratic Programming with Line Search

Let $z \in \mathbb{R}^n$ stack all stage variables in (1), $g(z) \in \mathbb{R}^m$ stack all constraints, and write the NLP compactly as

$$\underset{z}{\text{minimize}} f(z) \quad \text{subject to} \quad l \leq g(z) \leq u. \quad (2)$$

SQP computes a step $d^j \in \mathbb{R}^n$ at iterate $z^j \in \mathbb{R}^n$ from a quadratic approximation of the objective and a first-order approximation of the constraints,

$$\begin{aligned} & \underset{d}{\text{minimize}} && \frac{1}{2} d^T H^j d + \nabla f(z^j)^T d \\ & \text{subject to} && l - g(z^j) \leq J_g(z^j) d \leq u - g(z^j), \end{aligned} \quad (3)$$

where $J_g(z^j) = \partial g / \partial z(z^j) \in \mathbb{R}^{m \times n}$ is the constraint Jacobian and $H^j \in \mathbb{R}^{n \times n}$ is a symmetric positive semidefinite Gauss-Newton Hessian approximation $\partial^2 f / \partial z^2(z^j)$.

The full SQP step $z^j + d^j$ can be too aggressive for nonlinear constraints. Therefore, a damped update of the form

$$z^{j+1} = z^j + \alpha^j d^j, \quad \alpha^j \in (0, 1], \quad (4)$$

is common, where α is selected from a finite geometric ladder. Algorithms for selecting α^j include filter line searches [35], which we implement without second-order corrections or backtracking [36], and backtracking on merit functions [19].

C. Operator Splitting Direct ADMM Step

Problem (3) can be compactly written as a convex QP

$$\begin{aligned} & \underset{\xi \in \mathbb{R}^n}{\text{minimize}} && \frac{1}{2} \xi^\top P \xi + q^\top \xi \\ & \text{subject to} && \underline{b} \leq A \xi \leq \bar{b}, \end{aligned} \quad (5)$$

where $P \succeq 0$, $A \in \mathbb{R}^{m \times n}$, and the inequalities may include one-sided or equality constraints. This QP can be solved by many generic solvers, yet ADMM flavored solvers are particularly appealing in practice due to very few per-iteration computations, excellent warm starting capabilities, sparsity exploitation, and fast convergence to accuracy sufficient for closed-loop control. We focus on OSQP's [7] implementation of operator splitting $s = A\xi$ and $\mathcal{C} = \{s \mid \underline{b} \leq s \leq \bar{b}\}$. At each iterate t , the algorithm solves the quasi-definite linear system

$$\mathcal{K} \begin{bmatrix} \tilde{\xi}^{t+1} \\ \nu^{t+1} \end{bmatrix} = \begin{bmatrix} \sigma \xi^t - q \\ s^t - \Gamma^{-1} y^t \end{bmatrix}, \quad \mathcal{K} = \begin{bmatrix} P + \sigma I & A^\top \\ A & -\Gamma^{-1} \end{bmatrix} \quad (6)$$

with proximal parameter $\sigma > 0$, relaxation parameter $\omega_{\text{rel}} \in (0, 2)$, and positive diagonal $\Gamma = \text{diag}(\rho_1, \dots, \rho_m)$. It then updates and projects:

$$\begin{aligned} \tilde{s}^{t+1} &= s^t + \Gamma^{-1}(\nu^{t+1} - y^t), \\ \xi^{t+1} &= \omega_{\text{rel}} \tilde{\xi}^{t+1} + (1 - \omega_{\text{rel}}) \xi^t, \\ v^{t+1} &= \omega_{\text{rel}} \tilde{s}^{t+1} + (1 - \omega_{\text{rel}}) s^t + \Gamma^{-1} y^t, \\ s^{t+1} &= \Pi_{\mathcal{C}}(v^{t+1}), \\ y^{t+1} &= y^t + \Gamma(\omega_{\text{rel}} \tilde{s}^{t+1} + (1 - \omega_{\text{rel}}) s^t - s^{t+1}). \end{aligned} \quad (7)$$

Notably, $\mathcal{K}$ is independent of t , thus the dominating computational tasks are one factorization and many backsolves.

D. Sensitivities of the QP Solution

An outer objective $\varphi(\xi^*, y^*) \in \mathbb{R}$ may depend on the solution of (5). Reverse-mode differentiation computes vector-Jacobian products of the solution map $(P, q, A, l, u) \mapsto (\xi^*, y^*)$ from cotangents $\bar{\xi} = \partial\varphi/\partial\xi^*$ and $\bar{y} = \partial\varphi/\partial y^*$, without forming the full Jacobian. OSQP obtains these derivatives by differentiating the QP optimality conditions [7].

Finite lower and upper bounds are written as inequalities $G\xi \leq \beta$, and equalities as $E\xi = e$. The signed OSQP dual is converted to nonnegative inequality multipliers λ , and inequality slack $v = G\xi^* - \beta$. With $\bar{r}$ the cotangent vector and $w = [\mu^\top, \psi^\top]^\top$, the adjoint variables are initialized as

$$\underbrace{\begin{bmatrix} (1+\varepsilon)I & \mathcal{M} \\ \mathcal{M}^\top & -\varepsilon I \end{bmatrix}}_{S_\varepsilon} \begin{bmatrix} \mu^0 \\ \psi^0 \end{bmatrix} = -b, \quad \mathcal{M} = \begin{bmatrix} P & G^\top \text{diag}(\lambda) & E^\top \\ G & \text{diag}(v) & 0 \\ E & 0 & 0 \end{bmatrix}, \quad (8)$$

with $b = -[\bar{r}^\top, 0^\top]^\top$ and $\varepsilon > 0$ is a small regularization. Accurate sensitivities require refinement against the unregularized system for N_{ref} iterations, $k = 0, \dots, N_{\text{ref}}$, which update

$$S_\varepsilon \Delta w^k = b - S_0 w^k, \quad w^{k+1} = w^k + \Delta w^k, \quad (9)$$

reusing the factorization of S_ε for all correction solves. S_0 is S_ε for $\varepsilon = 0$. After the final refinement step, let ψ_ξ denote the primal component of ψ , and $r_b, r_{\bar{b}}$ the lower- and upper-bound adjoints obtained by mapping back to the original OSQP bound rows. The gradients are then $\nabla_q \varphi = \psi_\xi$, $\nabla_l \varphi = r_{\bar{b}}$, $\nabla_u \varphi = -r_b$, and with $\psi_i^\xi = (\psi_\xi)_i$ and indices i, j ,

$$\frac{\partial \varphi}{\partial P_{ij}} = \frac{1}{2}(\psi_i^\xi \xi_j^* + \psi_j^\xi \xi_i^*), \quad \frac{\partial \varphi}{\partial A_{ij}} \varphi = y_i^* \psi_j^\xi + (r_{\bar{b}} - r_b)_i \xi_j^*. \quad (10)$$

Thus the sensitivity computations are dominated by one fixed-pattern factorization of S_ε and many backsolves.

E. Sparse $LDL^\top$ Factorization

The matrix $\mathcal{K}$ in (6) and Fig. 1 is symmetric quasi-definite because σI makes the $\blacksquare$ block positive definite and the $\blacksquare$ block is negative definite. The same holds for S_ε in (8). This matrix can be efficiently factorized with sparse $LDL^\top$ factorizations [21]. First, a fill-reducing permutation Q is computed, then the system $\bar{\mathcal{K}} = Q\mathcal{K}Q^\top$ factorized as $\bar{\mathcal{K}} = LDL^\top$, where L is unit lower triangular and D is diagonal. With the permutation, a backsolve with right-hand side h becomes

$$\chi = Q^\top L^{-\top} D^{-1} L^{-1} Q h. \quad (11)$$

After the first $c-1$ columns, consider the partition

$$\bar{\mathcal{K}} = \begin{bmatrix} \mathcal{K}_{11} & k_{1c} & \mathcal{K}_{31}^\top \\ k_{1c}^\top & \kappa_{cc} & k_{3c}^\top \\ \mathcal{K}_{31} & k_{3c} & \mathcal{K}_{33} \end{bmatrix}, \quad L = \begin{bmatrix} L_{11} & 0 & 0 \\ L_{c1} & 1 & 0 \\ L_{31} & L_{3c} & L_{33} \end{bmatrix}, \quad (12)$$

where $\mathcal{K}_{11} \in \mathbb{R}^{(c-1) \times (c-1)}$, $k_{1c} \in \mathbb{R}^{c-1}$, and $D = \text{diag}(D_{11}, \delta_c, D_{33})$, $D_{11} = \text{diag}(\delta_1, \dots, \delta_{c-1})$. Writing out the equations for the c -th block column of $\bar{\mathcal{K}} = LDL^\top$ gives

$$\begin{bmatrix} k_{1c} \\ \kappa_{cc} \end{bmatrix} = \begin{bmatrix} L_{11} D_{11} L_{c1}^\top \\ L_{c1} D_{11} L_{c1}^\top + \delta_c \end{bmatrix}, \quad (13)$$

which can be evaluated in a sparse form: at column c of $\bar{\mathcal{K}}$, L_{c1} and d_c are computed. With $\delta_c \leftarrow \kappa_{cc}$ and work vector w initialized from the strict upper entries $\bar{\mathcal{K}}_{ic}$, $i < c$, the pure arithmetic of the factorization is, for each visited column $j < c$,

$$L_{cj} \leftarrow w_j \delta_j^{-1}, \quad d_c \leftarrow \delta_c - w_j L_{cj}, \quad (14)$$

$$w_i \leftarrow w_i - L_{ij} w_j, \quad i \in j+1, \dots, c-1. \quad (15)$$

Here $w_j = \delta_j L_{cj}$ is the current residual entry of the triangular solve $L_{11} D_{11} L_{c1}^\top = k_{1c}$. Thus, the first assignment in (14) computes one entry of L_{c1} , the second accumulates the Schur complement $\delta_c = \kappa_{cc} - L_{c1} D_{11} L_{c1}^\top$, and (15) subtracts the contribution of column j from the remaining work entries.

A typical $LDL^\top$ implementation first computes symbolic data such as the permutation Q , the permuted upper-triangular sparsity pattern, the elimination tree, and the nonzero pattern of L . During numerical factorization, it still performs branching, non-floating-point work such as diagonal lookup, elimination-tree walks, insertion-pointer updates, and variable-length loops over column prefixes. However, all of these operations depend only on the sparsity pattern of $\mathcal{K}$ and can therefore be precomputed or unrolled, which we do in this paper. Hence, for factorizations with the same sparsity pattern, the online numerical work reduces to the value-dependent arithmetic in (14) and (15) and inverting D in (11).

Algorithm 1: WarpMPC’s batched SQP solve

Input: functions f, l, g, u , horizon N , batched z and p

- 1 **Offline phase (CPU/JIT setup).**
- 2 Linearize ℓ_k, g_k , translate CasADi to JAX
- 3 Build sparsity patterns and scatter maps for P, A
- 4 Compute infill reducing reordering Q
- 5 Symbolic factorization for fixed-pattern $\bar{K}$
- 6 Compute optimal segmentation $\mathcal{I}_\kappa$ and level schedule
- 7 Compile linerization, factorization, solve, line-search
- 8 **Online phase (GPU batched execution).**
- 9 **for each SQP iteration do**
- 10 Stagewise $\{\{\nabla \ell_k, \nabla^2 \ell_k, J_{g_k}, g_k, l_k, u_k\}_{k=0}^N\}_{b=1}^B$
- 11 Scatter into $\{P, q, A, b, \bar{b}\}_{b=1}^B$
- 12 $\bar{K} \leftarrow$ assemble K and permute $QKQ^\top$
- 13 $L, D \leftarrow$ segment-wise factorization of $\bar{K}$
- 14 **for fixed ADMM iterations do**
- 15 $\tilde{\xi}, \tilde{\nu} \leftarrow$ assemble RHS and backsolve (6)
- 16 $\xi, \nu, s, y \leftarrow$ project, relax, dual upd. (7)
- 17 $\alpha \leftarrow$ parallel evaluate line-search ladder for $d = \xi$
- 18 $z \leftarrow z + \alpha d$, see (4)

III. A FIXED-PATTERN BATCHED GPU SOLVER

We consider batched SQP iterations for MPC problems that share a stage structure and therefore a QP sparsity pattern. Across the batch, only numerical values change: the nonzero locations in P, A , and the OSQP KKT matrix are fixed. This allows us to split the solver into an offline symbolic just-in-time compilation phase and an online numerical phase, summarized in Algorithm 1.

A. Sparse SQP Data Functions in JAX

We implement (1) in a generic, stage-wise form, where each nonterminal stage is a function of (z_k, z_{k+1}, p_k) and the terminal stage of (z_N, p_N) . These define the four objects ℓ_k, g_k, l_k, u_k without sacrificing flexibility. At offline construction time, the user provides CasADi functions, from which we compute the Jacobian and Hessian, expand to scalar SX form, and sparsify. The stage object stores only the fixed triplets needed by SQP: nonzero entries of $\nabla \ell_k$, upper-triangular nonzeros of $\nabla^2 \ell_k$, and nonzeros of J_{g_k} . We then automatically translate the CasADi functions to JAX for (ℓ_k, g_k, l_k, u_k) and packed structural nonzeros of $\nabla \ell_k, \nabla^2 \ell_k$, and J_{g_k} . During the online evaluation, we group reused stage functions: typically there is one for the initial stage, one reused for all intermediate stages, and one terminal function. However, any number of different stages is possible. Identical middle stages are evaluated by one function mapped over stage and batch indices to improve throughput. From the output of stage functions, the permuted KKT system is assembled.

B. Optimized Parallel $LDL^\top$ Factorizations and Solves

During the offline phase, we unroll the $LDL^\top$ factorization into a program containing the column reach sets, destination indices for L , row-update lists, permutation tables, and

backsolve tables. As columns of the factorization may have different amounts of structural nonzeros, the lists are padded and masked. At run time, the GPU receives only numerical KKT values, right-hand sides, and the integer tables. For each batch element, the same symbolic operations are applied to different numerical values and the factorization becomes a function of only the structural nonzeros in $\bar{K}$. We propose three optimizations for the fixed-pattern program.

Symbolic-major layout. The naive baseline batched layout stores work arrays as $(B, \text{nnz}(\cdot))$ with the batch size B . For a fixed symbolic operation, adjacent GPU threads then access values separated by the potentially very large sparse dimension $\text{nnz}(\cdot)$. We instead store the main factorization and solve arrays as $a \in \mathbb{R}^{\text{nnz}(\bar{K}) \times B}$, $L_x \in \mathbb{R}^{\text{nnz}(L) \times B}$, and $w, D^{-1}, h_{\text{rhs}} \in \mathbb{R}^{(n+m) \times B}$. This makes the whole batch slice contiguous in memory for fixed symbolic operations (14)-(15). The symbolic operation remains scalar in the sparse index, but is vectorized over the batch, which greatly improves throughput at high batch sizes.

Segmented padded scans. Naively padding every column to the global maximum work-list length wastes arithmetic when only a few columns attain that maximum. Let w_c be the number of active process entries in factorization column c , see (13)-(15). A rectangular scan when padding all columns to the maximum costs $W_{\text{global}} = (n+m) \cdot \max_c w_c$. As visualized in Fig. 2 for three realistic MPC examples, the number of wasted entries and computations can be well over 80 % of the total when padding uniformly to the maximum.

Instead, we reduce the amount of wasted computations by partitioning consecutive columns into index intervals $\mathcal{I}_\kappa$ and compile each segment with its own local width, giving

$$W_{\text{seg}} = \sum_{\kappa} |\mathcal{I}_\kappa| \max_{c \in \mathcal{I}_\kappa} w_c. \quad (16)$$

The same construction is used for forward and transpose solves with column nonzero counts of L . Choosing the number of segments (“segment budget”) trades off runtime overhead from masked work for compile time and generated code size.

We compute the optimal segment budget allocation by solving the contiguous partitioning problem induced by (16). For a budget of n_{seg} segments with $n_{\text{seg}} \leq n + m$, we compute offline the ordered nonempty intervals $\mathcal{I}_\kappa = [a_\kappa, a_{\kappa+1})$ satisfying $0 = a_1 < \dots < a_{\hat{n}_{\text{seg}}+1} = n + m$, such that

$$\min_{\{\mathcal{I}_\kappa\}_{\kappa=1}^{\hat{n}_{\text{seg}}}} \sum_{\kappa=1}^{\hat{n}_{\text{seg}}} |\mathcal{I}_\kappa| \max_{c \in \mathcal{I}_\kappa} w_c. \quad (17)$$

We can solve (17) exactly using dynamic programming.

Level-scheduled triangular solves. While factorization is the dominant time in a single sparse solve, each SQP iteration requires multiple ADMM iterations (typically 25 to 100 in our examples) with full backsolves each. Thus, triangular solves become a non-negligible part of overall wallclock time. The fixed sparsity pattern exposes potential parallelism inside the sparse triangular solves, which we exploit. For each nonzero $L_{ic}, i > c$, the forward solve has a dependency from column c to column i . In the offline phase, we precompute dependency levels for columns of L such that the same level has no mutual

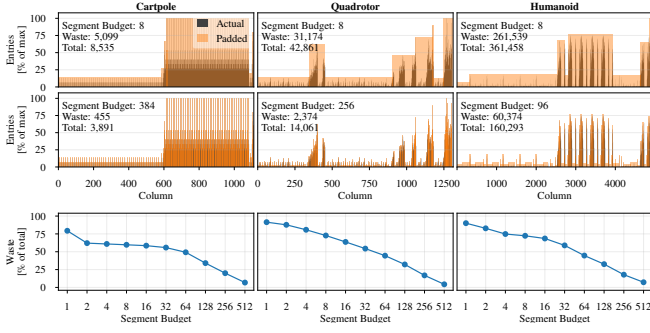


Fig. 2. Visualization of optimal column segmentation for the cartpole, quadrotor, and humanoid MPC. The number of factor entries per column are plotted as a histogram over the column index for exemplary segment budgets of 8 (top) and empirically chosen segment budgets 384, 256, and 96 (center). Additionally, the percentage of wasted padding entries over segment budget are shown for a sweep over segment sizes (bottom).

dependencies. Forward substitution then scatters updates from all columns of one level in a single batched operation, while transpose substitution traverses the same levels in reverse. This reduces the number of sequential column operations from the number of KKT columns to the number of dependency levels. In our numerical examples, this results in the reduction of dependency levels between 55% and 85%, visualized in Fig. 3. This reduction will only translate to meaningful throughput gains if the batch size does not yet fully occupy the GPU, which we evaluate with batch size sweeps in more detail in the benchmarks in Sec. IV. Additionally, we mitigate the overhead from many kernel launches by fusing the long tail of levels with one or two dependencies (Fig. 3, $\blacksquare$).




Fig. 3. Number of columns per dependency level over dependency level index for the cartpole, quadrotor, and humanoid MPC examples. The overall number of dependency levels in the backsolve is reduced by 55 to over 85%, which allows for parallelization ($\blacksquare$) and thus significantly speeds up the backsolve, when the GPU is not yet fully utilized. The long narrow tail ($\blacksquare$), can be fused to reduce launch overhead.

IV. BENCHMARKS

We present numerical benchmarks to validate the proposed optimizations and implementation. We evaluate the CasADi to JAX translation used for computing SQP problem data in Sec. IV-A. We test the unrolled sparse LDL^T factorization and backsolve to highlight the effectiveness of memory layout optimization, segmentation, and dependency level parallelization in Sec. IV-B. We test our ADMM implementation and sensitivity computation on a linear MPC in Sec. IV-C. In Sec. IV-D, we provide three realistic, nonlinear MPC benchmarks to measure throughput of WarPMPC in closed-loop simulations. The problem dimensions and solver settings for our benchmarks are summarized in Table II. All benchmarks are performed on NVIDIA H100 GPUs with 96GB HBM2e, 24 Intel Xeon 8468 Sapphire CPU cores at 2.1 GHz, and in single precision when not explicitly stated otherwise.

TABLE II
BENCHMARK MPC PROBLEM DIMENSIONS AND SOLVER SETTINGS.

System	N	n	m	$\text{nnz}(K)$	Fact. Instr.	SQP Dat. Instr.	SQP Iter.	QP Iter.	Segm. Budg.	Indep. Lvl.
Linear MPC	40	652	1144	9799	10 644	–	–	25	16	310/1796
Cartpole	100	505	606	4723	3436	243	10	50	384	496/1111
Quadrotor	40	656	656	7104	11 687	617	1	25	256	180/1312
Humanoid	28	1704	3234	70 810	99 919	110 075	1	25	96	730/4938

A. Translating CasADi functions to JAX

CasADi [26] is a popular software package for sparse differentiation and optimization. There exists software to automatically generate custom CUDA kernels [25] and JAX functions [37] from CasADi expressions. However, using custom CUDA kernels from JAX reduces flexibility and [37] is limited to small functions, which prohibits the use for large systems like humanoids. In our humanoid benchmark, computing Jacobians of multibody dynamics constraints can mean over 100 000 floating point operations per MPC horizon timestep. To handle such large functions, we implement a custom CasADi to JAX conversion based on string replacement in CasADi SX generated C-code. This surprisingly provides significant speedups compared to CusADi [25] and scales to very large functions that [37] can not handle.

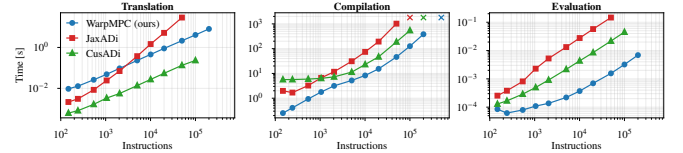


Fig. 4. Code export, compilation, and execution time over number of floating point operations in synthetic functions. We compare our CasADi to JAX translation ($\bullet$) with JaxADi [37] ($\blacksquare$) and CusADi [25] ($\blacktriangle$). For sweeps across number of instructions we evaluate on batch size 10 000 and set a compilation time limit to 30 min ($\times$). We significantly outperform the baselines in compilation and evaluation times.

As a benchmark, we generate random CasADi functions of different sizes and compare the wallclock times for export, compilation, and execution using our implementation with JaxADi [37] and CusADi [25]. We report the results in Fig. 4: Our code export with string replacements outperforms both baselines in compilation and evaluation speed. We argue that the translation disadvantage (Fig. 4, left) is insignificant compared to the overall compilation times in our framework. Importantly, the execution time of the compiled code is an order of magnitude faster than both baselines. We attribute this speedup to the algorithmic form introduced by the CasADi code generator, which seems to allow the XLA compiler to find better optimizations compared to the nested “single-line-of-code” in [37]. To achieve this speedup consistently with different JAX versions, it is paramount to disable the multi output fusion optimization¹.

B. Optimized Unrolled Sparse Linear Factorization and Solve

We benchmark linear system factorization and solve in isolation to highlight the benefits from our proposed optimizations. In this benchmark, we use a sparse linear system typical for MPC problems and time the throughput in solved systems

¹--xla_disable_hlo_passes=multi_output_fusion

per second, reporting factorization and backsolve throughput separately in Fig. 5. We compare against NVIDIA’s sparse cuDSS [22] factorization, the dense JAX factorization, and CPU-based factorization implemented by OSQP [7]. Notably, the dense factorization reaches memory limits even for small batch sizes. The cuDSS throughput reaches peak levels for small batch sizes already. In comparison, the unrolled, sparse and optimized factorization and backsolve outperform all baselines beyond batch sizes of 2000. The dependency level scheduling improves throughput for small batch sizes when additional parallelization across underutilized GPU resources is possible. However, asymptotic performance for very large batches matches the case without level scheduling. In single precision, throughput noticeably plateaus for batch sizes of over 100 000, while double precision benchmarks only run up to 50 000 batches due to memory limits. In summary, the optimized unrolled factorization and backsolve outperform all baselines by up to $27\times$ and $105\times$ in single precision throughput. An H100 GPU achieves the $167\times$ and $270\times$ single core CPU performance of the optimized QDLDL C implementation.

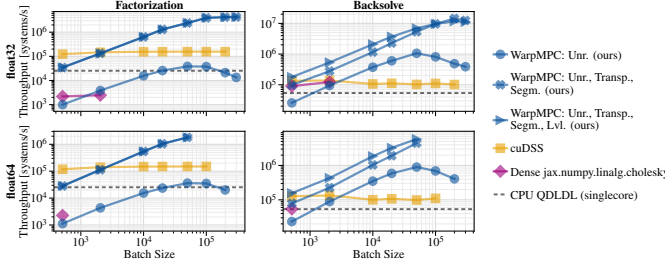


Fig. 5. Effect of optimizations for a single sparse factorization (left) and backsolve (right) on GPU. We evaluate the throughput over batch size for single (top) and double (bottom) floating point precision. We benchmark WarpMPC (●, ✕, ►) against sparse cuDSS [22] (■), dense factorization (◆), and CPU factorization (—), all of which we outperform for batch sizes over 2000. The dependency level scheduling backsolve (►) improves throughput with underutilized GPU resources for small batches.

C. Fixed-Pattern QP Solves and Sensitivities with ADMM

We test the QP solver implementation and effects of our proposed optimizations in batched linear MPC without the SQP data generation. We benchmark against a *dense* GPU OSQP implementation BoxOSQP using CG linear solves [38], the sparse MPAX solver [32] in JAX, and the throughput on a single CPU core with the OSQP C-code implementation [7]. We report the results for single (top) and double (bottom) precision in Fig. 6 for a naive unrolled factorization and the proposed optimizations with and without scheduling dependency levels in the backsolves. We report throughput for only solving the MPC problem (left) and additional sensitivities (right) in a backward pass, which requires an additional factorization and backsolves (Sec. II-D).

In this benchmark, we consistently outperform the MPAX baseline (which requires significantly more iterations) and achieve throughputs of 60 CPU cores with and 150 without sensitivities, which is only possible due to the proposed optimizations. Peak throughput reaches 279 000 solves per second without sensitivities and 9570 solves per second with sensitivities. Notably, MPAX computes sensitivities by back-propagating through the computational graph of the forward

pass, for which even the linear MPC example is too large. The *dense* BoxOSQP [38] can only handle small batches and does not improve throughput compared to a single CPU core. The advantage of scheduling backsolve dependency levels diminishes for large batches, in line with Fig. 5.

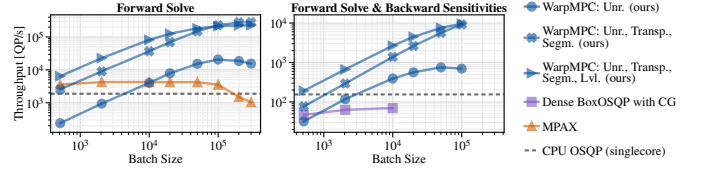


Fig. 6. Throughput in QPs per second over batch size for a linear MPC without (left) and with (right) sensitivities. We compare WarpMPC’s unrolled implementation (●) and proposed optimizations (✕, ►) with sparse MPAX [32] (▲), dense JAXopt BoxOSQP with CG [38] (■), and single-threaded CPU OSQP (—). We outperform all baselines for batches over 2000.

D. Nonlinear MPC

We benchmark WarpMPC on three nonlinear problems: cartpole swingup and stabilization [5], quadrotor setpoint tracking [39], and whole-body humanoid robot locomotion [40]. As highlighted in Tab. II, the three systems have vastly different dimensions (4 to 78 states), horizons (27 to 100), and complexities (number of floating point operations in a single SQP data linearization stage k from 243 to 110 075, number of floating point operations in factorizing $\bar{K}$ from 3436 to 99 919). All systems have nonlinear dynamics and general constraints, e.g., the humanoid has action, self-collision, ground contact, and friction cone constraints, see [40].

We compare our implementation and optimizations with sparse preconditioned conjugate gradient (PCG) linear solvers with the Jacobi preconditioner proposed in [8]. We set maximum PCG iterations to 20 and convergence tolerance² to 10^{-5} . We additionally benchmark against MPAX [32]. Both PCG and MPAX baselines are implemented as backends in our library, thus using WarpMPC’s SQP and line search implementation. Furthermore, we compare with the concurrent work TurboMPC [24], using its fused cuDSS backend and otherwise identical settings to our ADMM implementation.

We find that PCG, MPAX, and TurboMPC (cuDSS) baselines are outperformed beyond batches of 10 000. The comparison with PCG is in line with the results in [8], [10], where PCG is an effective strategy when accelerating single solves or small batches. We additionally find improved constraint satisfaction with WarpMPC’s sparse factorization compared to PCG. We attribute this to the PCG solver tolerance. Therefore, improving constraint satisfaction with PCG would come at the expense of throughput. In all three examples, MPAX has significantly lower closed-loop performance even after 1000 QP iterations compared to ADMM. The TurboMPC baseline exhibits remarkable performance on small batches, yet fails with out-of-memory errors on large batches in the cartpole and quadrotor examples and does not run for batches beyond 512 on the humanoid for the same reason. The effectiveness of all of WarpMPC’s optimizations is noticeable in the nonlinear MPC examples, with the effect of the parallel solve level

²Diverging simulations at 10^{-4} PCG tolerance from [15] in all examples.

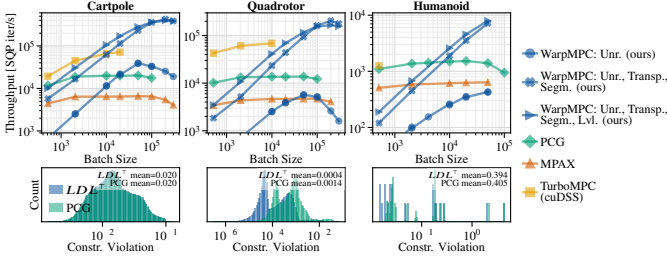


Fig. 7. Overall throughput in SQP iterations per second over batch size for three nonlinear MPC examples: cartpole pendulum (left), quadrotor (center), and humanoid robot (right). We compare WarpMPC (●, ×, ▶) with a sparsity exploiting PCG [8] (◆), MPAX [32] (▲) for QP solving, and TurboMPC [24] (■), which uses the cuDSS sparse linear solver. For batch sizes above 10 000, the optimized, unrolled LDL^T factorization in WarpMPC consistently improves throughput compared to all baselines. The effectiveness of the solve level optimization (▶) diminishes for large batches. Due to the low tolerance, PCG shows higher mean constraint violations (bottom). For the humanoid, TurboMPC fails with out-of-memory errors above $B = 512$.

optimization diminishing for very large batches when the GPU is fully utilized. In Fig. 9, we summarize WarpMPC’s effectiveness as improvement over the best PCG throughput observed across all batch sizes. WarpMPC significantly improves throughput by up to 24×. We outperform TurboMPC by 6× in the cartpole and 3× in the quadrotor example.

In comparison to [3] (code not publicly available), which reports humanoid MPC throughputs of 2000 SQP RTI per second, we achieve almost 8000 SQP RTI per second on a more complex MPC formulation matching [40], see rendering in Fig. 8. The KKT system in [3] is significantly smaller due to the horizon of only 12 timesteps compared to the 27 timesteps in this paper. We highlight that the throughput improvement is only possible due to significantly larger batches compared to [3], which solves 1000 instances in parallel.

The iLQR method MPX [16] (not to be confused with QP solver MPAX [32]) can not directly handle constraints, but requires encoding these in the cost function [16, Eqn. (21)] with per-constraint tunable penalty terms. Nonetheless, MPX shows exceptional throughput on GPU due to the parallelization within the N horizon steps. We report percentage of constraint satisfying closed-loop simulations over number of SQP iterations of [16] for the cartpole and a modified quadcopter example with additional cylindrical obstacles in Fig. 11. For WarpMPC, we report the constraint satisfaction near 100 % with the smallest number of SQP. At throughput parity, MPX shows significantly worse constraint satisfaction in the quadrotor example with obstacles. For the relatively simple cartpole example, MPX plateaus at high constraint satisfaction just below that of 5 SQP iterations with WarpMPC.

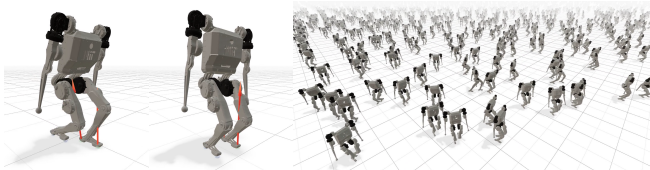


Fig. 8. Humanoid whole-body MPC with forward (left) and sideways (center) walking, and 10 000 parallel environments (right). The MPC formulation from [40] implemented with WarpMPC on GPU stabilizes a walking gate in simulation with hard impulse-based contacts [41].




Fig. 9. Improvement of maximum throughput using the optimized WarpMPC (■) compared to sparse PCG (■). We also show baselines MPAX [32] (■) and TurboMPC with cuDSS [24] (■), which we outperform by 3× to 6×.

V. ILLUSTRATIVE EXAMPLE: NEURAL NETWORK MPC

MPC is a popular method for controlling quadrotors, yet, the limited computing resources and fast system dynamics make deployment particularly difficult on nano quadrotors, such as the Crazyflie. A way to speed up computations is to synthesize a large dataset of states and optimal actions from an MPC in offline simulations, train a neural network in a supervised learning setup to explicitly approximate the optimal actions, and deploy this neural network on the embedded target. Prior work was limited to low-dimensional systems [42], [43] or required large computing clusters to naively parallelize with existing solvers on CPU [5], [18]. With WarpMPC, we can now synthesize large datasets (here 20 million state-action pairs) and train neural networks (here 3 hidden layers with 32 neurons per layer, leaky ReLU activations) on a single GPU within less than 4 min. For convenience, we provide code export for generating embedded C-code from the trained neural network automatically. The approximate MPC directly controls the quadrotors thrusts in the stabilizer loop.

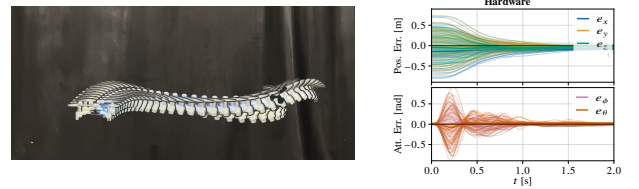


Fig. 10. Hardware experiments controlling a Crazyflie nano quadrotor with a neural network approximation of MPC (left: frames overlaid from experiment video, right: recorded state error evolution for tracking randomized setpoints). We synthesize the dataset in 2 min and train the policy in 1.7 min wallclock time with 11 min compilation overhead, which can be cached.

VI. CONCLUSION & OUTLOOK

We presented WarpMPC, a JAX toolbox with Warp backend for solving large batches of constrained nonlinear MPC problems on GPU via SQP, ADMM, and problem-specific unrolled sparse LDL^T factorization. We propose throughput maximizing optimizations: automatic JAX function generation from CasADi expressions, a memory layout optimization, an optimal segmentation for the factorization, and parallelizing dependency levels in the backsolve. We achieve throughputs of 8000 to 250 000 SQP iterations per second on large batches of realistic MPC benchmarks, outperforming baselines by 3× to 25×. We illustrate WarpMPC’s usefulness by synthesizing a neural network approximation of an MPC for embedded hardware deployment onboard a nano quadrotor. Many common features of CPU based MPC toolboxes are left for future work, e.g., Hessian regularization, and GPU native interfaces for neural network models in the MPC constraints. Additional optimizations like reordering to minimize padding rather than infill could further improve overall throughput.




Fig. 11. Constraint satisfaction and throughput in simulation steps per second over SQP iterations of MPX [16] compared to WarpMPC for the cartpole (left) and quadrotor setpoint tracking with additional round obstacles (center). While the parallel-scan iLQR of MPX [16] shows impressive throughput, the penalty method struggles to satisfy constraints even with significantly more SQP iterations than WarpMPC. For the cartpole, constraint satisfaction of MPX at throughput parity (○) is close to that of WarpMPC, while it remains significantly lower for the quadrotor. We plot closed-loop trajectories of MPX with 20 SQP iterations and WarpMPC with 1 SQP iteration (right).

ACKNOWLEDGMENTS

Simulations were performed with computing resources granted by the NHR Center NHR4CES at RWTH Aachen University (project numbers p0027430 and rwth2087). We thank J. Terrazzano for feedback on the manuscript.

REFERENCES

- [1] J. B. Rawlings, D. Q. Mayne, and M. M. Diehl, *Model Predictive Control: Theory, Computation, and Design*. Nob Hill Publishing, 2017.
- [2] A. Romero, Y. Song, and D. Scaramuzza, “Actor-critic model predictive control,” in *ICRA*. IEEE, 2024, pp. 14 777–14 784.
- [3] S. H. Jeon, H. J. Lee, S. Hong, and S. Kim, “Residual MPC: Blending reinforcement learning with GPU-parallelized model predictive control,” *arXiv preprint arXiv:2510.12717*, 2025.
- [4] J. Nubert, J. Köhler, V. Berenz, F. Allgöwer, and S. Trimpe, “Safe and fast tracking on a robot manipulator: Robust MPC and neural network control,” *IEEE Rob. and Aut. Let.*, vol. 5, no. 2, pp. 3050–3057, 2020.
- [5] H. Hose, A. Gräfe, and S. Trimpe, “Parameter-adaptive approximate MPC: Tuning neural-network controllers without retraining,” in *6th Annual Learning for Dynamics & Control Conference*, 2024.
- [6] R. Verschueren, G. Frison, D. Kouzoupis, J. Frey, N. v. Duijkeren, A. Zanelli, B. Novoselnik, T. Albin, R. Quirynen, and M. Diehl, “acados—a modular open-source framework for fast embedded optimal control,” *Math. Prog. Comp.*, vol. 14, no. 1, pp. 147–183, 2022.
- [7] B. Stellato, G. Banjac, P. Goulart, A. Bemporad, and S. Boyd, “OSQP: An operator splitting solver for quadratic programs,” in *2018 UKACC 12th international conference on control (CONTROL)*. IEEE, 2018, pp. 339–339.
- [8] M. Schubiger, G. Banjac, and J. Lygeros, “GPU acceleration of ADMM for large-scale quadratic programming,” *Journal of Parallel and Distributed Computing*, vol. 144, pp. 55–67, 2020.
- [9] D. Cole, S. Shin, F. Pacaud, V. M. Zavala, and M. Anitescu, “Exploiting GPU/SIMD architectures for solving linear-quadratic MPC problems,” *arXiv preprint arXiv:2209.13049*, 2022.
- [10] E. Adabag, M. Atal, W. Gerard, and B. Plancher, “MPCGPU: Real-time nonlinear model predictive control through preconditioned conjugate gradient on the GPU,” in *ICRA*. IEEE, 2024, pp. 9787–9794.
- [11] F. Pacaud and S. Shin, “GPU-accelerated dynamic nonlinear optimization with ExaModels and MadNLP,” in *2024 IEEE 63rd Conference on Decision and Control (CDC)*. IEEE, 2024, pp. 5963–5968.
- [12] S. Kang, X. Xu, J. Sarva, L. Liang, and H. Yang, “Fast and certifiable trajectory optimization,” *arXiv preprint arXiv:2406.05846*, 2024.
- [13] B. Amos, I. D. Jimenez Rodriguez, J. Sacks, B. Boots, and J. Z. Kolter, “Differentiable MPC for end-to-end planning and control,” in *Adv. in Neur. Inf. Proc. Sys.*, 2018.
- [14] R. Frostig, M. Johnson, C. Leary, and D. Maclaurin, “Trajax: Differentiable trajectory optimization with JAX,” Google, Tech. Rep., 2021.
- [15] E. Adabag, M. Greiff, J. Subosits, and T. J. Lew, “Differentiable model predictive control on the GPU,” in *ICLR*, 2026.
- [16] L. Amatucci, J. Sousa-Pinto, G. Turrissi, D. Orban, V. Barasuol, and C. Semini, “Primal-dual iLQR for GPU-accelerated learning and control in legged robots,” *IEEE Rob. and Aut. Let.*, vol. 11, no. 1, pp. 1010–1017, 2025.
- [17] F. Jenelten, J. He, F. Farshidian, and M. Hutter, “DTC: Deep tracking control,” *Science Robotics*, vol. 9, no. 86, p. eadh5401, 2024.
- [18] P. M. Julbe, J. Nubert, H. Hose, S. Trimpe, and K. J. Kuchenbecker, “Diffusion-based approximate MPC: Fast and consistent imitation of multi-modal action distributions,” in *IROS*. IEEE, 2025, pp. 5633–5640.
- [19] J. Nocedal and S. J. Wright, *Numerical optimization*. Springer, 2006.
- [20] A. Du, E. Adabag, G. Bravo-Palacios, and B. Plancher, “GATO: GPU-accelerated and batched trajectory optimization for scalable edge model predictive control,” *arXiv preprint arXiv:2510.07625*, 2025.
- [21] G. Stewart, “Building an old-fashioned sparse solver,” University of Maryland, Tech. Rep., 2003.
- [22] NVIDIA Corporation, *cuDSS: A High-Performance CUDA Library for Direct Sparse Solvers*, 2026, accessed: 2026-05-22. [Online]. Available: <https://docs.nvidia.com/cuda/cudss/index.html>
- [23] K. Świrydowicz, E. Darve, W. Jones, J. Maack, S. Regev, M. A. Saunders, S. J. Thomas, and S. Peleš, “Linear solvers for power grid optimization problems: a review of GPU-accelerated linear solvers,” *Parallel Computing*, vol. 111, p. 102870, 2022.
- [24] G. Bravo-Palacios, J. Zhang, Z. Pestrkov, B. Plancher, and T. Lew, “TurboMPC: Fast, scalable, and differentiable model predictive control on the GPU,” *arXiv preprint arXiv: 2606.24039*, 2026.
- [25] S. H. Jeon, S. Hong, H. J. Lee, C. Khazoom, and S. Kim, “CasADi: A GPU parallelization framework for symbolic expressions and optimal control,” *IEEE Rob. and Aut. Let.*, vol. 10, no. 2, pp. 899–906, 2024.
- [26] J. A. E. Andersson, J. Gillis, G. Horn, J. B. Rawlings, and M. Diehl, “CasADi – A software framework for nonlinear optimization and optimal control,” *Math. Prog. Comp.*, vol. 11, no. 1, pp. 1–36, 2019.
- [27] W. E. Hart, C. D. Laird, J.-P. Watson, D. L. Woodruff, G. A. Hackebeil, B. L. Nicholson, J. D. Sirola *et al.*, *Pyomo-optimization modeling in python*. Springer, 2017, vol. 67.
- [28] F. Fiedler, B. Karg, L. Lücken, D. Brandner, M. Heinlein, F. Brabender, and S. Lucia, “do-MPC: Towards FAIR nonlinear and robust model predictive control,” *Contr. Eng. Pract.*, vol. 140, p. 105676, 2023.
- [29] T. Salzmann, J. Arrizabalaga, J. Andersson, M. Pavone, and M. Ryll, “Learning for CasADi: Data-driven models in numerical optimization,” in *6th Annual Learning for Dynamics & Control Conference*. PMLR, 2024, pp. 541–553.
- [30] A. Lahr, J. Näf, K. P. Wabersich, J. Frey, P. Siehl, A. Carron, M. Diehl, and M. N. Zeilinger, “L4acados: Learning-based models for acados, applied to Gaussian process-based predictive control,” *IEEE Trans. on Contr. Sys. Tech.*, 2026.
- [31] K. Tracy and Z. Manchester, “On the differentiability of the primal-dual interior-point method,” *arXiv preprint arXiv:2406.11749*, 2024.
- [32] H. Lu, Z. Peng, and J. Yang, “MPAX: Mathematical programming in JAX,” in *NeurIPS Workshop on GPU-Accelerated and Scalable Optimization*, 2025.
- [33] S. Regev, N.-Y. Chiang, E. Darve, C. G. Petra, M. A. Saunders, K. Świrydowicz, and S. Peleš, “HyKKT: a hybrid direct-iterative method for solving KKT linear systems,” *Optimization Methods and Software*, vol. 38, no. 2, pp. 332–355, 2023.
- [34] A. L. Bishop, J. Z. Zhang, S. Gurumurthy, K. Tracy, and Z. Manchester, “ReLU-QP: A GPU-accelerated quadratic programming solver for model-predictive control,” in *ICRA*. IEEE, 2024, pp. 13 285–13 292.
- [35] A. Wächter and L. T. Biegler, “On the implementation of an interior-point filter line-search algorithm for large-scale nonlinear programming,” *Mathematical programming*, vol. 106, no. 1, pp. 25–57, 2006.
- [36] R. Grandia, F. Jenelten, S. Yang, F. Farshidian, and M. Hutter, “Perceptive locomotion through nonlinear model-predictive control,” *IEEE Transactions on Robotics*, vol. 39, no. 5, pp. 3402–3421, 2023.
- [37] I. Alentev, L. Kozlov, and S. Nedelchev, “JaxADi: Bridging CasADi and JAX for efficient numerical computing,” 2024. [Online]. Available: <https://github.com/based-robotics/jaxadi>
- [38] M. Blondel, Q. Berthet, M. Cuturi, R. Frostig, S. Hoyer, F. Llinares-López, F. Pedregosa, and J.-P. Vert, “Efficient and modular implicit differentiation,” in *Adv. in Neur. Inf. Proc. Sys.*, 2022.
- [39] B. B. Carlos, T. Sartor, A. Zanelli, G. Frison, W. Burgard, M. Diehl, and G. Oriolo, “An efficient real-time NMPC for quadrotor position control under communication time-delay,” in *16th Int. Conf. on Control, Automation, Robotics and Vision (ICARCV)*, 2020, pp. 982–989.
- [40] C. Khazoom, S. Hong, M. Chignoli, E. Stanger-Jones, and S. Kim, “Tailoring solution accuracy for fast whole-body model predictive control of legged robots,” *IEEE Rob. and Aut. Let.*, vol. 9, no. 12, pp. 11 074–11 081, 2024.
- [41] D. Stewart and J. C. Trinkle, “An implicit time-stepping scheme for rigid body dynamics with coulomb friction,” in *ICRA*, vol. 1. IEEE, 2000, pp. 162–169.
- [42] M. Hertneck, J. Köhler, S. Trimpe, and F. Allgöwer, “Learning an approximate model predictive controller with guarantees,” *IEEE Contr. Sys. Let.*, vol. 2, no. 3, pp. 543–548, 2018.
- [43] S. Lucia, D. Navarro, B. Karg, H. Sarnago, and O. Lucia, “Deep learning-based model predictive control for resonant power converters,” *IEEE Trans. on Ind. Inf.*, vol. 17, no. 1, pp. 409–420, 2020.