

VGOcc: Learning Visual-Geometric Gaussians for Vision-Centric 3D Driving Occupancy Prediction

Junhong Lin^{1,*}, Xianda Guo^{2,*†}, Kangli Wang¹, Yuqi Ye¹, Xiaoyu Liang¹, Yanlun Peng³, Wei Gao^{1,‡}

¹SECE, Peking University

²School of Computer Science, Wuhan University

³Great Wall Motor

jhlin42in@stu.pku.edu.cn, xianda.guo@163.com, gaowei262@pku.edu.cn

Abstract

Vision-only occupancy prediction requires recovering a semantic 3D occupancy field from calibrated surround-view images, where each view provides observations with ambiguous depth along camera rays. Existing methods have progressed from dense structured representations to sparse Gaussian primitives, improving the efficiency of 3D scene representation. However, Gaussian learning still relies primarily on image domain features, which provide limited explicit geometric information for volumetric reasoning. Our key observation is that effective Gaussian occupancy modeling requires not only sparse primitives, but also richer geometric and semantic learning cues. In this paper, we propose VGOcc, which learns visual and geometric cues from foundation models for Gaussian modeling. VGOcc incorporates these cues into primitive initialization and refinement, yielding a representation termed *Visual-Geometric Gaussians* tailored to semantic occupancy prediction. Specifically, we propose Visual-Geometric Gaussian Birth to form spatially balanced Gaussian centers from ray depth hypotheses, while visual semantic features initialize primitive attributes. Next, we design Pose-Aware Feature Learning to combine foundation tokens with camera embeddings and calibrated ray information. Features from neighboring views are then aggregated at projected 3D locations for each Gaussian refinement stage. Finally, Gaussian decoder refines birth Gaussians with pose-aware features and renders them into semantic occupancy. Experiments on nuScenes demonstrate that VGOcc achieves state-of-the-art performance in vision-only 3D occupancy prediction. Codes will be available at <https://github.com/JHLin42in/VGOcc>.

Introduction

Vision-centric 3D occupancy prediction provides a unified scene representation for autonomous driving. Given calibrated surround-view images, it estimates a dense semantic field in the ego coordinate frame, covering diverse objects, road surfaces, thin structures, and background regions. Such representations also support occupancy forecasting, cooperative perception, scene prediction with world models, and motion planning (Wang et al. 2025b; Yang et al. 2025; Li et al. 2025; Zhu et al. 2026b,a). However, cameras observe only visible surfaces rather than the complete 3D scene

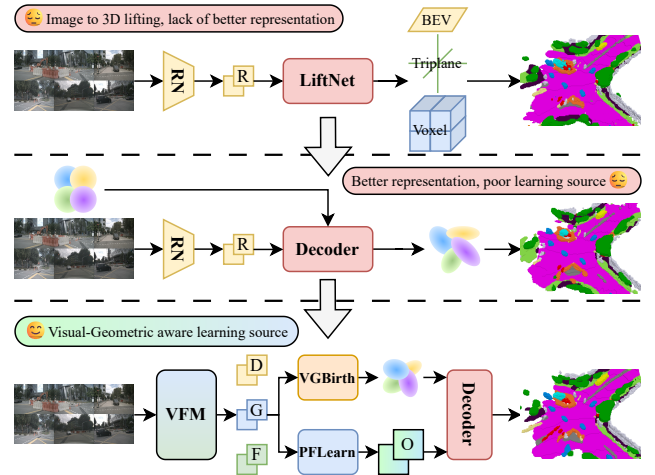


Figure 1: From structured lifting to *Visual-Geometric Gaussians*. BEV, tri-plane, and voxel methods establish structured 3D representations, while sparse Gaussians reduce spatial redundancy. VGOcc learns *Visual-Geometric Gaussians* by grounding their initialization and refinement in complementary visual and geometric cues.

structure. Each image location defines a ray but does not reveal the occupied depth or structures hidden behind visible surfaces. Therefore, the key challenge of vision-only occupancy prediction is to infer a complete 3D semantic field from 2D ray observations with ambiguous depth.

Existing vision-centric occupancy methods mainly address this problem by lifting image features into structured 3D spaces. BEV based methods such as FB-OCC (Li et al. 2023b) aggregate multiview features in bird’s eye view, but height compression limits fine vertical modeling. Tri-plane methods extend BEV features across multiple orthogonal planes to preserve more complete spatial structure (Huang et al. 2023), while voxel methods build 3D feature volumes to capture fine geometry (Wei et al. 2023; Zhang, Zhu, and Du 2023; Li et al. 2023a; Ma et al. 2024). These methods provide explicit 3D feature spaces but still allocate considerable computation to empty or weakly observed regions. GaussianFormer (Huang et al. 2024) and GaussianFormer-2 (Huang et al. 2025) instead encode scenes with sparse se-

*Equal contribution. †Project leader. ‡Corresponding author.

mantic Gaussians, substantially reducing spatial redundancy and improving the efficiency of 3D scene representation.

Nevertheless, sparse Gaussian primitives alone do not resolve the limited explicit geometry available in image domain features, as illustrated in Figure 1. Gaussian primitives are typically initialized using learned priors or image features, and subsequently refined by sampling image features at projected 3D reference points. Although this provides visual information for Gaussian refinement, sampling at projected locations does not explicitly model the geometric relations required for volumetric reasoning. This limitation constrains volumetric structure recovery and semantic modeling, particularly in occluded and distant regions.

We argue that improving occupancy prediction requires not only an efficient 3D Gaussian representation, but also richer learning of geometry and semantics. In particular, visual and geometric foundation models provide rich semantic and geometric information (Oquab et al. 2024; Wang et al. 2025a). However, since they are pretrained for image and surface understanding, their priors cannot be directly exploited by Gaussian primitives for semantic occupancy reasoning. Therefore, we aim to transform their informations into a useful learning cues for Gaussian primitives, yielding a representation we term *Visual-Geometric Gaussians*.

To this end, we propose VGOcc, a sparse Gaussian occupancy framework that learns visual and geometric cues from foundation models and incorporates them into primitive initialization and refinement. First, Visual-Geometric Gaussian Birth (VGBirth) constructs the initial Gaussians from current scene. It predicts ray depth hypotheses from frozen geometric features and applies fast voxel-thinned sampling to obtain spatially balanced Gaussian centers. Visual semantic features along the corresponding rays initialize the primitive attributes, while learned fallback queries cover regions with weak geometric observations. Second, Pose-Aware Feature Learning (PFLearn) constructs features for iterative Gaussian refinement. It conditions and fuses DINO, frame, and global tokens with camera embeddings and calibrated ray information. The resulting features are aggregated across neighboring views at projected 3D locations for each refinement stage. Finally, Gaussian decoder refines birth Gaussians with these features and renders the resulting *Visual-Geometric Gaussians* into semantic occupancy. In this way, VGOcc preserves the efficiency of sparse Gaussian modeling while grounding both Gaussian birth and refinement in scene specific visual and geometric cues. Our main contributions are summarized as follows:

- We introduce VGOcc, which learns complementary visual and geometric cues from foundation models for Gaussian initialization and refinement, yielding a representation termed *Visual-Geometric Gaussians* tailored to semantic occupancy prediction.
- We propose Visual-Geometric Gaussian Birth, which forms spatially balanced Gaussian centers from ray depth hypotheses and initializes primitive attributes with visual semantic features.
- We design Pose-Aware Feature Learning, which conditions and fuses foundation tokens using camera embed-

dings and calibrated ray information, then aggregates neighboring view features at projected 3D locations for iterative Gaussian refinement.

- Extensive experiments on nuScenes demonstrate that VGOcc achieves state-of-the-art performance among the compared vision-only occupancy methods.

Related Work

Vision-Centric Occupancy Prediction

Vision-centric occupancy prediction has evolved from BEV perception to dense scene completion. BEVFormer aggregates multi-camera features with BEV transformers (Li et al. 2022). TPVFormer introduces orthogonal planes to preserve vertical structure (Huang et al. 2023). SurroundOcc constructs dense multi-scale 3D volumes (Wei et al. 2023), while OccFormer adopts dual-path voxel transformers (Zhang, Zhu, and Du 2023). VoxFormer generates depth-guided sparse proposals before densification (Li et al. 2023a). Efficient variants such as COTR and SparseOcc reduce volumetric computation through compressed tokens or sparse latent modeling (Ma et al. 2024; Liu et al. 2024). Occ3D and OpenOccupancy establish semantic occupancy benchmarks for autonomous driving (Tian et al. 2023; Wang et al. 2023), while Humanoid-OmniOcc extends full-view occupancy evaluation to embodied AI (Guo et al. 2026).

Sparse Gaussian methods replace dense voxel features with continuous primitives following 3D Gaussian Splatting (Kerbl et al. 2023). GaussianFormer and GaussianFormer-2 adapt semantic 3D Gaussians to vision-centric occupancy prediction (Huang et al. 2024, 2025). VG3T improves multi-view Gaussian generation through structured sampling and positional refinement (Kim and Lee 2025), while VG3S adapts frozen foundation features for Gaussian occupancy learning (Yan, Pei, and Shen 2026). Unlike these methods, we learn complementary visual and geometric cues for Gaussian initialization and refinement.

Visual and Geometric Foundation Models

Visual and geometric foundation models provide transferable information for downstream 3D perception. DINOv2 learns robust appearance and semantic features through large-scale visual pretraining (Oquab et al. 2024). DUST3R predicts dense point maps directly from image pairs (Wang et al. 2024), while MAST3R improves geometric matching and reconstruction with dense local descriptors (Leroy, Cabon, and Revaud 2024). VGGT further unifies camera, depth, point map, and point track prediction within a feed-forward multi-view framework (Wang et al. 2025a).

Recent work adapts these models to driving tasks. DriveVGGT, DVGT, DVGT-2 and DGGT extend geometry prediction to driving (Jia et al. 2025; Zuo et al. 2025, 2026; Chen et al. 2025). VGD applies geometry priors to surround-view Gaussian reconstruction (Lin et al. 2025). SURDS evaluates spatial reasoning in driving (Guo et al. 2025). AutoDrive-P3 unifies perception, prediction and planning (Ye et al. 2026). OmniNWM studies navigation world models (Li et al. 2026). SparseOccVLA and VGGDrive connect occupancy or geometry with language-guided planning

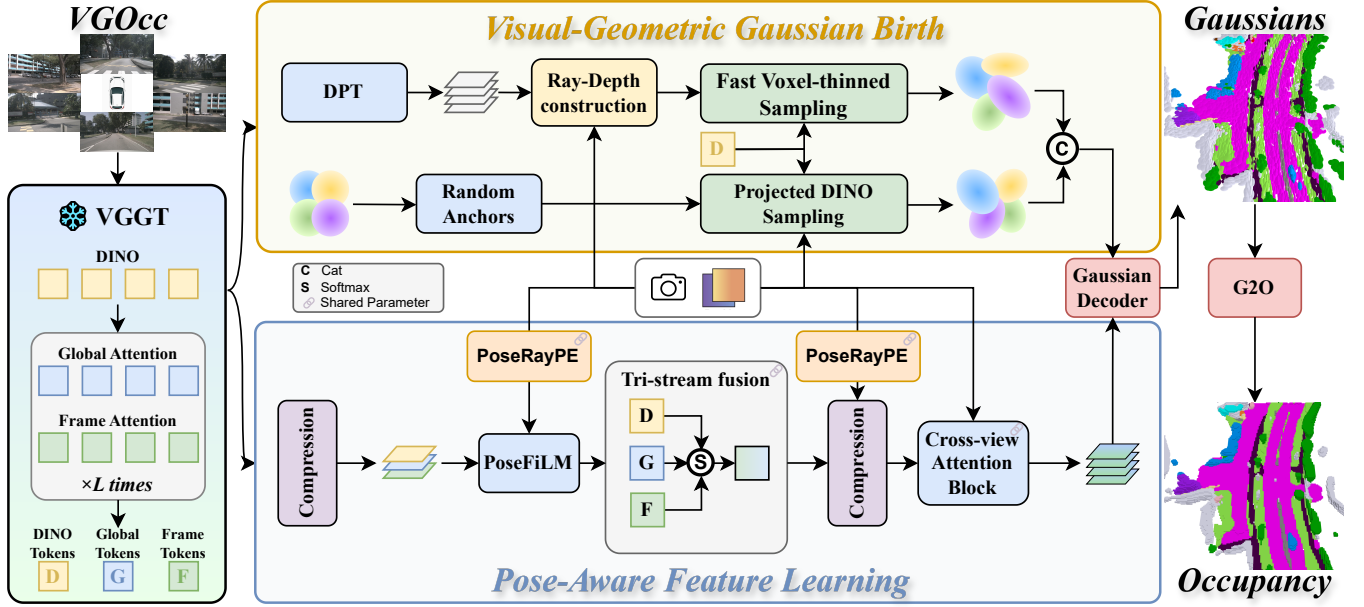


Figure 2: Overall architecture of VGOcc. Frozen VGGT provides complementary visual and geometric tokens. Visual-Geometric Gaussian Birth constructs Gaussian queries with geometry based initialization and visual semantic attribute priors, while Pose-Aware Feature Learning converts foundation tokens into pose-conditioned multi-view features. The Gaussian decoder refines the queries and renders the final semantic occupancy field.

(Dang et al. 2026; Wang et al. 2026). In contrast, we focus on vision-only semantic occupancy and convert visual and geometric foundation features into sparse Gaussian cues.

Method

Problem Statement

Given calibrated surround-view images $\mathcal{I} = \{I_c\}_{c=1}^N$ and camera parameters $\mathcal{P} = \{K_c, T_{c \rightarrow e}\}_{c=1}^N$, vision-only occupancy prediction estimates an ego-frame semantic field $\hat{\mathcal{Y}}$. We describe a Gaussian occupancy representation by its locations $\mathcal{X}$ and attribute states $\mathcal{A}$, which are initialized and updated using feature inputs $\mathcal{K}$:

$$\mathcal{R} = \text{Learn}(\mathcal{X}, \mathcal{A} | \mathcal{K}), \quad \hat{\mathcal{Y}} = D_\theta(\mathcal{R}). \quad (1)$$

Sparse Gaussian methods instantiate $\mathcal{R}$ with M primitives and obtain update features by sampling camera features at projected 3D reference points:

$$\begin{aligned} \mathcal{Q} &= \{Q_q\}_{q=1}^M, \\ Q_q &= (\mu_q, \Sigma_q, \alpha_q, s_q, f_q), \\ k_q &= \{F_c(\pi_c(x_{qn}^{\text{ref}}))\}_{c=1, j=1}^{N, J}. \end{aligned} \quad (2)$$

Here, x_{qn}^{ref} denotes the n -th 3D reference point associated with primitive q . The centers μ_q provide compact 3D locations, while Σ_q , α_q , s_q , and f_q encode shape, occupancy strength, semantics, and latent content. However, generic query initialization provides limited scene-specific information, while projected sampling does not explicitly encode calibrated ray and cross-view relations for volumetric reasoning. Thus, sparse primitives alone are insufficient for effective Gaussian occupancy modeling.

Therefore, we incorporate visual and geometric cues into sparse Gaussian initialization and refinement. The desired Gaussian representation should obtain a geometry-guided center set $\mathcal{C}$, a visual semantic attribute set $\mathcal{V}$, and pose-aware refinement features $\mathcal{F}$. Visual and geometric foundation models provide geometric features $\mathcal{Z}_{\text{geo}}$ and visual semantic features $\mathcal{Z}_{\text{vis}}$. We formulate this process as:

$$\begin{aligned} (\mathcal{Z}_{\text{geo}}, \mathcal{Z}_{\text{vis}}) &= \Phi_{\text{VG}}(\mathcal{I}), \\ (\mathcal{C}, \mathcal{V}, \mathcal{F}) &= \Psi(\mathcal{Z}_{\text{geo}}, \mathcal{Z}_{\text{vis}}, \mathcal{P}), \\ \mathcal{G} &= \text{Learn}(\mathcal{C}, \mathcal{V} | \mathcal{F}). \end{aligned} \quad (3)$$

We term the resulting Gaussian set $\mathcal{G}$ *Visual-Geometric Gaussians*. This formulation summarizes how visual and geometric cues support Gaussian initialization and refinement.

Overall Design

Figure 2 illustrates the VGOcc pipeline. Given surround-view images $\mathcal{I}$, frozen VGGT extracts multi-level DINO, frame, and global tokens as visual and geometric features, while camera parameters $\mathcal{P}$ provide calibrated ray and pose information. Frozen geometric features pass through a trainable DPT head to produce ray depth hypotheses. Non-empty candidates are lifted into 3D and selected by fast voxel-thinned sampling to form spatially balanced centers $\mathcal{C}$. Learned fallback queries cover weakly observed regions, while corresponding DINO features initialize primitive attributes $\mathcal{V}$. Together, $\mathcal{C}$ and $\mathcal{V}$ form the birth Gaussian queries $\mathcal{Q}$. At refinement stage j , foundation tokens are conditioned on camera embeddings and calibrated patch rays before fusion. Neighboring-view features are then aggregated at projected 3D locations to produce F^j . Four stages yield $\mathcal{F} =$

$\{F^j\}_{j=1}^4$, which guides Gaussian Occupancy Decoder to refine $\mathcal{Q}$ into the final set $\mathcal{G}$, termed *Visual-Geometric Gaussians*. Finally, $\mathcal{G}$ is rendered into the semantic occupancy $\mathcal{Y}$.

Visual-Geometric Gaussian Birth

We design Visual-Geometric Gaussian Birth to construct the center set $\mathcal{C}$ and attribute set $\mathcal{V}$ defined in Eq. 3. Generic learned queries provide limited scene-specific placement, while confidence ranking tends to concentrate primitives near dominant visible surfaces. We use ray depth hypotheses to generate scene-specific candidates, fast voxel-thinned sampling to maintain spatial coverage, and visual features to initialize primitive attributes.

Ray-depth hypothesis construction. For patch i in camera c , let (o_c, r_{ci}) denote its calibrated ego-frame ray. A lightweight DPT head predicts a depth posterior with an empty category $p_{\text{ray}}(b | c, i)$ from frozen geometric features. The empty category suppresses rays without occupied structures. Each non-empty depth bin produces:

$$\begin{aligned} x_{cib} &= o_c + d_b r_{ci}, & w_{cib} &= p_{\text{ray}}(b | c, i), \\ \xi_{ci} &= \phi_{\text{DINO}}(c, i), & b &\neq \emptyset. \end{aligned} \quad (4)$$

Here x_{cib} is a 3D center candidate, w_{cib} is its confidence, and ξ_{ci} is the DINO token from the same ray. Pairing each candidate with its visual token preserves the correspondence between geometric placement and visual semantics without affecting its location.

Fast voxel-thinned sampling. Global confidence ranking favors visible and near-camera regions. We instead partition the candidates into coarse voxels:

$$\nu(x_i) = \left\lfloor \frac{x_i - p_{\min}}{s_v} \right\rfloor. \quad (5)$$

Non-empty voxels are sampled uniformly, while candidates within each selected voxel are sampled according to their confidence w_i . This balances spatial coverage and geometric reliability, producing M_g geometry-guided queries. Another M_p learned fallback queries cover weakly observed regions, with $M = M_g + M_p$.

Pose-aware attribute initialization. After geometry determines the centers, visual features initialize the non-spatial primitive attributes. For a geometry-guided query, Ω_q contains its source patch. For a fallback query, it contains valid projections into visible cameras. The corresponding features are aggregated as:

$$\begin{aligned} \hat{\xi}_q &= \text{Norm}_{\mathcal{Q}} \left(\text{Avg}_{\Omega_q} [\text{PoseGate}(\xi_{ci}, \rho_{ci})] \right), \\ a_q &= a_{\text{base}} + \boldsymbol{\eta} \odot \text{MLP}_a(\hat{\xi}_q). \end{aligned} \quad (6)$$

Here $a_q = (\alpha_q, s_q, f_q)$ contains the opacity, semantic, and latent feature states. MLP_a denotes the attribute prediction heads, and $\boldsymbol{\eta}$ contains their residual scales. The covariance Σ_q is initialized from learned bases. Residual prediction retains the base initialization while introducing scene-specific

visual semantics. The resulting Gaussian queries are:

$$\begin{aligned} Q_q &= (\mu_q, \Sigma_q, \alpha_q, s_q, f_q), \\ \mathcal{C} &= \{\mu_q\}_{q=1}^M, \\ \mathcal{V} &= \{(\Sigma_q, \alpha_q, s_q, f_q)\}_{q=1}^M, \\ \mathcal{Q} &= \{Q_q\}_{q=1}^M = \mathcal{Q}_g \cup \mathcal{Q}_p. \end{aligned} \quad (7)$$

Visual-Geometric Gaussian Birth therefore uses geometry for Gaussian placement, balanced allocation for spatial coverage, and visual semantics for attribute initialization.

Pose-Aware Feature Learning

Visual-Geometric Gaussian Birth constructs the query set $\mathcal{Q}$ once, whereas the four decoder stages operate at different feature levels. Raw foundation tokens lack patch-level ray identity and calibrated cross-view consistency. We therefore apply Pose-Aware Feature Learning at each stage j to produce stage-specific feature maps F^j .

Patch-local pose conditioning. A camera-level embedding assigns the same pose information to all patches in one view, although each patch corresponds to a distinct ray. For patch i in camera c , we encode:

$$\begin{aligned} \rho_{ci} &= [r_{ci}, o_c \times r_{ci}, o_c, \bar{u}_i], \\ t_{ci} &= E_{\text{ray}}(\Gamma(\rho_{ci})), \end{aligned} \quad (8)$$

where $\bar{u}_i$ is the normalized patch coordinate and Γ denotes Fourier encoding. The resulting t_{ci} distinguishes each patch by its calibrated origin, direction, and image location.

Stage-wise tri-stream fusion. At stage j , foundation level ℓ_j provides DINO, frame, and global tokens $z_{ci}^{\ell_j, \tau}$, where $\tau \in \{d, f, g\}$. These streams provide semantic, local geometric, and global contextual cues. Since their contributions vary across refinement stages, each stream is projected and conditioned on the local pose before fusion:

$$\begin{aligned} \tilde{z}_{ci}^{j, \tau} &= \text{PoseFiLM}_{j, \tau} \left(P_{\tau} z_{ci}^{\ell_j, \tau}, t_{ci} \right), \\ h_{ci}^j &= \text{Fuse}_j \left(\{\tilde{z}_{ci}^{j, \tau}\}_{\tau}, t_{ci} \right). \end{aligned} \quad (9)$$

Here Fuse_j is a pose-conditioned softmax gate over the three streams. It preserves their complementary information while adapting their contributions to each stage.

Pose-guided cross-view aggregation. Patch-local pose identifies the source ray but does not resolve its depth ambiguity. We therefore sample metric points $X_{cik} = o_c + \delta_k r_{ci}$ and project them into neighboring cameras. Let $y_{c'ik}^j$ denote a sampled target feature and $\gamma_{c'k} = \max(r_{ci}^\top r_{c'ik}, 0)$ its ray compatibility. Cross-view aggregation is defined as:

$$\begin{aligned} e_{c'k}^j &= \frac{\langle W_q^j h_{ci}^j, W_k^j y_{c'ik}^j \rangle}{\sqrt{d_h}} + \lambda_a \log(\gamma_{c'k} + \epsilon), \\ \Delta h_{ci}^j &= \sum_{c', k} a_{c'k}^j W_v^j y_{c'ik}^j, & a^j &= \text{softmax}(e^j). \end{aligned} \quad (10)$$

Invalid projections are masked. Combining feature similarity with ray compatibility suppresses geometrically inconsistent projections and introduces depth-aware cross-view information.

Method	Venue	SC																	
		IoU	mIoU	barrier	bicycle	bus	car	const. veh.	motorcycle	pedestrian	traffic cone	trailer	truck	drive. suf.	other flat	sidewalk	terrain	manmade	vegetation
MonoScene	CVPR'22	23.96	7.31	4.03	0.35	8.00	8.04	2.90	0.28	1.16	0.67	4.01	4.35	27.72	5.20	15.13	11.29	9.03	14.86
Atlas	ECCV'20	28.66	15.00	10.64	5.68	19.66	24.94	8.90	8.84	6.47	3.28	10.42	16.21	34.86	15.46	21.89	20.95	11.21	20.54
BEVFormer	ECCV'22	30.50	16.75	14.22	6.58	23.46	28.28	8.66	10.77	6.64	4.05	11.20	17.78	37.28	18.00	22.88	22.17	13.80	<u>22.21</u>
TPVFormer	CVPR'23	11.51	11.66	16.14	7.17	22.63	17.13	8.83	11.39	10.46	8.23	9.43	17.02	8.07	13.64	13.85	10.34	4.90	7.37
TPVFormer [†]	CVPR'23	30.86	17.10	15.96	5.31	23.86	27.32	9.79	8.74	7.09	5.20	10.97	19.22	38.87	21.25	24.26	23.15	11.73	20.81
OccFormer	ICCV'23	31.39	19.03	18.65	10.41	23.92	<u>30.29</u>	10.31	14.19	13.59	10.13	12.49	20.77	38.78	19.79	24.19	22.21	13.48	21.35
SurroundOcc	ICCV'23	<u>31.49</u>	<u>20.30</u>	20.59	11.68	28.06	30.86	10.70	15.14	14.09	12.06	<u>14.38</u>	<u>22.26</u>	37.29	<u>23.70</u>	24.49	22.77	<u>14.89</u>	21.86
GaussianFormer	ECCV'24	29.83	19.10	19.52	11.26	26.11	29.78	10.47	13.83	12.58	8.67	12.74	21.57	<u>39.63</u>	23.28	24.46	22.99	9.59	19.12
GaussianFormer-2	CVPR'25	30.56	20.02	20.15	12.99	27.61	30.23	11.19	<u>15.31</u>	12.64	9.63	13.31	<u>22.26</u>	39.68	23.47	<u>25.62</u>	<u>23.20</u>	12.25	20.73
VGOcc	Ours	34.07	21.75	<u>20.43</u>	<u>12.48</u>	29.27	30.00	13.24	16.10	<u>13.97</u>	<u>10.50</u>	15.09	22.50	43.09	25.93	28.17	26.21	16.22	24.83

Table 1: 3D semantic occupancy prediction results on nuScenes. [†] means supervised by dense occupancy annotations as opposed to original LiDAR segmentation labels. The best and second-best results are represented by **bold** and underline respectively.

The fused source and cross-view features are converted into the maps used by each decoder stage:

$$F_c^j = \text{Map}_j \left(\{ \text{LN}(h_{ci}^j + W_o^j \Delta h_{ci}^j) \}_i \right), \quad (11)$$

$$\mathcal{F} = \{ \{ F_c^j \}_{c=1}^N \}_{j=1}^4.$$

Thus, $\mathcal{F}$ provides stage-specific pose-conditioned and cross-view features for refining $\mathcal{Q}$ into the final Gaussian set $\mathcal{G}$.

Gaussian Occupancy Decoder

The decoder takes the birth Gaussian queries $\mathcal{Q}$ and the pose-aware features $\mathcal{F} = \{ F_c^j \}_{j=1}^4$. At stage j , the current Gaussian centers are projected into the camera views to sample F^j , which refines their centers, covariance, opacity, semantics, and latent features. After four stages, the decoder produces the final Gaussian set $\mathcal{G}$ and renders it into semantic occupancy:

$$\mathcal{G} = \mathcal{D}_{\text{SG}}(\mathcal{Q}, \mathcal{F}) = \{ \{ \bar{\mu}_q, \bar{\Sigma}_q, \bar{\alpha}_q, \bar{s}_q, \bar{f}_q \} \}_{q=1}^M, \quad (12)$$

$$\hat{\mathcal{Y}} = \text{GS2Occ}(\mathcal{G}).$$

We retain the standard sparse Gaussian refinement and rendering process, while modifying only the initial queries $\mathcal{Q}$ and stage-specific features $\mathcal{F}$. This keeps the decoder unchanged and attributes the resulting gains to Gaussian birth and pose-aware feature learning.

Training Details

VGOcc is trained with the visual geometry foundation model frozen. The trainable components include the DPT ray depth head, visual attribute heads, Pose-Aware Feature Learning blocks, Gaussian Occupancy Decoder, and GS2Occ head. Given the predicted semantic occupancy field $\hat{\mathcal{Y}}$ and ground truth $\mathcal{Y}$, the overall objective is:

$$\mathcal{L} = \mathcal{L}_{\text{occ}} + \lambda_{\text{pix}} \mathcal{L}_{\text{pix}} + \lambda_{\text{aux}} \mathcal{L}_{\text{aux}}. \quad (13)$$

The occupancy loss is defined as:

$$\mathcal{L}_{\text{occ}} = 10 \text{ CE}(\hat{\mathcal{Y}}, \mathcal{Y}) + \text{Lovasz}(\hat{\mathcal{Y}}, \mathcal{Y}). \quad (14)$$

$\mathcal{L}_{\text{pix}}$ supervises the ray depth posterior p_{ray} using the ray depth target $\mathcal{Y}_{\text{ray}}$, while $\mathcal{L}_{\text{aux}}$ denotes the auxiliary occupancy losses applied to intermediate decoder stages. We train VGOcc for 20 epochs using Adam with a learning rate of 4×10^{-4} on four NVIDIA H20 GPUs.

Experiments

Experimental Setup

Dataset. We conduct all experiments on nuScenes (Caesar et al. 2020), which contains 1,000 driving scenes recorded in Boston and Singapore. The official split contains 700 training, 150 validation, and 150 testing scenes, with synchronized images from six surround-view cameras. Following SurroundOcc (Wei et al. 2023), we use its 3D semantic occupancy labels for training and evaluation. The ego-centered evaluation region spans $100 \text{ m} \times 100 \text{ m} \times 8 \text{ m}$, with $X, Y \in [-50 \text{ m}, 50 \text{ m}]$ and $Z \in [-5 \text{ m}, 3 \text{ m}]$. Discretization at 0.5 m produces a $200 \times 200 \times 16$ voxel grid with 16 semantic classes, one empty class, and one unknown class.

Metrics. Following standard semantic occupancy evaluation (Cao and de Charette 2022), we report semantic scene completion mIoU and scene completion IoU. The former averages class-wise IoU over occupied semantic classes $\mathcal{C}_{\text{sem}}$:

$$\text{mIoU} = \frac{1}{|\mathcal{C}_{\text{sem}}|} \sum_{i \in \mathcal{C}_{\text{sem}}} \frac{\text{TP}_i}{\text{TP}_i + \text{FP}_i + \text{FN}_i}. \quad (15)$$

For scene completion, all non-empty classes are merged into one occupied class o :

$$\text{IoU} = \frac{\text{TP}_o}{\text{TP}_o + \text{FP}_o + \text{FN}_o}. \quad (16)$$

Here TP, FP, and FN denote true positives, false positives, and false negatives.

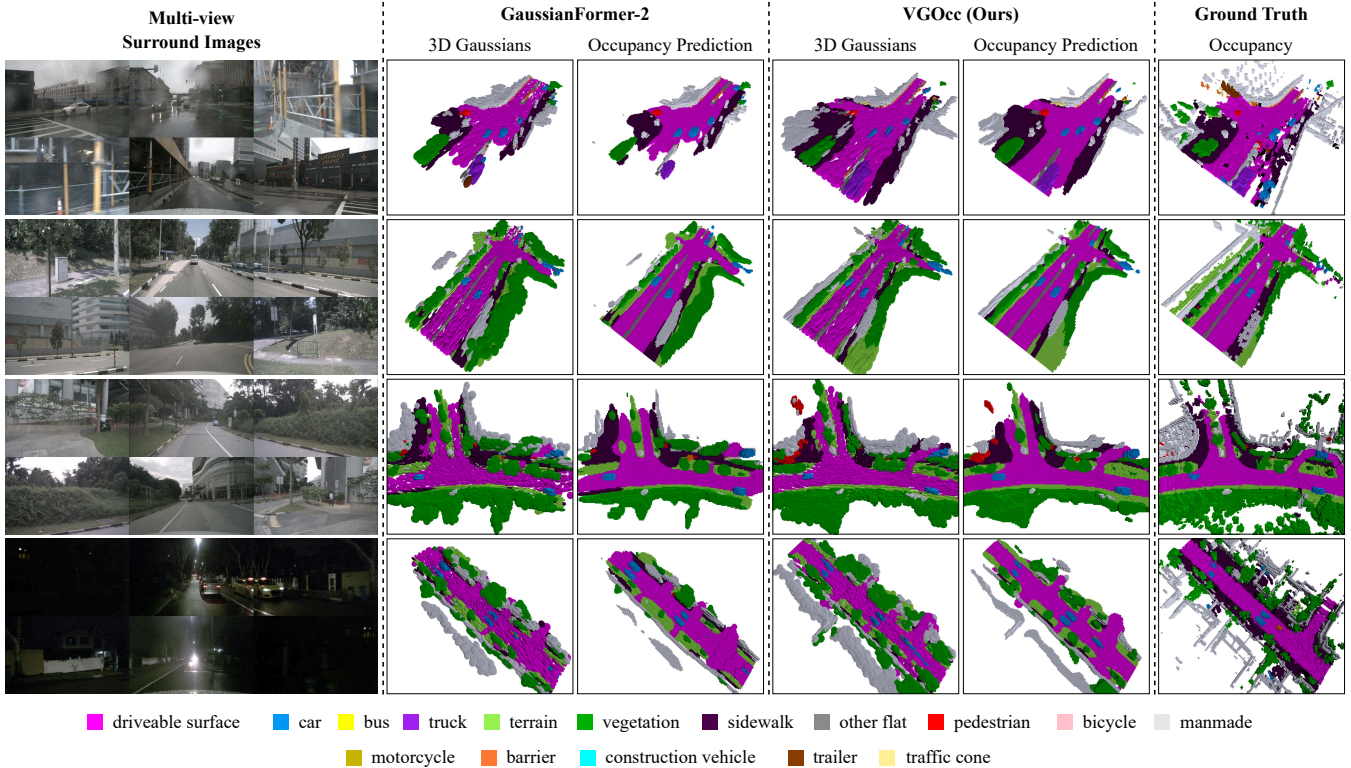


Figure 3: Qualitative results of our method and GaussianFormer-2 on SurroundOcc dataset.

Compared methods. We compare VGOcc with representative vision-only occupancy methods under the same nuScenes evaluation protocol. The structured representation baselines include MonoScene (Cao and de Charette 2022), Atlas (Murez et al. 2020), BEVFormer (Li et al. 2022), TPVFormer (Huang et al. 2023), VoxFormer (Li et al. 2023a), OccFormer (Zhang, Zhu, and Du 2023), SurroundOcc (Wei et al. 2023), COTR (Ma et al. 2024), and SparseOcc (Liu et al. 2024). We further compare with the sparse Gaussian methods GaussianFormer (Huang et al. 2024) and GaussianFormer-2 (Huang et al. 2025). All results are taken from official vision-only evaluations when available.

Implementation details. VGOcc uses frozen VGGT to extract multi-level DINO, frame, and global tokens (Wang et al. 2025a). DINO tokens provide visual-semantic features for Gaussian attributes and stage-wise feature learning (Oquab et al. 2024). The foundation feature grid is 21×37 . We fix the Gaussian budget at 25.6k primitives, including 19.2k geometry-guided queries and 6.4k learned fallback queries. The trainable components are the DPT ray-posterior head, visual attribute heads, four Pose-Aware Feature Learning blocks, sparse Gaussian decoder, and Gaussian-to-voxel head. All ablation studies retain the same Gaussian budget and decoder unless otherwise stated.

Quantitative Results

As shown in Table 1, VGOcc achieves 34.07 SC IoU and 21.75 SSC mIoU, surpassing non-Gaussian baseline Sur-

roundOcc by 2.58 and 1.45 points. It ranks first among non-Gaussian methods in 12 of 16 classes. Clear gains on large-scale surfaces and foreground objects show that VGOcc captures scene geometry and semantic content better than BEV, tri-plane, and voxel representations. This indicates that the visual-geometric representation preserves global layout while retaining object-level semantics. Lower scores on barrier, car, pedestrian, and traffic cone suggest that compact or thin classes remain sensitive to limited image support and sparse sampling. Overall, VGOcc provides a more balanced representation of spatial structure and semantic detail.

Compared with GaussianFormer-2, VGOcc improves SC IoU by 3.51 and SSC mIoU by 1.73 points, with higher scores in 14 of 16 classes. The broad gains across large-scale surfaces and foreground objects demonstrate the effectiveness of the overall visual-geometric design in improving both structural recovery and semantic modeling. The consistent improvements across categories further show that these benefits are not limited to either background layout or discrete objects. Since both methods use sparse semantic Gaussians and the same decoder, the results confirm that scene-specific visual and geometric cues produce a stronger Gaussian representation than sparsity alone.

Qualitative Results

Figure 3 compares VGOcc with GaussianFormer-2 under rainy, sunny, cloudy, and nighttime conditions. All Gaussian and occupancy results are rendered from the same view-

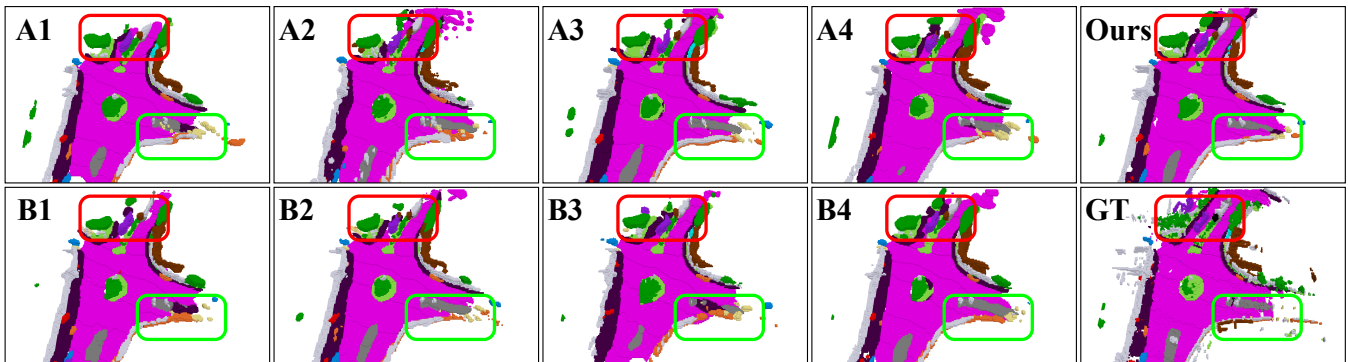


Figure 4: Qualitative results of ablation studies. Red and Green rectangular boxes highlight the differences.

Table 2: Quantitative results of ablation studies. All variants use the same Gaussian budget and decoder.

Variant	Modification	IoU $\uparrow$	mIoU $\uparrow$
<i>Visual-Geometric Gaussian Birth</i>			
A1	w/o visual residual initialization	33.64	21.09
A2	GaussianFormer-2 query initialization	32.42	20.24
A3	w/o pose-ray attribute gate	33.78	21.46
A4	FPS instead of Fast Voxel-thinned Sampling	33.74	21.23
<i>Pose-Aware Feature Learning</i>			
B1	w/o patch-local pose conditioning	32.75	21.14
B2	w/o DINO stream	33.27	21.06
B3	independent adapters at all levels	31.87	19.96
B4	w/o pose-guided cross-view aggregation	33.67	21.37
Full VGOcc		34.07	21.75

point. In the 2nd row sunny and 3rd row cloudy scenes, VGOcc preserves clearer road boundaries, sidewalks, and vegetation, producing more complete occupancy predictions. In the 1st row rainy and 4th row nighttime scenes, GaussianFormer-2 suffers severe structural failures and scattered errors, while VGOcc retains coherent 3D geometry and scene layout. These results show that *Visual-Geometric Gaussians* provide a stronger representation for semantic occupancy across diverse conditions.

Ablation Studies

We conduct ablation studies to verify that VGOcc effectively learns visual and geometric cues for constructing *Visual-Geometric Gaussians*. All variants are evaluated under the same experimental setting for fair comparison.

Visual-Geometric Gaussian Birth. Table 2 evaluates the proposed Gaussian birth strategy. Removing visual residual initialization (A1) decreases IoU and mIoU by 0.43 and 0.66, confirming that same-ray visual features provide scene-specific semantic priors. Replacing VGBirth with GaussianFormer-2 initialization (A2) causes the largest drops of 1.65 and 1.51, demonstrating the joint contribution of ray-depth centers, visual attributes, and balanced allocation. Removing the pose-ray attribute gate (A3) reduces both metrics by 0.29, showing that calibrated camera and ray cues improve attribute initialization. Replacing fast voxel-thinned

sampling with FPS (A4) decreases IoU and mIoU by 0.33 and 0.52, validating our sampling strategy for balanced center allocation. As shown in Figure 4, the full design preserves clearer road boundaries and structures than variants A1-A4. Overall, VGBirth provides effective geometric and semantic initialization for sparse Gaussians.

Pose-Aware Feature Learning. The second group evaluates feature learning during Gaussian refinement. Removing patch-local pose conditioning (B1) decreases IoU and mIoU by 1.32 and 0.61, confirming that patch-specific ray geometry is essential for feature adaptation. Removing the DINO stream (B2) causes drops of 0.80 and 0.69, showing that visual semantics complement geometric and global cues. Using independent adapters at all levels (B3) produces the largest degradation of 2.20 and 1.79, demonstrating that shared adaptation improves feature consistency across levels. Removing pose-guided cross-view aggregation (B4) reduces IoU and mIoU by 0.40 and 0.38, validating calibrated neighboring-view features for resolving ray-depth ambiguity. Figure 4 also shows that the full design yields cleaner semantic boundaries and fewer fragmented regions than variants B1-B4. Overall, PFLearn provides effective pose-aware and multi-view features for Gaussian refinement.

Conclusion

We present VGOcc, a vision-centric 3D occupancy framework that learns *Visual-Geometric Gaussians* from frozen visual and geometric foundation features. First, we form scene-specific centers through ray-depth hypotheses and fast voxel-thinned sampling, while same-ray visual features initialize primitive attributes. Then, we condition multi-level foundation tokens on calibrated pose-ray information and aggregate neighboring-view features across multiple stages for iterative refinement. Together, these designs improve scene structure recovery and semantic modeling, achieving state-of-the-art performance on nuScenes and robust predictions across diverse imaging conditions.

VGOcc still has several limitations, including its reliance on accurate cameras, the computational overhead of the frozen backbone, and the lack of temporal modeling. Future work will focus on addressing these challenges.

Acknowledgments

This work was supported by National Science and Technology Major Project (2024ZD01NL00101), Natural Science Foundation of China (62271013), Guangdong Provincial Key Laboratory of Ultra High Definition Immersive Media Technology (2024B1212010006), Guangdong Province Pearl River Talent Program (2021QN020708), Guangdong Basic and Applied Basic Research Foundation (2024A1515010155), Shenzhen Science and Technology Program (JCYJ20240813160202004, JCYJ20230807120808017, SYSPG20241211173440004), Shenzhen Fundamental Research Program (GXWD20201231165807007-20200806163656003), and financially supported for Outstanding Talents Training Fund in Shenzhen. We also thank Great Wall Motor Co., Ltd. for their support.

References

- Caesar, H.; Bankiti, V.; Lang, A. H.; Vora, S.; Liong, V. E.; Xu, Q.; Krishnan, A.; Pan, Y.; Baldan, G.; and Beijbom, O. 2020. nuScenes: A Multimodal Dataset for Autonomous Driving. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 11621–11631.
- Cao, A.-Q.; and de Charette, R. 2022. MonoScene: Monocular 3D Semantic Scene Completion. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 3991–4001.
- Chen, X.; Xiong, Z.; Chen, Y.; Li, G.; Wang, N.; Luo, H.; Chen, L.; Sun, H.; Wang, B.; Chen, G.; et al. 2025. DGGT: Feedforward 4D Reconstruction of Dynamic Driving Scenes using Unposed Images. *arXiv preprint arXiv:2512.03004*.
- Dang, C.; Wang, J.; Li, G.; Hou, Z.; You, Z.; Ye, H.; Ma, J.; Chen, L.; and Wang, Y. 2026. SparseOccVLA: Bridging Occupancy and Vision-Language Models via Sparse Queries for Unified 4D Scene Understanding and Planning. *arXiv preprint arXiv:2601.06474*.
- Guo, X.; Zhang, B.; Huang, C.; Chen, S.; Wang, R.; Duan, Y.; Yang, C.; Zou, Q.; and Sui, W. 2026. Humanoid-OmniOcc: Stereo-Based Full-View Occupancy Dataset for Embodied AI. *arXiv preprint arXiv:2606.22971*.
- Guo, X.; Zhang, R.; Duan, Y.; He, Y.; Nie, D.; Huang, W.; Zhang, C.; Liu, S.; Zhao, H.; and Chen, L. 2025. SURDS: Benchmarking Spatial Understanding and Reasoning in Driving Scenarios with Vision Language Models. In *Conference on Neural Information Processing Systems (NeurIPS)*.
- Huang, Y.; Thammatadatrakoon, A.; Zheng, W.; Zhang, Y.; Du, D.; and Lu, J. 2025. GaussianFormer-2: Probabilistic Gaussian Superposition for Efficient 3D Occupancy Prediction. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 27477–27486.
- Huang, Y.; Zheng, W.; Zhang, Y.; Zhou, J.; and Lu, J. 2023. Tri-Perspective View for Vision-Based 3D Semantic Occupancy Prediction. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 9223–9232.
- Huang, Y.; Zheng, W.; Zhang, Y.; Zhou, J.; and Lu, J. 2024. GaussianFormer: Scene as Gaussians for Vision-Based 3D Semantic Occupancy Prediction. In *Proceedings of the European Conference on Computer Vision (ECCV)*.
- Jia, X.; Liu, Y.; Hong, Y.; Xia, R.; You, J.; Sun, B.; Hao, Z.; and Yan, J. 2025. DriveVGGT: Calibration-Constrained Visual Geometry Transformers for Multi-Camera Autonomous Driving. *arXiv preprint arXiv:2511.22264*.
- Kerbl, B.; Kopanas, G.; Leimkuehler, T.; and Drettakis, G. 2023. 3D Gaussian Splatting for Real-Time Radiance Field Rendering. *ACM Transactions on Graphics*, 42(4): 139:1–139:14.
- Kim, J.; and Lee, S. 2025. VG3T: Visual Geometry Grounded Gaussian Transformer. *arXiv preprint arXiv:2512.05988*.
- Leroy, V.; Cabon, Y.; and Revaud, J. 2024. Grounding Image Matching in 3D with MAST3R. In *Proceedings of the European Conference on Computer Vision (ECCV)*, 71–91.
- Li, B.; Ma, Z.; Du, D.; Peng, B.; Liang, Z.; Liu, Z.; Guo, X.; Zhu, Z.; Ma, C.; Jin, Y.; Zhao, H.; and Zeng, W. 2026. OmniNWM: Omniscient Driving Navigation World Models. In *Proceedings of the European Conference on Computer Vision (ECCV)*.
- Li, X.; Li, P.; Zheng, Y.; Sun, W.; Wang, Y.; and Chen, Y. 2025. PreWorld: Semi-Supervised Vision-Centric 3D Occupancy World Model for Autonomous Driving. In *International Conference on Learning Representations*.
- Li, Y.; Yu, Z.; Choy, C.; Xiao, C.; Alvarez, J. M.; Fidler, S.; Feng, C.; and Anandkumar, A. 2023a. VoxFormer: Sparse Voxel Transformer for Camera-Based 3D Semantic Scene Completion. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 9087–9098.
- Li, Z.; Wang, W.; Li, H.; Xie, E.; Sima, C.; Lu, T.; Yu, Q.; and Dai, J. 2022. BEVFormer: Learning Bird’s-Eye-View Representation from Multi-Camera Images via Spatiotemporal Transformers. In *Proceedings of the European Conference on Computer Vision (ECCV)*, 1–18.
- Li, Z.; Yu, Z.; Austin, D.; Fang, M.; Lan, S.; Kautz, J.; and Alvarez, J. M. 2023b. FB-OCC: 3D Occupancy Prediction based on Forward-Backward View Transformation. In *CVPR Workshop on End-to-End Autonomous Driving*.
- Lin, J.; Wang, K.; Wang, S.; Fan, S.; Li, G.; and Gao, W. 2025. VGD: Visual Geometry Gaussian Splatting for Feed-Forward Surround-view Driving Reconstruction. *arXiv preprint arXiv:2510.19578*.
- Liu, H.; Chen, Y.; Wang, H.; Yang, Z.; Li, T.; Zeng, J.; Chen, L.; Li, H.; and Wang, L. 2024. Fully Sparse 3D Occupancy Prediction. In *Proceedings of the European Conference on Computer Vision (ECCV)*.
- Ma, Q.; Tan, X.; Qu, Y.; Ma, L.; Zhang, Z.; and Xie, Y. 2024. COTR: Compact Occupancy TRansformer for Vision-Based 3D Occupancy Prediction. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 19936–19945.

- Murez, Z.; van As, T.; Bartolozzi, J.; Sinha, A.; Badrinarayanan, V.; and Rabinovich, A. 2020. Atlas: End-to-End 3D Scene Reconstruction from Posed Images. In *Proceedings of the European Conference on Computer Vision (ECCV)*, 414–431. Springer.
- Oquab, M.; Darcet, T.; Moutakanni, T.; Vo, H. V.; Szafraniec, M.; Khalidov, V.; Fernandez, P.; Haziza, D.; Massa, F.; El-Nouby, A.; Assran, M.; Ballas, N.; Galuba, W.; Howes, R.; Huang, P.-Y.; Li, S.-W.; Misra, I.; Rabbat, M.; Sharma, V.; Synnaeve, G.; Xu, H.; Jegou, H.; Mairal, J.; Labatut, P.; Joulin, A.; and Bojanowski, P. 2024. DI-NOv2: Learning Robust Visual Features without Supervision. *Transactions on Machine Learning Research*.
- Tian, X.; Jiang, T.; Yun, L.; Mao, Y.; Yang, H.; Wang, Y.; Wang, Y.; and Zhao, H. 2023. Occ3D: A Large-Scale 3D Occupancy Prediction Benchmark for Autonomous Driving. In *Advances in Neural Information Processing Systems, Datasets and Benchmarks Track*.
- Wang, J.; Chen, M.; Karaev, N.; Vedaldi, A.; Rupprecht, C.; and Novotny, D. 2025a. VGGT: Visual Geometry Grounded Transformer. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 5294–5306.
- Wang, J.; Li, G.; Huang, Z.; Dang, C.; Ye, H.; Han, Y.; and Chen, L. 2026. VGGDrive: Empowering Vision-Language Models with Cross-View Geometric Grounding for Autonomous Driving. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*.
- Wang, S.; Leroy, V.; Cabon, Y.; Chidlovskii, B.; and Revaud, J. 2024. DUST3R: Geometric 3D Vision Made Easy. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 20697–20709.
- Wang, X.; Zhu, Z.; Xu, W.; Zhang, Y.; Wei, Y.; Chi, X.; Ye, Y.; Du, D.; Lu, J.; and Wang, X. 2023. OpenOccupancy: A Large Scale Benchmark for Surrounding Semantic Occupancy Perception. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 17850–17859.
- Wang, Y.; Huang, X.; Sun, X.; Yan, M.; Xing, S.; Tu, Z.; and Li, J. 2025b. UniOcc: A Unified Benchmark for Occupancy Forecasting and Prediction in Autonomous Driving. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*. IEEE.
- Wei, Y.; Zhao, L.; Zheng, W.; Zhu, Z.; Zhou, J.; and Lu, J. 2023. SurroundOcc: Multi-Camera 3D Occupancy Prediction for Autonomous Driving. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 21729–21740.
- Yan, X.; Pei, M.; and Shen, S. 2026. VG3S: Visual Geometry Grounded Gaussian Splatting for Semantic Occupancy Prediction. *arXiv preprint arXiv:2603.06210*.
- Yang, Y.; Mei, J.; Ma, Y.; Du, S.; Chen, W.; Qian, Y.; Feng, Y.; and Liu, Y. 2025. Driving in the Occupancy World: Vision-Centric 4D Occupancy Forecasting and Planning via World Models for Autonomous Driving. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 39, 9327–9335.
- Ye, Y.; Zhang, Z.; Lin, J.; Sun, S.; Peng, C.; and Gao, W. 2026. AutoDrive-P³: Unified Chain of Perception–Prediction–Planning Thought via Reinforcement Fine-Tuning. *arXiv preprint arXiv:2603.28116*.
- Zhang, Y.; Zhu, Z.; and Du, D. 2023. OccFormer: Dual-Path Transformer for Vision-Based 3D Semantic Occupancy Prediction. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 9433–9443.
- Zhu, H.; Li, B.; Guo, X.; Liu, H.; Peng, B.; Yuan, M.; Jin, X.; Zeng, W.; and Chen, C. W. 2026a. GEM-Occ: From Visual Geometry Evidence to Embodied Semantic Occupancy Memory. *arXiv preprint arXiv:2607.05543*.
- Zhu, H.; Li, B.; Guo, X.; Peng, Y.; Zhu, Z.; Jin, X.; Zeng, W.; and Chen, C. W. 2026b. Bridging 3D Gaussians and Semantic Occupancy for Comprehensive Open-Vocabulary Scene Understanding from Unposed Images. *arXiv preprint arXiv:2607.01633*.
- Zuo, S.; Xie, Z.; Zheng, W.; Xu, S.; Li, F.; Jiang, S.; Chen, L.; Yang, Z.-X.; and Lu, J. 2025. DVG-T: Driving Visual Geometry Transformer. *arXiv preprint arXiv:2512.16919*.
- Zuo, S.; Xie, Z.; Zheng, W.; Xu, S.; Li, F.; Li, H.; Chen, L.; Yang, Z.-X.; and Lu, J. 2026. DVG-T-2: Vision-Geometry-Action Model for Autonomous Driving at Scale. *arXiv preprint arXiv:2604.00813*.