

The Label Complexity of Class Conditional Coverage under Distribution Shift

Weijia Han Lisha Qu
University of Washington

Abstract

Standard evaluation of many recognition systems contains distribution shift by construction, since benchmarks place disjoint conditions in the training and test splits. Under such a shift, split conformal prediction keeps marginal coverage close to the nominal level while per class coverage fails silently. On a real cross subject skeleton benchmark the marginal coverage stays near ninety percent, the worst action class is covered about seventy percent of the time, and ten of the sixty classes fall below eighty percent coverage. Marginal coverage is the wrong safety target in this regime.

This paper characterizes the cost of restoring per class validity. Our first result is an impossibility. Once the shift acts jointly on the covariates and the labels, the target class conditional score law is unidentified from source labels and an unlabeled target sample (methods here are label free: they see no target labels), so no label free method attains per class coverage that is at once valid and efficient. Our second result makes the cost precise. Per class validity alone needs only a handful of target labels per class; the per class label count necessary and sufficient for validity together with per class efficiency grows as the inverse square of the efficiency tolerance and the logarithm of the number of classes, and our upper and lower bounds match. Our third result addresses the natural shortcut. Within the evaluated prediction powered inference family, even the most favorable use of the classifier’s own pseudo labels on an unbounded unlabeled target pool improves the achievable efficiency by at most a small constant factor on the classes where coverage collapses.

Skeleton action recognition is our real data case study. A per class calibration that uses source labels alone recovers a substantial share of the per class gap while the shift preserves marginal coverage, and it stops helping exactly when marginal coverage itself breaks. A spectrum of three real shifts of increasing severity traces this boundary, and the same collapse and recovery appears on a natural image corruption benchmark, which places the phenomenon in conditional coverage under shift beyond any single modality.

1 Introduction

Skeleton action recognition benchmarks build distribution shift into their evaluation protocols by design. Cross subject and cross view splits train and test on disjoint people and cameras. Split conformal prediction gives finite sample distribution free coverage under exchangeability [Vovk et al., 2005, Lei et al., 2018]. That guarantee is marginal, and it degrades once calibration and test distributions diverge [Tibshirani et al., 2019, Barber et al., 2023]. On a real cross subject skeleton benchmark, split conformal prediction keeps marginal coverage near ninety percent while per class coverage collapses silently: the worst action class is covered about seventy percent of the time, and ten of the sixty classes fall below eighty percent coverage (Figure 1). The shift affects classes unevenly, so this collapse stays invisible to any diagnostic that reports only the marginal number. Marginal coverage is the wrong safety target in this regime.

This paper asks a precise question: what is the label cost of restoring per class validity under distribution shift? Three theoretical results answer it, and skeleton action recognition serves as the real data case study that shows the phenomenon and a partial, label free remedy.

Contributions.

1. **Impossibility.** Under a shift that acts jointly on covariates and labels, the target class conditional score law is unidentified from labeled source data and an unlabeled target sample. No label free method can therefore be both valid and efficient per class (Proposition 2).
2. **Tight label complexity.** Per class validity alone needs only $O(1/\alpha)$ target labels per class. The per class label count necessary and sufficient for validity *and* per class efficiency grows as the inverse square of the efficiency tolerance and the logarithm of the number of classes, and our upper and lower bounds match (Theorem 1). To our knowledge this is the first matching label complexity characterization for conformal prediction under distribution shift.
3. **Pseudo label ceiling.** Within the evaluated prediction powered inference family, even the most favorable pseudo label estimator, built on an unbounded unlabeled target pool, raises efficiency by at most a small constant factor on the classes where coverage collapses (Section 5.5). Unlabeled target data offers no shortcut around this label cost in that family.
4. **Real data case study.** On skeleton action recognition, a label free per class calibration on the source domain (label free means it requires no target labels; labeled source calibration data is permitted) recovers a substantial share of the per class gap while marginal coverage holds. A severity spectrum of three real shifts marks the boundary where this label free recovery stops. The same phenomenon reproduces on natural images (supplementary material). See Figure 2 and Figure 3.

Scope. The per class guarantee behind the real data calibration is exact under within class exchangeability and only approximate under distribution shift, which bounds how much the label free calibration can recover. The conformal backbone we evaluate also trails the strongest supervised head [Chen et al., 2021] (Section 5.6).

2 Related Work

Conformal prediction and distribution shift. When the test distribution shifts away from the split CP exchangeability regime [Vovk et al., 2005, Lei et al., 2018], two strands restore guarantees: *weighted* conformal prediction under covariate shift, which reweights calibration scores by the ratio of the target density to the source density [Tibshirani et al., 2019], and *non exchangeable* conformal prediction, which bounds the coverage gap by a total variation style weight discrepancy [Barber et al., 2023]. Both strands take the density ratio as input; we estimate it on the manifold of symmetric positive definite (SPD) matrices (Section 3). Adaptive conformal inference [Gibbs and Candès, 2021] targets sequential settings; ours is a batch setting. The classification scores we compare against are the least ambiguous set valued classifier score (LAC) [Sadinle et al., 2019], adaptive prediction sets (APS) [Romano et al., 2020], and regularized APS (RAPS) [Angelopoulos et al., 2021].

Class conditional and Mondrian conformal prediction. Mondrian conformal prediction [Vovk et al., 2003, 2005] partitions the calibration data by a “taxonomic” criterion, here the true source class label, and calibrates a separate quantile per partition. Per class coverage is guaranteed under within class exchangeability. Class conditional CP has been studied by Löfström et al. [2015] and Sadinle et al. [2019], and more recently by Ding et al. [2023]. Our case study instantiates Mondrian conformal prediction on the SPD feature manifold, using the log Euclidean geometry for per class scoring, and shows it reduces per class undercoverage on the real NTU RGB+D 60 skeleton benchmark (NTU-60) [Shahroudy et al., 2016] under cross subject shift, label free.

Selective prediction and conformal risk control. Conformal Risk Control (CRC) generalizes conformal coverage to any bounded, monotone risk [Angelopoulos et al., 2024]; we instantiate it using a joint accept and err loss, so the controlled quantity is the probability of accepting a miscovered point. Treating out of distribution (OOD) detection and selective safety as distinct is motivated by evidence that a high OOD detection AUROC (area under the ROC curve) can coexist alongside unsafe selective accuracy under severe shift [Khanal and Zhou, 2026]; we reproduce this phenomenon under a coverage lens and identify a manifold signal that escapes it.

Geometry of SPD matrices. SPD descriptors of joint trajectories are a standard action representation, and SPD manifold networks learn on them directly [Huang and Van Gool, 2017]. The two common metrics are the affine invariant Riemannian metric, invariant under the full congruence action of the general linear group [Pennec, 2006, Bhatia, 2007], and the log Euclidean metric, whose geodesic distance is the Frobenius distance between matrix logarithms and which admits a closed form mean and an isometric tangent space vectorization [Arsigny et al., 2006]. We use the log Euclidean metric throughout: it gives the closed form Karcher means our signals consume and an exact distance preserving flattening (Section 4), at the cost of full affine invariance, a trade off we make explicit.

Conformal prediction on manifolds and prototypes. Distance to prototype nonconformity scores are known in *flat* feature space, including categorical and prototype conformal predictors [Caprio, 2025]; conformal inference has also been extended to regression on Riemannian manifolds. Our geodesic to Karcher score is the SPD manifold instantiation of this idea; matching the literature and our own ablations, the in distribution efficiency gain of geometry over a flat softmax baseline is real but modest. In the case study, the load bearing element is label free per class calibration *under the benchmark’s own shift*, separate from the geodesic score considered in isolation.

Action recognition: accuracy versus reliability. Conformal prediction has been applied to human action recognition using vision language models, evaluated in distribution and for RGB set size control [Bary et al., 2025]. Skeleton domain adaptation methods (graph based alignment, contrastive view invariance, backbones such as the spatial temporal graph convolutional network (ST-GCN) and the channel wise topology refinement graph convolutional network (CTR-GCN)) improve *target accuracy* [Yan et al., 2018, Chen et al., 2021]; none provide coverage guarantees or per class reliability. Our reliability layer is backbone agnostic: it consumes descriptors and class means, and it complements these methods without competing against them. To our knowledge, the case study is the first report of the per class coverage collapse on real NTU-60 cross subject under an SPD and ST-GCN conformal setup, an empirical instance of the impossibility and label complexity results above that we address in part using label free Mondrian calibration on the SPD manifold. Datasets used are NTU-60 and Northwestern-UCLA (N-UCLA) [Wang et al., 2014] (Section 5).

3 Method

Setup. Each input sequence is summarized by an SPD descriptor, the temporal covariance of joint coordinates and velocities. A source domain supplies labeled descriptors. A target domain supplies only unlabeled descriptors at deployment, and its distribution can differ from the source.

We study three backbone configurations that jointly vary the SPD representation and its classifier. The first is a nearest mean geometric classifier: it scores each class through a log Euclidean nearest class mean rule, and it is the weakest of the three, producing the largest prediction sets. The second is a tangent space logistic classifier: it flattens each descriptor into a Euclidean tangent space and fits a logistic classifier there,

giving moderate discriminative power. The third builds on features from ST-GCN [Yan et al., 2018]: per frame features from the graph convolutional backbone are summarized into a temporal covariance SPD descriptor and classified by the same tangent space logistic classifier; this is the strongest configuration we test (accuracies appear in the supplementary material). The ST-GCN feature configuration is evaluated under two training regimes of increasing length, detailed in the supplementary material. A gap between the graph convolutional network’s own classification head and the conformal backbone built from its features is expected: the SPD framework operates on descriptors extracted from the network, using its own separate classifier.

Source data is split into a scorer training subset, which fits the backbone classifier, and a calibration subset, which estimates conformal quantiles. All four calibration methods described below share one backbone and one calibration pool, so their comparison is fair. The geometric classifier and the tangent space classifiers both build on a log Euclidean Karcher mean per class and an isometric log Euclidean vectorization of the SPD descriptor. Both constructions, alongside the descriptor dimensions, the calibration set sizes, and the training regimes, are given precisely in the supplementary material.

Nonconformity score. All four calibration methods score a candidate class by one minus the backbone’s estimated probability for that class, the LAC nonconformity score [Sadinle et al., 2019]. For the nearest mean configuration, this probability is a softmax over negative geodesic distances to the class means. For the tangent space configurations, it is the logistic classifier’s own output. The exact score formulas appear in the supplementary material.

3.1 Split CP baseline

The split conformal baseline calibrates a single threshold from the source calibration set: the empirical quantile of the true class scores at the target coverage level. A test point’s prediction set contains every class whose score falls below this one threshold. This preserves marginal coverage in distribution. Under deployment shift, marginal coverage can remain near or even above the nominal level while per class coverage collapses, and only under severe shift does marginal validity itself break (Section 5).

3.2 Source Mondrian (class conditional) calibration

A single global threshold is too tight for classes whose score distribution the shift distorts adversely. Source Mondrian calibration computes a separate conformal quantile for each class, estimated from the source calibration scores that belong to that class alone. The exact order statistic formula is given in the supplementary material. A test point’s prediction set then contains every class whose score falls below that class’s own threshold.

Guarantee and deployment. The per class thresholds are estimated entirely on the source calibration set, using source labels only to partition calibration scores by class. No target labels are needed. Under within class exchangeability, source Mondrian provides per class marginal coverage at least the nominal level (Proposition 1). Under deployment shift this guarantee holds only approximately (Remark 1), which is why source Mondrian closes part of the oracle gap and leaves the rest open.

3.3 Weighted conformal calibration

Weighted conformal prediction [Tibshirani et al., 2019, Barber et al., 2023] restores marginal coverage under covariate shift, given valid density ratio weights, by reweighting calibration scores through an estimated source to target density ratio in place of the plain empirical quantile; with a joint shift and estimated weights,

as here, its use is empirical rather than guaranteed. We use the exact per test point variant of this weighted quantile, which normalizes the calibration weights separately for every test point; the plain single threshold variant fails to recover coverage on our controlled synthetic study. Both quantiles are stated precisely in the supplementary material.

The density ratio is estimated directly from the SPD descriptors: a regularized logistic discriminator separates source from target descriptors on a held out pool and is applied out of sample. Its regularization, clipping, and temperature constants are given in the supplementary material. We also evaluate a weighted class conditional variant, combining the density ratio weights and the per class quantiles of source Mondrian. This combination inflates prediction sets severely: high variance density ratio weights applied to small per class subsets drive the per class weighted quantile up.

3.4 Margin abstention (negative control)

We study two geometric per sample abstention signals built from geodesic distances to class means: a minimum distance signal that flags points far from every class, and a geodesic margin that flags points close to two competing classes at once. Both signals are defined precisely in the supplementary material. We threshold the margin signal using Conformal Risk Control [Angelopoulos et al., 2024], which requires a labeled target calibration pool to set the threshold (Section 4.4). This requirement makes margin abstention a negative control: it cannot serve as a deployable label free rule. Even given target labels, it fails to reduce per class undercoverage on the real NTU-60 benchmark, a mechanism detailed in the supplementary material.

4 Guarantees and their scope

4.1 Marginal versus per class coverage, and the Mondrian guarantee

Split conformal prediction guarantees marginal coverage

$$\Pr[y^* \in \hat{C}(x^*)] \geq 1 - \alpha$$

over a fresh test point (x^*, y^*) ; throughout, such probabilities are over the joint draw of the calibration set and the test point, under exchangeability of the two. This marginal guarantee decomposes over classes as

$$\Pr[y^* \in \hat{C}(x^*)] = \sum_{c=1}^K p_c \Pr[y^* \in \hat{C}(x^*) \mid y^* = c], \quad p_c = \Pr[y^* = c],$$

so marginal coverage $\geq 1 - \alpha$ allows some classes far below $1 - \alpha$, provided higher coverage classes compensate. The NTU-60 cross subject shift is uneven across action classes, so a globally calibrated quantile creates systematic per class imbalance.

Proposition 1 (Mondrian per class coverage). *Let $\{(x_i, y_i) : y_i = c\}_{i=1}^{n_c}$ be a source calibration set for class c , exchangeable with a fresh test point (x^*, y^*) with $y^* = c$ (within class exchangeability). Let $\hat{q}_c$ be the conformal quantile, the $\lceil (n_c + 1)(1 - \alpha) \rceil$ -th smallest of $\{s(x_i, c) : y_i = c\}$ (or $+\infty$ if that index exceeds n_c), and let the Mondrian prediction set be*

$$\hat{C}(x) = \{c : s(x, c) \leq \hat{q}_c\}.$$

Then, for every class c ,

$$1 - \alpha \leq \Pr[c \in \hat{C}(x^*) \mid y^* = c] \leq 1 - \alpha + \frac{1}{n_c + 1},$$

where the upper bound holds when the class c scores are almost surely distinct (or ties are broken at random).

This is the standard Mondrian conformal coverage result [Vovk et al., 2003, 2005, Löffström et al., 2015]; the proof follows by exchangeability within class c [Ding et al., 2023].

Remark 1 (Approximate validity under deployment shift). Proposition 1 requires within class exchangeability between source calibration and target test scores, which deployment shift violates. Source Mondrian corrects the between class component of how the shift distorts nonconformity scores: adversely shifted classes get a looser class specific threshold. A full decomposition of within class and between class effects is future work. This is why it closes part of the oracle gap (Figure 2) and leaves the rest open; we make the approximation explicit.

4.2 Label free per class coverage is impossible under joint shift

Proposition 1 assumes within class exchangeability, a form of label shift. The next result shows such an assumption is *unavoidable*. Call a rule *label free* if it is a function of the labeled source law $P_S(X, Y)$ and the unlabeled target covariate law $P_T(X)$ alone. Target per class coverage at level $1-\alpha$ is attained most efficiently, within threshold rules, at the $(1-\alpha)$ -quantile q_c^* of the target class conditional score law $F_c^T(t) = \Pr_T[s(X, c) \leq t \mid Y = c]$, which depends on the unobserved $P_T(Y \mid X)$.

Proposition 2 (No valid and efficient label free per class coverage under joint shift). *Fix a source law P_S , a fixed score $s(\cdot, \cdot)$, and a target covariate marginal $P_T(X)$ such that for some class c the map $x \mapsto s(x, c)$ is nonconstant on $\text{supp } P_T(X)$ ($K \geq 2$ classes). Then there exist two target joint laws P_T, P'_T that share P_S and have the same covariate marginal $P_T(X) = P'_T(X)$, hence are indistinguishable from labeled source data plus an unlabeled target pool, yet whose class c score quantiles differ by an explicit constant,*

$$q_c^*(P'_T) - q_c^*(P_T) \geq \delta \quad \text{for some } \delta > 0 \text{ depending only on } (s, P_T(X), \alpha).$$

Because the joint law of the observables is identical under P_T and P'_T , any label free procedure (possibly randomized, outputting arbitrary set valued predictors, not only thresholds on s) has the same output distribution under both. Let $\text{OPT}(P)$ be the smallest expected set size among rules with per class coverage $\geq 1 - \alpha$ under P , and call a rule β -efficient on P if it is per class valid there with expected size at most $\text{OPT}(P) + \beta$. Any label free rule attaining class c coverage $\geq 1 - \alpha$ under P'_T satisfies

$$\mathbb{E}_{P_T}|\hat{C}(X)| \geq \text{OPT}(P_T) + \beta, \quad \beta = \frac{P_T(A)(\varepsilon - \alpha)}{\varepsilon} > 0,$$

for an event $A \subset \text{supp } P_T(X)$ and a level $\varepsilon \in (\alpha, 1)$ exhibited explicitly in the two point construction of the supplementary proof; conversely any rule within δ of the P_T -oracle threshold undercovers class c under P'_T . Hence no label free rule is per class valid on every consistent target law and β' -efficient on each for $\beta' < \beta$: validity across the identified set is possible only through conservative set inflation.

The two point construction and proof are in the supplementary material. Unlike the classical impossibility of distribution free *conditional* coverage [Vovk, 2012, Lei and Wasserman, 2014, Barber et al., 2021], which stems from the nonatomicity of X within a single unknown i.i.d. law (class conditional coverage is attainable by Mondrian CP when labels are available), our obstruction is an identification failure *across* laws: $(P_S, P_T(X))$ does not identify the target class conditional score law under unrestricted $P_T(Y \mid X)$, and the price is an explicit set size inflation, the same quantity that worst case robust conformal methods [Cauchois et al., 2024] pay by design. Recent group conditional generalizations that unify class and covariate conditional coverage [Bairaktari et al., 2025] likewise enrich the covering family under a *fixed, known* law: their shift extension assumes the source to target density ratio is known and lies in a prescribed class, so it sidesteps the label free identification failure our result isolates, and does not resolve it.

Corollary 1 (When label free recovery is possible). *Valid and efficient target per class coverage label free requires an identifying restriction on $P_T(Y | X)$: covariate shift ($p(y | x)$ invariant, so class conditional weighted CP with the covariate ratio is valid given $P_T(X) \ll P_S(X)$, approximate with estimated weights, Tibshirani et al., 2019), or label shift ($p(x | y)$ invariant with $\pi_c^T > 0$, so source Mondrian applies, Podkopaev and Ramdas, 2021). Under a joint shift satisfying neither restriction, as in the cross sensor NTU→N-UCLA shift (Section 5.2), where source thresholds transfer neither marginally nor per class, any method valid over the identified set must calibrate to its worst case and hence overcovers on non extremal laws (empirically, weighted CP here), while any method matching oracle efficiency on one consistent law undercovers on another (the geometric candidate’s failure mode); none matches the target label oracle uniformly. The strongest honest guarantee is then assumption conditional, with a slack that is not point identified from $(P_S, P_T(X))$ (only worst case one sided bounds are available label free). This is the theoretical boundary that the severity spectrum (Figure 3) traces empirically.*

4.3 The label complexity of per class coverage under joint shift

Proposition 2 is the $m=0$ endpoint of a sharper question: *how many* labeled target examples are necessary and sufficient to recover per class coverage? We answer it exactly. Add to the label free setting an *audit set* of m labeled target draws with m_c of them in class c , and *no* restriction on $P_T(Y | X)$. Per class statements below are conditional on the realized counts m_c (under i.i.d. auditing the m_c are multinomial and the statements hold conditionally on them; a stratified audit fixes the m_c by design, and the total label cost of hitting a per class budget then depends on the target class prevalences π_c^T). **Audit Mondrian** calibrates a per class quantile on the audit set: $\hat{q}_c$ is the $\lceil (m_c + 1)(1 - \alpha) \rceil$ -th order statistic of $\{s(\tilde{X}_j, c) : \tilde{Y}_j = c\}$ ($+\infty$ if that index exceeds m_c), and the prediction set is

$$\hat{C}(x) = \{c : s(x, c) \leq \hat{q}_c\}.$$

Theorem 1 (Label complexity of class conditional coverage). *Parts (a,b) hold for any fixed score s , level α , source law P_S , and target covariate law $P_T(X)$ with $x \mapsto s(x, c)$ nonconstant on $\text{supp } P_T(X)$ and class c target score law F_c^T atomless (or ties broken at random); parts (c) and (d) are existential over the shift instance. (a) Validity (assumption free). For every class c with $m_c \geq \lceil 1/\alpha \rceil - 1$, audit Mondrian satisfies, using no assumption on $P_T(Y | X)$,*

$$1 - \alpha \leq \Pr_T[c \in \hat{C}(X) | Y = c] \leq 1 - \alpha + \frac{1}{m_c + 1}.$$

(b) Efficiency. *If additionally F_c^T has density $\geq f_0$ near its $(1 - \alpha)$ -quantile and the score marginal under $P_T(X)$ has density $\leq L$, then with probability $\geq 1 - \delta$ the excess expected set size over the target oracle is at most*

$$\frac{L}{f_0} \sum_c \sqrt{\frac{\log(2K/\delta)}{2m_c}}.$$

So $m_c = O(\varepsilon^{-2} \log(K/\delta))$ per class bounds every class c term by a constant times ε , giving per class ε -efficiency (average per class excess $O(\varepsilon)$; the total excess over all K classes is correspondingly $O(K\varepsilon)$). (c) Necessity (for a suitable shift instance). There exist a score, source law, and target covariate law with $x \mapsto s(x, c)$ nonconstant, and a constant $c_0 > 0$, so that for all small $\varepsilon > 0$ there are two target laws P_T, P'_T consistent with that same $(P_S, P_T(X))$ and with per audit sample squared Hellinger $\leq c_0 \varepsilon^2$, on which any procedure (randomized, set valued, using the full source, an unbounded unlabeled target pool, and $m \leq c_0/\varepsilon^2$ audit labels) must, on at least one law, with probability $\geq \frac{1}{4}$, either violate per class validity or exceed the oracle set size by $\Omega(\varepsilon)$ (the same high probability efficiency notion the Dvoretzky-Kiefer-Wolfowitz (DKW) upper bound attains). (d) The $\log K$ is necessary (simultaneous efficiency). There is an

instance with K foreground classes and one background class (a distinct construction, below) on which any procedure that is simultaneously per class valid and ε -efficient on all K foreground classes with probability $\geq \frac{3}{4}$ must use m_c labeled target points in class c satisfying, for an absolute $C > 0$,

$$\sum_{c=1}^K e^{-C\varepsilon^2 m_c} \leq 4 \log \frac{4}{3}.$$

Hence

$$\sum_c m_c = \Omega(K\varepsilon^{-2} \log K),$$

at least $K/2$ classes individually need $m_c = \Omega(\varepsilon^{-2} \log K)$, and a uniform per class budget needs $m_c = \Omega(\varepsilon^{-2} \log K)$.

Thus $m_c = \Theta(\varepsilon^{-2} \log K)$ target labels per class are necessary and sufficient for simultaneous per class ε -efficiency, measured as the per class excess set size over the class c oracle (part (b)); the total excess over all K classes is then $O(K\varepsilon)$. This is a per class metric, distinct from the total expected set size inflation β of the $m=0$ impossibility (Proposition 2); we use ε for the former and β for the latter throughout. Validity alone is far cheaper, needing only $m_c \geq \lceil 1/\alpha \rceil - 1$ by part (a). Since the hard pair P_T, P'_T shares $P_T(X)$ exactly, *unlabeled* target data cannot improve the minimax *rate*: it identifies the marginal score law perfectly yet says nothing about the conditional tilt that sets F_c^T . Proposition 2 is the $\varepsilon \rightarrow 0, m=0$ corner; Theorem 1 is the full trade off curve, having upper (DKW, part (b)) and lower (Le Cam two point, parts (c) and (d)) bounds that match exactly: part (d) shows the $\log K$ factor in the simultaneous upper bound is intrinsic to the problem, closing the gap left open by part (c)'s single class rate. The construction and proof are in the supplementary material. Empirically (Section 5, supplementary audit curve) the sufficiency is benign: ≈ 25 labeled target examples per class recover near oracle per class coverage across all three shifts, tracing a monotone floor to oracle curve once m_c exceeds $\lceil 1/\alpha \rceil$. To our knowledge this is the first label complexity characterization, including a matching lower bound, in conformal prediction under distribution shift; prior labeled target methods [Bairaktari et al., 2025, Podkopaev and Ramdas, 2021] give neither a rate nor a necessity companion.

This zero rate value of unlabeled data conclusion is complemented empirically in Section 5.5: even the best case (oracle λ , an infinite unlabeled pool, and the true target quantile) pseudo label estimator from prediction powered inference (PPI, and its tuned PPI++ variant) [Angelopoulos et al., 2023] yields a per class label efficiency gain of at most $1.08\times$ on the classes whose target coverage collapses under shift, on both real shifts we test. This ceiling is specific to the evaluated asymptotic PPI++ family and its control span, not a bound on every conceivable estimator. Unlabeled target data, even when augmented by the classifier's own pseudo labels, therefore cannot substitute for labeled target data where the recovery matters most.

4.4 Supporting guarantees (statements in the supplement)

Joint accept and err risk control. The margin abstention negative control (Section 3.4) is governed by a Conformal Risk Control guarantee [Angelopoulos et al., 2024] on a *marginal joint* (accept and err) risk, not per class conditional coverage, and it requires a labeled target pool. This is precisely why it leaves per class undercoverage unresolved. *The LE chart is isometric.* The half vectorization $\Phi(X) = \text{vech}_{\sqrt{2}}(\text{Log } X)$ is an isometry from $(\text{SPD}(d), d_{\text{LE}})$ to Euclidean space, so all backbone and abstention computations operate in the isometric LE chart without further geometric approximation (lemma, proof, and the inherited invariance corollary, which holds under $O(d)$ but not $\text{GL}(d)$, in the supplementary material).

Remark 2 (Honest theoretical status). Weighted CP inherits the guarantees of Tibshirani et al. [2019], Barber et al. [2023] only to the extent the covariate shift assumption holds, which is approximate here since the

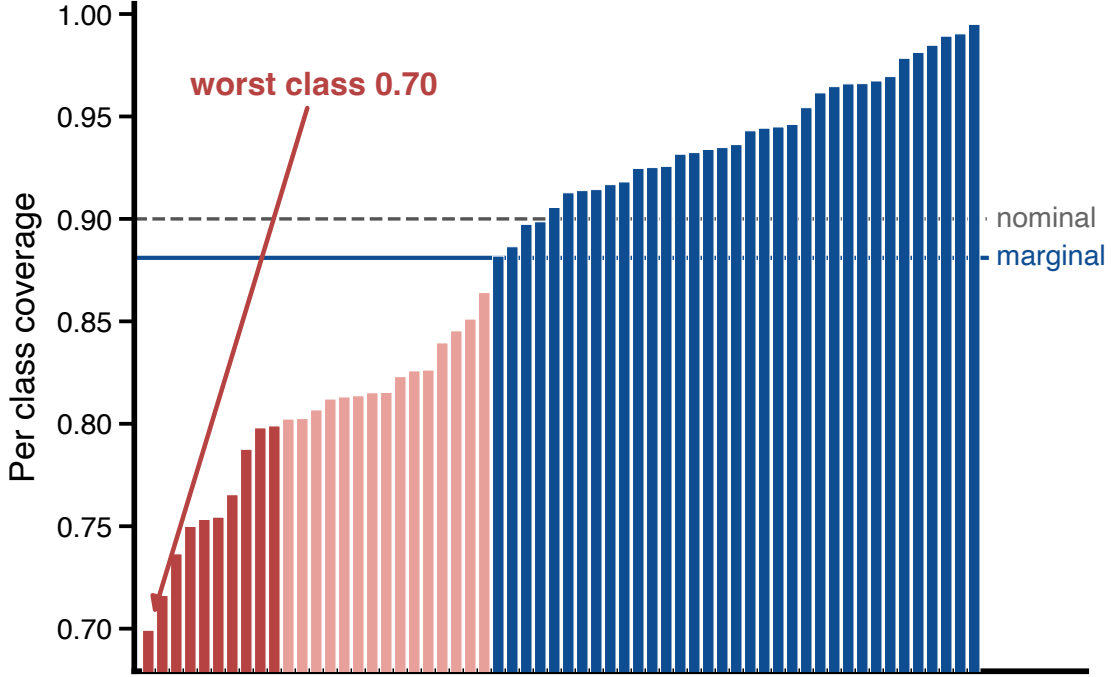


Figure 1: Per class coverage on the real NTU-60 cross subject skeleton benchmark under split conformal prediction. Classes are sorted by coverage. The marginal number sits near the nominal level while a large group of classes falls into the unsafe band, the worst near seventy percent.

shift acts on $p(y \mid x)$, and this is why it recovers only by over covering. Source Mondrian’s guarantee is Proposition 1, approximate under shift (Remark 1); margin abstention’s is the marginal joint risk CRC control of Section 4.4. We make no claim of conditional coverage for any method, no $GL(d)$ invariance, and no asymptotic optimality of any signal; by Proposition 2, the efficiency limit under joint shift is a boundary inherent to the problem, and every method faces it.

5 Experiments

5.1 Per class coverage collapse and recovery on NTU-60 cross subject

Setup. We use the NTU RGB+D 60 cross subject split [Shahroudy et al., 2016] and an ST-GCN backbone [Yan et al., 2018]. We fit the backbone on a scorer training subset of the source domain, calibrate conformal quantiles on a disjoint source pool, and deploy on the target domain. The conformal framework uses a tangent space logistic classifier on the ST-GCN feature SPD descriptor and the LAC score (Section 3). The miscoverage level is ten percent, for a nominal coverage of ninety percent; results are the mean over ten seeds and sixty classes. The split sizes and the backbone accuracies are reported in the supplementary material. Worst class coverage is noisier across seeds than marginal coverage, since it tracks a single hard class, and the ranking among methods stays stable.

Collapse. Split conformal prediction reaches near nominal marginal coverage while a large fraction of classes fall below eighty percent per class coverage (Figure 1). The worst action class is covered about seventy percent of the time, against a target label oracle near ninety percent (the oracle calibrates per class

conformal quantiles on labeled target data from the deployment distribution, a finite audit whose construction the supplementary material states; it is a ceiling, not a deployable method). Marginal coverage alone hides this entirely, since the shift distorts classes unevenly.

Recovery. The recovery frontier (Figure 2) summarizes the comparison. Source Mondrian, using source labels alone, closes a substantial share of the oracle gap at a small set size cost, and it does so without changing marginal coverage: it gives the smallest sets among the methods that materially raise the worst class. Weighted conformal prediction reaches a somewhat higher worst class, and it pays for that in two ways at once, a much larger set size and marginal over coverage; the weighted class conditional combination reaches a similar worst class only by inflating sets further, since high variance density ratio weights on small per class subsets drive its per class quantiles up. In summary, source Mondrian is the efficient label free recoverer, the one that keeps sets small and holds marginal coverage on target, while the weighted methods buy a higher worst class at the price of efficiency. Margin abstention, even given a labeled target pool for threshold selection, fails to reduce per class undercoverage: its guarantee controls only a joint marginal risk (supplementary material). Full six method numbers are in the supplementary material.

Robustness. The pattern holds across backbones. Sweeping the three backbone configurations of Section 3, source Mondrian remains the near nominal marginal, label free recoverer at every accuracy level, and prediction sets tighten as the backbone grows stronger; the sweep varies representation and classifier together, so it traces a trend without isolating either factor (full numbers in the supplementary material). The pattern also holds across the coverage level: sweeping the nominal coverage target, the split conformal worst class gap to nominal widens as the target tightens, while source Mondrian raises the worst class at every level and tracks the split conformal marginal coverage (full numbers in the supplementary material).

5.2 Cross dataset shift from NTU to N-UCLA, where marginal coverage itself breaks

We test a far harsher shift: we calibrate on NTU-60 and deploy on N-UCLA, a different sensor (Kinect v1 versus v2), different subjects, and different views. We map NTU’s twenty five joints onto the twenty shared Kinect v1 joints and restrict both domains to the five shared actions (drop, pick up, throw, sit down, stand up); skeletons are spine normalized so only pose and motion differ, and scale does not. The tangent backbone still transfers meaningfully (target top-1 accuracy well above chance; the target oracle recovers cleanly, per class coverage near ninety percent), so the shift is severe and it is not degenerate.

Finding: the shift is severe enough to break *marginal coverage*. Here even marginal coverage collapses (full six method breakdown in the supplementary material): split conformal prediction reaches only about half the nominal marginal coverage, producing mostly empty prediction sets, and one class is covered none of the time. The score distribution shifts globally, so neither the source calibrated global threshold nor the per class source thresholds of source Mondrian transfer, and *none of the evaluated source only, label free methods recover*, consistent with, though not implied by, Proposition 2 once the shift acts on both covariates and labels. The failure is not attributable to a poorly chosen weight: a geometry aware label free candidate, which reweights per class quantiles by log Euclidean geodesic proximity to the target class means, also undercovers. Its weights keep a healthy effective sample size on every class, and even so the reweighted source quantiles fall well short of every class’s target threshold, since source true class scores concentrate too low, exactly the support gap the impossibility result rests on. Recovery requires target information: weighted conformal prediction, label free and using the unlabeled target pool, restores marginal coverage only by over covering, and it still leaves the worst class below nominal at a large set size cost, and only the target label oracle attains a clean ceiling on both marginal and worst class coverage. This bounds the

case study calibration honestly: source Mondrian’s regime is the one where the shift preserves marginal coverage, as in the cross subject case; once that breaks, as in the cross sensor case here, unlabeled target reweighting restores at most the marginal by overcovering, and per class recovery requires target labels. Marginal coverage itself is thus the regime diagnostic.

5.3 Cross view, and the severity spectrum

Re-partitioning the same NTU-60 samples by camera (train cameras two and three, test camera one) gives a milder shift than cross subject. Even here, split conformal prediction overcovers marginally and it still leaves the worst class in an unsafe range, so per class undercoverage persists even when marginal coverage is above nominal (full per class numbers in the supplementary material). Source Mondrian recovers a substantial share of the oracle gap label free while keeping marginal coverage on target at the nominal level, at a modest set size cost; the weighted methods over cover, and the weighted class conditional variant inflates sets substantially. This mild shift is the left end of the severity spectrum (Figure 3).

The severity spectrum. Across three real NTU based shifts of increasing severity (Figure 3), source Mondrian’s label free per class recovery degrades in step, and the failure mode itself changes: marginal coverage holds under the mild and moderate shifts, and it collapses only under the severe one (Section 5.2). The severe point is a cross dataset stress test on five shared classes, a different task setting from the two sixty class NTU shifts, so we read the spectrum qualitatively. The symptoms separating these regimes, prediction sets collapsing toward empty and the source and target score distributions diverging, are visible label free, so a deployed system can flag from the unlabeled target pool alone whether label free recovery is even plausible. Confirming the per class collapse itself requires a labeled audit.

5.4 Controlled synthetic study

A controlled synthetic class conditional SPD shift reproduces the mechanism in isolation and confirms that margin abstention fails to address class systematic undercoverage even under a labeled target pool CRC threshold; full details, including the signal dichotomy between the out of distribution signal and the margin signal, are in the supplementary material.

5.5 Can unlabeled target data substitute for labels? The pseudo label efficiency ceiling

Question. Theorem 1 proves that unlabeled target data cannot improve the minimax rate of per class coverage recovery. The classifier under evaluation also emits free pseudo labels on the unlabeled target pool, so we ask whether the best possible estimator built from those pseudo labels recovers any of the missing efficiency in practice. We test this using PPI [Angelopoulos et al., 2023], which uses pseudo label statistics on the unlabeled pool as control variates and a handful of true target labels to debias the per class quantile estimate. We report the oracle ceiling on its achievable gain: a label efficiency gain computed from how strongly a two dimensional pseudo label control span explains the naive per class quantile estimator, evaluated at the oracle tuning parameter, an unbounded unlabeled pool, and the true target quantile. This is an asymptotic best case benchmark for this control span, and it is not a deployable estimator; finite sample, tunable estimators should not be expected to improve on it systematically. Every reported number passes an integrity check: no class is non finite or skipped, and the multivariate gain never falls below the scalar gain, on both datasets.

Finding: negligible ceiling exactly where it matters. On both real shifts we test, the median gain over all classes is modest, and only a small tail reaches three times the baseline (full breakdown in the supplementary

material). Restricted to the classes whose split conformal per class coverage collapses below eighty percent, the ceiling collapses further: the eight collapsing NTU-60 classes cap near a factor of one, and the ninety seven collapsing CIFAR-100-C classes cap near a factor of one as well, and none reach three times the baseline on either dataset. The intrinsically hard, most confusable NTU actions are the worst served, each capping near a factor of one. Gain tracks classifier accuracy closely on both datasets: the shift decorrelates the pseudo label from the truth on precisely the classes whose coverage collapses, so the signal that control variate PPI relies on all but vanishes exactly where efficiency is needed.

This is an empirical measurement, and it is not a theorem: it complements Theorem 1, which already proves unlabeled data cannot improve the minimax rate, by showing that even the best case pseudo label estimator, using oracle tuning, an infinite unlabeled pool, and the true quantile, fails to extract useful efficiency where coverage collapses, on two real shifts and two modalities. The ceiling upper bounds deployable estimators built on this pseudo label control span within the asymptotic PPI++ family, and it is not itself deployable. The untuned, standard deployable form performs worse than the naive audit: it inflates per class quantile variance and newly breaks per class validity. The full label budget curves and deployable form results are in the supplementary material.

5.6 Limitations

Backbone. The SPD conformal backbone, a tangent classifier on the SPD descriptor, lags the GCN head and stronger supervised baselines such as CTR-GCN [Chen et al., 2021]. Source Mondrian’s per class recovery builds on top of this suboptimal starting point, and even the target label oracle’s worst class coverage reflects an unsolved accuracy reliability trade off. The collapse and recovery pattern is not tied to this backbone: a stronger CTR-GCN feature extractor reproduces it, and conformalizing CTR-GCN’s own softmax head shows that the intrinsically hard NTU classes (reading, writing, type on keyboard) stay undercovered even at higher accuracy, and source Mondrian recovers them label free (supplementary material). The residual collapse thus persists across the tested backbones and heads, consistent with a data intrinsic mechanism. The backbone sweep (supplementary material) also varies representation and classifier together, so recovery differences cannot be attributed to either alone.

Scope and small classes. All three real skeleton shifts share NTU as the labeled source. The same collapse and recovery pattern, however, reproduces on a different modality and backbone entirely: CIFAR-100 natural images under a corruption shift, using a CLIP zero shot classifier [Radford et al., 2021] (supplementary material). The phenomenon is thus not skeleton specific, and a broader survey of source datasets remains future work. The severe regime result is a negative one by design: no source only, label free method recovers once marginal coverage collapses (Section 5.2). Finally, Mondrian conformal prediction needs at least a few source calibration points per class; very rare classes yield unreliable per class quantile estimates and remain the residual failure mode, classes staying below eighty percent even after Mondrian correction.

6 Conclusion

This paper characterizes the label cost of per class conformal coverage under distribution shift. Three results form the contribution. An impossibility result shows that once a shift acts jointly on covariates and labels, no label free method can be both valid and efficient per class (Proposition 2). A label complexity theorem shows that the number of labeled target examples per class needed to close that gap grows as the inverse square of the efficiency tolerance and the logarithm of the number of classes, and our upper and lower bounds match (Theorem 1). A pseudo label ceiling measurement shows that within the evaluated prediction powered inference family, even the most favorable use of unlabeled target data, through the classifier’s

own pseudo labels, raises efficiency by at most a small constant factor exactly where coverage collapses (Section 5.5).

Skeleton action recognition is the real data case study that grounds these results. On a real cross subject benchmark, marginal coverage stays near ninety percent while the worst action class is covered about seventy percent of the time and ten of the sixty classes fall below eighty percent coverage. A label free per class calibration on the source domain, source Mondrian, recovers a substantial share of this gap using only source labels. It does so precisely in the regime the theory predicts, where marginal coverage itself still holds.

We are equally clear about the boundary. The per class guarantee behind this calibration is exact under within class exchangeability and only approximate under distribution shift, which is why the calibration closes only part of the gap. A severity spectrum of three real shifts traces where the label free recovery stops: it degrades as the shift grows more severe, and the evaluated label free methods fail once the shift is severe enough that marginal coverage itself collapses (Figure 3). In that regime, per class recovery in our experiments requires labeled target information, and unlabeled target data supports only conservative or assumption dependent marginal corrections, consistent with the impossibility result. We release the seeded scripts and the synthetic harness so each theoretical claim and each empirical number can be verified independently.

References

- Anastasios N. Angelopoulos, Stephen Bates, Jitendra Malik, and Michael I. Jordan. Uncertainty sets for image classifiers using conformal prediction. In *International Conference on Learning Representations (ICLR)*, 2021.
- Anastasios N. Angelopoulos, Stephen Bates, Clara Fannjiang, Michael I. Jordan, and Tijana Zrnica. Prediction-powered inference. *Science*, 382(6671):669–674, 2023.
- Anastasios N. Angelopoulos, Stephen Bates, Adam Fisch, Lihua Lei, and Tal Schuster. Conformal risk control. In *International Conference on Learning Representations (ICLR)*, 2024.
- Vincent Arsigny, Pierre Fillard, Xavier Pennec, and Nicholas Ayache. Log-euclidean metrics for fast and simple calculus on diffusion tensors. *Magnetic Resonance in Medicine*, 56(2), 2006.
- Konstantina Bairaktari, Jiayun Wu, and Zhiwei Steven Wu. Kandinsky conformal prediction: Beyond class- and covariate-conditional coverage. In *Proceedings of the 42nd International Conference on Machine Learning*, volume 267 of *Proceedings of Machine Learning Research*, pages 2581–2602. PMLR, 2025.
- Rina Foygel Barber, Emmanuel J. Candès, Aaditya Ramdas, and Ryan J. Tibshirani. The limits of distribution-free conditional predictive inference. *Information and Inference: A Journal of the IMA*, 10(2):455–482, 2021.
- Rina Foygel Barber, Emmanuel J. Candès, Aaditya Ramdas, and Ryan J. Tibshirani. Conformal prediction beyond exchangeability. *The Annals of Statistics*, 51(2), 2023.
- Tim Bary, Clément Fuchs, and Benoît Macq. Conformal predictions for human action recognition with vision-language models. In *IEEE International Conference on Image Processing Workshops (ICIPW)*, 2025.
- Rajendra Bhatia. *Positive Definite Matrices*. Princeton University Press, 2007.

- Michele Caprio. A category-theoretic analysis of conformal prediction. *arXiv preprint arXiv:2507.04441*, 2025.
- Maxime Cauchois, Suyash Gupta, Alnur Ali, and John C. Duchi. Robust validation: Confident predictions even when distributions shift. *Journal of the American Statistical Association*, 119(548):3033–3044, 2024.
- Yuxin Chen, Ziqi Zhang, Chunfeng Yuan, Bing Li, Ying Deng, and Weiming Hu. Channel-wise topology refinement graph convolution for skeleton-based action recognition. In *IEEE/CVF International Conference on Computer Vision (ICCV)*, 2021.
- Tiffany Ding, Anastasios N. Angelopoulos, Stephen Bates, Michael I. Jordan, and Ryan J. Tibshirani. Class-conditional conformal prediction with many classes. In *Advances in Neural Information Processing Systems*, volume 36, 2023. arXiv:2306.09335.
- Isaac Gibbs and Emmanuel J. Candès. Adaptive conformal inference under distribution shift. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2021.
- Zhiwu Huang and Luc Van Gool. A riemannian network for SPD matrix learning. In *AAAI Conference on Artificial Intelligence*, 2017.
- Aaditya Khanal and Junxiu Zhou. Severe domain shift in skeleton-based action recognition: A study of uncertainty failure in real-world gym environments. *arXiv preprint arXiv:2603.15574*, 2026. Preprint.
- Jing Lei and Larry Wasserman. Distribution-free prediction bands for non-parametric regression. *Journal of the Royal Statistical Society: Series B (Statistical Methodology)*, 76(1):71–96, 2014.
- Jing Lei, Max G’Sell, Alessandro Rinaldo, Ryan J. Tibshirani, and Larry Wasserman. Distribution-free predictive inference for regression. *Journal of the American Statistical Association*, 113(523), 2018.
- Tuve Löfström, Henrik Boström, Henrik Linusson, and Ulf Johansson. Bias reduction through conditional conformal prediction. *Intelligent Data Analysis*, 19(6):1355–1375, 2015. doi: 10.3233/IDA-150786.
- Xavier Pennec. Intrinsic statistics on riemannian manifolds: Basic tools for geometric measurements. *Journal of Mathematical Imaging and Vision*, 25(1), 2006.
- Aleksandr Podkopaev and Aaditya Ramdas. Distribution-free uncertainty quantification for classification under label shift. In *Uncertainty in Artificial Intelligence (UAI)*, pages 844–853. PMLR, 2021.
- Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, Gretchen Krueger, and Ilya Sutskever. Learning transferable visual models from natural language supervision. In *International Conference on Machine Learning (ICML)*. PMLR, 2021.
- Yaniv Romano, Matteo Sesia, and Emmanuel J. Candès. Classification with valid and adaptive coverage. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2020.
- Mauricio Sadinle, Jing Lei, and Larry Wasserman. Least ambiguous set-valued classifiers with bounded error levels. *Journal of the American Statistical Association*, 114(525), 2019.
- Amir Shahroudy, Jun Liu, Tian-Tsong Ng, and Gang Wang. NTU RGB+D: A large scale dataset for 3D human activity analysis. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2016.

- Ryan J. Tibshirani, Rina Foygel Barber, Emmanuel J. Candès, and Aaditya Ramdas. Conformal prediction under covariate shift. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2019.
- Vladimir Vovk. Conditional validity of inductive conformal predictors. In *Asian Conference on Machine Learning (ACML)*, pages 475–490. PMLR, 2012.
- Vladimir Vovk, David Lindsay, Ilia Nouretdinov, and Alex Gammerman. Mondrian confidence machine. On-line Compression Modelling Project (Working Paper) 4, Computer Learning Research Centre, Royal Holloway, University of London, 2003. URL <http://alrw.net/old/04.pdf>.
- Vladimir Vovk, Alexander Gammerman, and Glenn Shafer. *Algorithmic Learning in a Random World*. Springer, 2005.
- Jiang Wang, Xiaohan Nie, Yin Xia, Ying Wu, and Song-Chun Zhu. Cross-view action modeling, learning, and recognition. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2014.
- Sijie Yan, Yuanjun Xiong, and Dahua Lin. Spatial temporal graph convolutional networks for skeleton-based action recognition. In *AAAI Conference on Artificial Intelligence*, 2018.

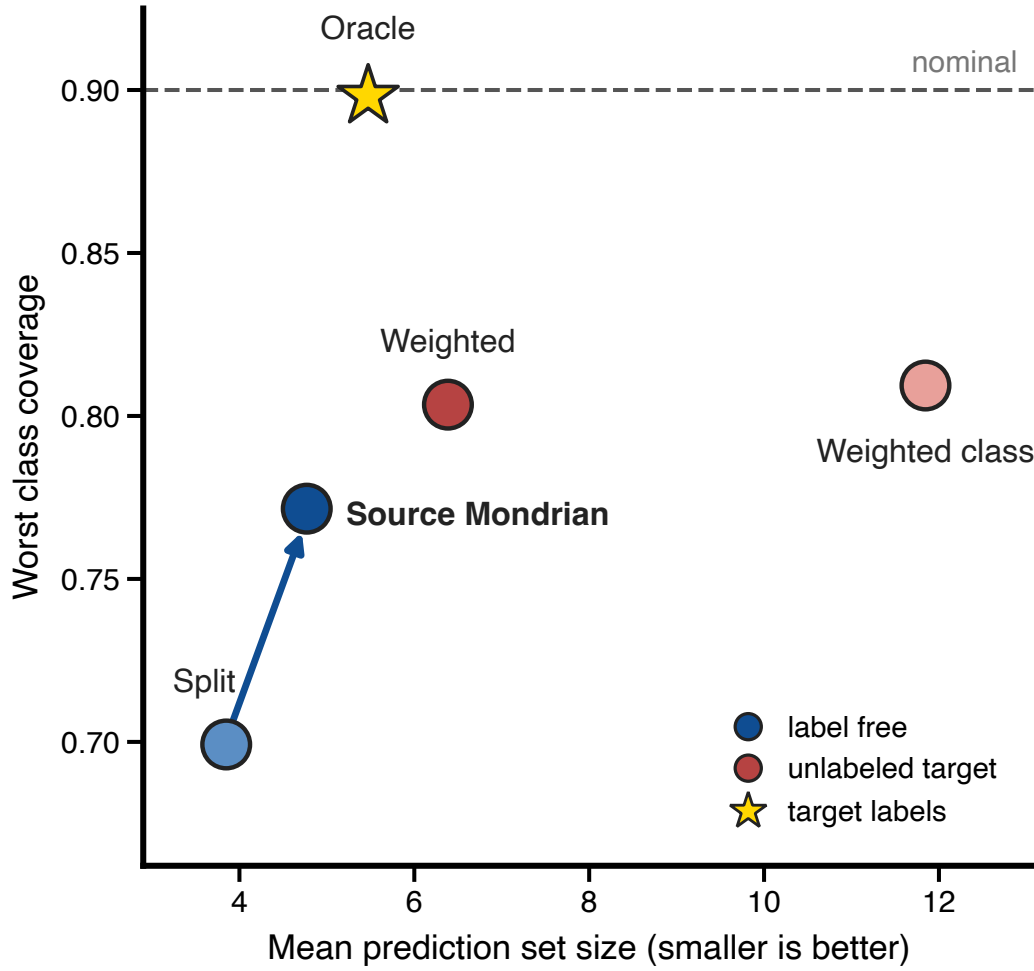


Figure 2: The recovery frontier on the real NTU-60 cross subject skeleton benchmark. Each method is placed by its worst class coverage and its mean prediction set size. Source Mondrian lifts the worst class using source labels alone, at a small set size cost, and it holds marginal coverage on target. The weighted methods reach a higher worst class only by inflating sets and overcovering the marginal; Weighted class denotes the weighted class conditional combination. The target label oracle marks the ceiling near the nominal line.

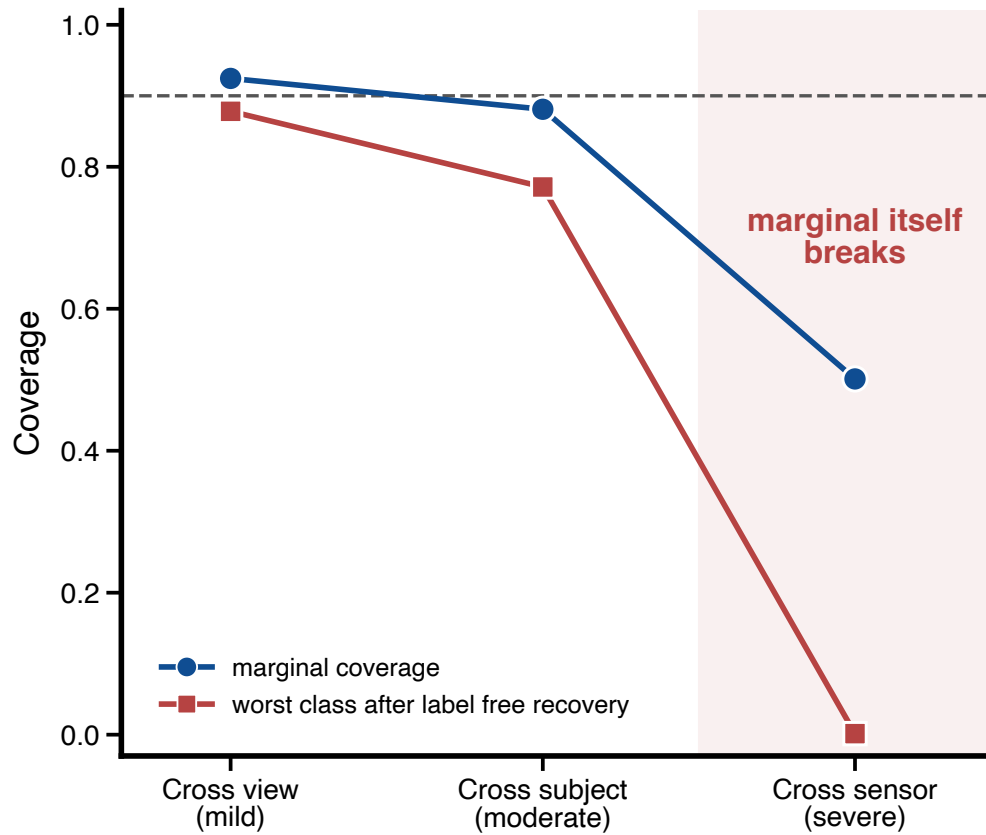


Figure 3: The severity spectrum across three real NTU based shifts. Marginal coverage holds under the mild and moderate shifts and then drops sharply under the severe one, while the worst class after label free recovery degrades and finally collapses. The shaded region marks where marginal coverage itself breaks and the evaluated label free methods no longer recover per class coverage.

Supplementary Material

The Label Complexity of Class Conditional Coverage under Distribution Shift

Abbreviations. SPD = symmetric positive definite; ST-GCN / CTR-GCN = the spatial temporal and channel wise topology refined graph convolutional network backbones; LAC / APS / RAPS = the least ambiguous set valued classifier, adaptive prediction sets, and regularized APS nonconformity scores; OOD = out of distribution; AUROC = area under the ROC curve; CRC = conformal risk control; PPI = prediction powered inference; CP = conformal prediction; LE = log Euclidean; xsub / xview = the NTU cross subject and cross view evaluation splits.

S1 Construction and proof of the impossibility proposition

The main paper states the impossibility proposition (no valid *and* efficient label free per class coverage under joint shift); its construction and proof follow.

Construction. Since $s(\cdot, c)$ is nonconstant on $\text{supp } P_T(X)$, fix disjoint regions B, A with

$$\begin{aligned} P_T(B) &> 0, & P_T(A) &= m > 0, \\ \inf_{x \in A} s(x, c) &\geq q_B + \delta, \end{aligned}$$

where q_B is the $(1-\alpha)$ -quantile of $s(X, c)$ on the class- c base population in B . Both laws place class c on B with mass $\mu_c > 0$ chosen so that

$$\varepsilon := \frac{m}{m + \mu_c} > \alpha.$$

P'_T assigns the A -mass to $Y=c$, whereas P_T assigns it to some $c' \neq c$. Thus,

$$\begin{aligned} q_c^*(P'_T) &\geq q_B + \delta, \\ q_c^*(P_T) &= q_B. \end{aligned}$$

Both joints share $P_T(X)$ and are consistent with P_S , since label free observables place no restriction on $P_T(Y | X)$; class c has positive mass under both. Validity under P'_T forces

$$\Pr[c \in \hat{C}(X) | X \in A] \geq \frac{\varepsilon - \alpha}{\varepsilon}.$$

Under P_T these inclusions are spurious, and deleting them preserves validity on P_T (class c has no A -mass there) while cutting expected size by at least

$$\beta = \frac{m(\varepsilon - \alpha)}{\varepsilon}.$$

□

S2 Proof of the label complexity theorem

We prove the label complexity theorem (main paper): audit-Mondrian with m labeled target draws attains per class coverage with excess set size $O(\sum_c m_c^{-1/2})$, and $m_c = \Omega(\varepsilon^{-2})$ is necessary, a matching characterization whose $m=0$ corner is the impossibility proposition (§S1).

(a) Validity

Condition on the audit counts $(m_c)_c$. The class- c audit scores $\{s(\tilde{X}_j, c) : \tilde{Y}_j = c\}$ are i.i.d. from the target class conditional score law F_c^T , and a fresh test point with $Y^* = c$ has score $s(X^*, c) \sim F_c^T$, exchangeable with them. The threshold $\hat{q}_c$ is the $\lceil (m_c+1)(1-\alpha) \rceil$ -th order statistic. Therefore, by the standard split conformal rank argument [Vovk et al., 2005, Lei et al., 2018],

$$\Pr_T[s(X^*, c) \leq \hat{q}_c \mid Y^*=c] = \frac{\lceil (m_c+1)(1-\alpha) \rceil}{m_c+1} \in \left[1-\alpha, 1-\alpha + \frac{1}{m_c+1}\right]$$

whenever $m_c \geq \lceil 1/\alpha \rceil - 1$ (else the index exceeds m_c , $\hat{q}_c = +\infty$, and class c is always included). Atomlessness of F_c^T (or random tie breaking) gives the exact upper edge. No assumption on $P_T(Y \mid X)$ enters: within class exchangeability of the *audit* scores holds by construction because they are drawn from P_T itself. $\square$

(b) Efficiency

We fix deterministic per class audit quotas $(m_c)_c$ (so the DKW events are independent across c and the union bound is clean; a multinomial audit is handled by conditioning on its realized counts). Assume the following *sufficient* regularity (not necessary, a local Hölder or margin condition would give other rates): there is a radius $r > 0$ such that

$$\begin{aligned} F_c^{T'}(t) &\geq f_0 && \text{for all } t \in [q_c^* - r, q_c^* + r], \\ G_c(t) &= \Pr_{P_T(X)}[s(X, c) \leq t] && \text{is } L\text{-Lipschitz on that neighborhood,} \end{aligned}$$

and let q_c^* be the target oracle threshold (the $(1-\alpha)$ -quantile of F_c^T).

Write

$$\epsilon_c := \sqrt{\frac{\log(2K/\delta)}{2m_c}}.$$

By the Dvoretzky-Kiefer-Wolfowitz inequality,

$$\sup_t |\hat{F}_c(t) - F_c^T(t)| \leq \epsilon_c$$

for all c simultaneously with probability $\geq 1 - \delta$ (union bound over the K fixed quotas), where $\hat{F}_c$ is the audit empirical CDF. The audit threshold $\hat{q}_c$ is the empirical quantile at level

$$\begin{aligned} u_{m_c} &:= \frac{\lceil (m_c+1)(1-\alpha) \rceil}{m_c} \\ &= (1-\alpha) + O(m_c^{-1}), \end{aligned}$$

so

$$|F_c^T(\hat{q}_c) - (1-\alpha)| \leq \epsilon_c + O(m_c^{-1}).$$

Provided $\epsilon_c + O(m_c^{-1}) < f_0 r$ (i.e. m_c past a constant threshold), $\hat{q}_c$ lies in the regularity neighborhood and the density lower bound inverts the CDF error into the quantile error:

$$|\hat{q}_c - q_c^*| \leq f_0^{-1}(\epsilon_c + O(m_c^{-1})).$$

The expected set size is

$$\mathbb{E}_{P_T} |\hat{C}(X)| = \sum_c G_c(\hat{q}_c).$$

By L -Lipschitzness, the *positive* excess over the oracle satisfies

$$(G_c(\hat{q}_c) - G_c(q_c^*))_+ \leq L |\hat{q}_c - q_c^*|.$$

Thus, summing gives excess over the oracle $\sum_c G_c(q_c^*)$ of at most

$$\frac{L}{f_0} \sum_c (\epsilon_c + O(m_c^{-1})) = \frac{L}{f_0} \sum_c \sqrt{\frac{\log(2K/\delta)}{2m_c}} + O\left(\sum_c m_c^{-1}\right).$$

Hence $m_c = O(\varepsilon^{-2} \log(K/\delta))$ per class bounds every class c term by a constant times ε , yielding *per class* ε -efficiency; the total excess over all K classes is then $O(K\varepsilon)$, and the lower bounds in (c) and (d) are stated in the same per class sense. $\square$

High probability validity variant (used by the lower bounds). The event pair (V_a, E_a) in (c) asks for *realized* class conditional coverage $\geq 1 - \alpha$ together with $O(\varepsilon)$ size excess, jointly with probability $\geq \frac{3}{4}$. Audit Mondrian achieves this at the same rate by calibrating at the DKW inflated level

$$u'_{m_c} = (1 - \alpha) + \epsilon_c.$$

On the DKW event (probability $\geq 1 - \delta$),

$$\begin{aligned} F_c^T(\hat{q}_c) &\geq u'_{m_c} - \epsilon_c \geq 1 - \alpha, \\ F_c^T(\hat{q}_c) &\leq u'_{m_c} + \epsilon_c + O(m_c^{-1}). \end{aligned}$$

Thus the realized coverage requirement holds, while the second inequality keeps the quantile within $f_0^{-1}(2\epsilon_c + O(m_c^{-1}))$ of the oracle and the class c size excess at $O(\epsilon_c)$. The upper and lower bounds therefore refer to the same validity and efficiency notion.

(c) Necessity: a perturbative two point lower bound

The $m=0$ construction moves an order one mass and separates quantiles by a constant, giving $\beta = \Omega(1)$; to obtain the ε^{-2} rate we instead tilt the conditional label law smoothly, so that an $\Theta(\varepsilon)$ objective gap costs only $\Theta(\varepsilon^2)$ Hellinger per audit sample.

Construction (a specific hard instance). We exhibit one shift instance, not a reduction from every non-constant score, which suffices for the existential necessity claim. Let $X \sim \text{Unif}[0, 1]$ under $P_T(X)$ and take the score $s(x, c) = x$; fix the level $\alpha \in (0, 1)$ and a base $a_0 \in (0, 1)$ bounded away from 1. Define, for $a \in (0, 1)$,

$$\begin{aligned} P_a(Y=c \mid X=x) &= \frac{1}{2} + a(\frac{1}{2} - x), \\ P_a(Y=c) &= \frac{1}{2}. \end{aligned}$$

On the complement put label $c' \neq c$ with score $s(x, c') = 1 - x$ (so class c' 's valid oracle is also a threshold, blocking cross label size compensation; $K > 2$ below). The class- c score CDF is

$$F_a(t) = P_a(X \leq t \mid Y=c) = t + a(t - t^2), \quad t \in [0, 1].$$

Compare P_{a+} and P_{a-} with

$$a_{\pm} = a_0 \pm \tau.$$

Both share $P_T(X) = \text{Unif}[0, 1]$; take the source sample law P_S identical under both and modeled as unconstraining the target conditional (arbitrary label/concept shift is permitted), so the two target laws are

consistent with the same $(P_S, P_T(X))$ and indistinguishable from labeled source plus an unbounded unlabeled target pool.

Objective gap is $\Theta(\tau)$. The $(1-\alpha)$ -quantile $q(a)$ solves

$$q + a(q - q^2) = 1 - \alpha.$$

Implicit differentiation gives

$$q'(a) = -\frac{q - q^2}{1 + a(1 - 2q)}.$$

Its denominator is positive and bounded away from 0 for $\alpha \in (0, 1)$ fixed and a_0 bounded away from 1 (so $q \in (0, 1)$), giving

$$\Delta := |q(a_+) - q(a_-)| = \Theta(\tau).$$

Size is a scalar estimator of $q(a)$ (no stability lemma needed). Because $p_a(x) = \frac{1}{2} + a(\frac{1}{2} - x)$ is decreasing in $x = s(x, c)$, the class- c conditional density ratio $dP_a(\cdot | Y=c)/dP_T(X) \propto p_a(x)$ is decreasing, so by the Neyman-Pearson lemma any (randomized, set valued) rule whose realized acceptance region has class- c coverage $\geq 1 - \alpha$ under the true law P_a has marginal size

$$\hat{s} := \Pr_{P_T(X)}[c \in \hat{C}(X)] \geq q(a).$$

A lower level set of the decreasing ratio is size optimal: for a randomized $\phi \in [0, 1]$,

$$\int \phi f_a \leq \int_0^{\hat{s}} f_a = F_a(\hat{s}),$$

so coverage $\geq 1 - \alpha$ forces $\hat{s} \geq q(a)$. Let

$$V_a = \{\text{realized class-}c \text{ coverage} \geq 1 - \alpha\}.$$

On V_a , **validity** $\Rightarrow \hat{s} \geq q(a)$ per realization. We take the (achievable, cf. (b)) **high probability efficiency** event

$$E_a = \left\{ \hat{s} \leq q(a) + \frac{\Delta}{4} \right\},$$

and call a rule ε -efficient/valid on P_a if $P_a(V_a \cap E_a) \geq \frac{3}{4}$. On $V_a \cap E_a$ then $|\hat{s} - q(a)| \leq \frac{\Delta}{4}$. Since $q'(a) < 0$ gives $q(a_+) < q(a_-)$ with $q(a_-) - q(a_+) = \Delta$, the test

$$\text{declare } a_+ \text{ iff } \hat{s} < \frac{q(a_+) + q(a_-)}{2}$$

errs only off $V_a \cap E_a$, hence with probability $\leq \frac{1}{4}$ under *each* of P_{a_+}, P_{a_-} . (If total expected set size is the efficiency metric rather than the class- c marginal $\hat{s}$: on the all label validity event $\{\text{realized coverage} \geq 1 - \alpha \text{ for every class}\}$ each label's marginal inclusion size $\hat{s}_y \geq q_y(a)$ by Neyman-Pearson, so $\sum_y \hat{s}_y \leq \sum_y q_y(a) + \frac{\Delta}{4}$ forces $\hat{s}_c \leq q_c(a) + \frac{\Delta}{4}$, an $\Omega(\Delta)$ class- c excess cannot be offset by other labels.)

Hellinger cost is $\Theta(\tau^2)$. For a labeled audit pair, the only a -dependence is the Bernoulli label given $X=x$, with success probabilities $p_{\pm}(x) = \frac{1}{2} + a_{\pm}(\frac{1}{2} - x)$ differing by $2\tau(\frac{1}{2} - x)$. As $a_0 + \tau < 1$ keeps $p_{\pm}$ bounded inside $(0, 1)$,

$$\begin{aligned} H^2(P_{a_+}, P_{a_-}) &= \frac{\tau^2}{2} \mathbb{E} \left[\left(\frac{1}{2} - X \right)^2 \left(\frac{1}{p_0(X)} + \frac{1}{1-p_0(X)} \right) \right] + O(\tau^4) \\ &= \Theta(\tau^2), \end{aligned}$$

with $p_0(x) = \frac{1}{2} + a_0(\frac{1}{2} - x)$. The bound is uniform in x :

$$H^2(\text{Bern}(p_+(x)), \text{Bern}(p_-(x))) \leq C\tau^2.$$

Thus the same tensorization holds even if audit points are queried adaptively from the unlabeled pool. (A localized order one perturbation would instead cost $H^2 = \Theta(\tau)$ and yield only $m = \Omega(1/\tau)$; the smooth tilt over constant covariate mass is what buys ε^{-2} .)

Le Cam contradiction. Set $\tau \asymp \varepsilon$. For m i.i.d. audit pairs, tensorization gives

$$\begin{aligned} H^2(P_{a_+}^{\otimes m}, P_{a_-}^{\otimes m}) &\leq mH^2(P_{a_+}, P_{a_-}) \\ &= O(m\varepsilon^2). \end{aligned}$$

Since $\text{TV} \leq H$, choosing c_0 small makes

$$\text{TV}(P_{a_+}^{\otimes m}, P_{a_-}^{\otimes m}) \leq \frac{1}{4}, \quad m \leq \frac{c_0}{\varepsilon^2}.$$

The source and the unlabeled pool are *identical* under both laws, so any procedure's output, hence the scalar $\hat{s}$ and the induced test, is a channel applied to the audit experiment. By the data processing inequality, the test's combined (type-I + type-II) error satisfies

$$\text{combined error} \geq 1 - \text{TV} \geq \frac{3}{4},$$

i.e. it errs $\geq \frac{3}{8}$ on one law. This contradicts the “error $\leq \frac{1}{4}$ on both laws” consequence of $P_a(V_a \cap E_a) \geq \frac{3}{4}$ above. Hence for $m \leq c_0/\varepsilon^2$ no rule can have $P_a(V_a \cap E_a) \geq \frac{3}{4}$ on both laws: on at least one law, with probability $\geq \frac{1}{4}$, it violates per class validity or has excess size $> \frac{\Delta}{4} = \Omega(\varepsilon)$. This gives $m = \Omega(\varepsilon^{-2})$, matching (b) in ε up to the $\log K$ factor, closed in (d) below. Because P_{a_+}, P_{a_-} share $P_T(X)$ exactly, the unlabeled pool cannot improve the minimax rate. $\square$

General K . Embed the binary instance into $K \geq 2$ classes. Take the complement score $s(x, c') = 1 - x$, so class c' 's Neyman-Pearson-optimal valid region is also a threshold at its own oracle, its size cannot be shrunk below the oracle minimum under validity, ruling out cross label compensation. For $K > 2$, allocate a fixed probability mass $\pi_0 > 0$ to the classes outside $\{c, c'\}$ *independently of (X, a)* (with a -independent scores), and rescale the $\{c, c'\}$ construction to mass $1 - \pi_0$: the class- c conditional law, its score quantile, and the audit Hellinger are unchanged up to the constant $1 - \pi_0$, and the other classes carry no a -dependence, so the lower bound is unaffected.

(d) Simultaneous necessity: the $\log K$ lower bound

Construction (K -region decoupling). Let

$$X = (Z, U), \quad Z \sim \text{Unif}\{1, \dots, K\} \text{ observed}, \quad U \sim \text{Unif}[0, 1] \text{ independent}.$$

The label is $Y \in \{0, 1, \dots, K\}$ (0 a background class). Given $Z = c$,

$$\begin{aligned} P(Y=c \mid Z=c, u) &= \frac{1}{2} + a_c(\frac{1}{2} - u), \\ P(Y=0 \mid Z=c, u) &= \frac{1}{2} - a_c(\frac{1}{2} - u), \end{aligned}$$

with $a_c \in \{+\tau, -\tau\}$ chosen *independently* per class and $\tau = c_1\varepsilon$. The scores are

$$s((z, u), c) = \begin{cases} u, & z = c, \\ M, & z \neq c, \end{cases} \quad M > 1, \quad s(\cdot, 0) = M.$$

Source P_S = the $a=0$ law, fixed for all hypotheses. Then

$$P_T(X) = \text{Unif}\{1..K\} \times \text{Unif}[0, 1]$$

is identical for every a , so neither the fixed source nor the unbounded unlabeled target pool (which only identifies $P_T(X)$) carries any information about any a_c ; and $P(Y=c) = \frac{1}{2K}$. Per class efficiency is the class c excess set size, the class c contribution to the expected size under $P_T(X)$, exactly the metric of parts (a) to (c); the class c score law is the law of $s(X, c)$ conditional on $Y = c$, and under $Y = c$ necessarily $Z = c$ and $U \mid Y=c$ has the linear tilt density

$$f_{a_c}(u) = 1 + 2a_c(\frac{1}{2} - u),$$

i.e. exactly the part-(c) class- c law, with

$$\Delta_c = 2\alpha(1 - \alpha)\tau + O(\tau^2) = \Theta(\varepsilon), \quad q'(0) = -\alpha(1 - \alpha).$$

Fix c_1 with $2\alpha(1 - \alpha)c_1 > 4$ so $\varepsilon < \Delta_c/4$. We state the bound for a stratified audit with preallocated per region counts n_c (fixed by design); the i.i.d. audit reduces to this case by conditioning on the observed region counts, which are ancillary here: given the counts, the per region samples are independent draws from the corresponding conditional laws. Within region c the class conditional count $\#\{Y=c\}$ is Binomial($n_c, \frac{1}{2}$) and concentrates at $n_c/2$, so per class and per region counts agree up to a constant factor with probability approaching one, and the rate below holds for either. The region- c audit data depend only on a_c and different regions are independent (observed Z). Per audit sample the two hypotheses $a_c = \pm\tau$ differ only through the Bernoulli label, with

$$\eta = \frac{\tau^2}{6} + O(\tau^4), \quad c'\tau^2 \leq \eta \leq C'\tau^2.$$

Reduction. By the part-(c) size as estimator argument applied under $Y = c$, on the event $A_c = V_c \cap E_c$ (“valid and ε -efficient on class c ”), the class- c size statistic obeys

$$q_c(a_c) \leq \hat{s}_c \leq q_c(a_c) + \frac{\Delta_c}{4}.$$

Thus the decision

$$\hat{a}_c = +\tau \text{ iff } \hat{s}_c < \frac{1}{2}(q_c(+\tau) + q_c(-\tau))$$

is *correct* on A_c . Consequently,

$$\{\forall c : \hat{a}_c = a_c\} \supseteq \bigcap_c A_c, \quad P_a(\forall c : \hat{a}_c = a_c) \geq \frac{3}{4}$$

for every a , where the second inequality follows from simultaneous validity+efficiency w.p. $\geq \frac{3}{4}$.

Bayes factorization. Under the uniform product prior (a_c i.i.d. $\text{Unif}\{\pm\tau\}$), worst case $\geq \frac{3}{4}$ implies average $\geq \frac{3}{4}$. Because the region data are independent and the prior is a product, the posterior factorizes and the Bayes-optimal exact vector estimator is coordinatewise MAP, with average all correct probability

$$\prod_{c=1}^K (1 - p_c^*),$$

where p_c^* is the equal prior Bayes error of testing $a_c = \pm\tau$ from the n_c region- c samples; no estimator beats this. Hence

$$\prod_c (1 - p_c^*) \geq \frac{3}{4}.$$

Testing bound. With affinity $\rho_{n_c} = (1 - \eta)^{n_c}$,

$$\begin{aligned}
p_c^\star &= \frac{1 - \text{TV}}{2} \\
&\geq \frac{1 - \sqrt{1 - \rho^2}}{2} \\
&\geq \frac{\rho^2}{4} \\
&= \frac{1}{4}(1 - \eta)^{2n_c} \\
&\geq \frac{1}{4}e^{-4\eta n_c} \\
&\geq \frac{1}{4}e^{-C\varepsilon^2 n_c},
\end{aligned}$$

for an absolute C , using $\eta \leq C'\tau^2 = \Theta(\varepsilon^2)$.

Combine. By $\log(1 - x) \leq -x$,

$$\begin{aligned}
\prod_c (1 - p_c^\star) &\geq \frac{3}{4} \Rightarrow \sum_c \log(1 - p_c^\star) \geq -\log \frac{4}{3} \\
&\Rightarrow \sum_c p_c^\star \leq \log \frac{4}{3}.
\end{aligned}$$

Therefore,

$$\sum_c e^{-C\varepsilon^2 n_c} \leq 4 \log \frac{4}{3} < 8/5.$$

Extract log K. Minimizing

$$\sum_c n_c = \frac{1}{C\varepsilon^2} \sum_c \log(1/y_c)$$

over $y_c = e^{-C\varepsilon^2 n_c} \in (0, 1]$ with $\sum_c y_c \leq A := 4 \log \frac{4}{3}$ is convex; the minimizer is $y_c = A/K$, giving

$$\sum_c n_c \geq \frac{K}{C\varepsilon^2} \log \frac{K}{A} = \Omega(K\varepsilon^{-2} \log K)$$

and average $n_c = \Omega(\varepsilon^{-2} \log K)$. If

$$n_c < \frac{1}{C\varepsilon^2} \log \frac{K}{2A},$$

then $y_c > 2A/K$, so fewer than $K/2$ classes can violate it: at least $K/2$ classes need $n_c = \Omega(\varepsilon^{-2} \log K)$; uniform budgets need $n = \Omega(\varepsilon^{-2} \log K)$. With (b) this is tight: $m_c = \Theta(\varepsilon^{-2} \log K)$. Here n_c denotes the per class audit budget (labeled target points in class c); the bound is stated for the preallocated count and, via the constant factor equivalence above, holds equally for the realized $Y=c$ count. $\square$

Remark 3 (Scope of the assumptions). Validity (a) is exact and assumption free on $P_T(Y \mid X)$, needing only atomless scores (or randomized ties). Efficiency (b) uses *sufficient* (not necessary) regularity, a local density lower bound f_0 near the quantile and local L -Lipschitz score marginal, to convert threshold error into set size excess. The lower bound (c) is an existential statement about a specific hard instance; it binds arbitrary randomized set valued rules, since the argument controls only the scalar set size $\hat{s}$ (lower bounded by the Neyman-Pearson oracle under validity), not the rule's shape.

S3 Joint accept and err risk control (negative control support)

The CRC guarantee applies to the margin abstention negative control (main paper, method section). It controls a *marginal joint* risk, not per class conditional coverage, which is precisely why margin abstention leaves per class undercoverage unresolved. The CRC threshold requires a **labeled target pool**, so this result does not contribute a deployable method.

Proposition S1 (CRC joint risk control). *Let $\{(x_i, y_i)\}_{i=1}^n$ be a labeled target calibration sample exchangeable with a test point (x^*, y^*) . Define the threshold indexed per point loss*

$$L_i(t) = \mathbf{1}\{s_{\text{mar}}(x_i) < t\} \cdot \mathbf{1}\{y_i \notin \hat{C}(x_i)\}$$

(accept and err: monotone non decreasing in t). Let $\hat{t}$ be the largest threshold satisfying

$$\frac{n \hat{R}_n(\hat{t}) + B}{n + 1} \leq \delta, \quad \hat{R}_n(t) = \frac{1}{n} \sum_{i=1}^n L_i(t), \quad (1)$$

with $B=1$ and $\delta=\alpha$. Then $E[L(\hat{t})] \leq \alpha$ on a fresh exchangeable test point.

This is the Conformal Risk Control guarantee of Angelopoulos et al. [2024]. The guarantee is on a *joint marginal* risk: it does not provide per class conditional coverage, and it requires target labels for threshold selection. Margin abstention is therefore a diagnostic negative control, not a deployable method.

S4 The LE chart is isometric

Lemma S1 (Isometric vectorization). *The map*

$$\Phi(X) = \text{vech}_{\sqrt{2}}(\text{Log} X)$$

from $(\text{SPD}(d), d_{\text{LE}})$ to $(\mathbb{R}^{d(d+1)/2}, \|\cdot\|_2)$ is an isometry:

$$\|\Phi(X) - \Phi(Y)\|_2 = \|\text{Log} X - \text{Log} Y\|_F = d_{\text{LE}}(X, Y).$$

Consequently: (i) the min distance signal s_{ood} and geodesic margin s_{mar} computed from Φ equal their log Euclidean manifold counterparts exactly; (ii) all backbone computations (nearest mean softmax, tangent logistic, density ratio discriminator) operate in the isometric LE chart without additional geometric approximation.

The $\sqrt{2}$ weighting on off diagonal entries makes the half vectorization norm preserving on symmetric matrices; the result follows from $d_{\text{LE}}(X, Y) = \|\text{Log} X - \text{Log} Y\|_F$.

Corollary S1 (Inherited invariances, and their limits). *Because d_{LE} is invariant under congruence by an orthogonal matrix ($X \mapsto OXO^\top$, $O \in O(d)$) and under inversion ($X \mapsto X^{-1}$), all abstention signals inherit these invariances. They are not invariant under the full $\text{GL}(d)$ congruence action, that is the affine invariant metric (AIRM). A fully affine invariant variant is future work.*

S5 Method and calibration details

This section collects the formal definitions, constants, and formulas underlying the four calibration methods of the main paper’s method section.

SPD descriptors and backbone configurations. Each input sequence is summarized by an SPD descriptor $\varphi(x) \in \text{SPD}(d)$, the temporal covariance of joint coordinates and velocities. The three backbone configurations are: (i) **nearest mean**, raw skeleton SPD descriptors ($d=150$) classified by a log Euclidean nearest class mean rule (softmax over negative geodesic distances to class Karcher means; formula below); (ii) **tangent logistic**, raw skeleton SPD ($d=150$) classified by a tangent space logistic classifier; (iii) **ST-GCN features**, per frame ST-GCN features [Yan et al., 2018] summarized into a temporal covariance SPD descriptor ($d=64$) classified by the same tangent space logistic classifier. The ST-GCN-feature configuration is run in two training regimes, a 40-epoch and an 80-epoch regime; the resulting worst class coverage across all four backbone rows appears in Table S1 (Section S6).

Source data is partitioned into disjoint scorer training and calibration subsets: the backbone classifier (class means or logistic weights) is fit on the former, and conformal quantiles are estimated on the latter, at a per class calibration count of approximately 334 on NTU-60 cross subject. All four calibration methods share this backbone and calibration pool.

Karcher means and the isometric vectorization. For each class c , the log Euclidean Karcher mean is

$$M_c = \text{Exp}\left(\frac{1}{|S_c|} \sum_{i \in S_c} \text{Log} \varphi(x_i)\right),$$

computed on the scorer training subset. The LE vectorization $\Phi(X) = \text{vech}_{\sqrt{2}}(\text{Log} X)$, a half vectorization that scales off diagonal entries by $\sqrt{2}$, is an isometry: its Euclidean norm equals the Frobenius norm of $\text{Log} X$ (Lemma S1, Section S4), so all backbone computations live in an isometric copy of the LE manifold.

The LAC nonconformity score. All four calibration methods use the LAC nonconformity score [Sadinle et al., 2019]: $s(x, c) = 1 - \hat{p}(c \mid x)$, where $\hat{p}(\cdot \mid x)$ is the backbone’s class probability output. For the nearest mean configuration,

$$\hat{p}(c \mid x) = \frac{\exp(-d_{\text{LE}}(\varphi(x), M_c)/\tau)}{\sum_{c'} \exp(-d_{\text{LE}}(\varphi(x), M_{c'})/\tau)}, \quad \tau=0.5,$$

so geodesic distance enters indirectly through the softmax; for the tangent logistic configuration, $\hat{p}$ is the logistic classifier output on $\Phi(\varphi(x))$.

Source Mondrian per class quantile. For each class c ,

$$\hat{q}_c = \text{the } \lceil (n_c + 1)(1 - \alpha) \rceil\text{-th smallest element of } \{s(x_i, c) : y_i = c, i = 1, \dots, n\}, \quad (2)$$

where $n_c = |\{i : y_i = c\}|$ is the per class calibration count (approximately 334 per class on NTU-60 cross subject), $\hat{q}_c = +\infty$ whenever the index $\lceil (n_c + 1)(1 - \alpha) \rceil$ exceeds n_c , and the prediction set is $\hat{C}(x) = \{c : s(x, c) \leq \hat{q}_c\}$. At this n_c , the finite sample correction $1/(n_c + 1) \approx 0.003$ is negligible.

Weighted conformal quantile. The marginal weighted quantile, using a +1 notional test atom, is

$$Q_{1-\alpha}(\{s_i\}, \{w_i\}) = \inf \left\{ q : \frac{\sum_{i: s_i \leq q} w_i}{\sum_j w_j + 1} \geq 1 - \alpha \right\}. \quad (3)$$

The exact per test point variant [Tibshirani et al., 2019] normalizes the calibration weights in Equation (3) by $w(x^*)$ for each test point x^* ; the test point itself contributes the notional unit atom, placed at $+\infty$, so it enters the denominator of Equation (3) but never the numerator at a finite threshold. We report this exact

variant throughout; the marginal single threshold variant fails to recover coverage on our controlled synthetic study (0.704/0.729; Table S9, Section S12).

A weighted class conditional variant combines density ratio weights and per class quantiles: for each class c it computes the marginal weighted quantile of Equation (3) over the class c calibration scores $\{s(x_i, c) : y_i = c\}$ with weights $w(x_i)$ (one threshold per class, without the per test point normalization), in place of the unweighted order statistic of Equation (2).

The density ratio discriminator. Importance weights $w(x) \approx p_{\text{target}}(x)/p_{\text{source}}(x)$ are SPD-derived. We fit an ℓ_2 -regularized logistic discriminator ($C=1$, balanced classes) on Φ -vectorized features to separate source from target; the resulting ratio $w(x) = p(\text{target} \mid x)/p(\text{source} \mid x)$ is clipped to $[0, 20]$, fit on a disjoint pool, and applied out of sample.

Margin-abstention signals. We study two geometric per sample abstention signals: the min distance OOD signal $s_{\text{ood}}(x) = \min_c d_g(\varphi(x), M_c)$ and the geodesic margin $s_{\text{mar}}(x) = d_g(\varphi(x), M_{(1)}) - d_g(\varphi(x), M_{(2)}) \leq 0$, where $M_{(1)}, M_{(2)}$ are the two nearest class manifolds and geodesic distances are computed via Φ (Lemma S1, Section S4). The signed margin is nonpositive: strongly negative values mean a confidently nearest class, values near zero mean ambiguity, and prose statements such as “large margin” refer to its magnitude $|s_{\text{mar}}(x)|$. The margin signal is thresholded by Conformal Risk Control (Proposition S1, Section S3), which requires a labeled target calibration pool.

S6 Backbone-strength sweep

Important caveat. The sweep varies *both* SPD representation *and* classifier together; it is not a controlled single variable ablation. The three backbone configurations are: nearest class mean on raw skeleton SPD; tangent logistic on raw skeleton SPD; and tangent logistic on ST-GCN-feature SPD. The ST-GCN-feature configuration is run in two training regimes (40-epoch and 80-epoch), giving four rows in Table S1.

Finding. As the combined representation+classifier becomes more discriminative (target accuracy from $\sim$ chance to 0.73 on the GCN head), prediction sets tighten ($\approx 27 \rightarrow 3.85$ of 60 classes; Figure S1). Source Mondrian reduces per class undercoverage at all tested levels and is the only near nominal marginal, label free recoverer throughout.

Figure S2 shows worst class coverage and the share of severely undercovered classes, per method, for the main paper recovery experiment on the strongest (ST-GCN 80-epoch) backbone; the set sizes appear in the recovery table.

S7 Stronger-backbone check (CTR-GCN)

To confirm that the collapse and recovery pattern is not tied to ST-GCN, we repeat it with a stronger feature extractor, a channel wise topology refinement GCN [Chen et al., 2021], trained on the same NTU-60 cross subject split (head top-1 0.767, above ST-GCN’s 0.727; tangent space conformal backbone top-1 0.675, above ST-GCN’s 0.627). This is a single joint stream network, still below strong four stream ensembles (≈ 0.92); the point is that the finding *persists as accuracy rises*, not a peak accuracy claim.

The finding reproduces on the SPD pipeline. Feeding CTR-GCN features through the same tangent space SPD conformal pipeline (Table S2), split CP again collapses per class (0.673 worst) at near nominal marginal (0.881), and label free source Mondrian again recovers it (0.725, +0.052) while holding marginal

Table S1: **[Real data, NTU-60 cross subject] Backbone sweep: worst class per class coverage.** Representation and classifier vary jointly (not a single variable ablation). Bold: highest non oracle worst class coverage per backbone row. [†]GCN head accuracy; conformal backbone uses tangent logistic on SPD. [‡]Tangent-logistic on raw SPD. [°]Threshold requires labeled target pool. Set sizes approximate for nearest mean and tangent rows (split CP only measured). $\alpha=0.10$.

Backbone	split	source-CC	weighted	wCC	abstention [°]	oracle
Nearest-mean (raw SPD)	0.682	0.690	0.711	0.698	0.687 ^{@92%}	0.888
sets (split / source-CC)	≈ 27 / n/a					
Tangent-logistic (raw SPD [‡] , top-1 ≈ 0.36)	0.720	0.824	0.723	0.814	0.722	0.876
sets (split / source-CC)	≈ 18 / n/a					
ST-GCN 40-epoch (GCN [†] 0.635)	0.693	0.798	0.717	0.605	0.681 ^{@90%}	0.885
sets (split / source-CC)	5.11 / 7.87					
ST-GCN 80-epoch (GCN [†] 0.727)	0.699	0.772	0.803	0.809	0.700 ^{@91%}	0.898
sets (split / source-CC)	3.85 / 4.77					

Table S2: **[Real data, NTU-60 cross subject, CTR-GCN features] Recovery on a stronger backbone.** Tangent-space conformal backbone on CTR-GCN-feature SPD (conformal top-1 0.675). $\alpha=0.10$, 10 seeds, 60 classes. [°]Threshold requires a labeled target pool. *Oracle needs target labels (ceiling).

Method	Marg. cov.	Worst-class	%<0.85	%<0.80	Mean size
Split CP (baseline)	0.881	0.673	32%	20%	2.98
Source Mondrian (ours, label free)	0.881	0.725	18%	3%	3.79
Weighted CP	0.910	0.735	20%	13%	4.01
Weighted class conditional	0.898	0.735	13%	3%	6.76
Margin abstention [°] (89% acc.)	0.892	0.681	30%	20%	2.82
Target-oracle class cond. *	0.908	0.899	0%	0%	4.51

coverage on target: the identical qualitative pattern to the ST-GCN rows, at a higher accuracy backbone. Weighted CP again buys worst class only by marginal over coverage.

The collapse persists across backbones and heads. Conformalizing CTR-GCN’s *own* softmax head directly (LAC on its class probabilities, the deployable single model recommendation) tells the same story: per class coverage collapses to 0.558 worst under split CP at $\alpha=0.10$ and source Mondrian recovers it to 0.677 label free (and at $\alpha=0.01$, split worst 0.895 $\rightarrow$ Mondrian 0.932). The mechanism is visible in the *intrinsically confusable* NTU actions, *reading, writing, play with phone, type on keyboard*, which stay at 42 to 56 percent per class accuracy even for strong skeleton models because they share near identical pose. Table S3 shows these classes remain badly under covered by split CP even at 0.767 head accuracy, and source Mondrian lifts each label free. The residual collapse thus persists across the tested backbones and heads, consistent with data intrinsic class heterogeneity that a stronger backbone does not remove and that class conditional calibration addresses directly.

S8 Generality beyond skeletons (CIFAR-100 under corruption shift)

The collapse and recovery is not specific to skeleton data. We reproduce it on a completely different modality, backbone, and shift type: **natural images** (CIFAR-100, 100 classes), a **CLIP ViT-L/14 zero shot** classifier [Radford et al., 2021] (no task training; one text classifier scores both domains), and a **corruption**

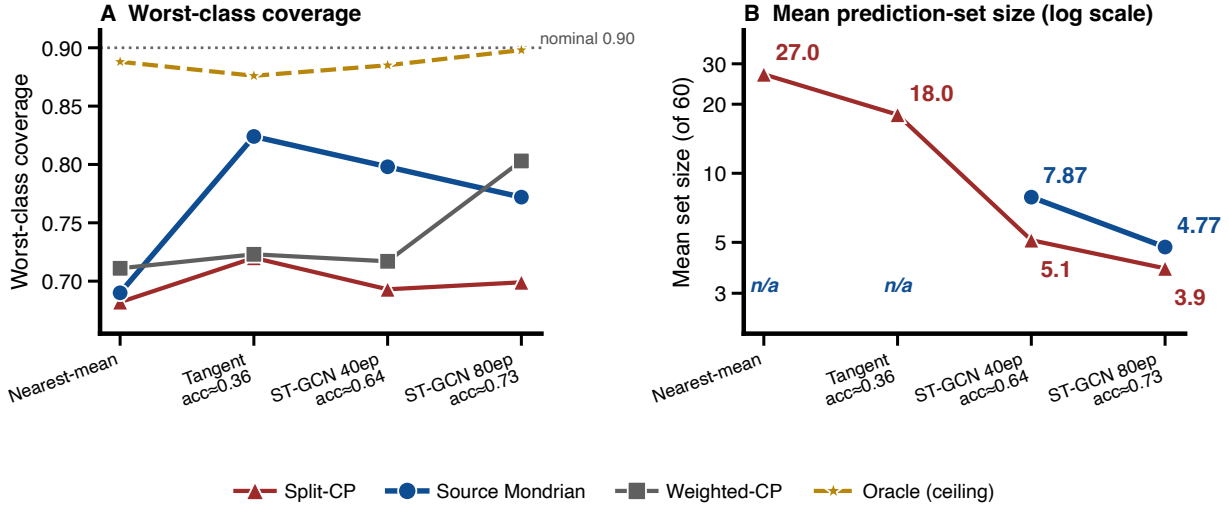


Figure S1: **[Real data, NTU-60 cross subject] Backbone sweep.** Worst-class per class coverage by method (Table S1). Representation and classifier vary jointly.

Table S3: **[Real data, NTU-60 cross subject, CTR-GCN head] Hard-class slice.** Per class target coverage for the four intrinsically confusable NTU actions, conformalizing CTR-GCN’s own softmax head (top-1 0.767). $\alpha=0.10$, 10 seeds. Split CP undercovers them even at high accuracy; source Mondrian recovers each label free.

Hard class	Split CP	Source Mondrian	Oracle
reading	0.558	0.821	0.908
writing	0.732	0.846	0.907
play with phone	0.719	0.835	0.915
type on keyboard	0.808	0.885	0.914

shift (Gaussian noise, source = clean, target = corrupted). Source Mondrian calibrates on source labels only; target labels are used for evaluation only, the same label free-on target protocol as our skeleton experiments.

The pattern is identical to NTU-60 (Table S4): split CP holds near nominal *marginal* coverage (0.916) while *per class* coverage collapses (worst class 0.601; 8% of classes below 0.80), and label free source Mondrian recovers it (worst class 0.601 $\rightarrow$ 0.784, severely undercovered classes 8% $\rightarrow$ 2%) while keeping marginal coverage on target (0.910) and a modest set size cost (+1.05). The recovery holds across the coverage regime: worst class 0.387 $\rightarrow$ 0.671 at $\alpha=0.10$ and 0.910 $\rightarrow$ 0.954 at $\alpha=0.01$. That the same marginal holds/per class collapses/label free-Mondrian-recovers structure appears on images with a vision language backbone, far from skeletons and SPD geometry, indicates the phenomenon is a property of class heterogeneous deployment shift in conformal prediction, not of the application.

S9 Pseudo-label efficiency ceiling: prediction powered per class calibration

Setup. The label complexity theorem (main paper) is a minimax statement: it treats a labeled audit set as the only source of information about $P_T(Y | X)$ and shows unlabeled target data cannot improve the rate at which it recovers per class coverage. In practice, however, the classifier under evaluation also supplies free pseudo labels on the unlabeled target pool, and PPI [Angelopoulos et al., 2023] is designed to exploit

Per-class coverage recovery (NTU-60 xsub, REAL)

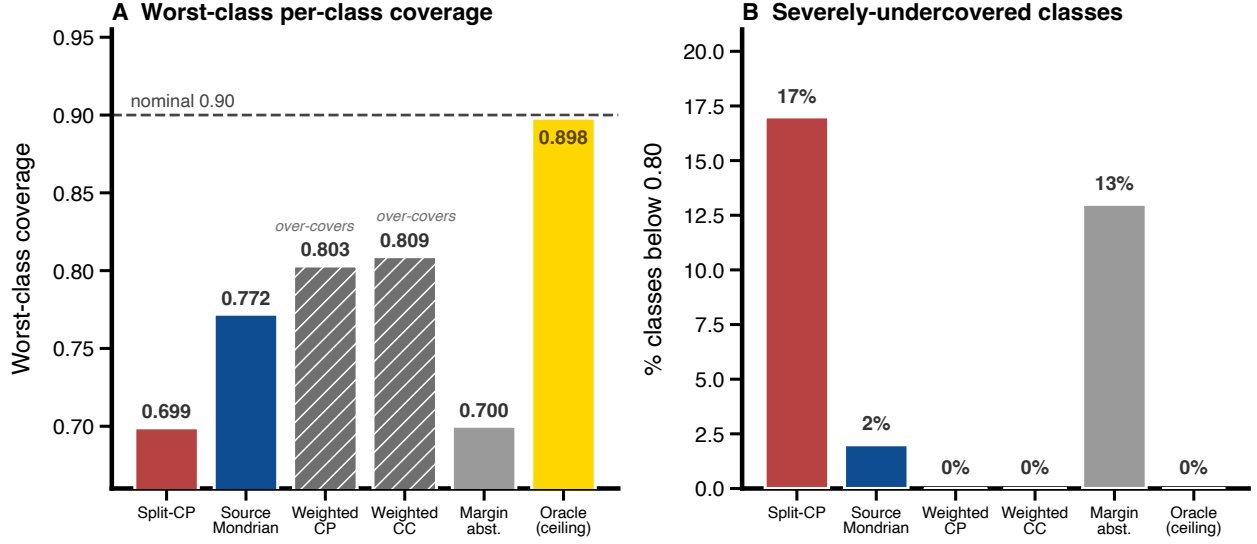


Figure S2: [Real data, NTU-60 cross subject] Worst-class coverage (left) and the percentage of classes below 0.80 coverage (right), by method (main paper recovery table). Source Mondrian is the efficient, near nominal marginal recoverer.

Table S4: [CIFAR-100, CLIP ViT-L/14 zero shot, corruption shift] Generality check. Source = clean, target = Gaussian-corrupted (target top-1 0.651). $\alpha=0.05$ (nominal 0.95), 10 seeds, 100 classes. Same collapse and recovery as the skeleton experiments, on a different modality and backbone. *Oracle needs target labels (ceiling).

Method	Marg. cov.	Worst-class	%<0.85	%<0.80	Mean size
Split CP (baseline)	0.916	0.601	17%	8%	5.73
Source Mondrian (ours, label free)	0.910	0.784	10%	2%	6.78
Target-oracle class cond. *	0.964	0.931	0%	0%	12.41

exactly this kind of correlated, cheap surrogate to debias an estimate using a small number of true labels. We test PPI as an alternative to Audit-Mondrian (main paper, label complexity section) for estimating the per class conformal quantile q_c^* at a fixed total labeled budget M split across classes, on two of the real backbone/dataset pairs used elsewhere in this supplement: NTU-60 cross subject with a CTR-GCN softmax head [Chen et al., 2021] (Section S7), and CIFAR-100 under corruption shift with CLIP zero shot [Radford et al., 2021] (Section S8).

Naive vs. PPI audit at matched budget. The naive audit uses only the m_c true labels per class (Audit-Mondrian). The PPI audit additionally uses the unlabeled pseudo labelled pool: it forms the per class quantile estimate as the naive audit estimate minus λ times (the pseudo label estimate on the audit indices minus the pseudo label estimate on the full unlabeled pool), for a tuning parameter λ , with $\lambda=1$ the standard, untuned, deployable choice [Angelopoulos et al., 2023]. We validate every configuration with a two layer guard: (i) an aggregate check, does the resulting worst class / %<0.80 summary get worse, and (ii) a same class check, does PPI newly break per class validity on a class the naive audit kept valid at the identical budget. Both layers flag harm below.

Table S5: **Real data. Oracle 2-D PPI++ label efficiency ceiling, per dataset.** Best case: oracle λ , infinite unlabeled pool, true target quantile; not a deployable estimator. “Collapsing” classes are those with split CP per class coverage < 0.80 . $\alpha=0.10$.

Metric	NTU-60 CTR-GCN	CIFAR-100-C / CLIP
K (classes)	60	100
$\bar{\rho}$ (mean pseudo label disagreement)	0.235	0.734
All classes: median gain	$1.07\times$	$1.01\times$
All classes: max gain	$3.36\times$	$1.06\times$
All classes: % gain $\geq 3\times$	2%	0%
Spearman(gain, $1-\rho$), all classes	0.96	0.79
Collapsing classes: n	8	97
Collapsing classes: median gain	$1.05\times$	$1.01\times$
Collapsing classes: max gain	$1.08\times$	$1.06\times$

The untuned estimator harms. At every labeled budget we test, $\lambda=1$ PPI is worse than the naive audit alone. On NTU-60 CTR-GCN, at total budget $M=300$ the worst decile per class coverage (the mean over the lowest ten percent of per class coverages, denoted cvar10) is 0.477 for PPI vs. 0.739 for naive; PPI newly breaks per class validity (undoes coverage the naive audit had achieved) on 39 classes (4 of them the intrinsically hard classes of Table S3) at $M=300$, and still on 15 classes (2 hard) at $M=600$. The measured per class quantile variance reduction ratio (median over classes, naive audit variance over PPI variance) is $0.44\times$ on NTU-60, i.e. PPI *increases* variance rather than reducing it, with Spearman correlation between this (harmful) ratio and classifier accuracy $1-\rho$ of 0.82. On CIFAR-100-C/CLIP the same pattern holds: variance ratio $0.47\times$, Spearman -0.59 , and PPI breaks per class validity at every budget we test, up to $M=4000$. Both failures are caught by our validity guard before any downstream use, this is why we do not recommend $\lambda=1$ PPI as a method, and why we instead ask what the best possible tuning could achieve.

The oracle ceiling: is the harm fixable by tuning λ ? The $\lambda=1$ harm could in principle be a tuning artifact rather than a structural limit. We therefore compute the best case directly: the oracle 2-D PPI++ label efficiency gain is $\text{gain} = 1/(1 - R^2)$, where R^2 is the squared multiple correlation of the naive per class quantile influence function with the 2-D span of pseudo label control variates (the pseudo label indicator $\mathbf{1}\{\hat{y} = c\}$ and the thresholded interaction $\mathbf{1}\{s(X, c) \leq q_c^*, \hat{y} = c\}$), evaluated at the oracle optimal λ , an unbounded unlabeled pool, and the true target quantile. This is the standard PPI++ efficiency identity [Angelopoulos et al., 2023] specialized to a scalar per class quantile target; gain ≥ 1 always, with equality when the pseudo label carries no information ($R^2 \rightarrow 0$). Because it assumes oracle tuning, an infinite unlabeled pool, and the (unknown, in deployment) true quantile, it is an asymptotic best case for this control span; a finite sample, tunable- λ estimator should not be expected to systematically exceed it, so the reported ceiling is, if anything, favorable to PPI, making the negative reading below conservative rather than overstated. We certify every reported number: 0 classes are non finite or skipped, and $\text{gain}_{\text{multi}} \geq \text{gain}_{\text{scalar}}$ holds for every class on both datasets (Table S5).

Mechanism. On both datasets, gain tracks classifier accuracy closely (Table S5): the pseudo label is a more informative control variate exactly where the classifier already agrees with the truth. Shift breaks this precisely on the classes whose per class coverage collapses, it decorrelates the pseudo label from the ground truth on those classes, so the 2-D control span the estimator relies on carries almost no signal ($R^2 \rightarrow 0$) where efficiency is needed most; the harder shifted CIFAR-100-C/CLIP setting has both a higher mean disagreement ($\bar{\rho}=0.734$ vs. 0.235) and a uniformly lower ceiling than NTU-60. The intrinsically confusable

Table S6: **[Real data, NTU-60 cross subject] α -sweep, worst class per class coverage.** Same cache and protocol as the main paper recovery table; mean over 10 seeds, 60 classes. *Oracle calibrates on target labels (not deployable; the ceiling).

α	Nominal	Split CP	Source-CC	Weighted CP	wCC	Oracle*
0.05	0.95	0.824	0.840	0.913	0.857	0.949
0.10	0.90	0.699	0.772	0.803	0.809	0.898
0.15	0.85	0.544	0.706	0.687	0.740	0.843
0.20	0.80	0.427	0.662	0.537	0.708	0.792

NTU actions (Table S3) illustrate this at the individual class level: reading ($\rho=0.71$) and writing ($\rho=0.68$) cap at $1.01\times$; play with phone ($\rho=0.45$) and type on keyboard ($\rho=0.41$) at $1.03\times$.

Reading. Two independent lines of evidence agree: the untuned, deployable PPI estimator actively harms, and the idealized, non deployable oracle ceiling shows this is not fixable by better tuning, on the classes where per class coverage collapses, no amount of λ -tuning or pool size manufactures efficiency the pseudo label does not carry. The result is an empirical measurement complementing, not superseding, the label complexity theorem (main paper): the theorem shows unlabeled data cannot help in the worst case over all consistent target laws; this experiment shows that, on two real shifts and two modalities, the single most favorable use of unlabeled data available in practice, the classifier’s own pseudo labels, does not help either, exactly where it would matter.

S10 Coverage-level (α) sweep

To test whether the per class collapse is an artifact of the single operating point $\alpha=0.10$, we sweep $\alpha \in \{0.05, 0.10, 0.15, 0.20\}$ on the same NTU-60 xsub ST-GCN (full) cache, no retraining, 10 seeds. Table S6 reports worst class per class coverage.

Finding. The collapse is not specific to $\alpha=0.10$: the split CP worst class to nominal gap grows monotonically from 0.13 ($\alpha=0.05$) to 0.37 ($\alpha=0.20$). Label free source Mondrian raises the worst class at every level, by +0.02, +0.07, +0.16, +0.24 as α increases, i.e. by more where the collapse is more severe, while its marginal coverage tracks split CP’s (both slightly below nominal: source 0.939/0.881/0.826/0.773 across the four levels). Weighted CP reaches higher worst class but only through marginal over coverage throughout (marginal 0.975/0.928/0.876/0.822 vs. nominal). The headline pattern is thus robust across the coverage regime.

S11 Cross-dataset shift (NTU $\rightarrow$ N-UCLA): full method breakdown

The main paper summarizes this cross sensor result; the full six method breakdown is in Table S7.

The geometry aware candidate’s diagnostic. The main text notes that a geometry aware label free candidate, which reweights per class quantiles by log Euclidean geodesic proximity to the target class means, also undercovers on this shift. The diagnostic behind that failure is as follows. Its importance weights keep an effective sample size of at least 68 percent of the calibration points on every class, so the reweighting itself is well behaved. Even so, its reweighted per class source quantiles, which range from 0.01 to 0.82

Table S7: **[Real data, NTU-60 $\rightarrow$ N-UCLA cross dataset] Recovery under a cross sensor shift.** $\alpha=0.10$, 10 seeds, five shared classes, target top-1 0.598. *Oracle needs target labels (ceiling). †Margin abstention’s CRC threshold also needs a labeled target pool.

Method	Marg. cov.	Worst-class	Mean size
Split CP (baseline)	0.501	0.000	0.72
Source Mondrian (ours, label free)	0.495	0.001	0.75
Weighted CP	0.968	0.837	4.57
Weighted class conditional	0.864	0.750	3.55
Margin abstention [†]	0.358	0.000	0.59
Target-oracle class cond. *	0.914	0.909	2.49

across classes, fall short of every target class threshold, which ranges from 0.78 to 1.00, by amounts between 0.18 and 0.97. Source true class scores are concentrated too low relative to the target, the support gap the impossibility result rests on.

S12 Synthetic Controlled Study: Full Details

All numbers and figures in this appendix are from a controlled synthetic SPD shift. They are mechanism illustrations only and should not be read as real data evidence.

The synthetic study uses a class conditional SPD generator: $K=5$ classes, 250 descriptors per class, $d=6$, in a *graded* regime (within class spread = shift strength = 0.3). We fix $\alpha=0.10$ and report two disjoint seed ranges (primary 0–9, held out 100–109) as $\text{mean} \pm \text{std}$. No hyperparameter is tuned to the outcome.

H1: Split CP undercovers (SYNTHETIC)

A source calibrated split CP threshold holds at nominal in distribution (source coverage 0.896/0.907) but undercovers the shifted target, dropping to 0.735/0.791 (Figure S4, Table S9). The shift is detectable, min distance AUROC 0.900/0.884, yet detectability does not buy safety: at 50% acceptance, selective coverage is only 0.757/0.825, below nominal. This is the “high OOD-AUROC $\neq$ safe selective classification” phenomenon [Khanal and Zhou, 2026] reproduced under a coverage lens.

H2: Geodesic score tightens in distribution sets (SYNTHETIC)

For reference: a *geodesic nonconformity score* $s(x, c) = d_{\text{LE}}(\varphi(x), M_c)$ (different from the LAC score used in the main results) yields tighter in distribution prediction sets than a Euclidean prototype score: 1.54/1.52 classes vs. 3.83/3.75 at matched ≈ 0.90 coverage, that is 2.29/2.23 classes smaller (Figure S3, Table S8). The geodesic score gives sets 0.52 classes *larger* than LAC (1.00/1.02), which exploits softmax sharpness on this low temperature backbone, a different mechanism. This result supports geodesic geometry for SPD but is not load bearing.

H3: Weighted CP restores marginal coverage, at a cost (SYNTHETIC)

Weighted exact CP restores marginal target coverage from 0.735/0.791 to 0.956/0.944 but inflates sets $\approx 4\times$ (Table S9, Figure S4). The marginal recipe does not recover (0.704/0.729). This illustrates why, on the real benchmark, weighted CP recovers marginal but not per class coverage efficiently.

Table S8: **Synthetic study. H2: mean prediction set size** at ≈ 0.90 coverage, 5 classes (lower is better). Mean $\pm$ std over seeds 0–9 / 100–109. Coverage in brackets. Synthetic setting: $K=5$, 250/class, $d=6$, in distribution (shift strength 0).

Score	Size (seeds 0–9)	Size (seeds 100–109)
Geodesic	1.54 $\pm$ 0.12 [0.90]	1.52 $\pm$ 0.07 [0.91]
Euclidean prototype	3.83 $\pm$ 0.19 [0.92]	3.75 $\pm$ 0.18 [0.91]
LAC	1.00$\pm$0.04 [0.90]	1.02$\pm$0.06 [0.91]
APS (non-rand.)	2.70 $\pm$ 0.12 [1.00]	2.72 $\pm$ 0.16 [1.00]
RAPS (non-rand.)	2.65 $\pm$ 0.09 [1.00]	2.64 $\pm$ 0.12 [1.00]

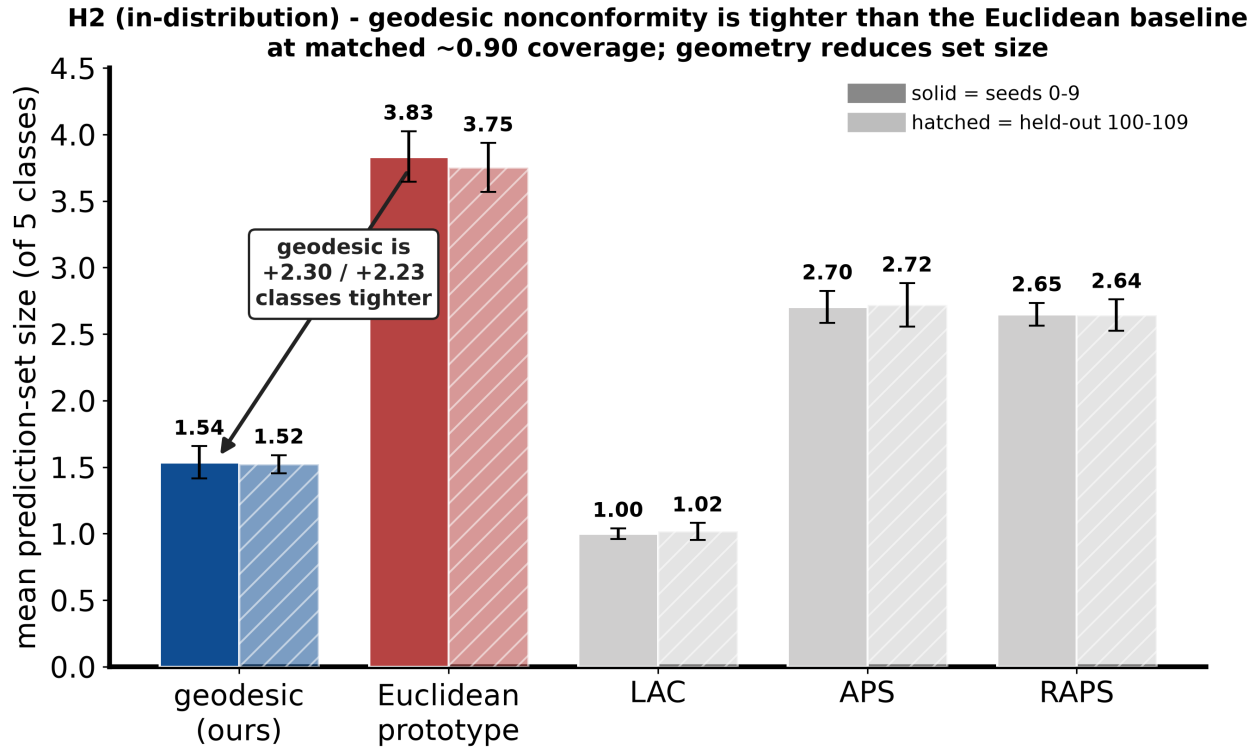


Figure S3: **Synthetic study. H2: geodesic vs. flat nonconformity scores, in distribution.** Geodesic sets are 2.29 classes smaller than the Euclidean prototype; LAC (smallest, using softmax sharpness) is 0.52 classes smaller than geodesic. Seeds 0–9 solid, 100–109 hatched. Synthetic setting: $K=5$, $d=6$, shift 0.

Table S9: **Synthetic study. H1/H3 coverage and size under shift** (nominal 0.90). Source split CP holds in distribution; target split CP undercovers; weighted exact restores marginal coverage but inflates sets $\approx 4\times$. Mean over seeds 0–9 / 100–109. Synthetic setting: $K=5$, 250/class, $d=6$, shift 0.3.

Method	Target coverage	Mean size
Source split CP (in distribution)	0.896 / 0.907	–
Target split CP (H1)	0.735 / 0.791	0.86 / 0.90
Weighted marginal	0.704 / 0.729	0.86 / 0.84
Weighted exact (H3)	0.956 / 0.944	3.63 / 3.80


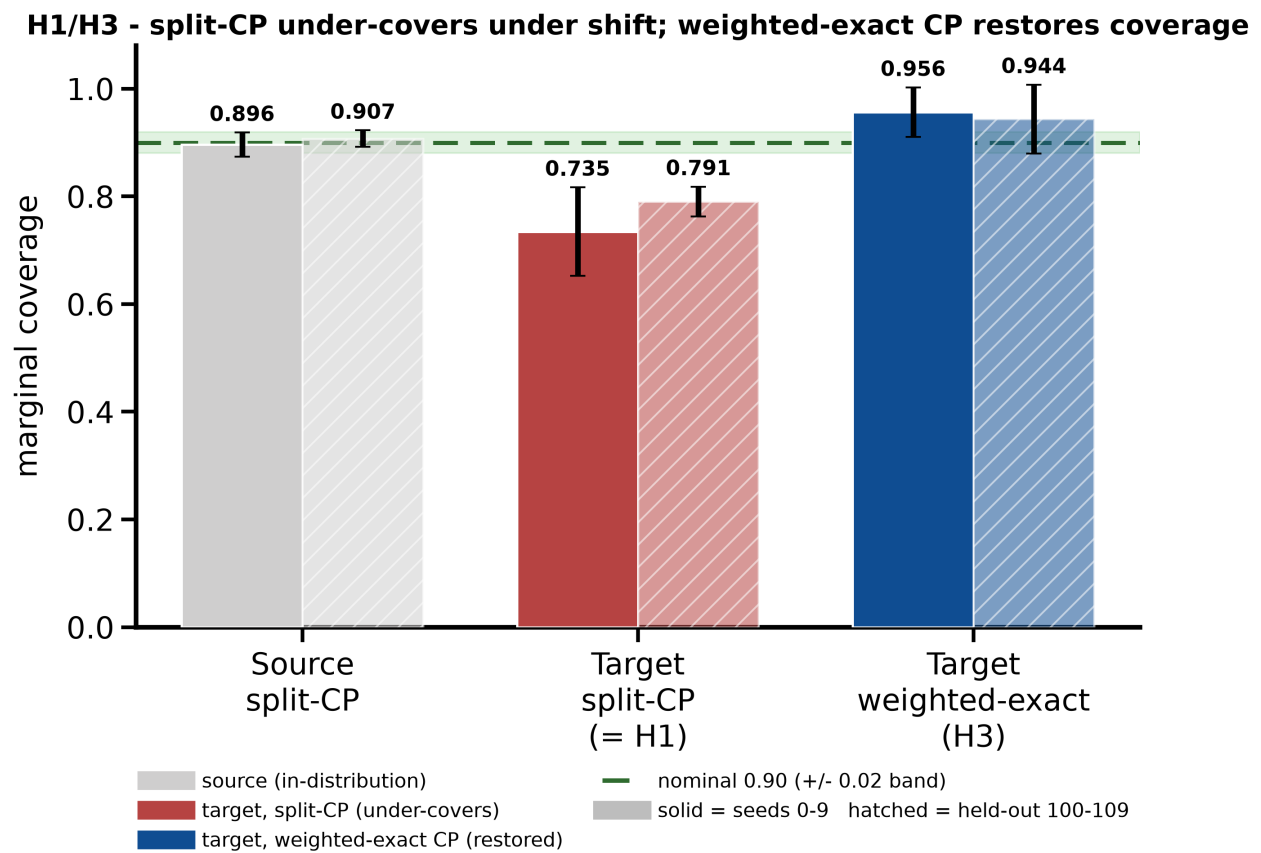


Figure S4: **Synthetic study. H1/H3 marginal coverage recovery.** Split CP undercovers target; weighted exact restores nominal. Solid = seeds 0–9, hatched = 100–109. Synthetic setting: $K=5$, $d=6$, shift 0.3.

Label-free abstention on the SPD manifold (synthetic): the margin tracks miscoverage; min-distance is an OOD trap

A Label-free signals on the SPD manifold

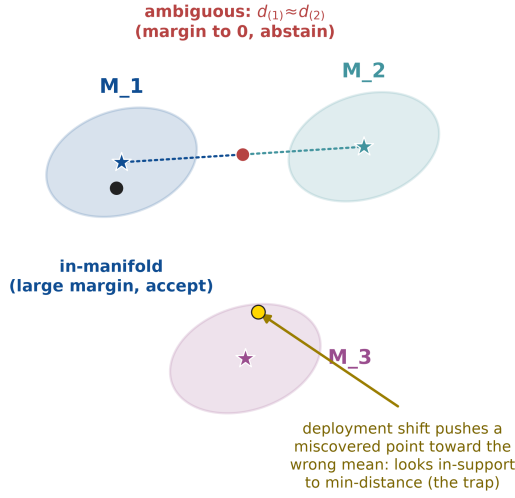

B Selective conformal pipeline

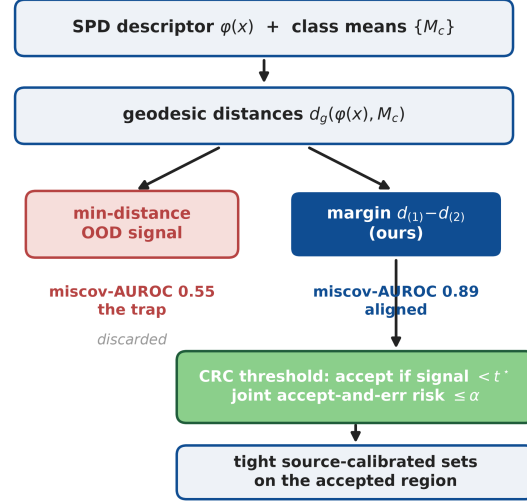


Figure S5: **Synthetic study. Margin abstention pipeline.** (A) Under synthetic congruence shift, a point inside a class manifold has a large margin magnitude (accept); an ambiguous point has margin $\rightarrow 0$ (abstain). Miscovered points look in support to OOD min distance but ambiguous to the margin, the OOD-AUROC trap. (B) Pipeline: geodesic distances to class means yield the two signals. Synthetic setting: $K=5$, shift 0.3.

H4: Margin abstention, negative control (SYNTHETIC)

H4 is a negative control: even given a labeled target pool to calibrate the abstention threshold, margin abstention does not address per class undercoverage.

The signal dichotomy on the synthetic shift. Figure S5 illustrates the mechanism. The min distance OOD score has high source versus target AUROC (0.898/0.881) but miscoverage AUROC of only 0.549/0.574, it ranks distributional outliers, not miscovered points. The geodesic margin has low source versus target AUROC (0.576/0.593) but miscoverage AUROC 0.895/0.894: on this synthetic shift, miscovered points are pushed toward the wrong class mean (small min distance) but look ambiguous (small margin), so the margin ranks miscovered points better (Figure S6).

The CRC operating point (requires labeled target pool). Setting the threshold by CRC (1) (using a labeled target pool) accepts 75%/82% of points, at conditional accepted coverage 0.869/0.885 ($<$ nominal; only the joint marginal risk is controlled, not conditional coverage) and accepted set size 0.948/0.961, $3.82 \times / 3.96 \times$ tighter than weighted exact's 3.63/3.80 (Table S10; Figures S8, S7). Joint risk mean $0.097/0.095 \leq \alpha + 0.01$, per seed max 0.130/0.125 (only the mean is guaranteed).

Synthetic H4 limitations. The geodesic margin's miscoverage AUROC (0.89) is comparable to, not above, a softmax confidence baseline (0.95), its value is being geometry aware, not beating softmax. The OOD-trap / margin contrast is shown on one synthetic shift family; class specific shifts and real backbones are untested. On the real NTU-60 benchmark, margin abstention does not reduce per class undercoverage even with this favorable synthetic shift mechanism operating (main paper recovery table).

Table S10: **Synthetic study. H4: signal diagnostics and CRC operating point** (seeds 0–9 / 100–109). CRC threshold calibrated on a *labeled target pool*; not deployable without target labels. Synthetic setting: $K=5$, $d=6$, shift 0.3.

Quantity	min distance (OOD)	geodesic margin
source versus target AUROC	0.898 / 0.881	0.576 / 0.593
miscoverage AUROC	0.549 / 0.574	0.895 / 0.894
<i>softmax (1–max prob.) miscoverage AUROC: 0.947 / 0.960</i>		
CRC point (margin; labeled target pool required):		
acceptance rate	0.754 / 0.820	
conditional accepted coverage	0.869 / 0.885 (< nominal)	
accepted set size	0.948 / 0.961	
joint risk (mean; per seed max)	0.097 / 0.095 ; 0.130 / 0.125	
set size gain vs. weighted exact	3.82× / 3.96×	

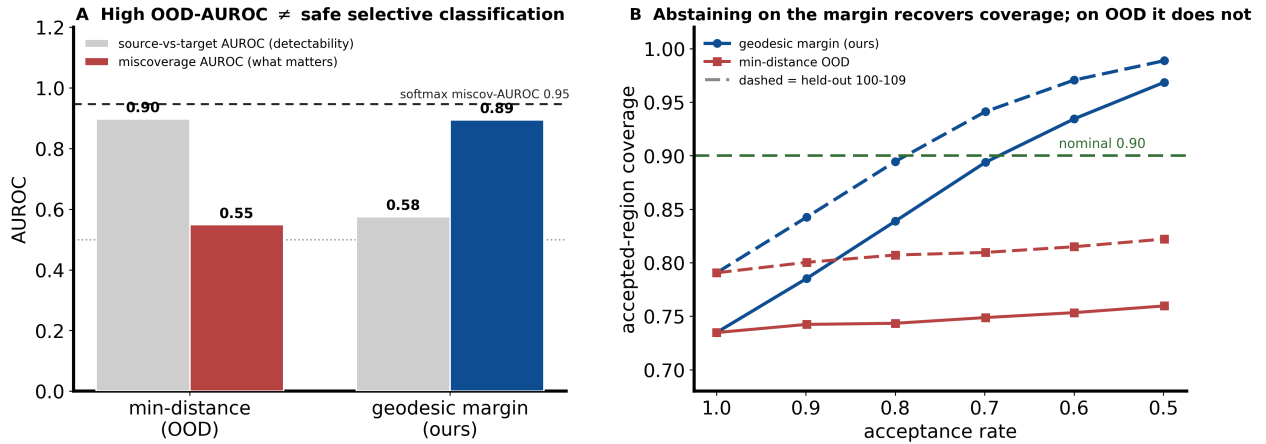


Figure S6: **Synthetic study. The OOD-AUROC trap.** (A) Min-distance: high OOD-AUROC, low miscoverage AUROC. Geodesic margin: reverse. (B) Abstaining on margin (blue) raises accepted coverage; abstaining on min distance (red) stays below nominal. Note: “past nominal” here refers only to a test label selected frontier, an oracle diagnostic that is not deployable, not to the CRC point (which gives 0.869/0.885 < nominal). Solid = seeds 0–9, dashed = 100–109. Synthetic setting: $K=5$, shift 0.3.

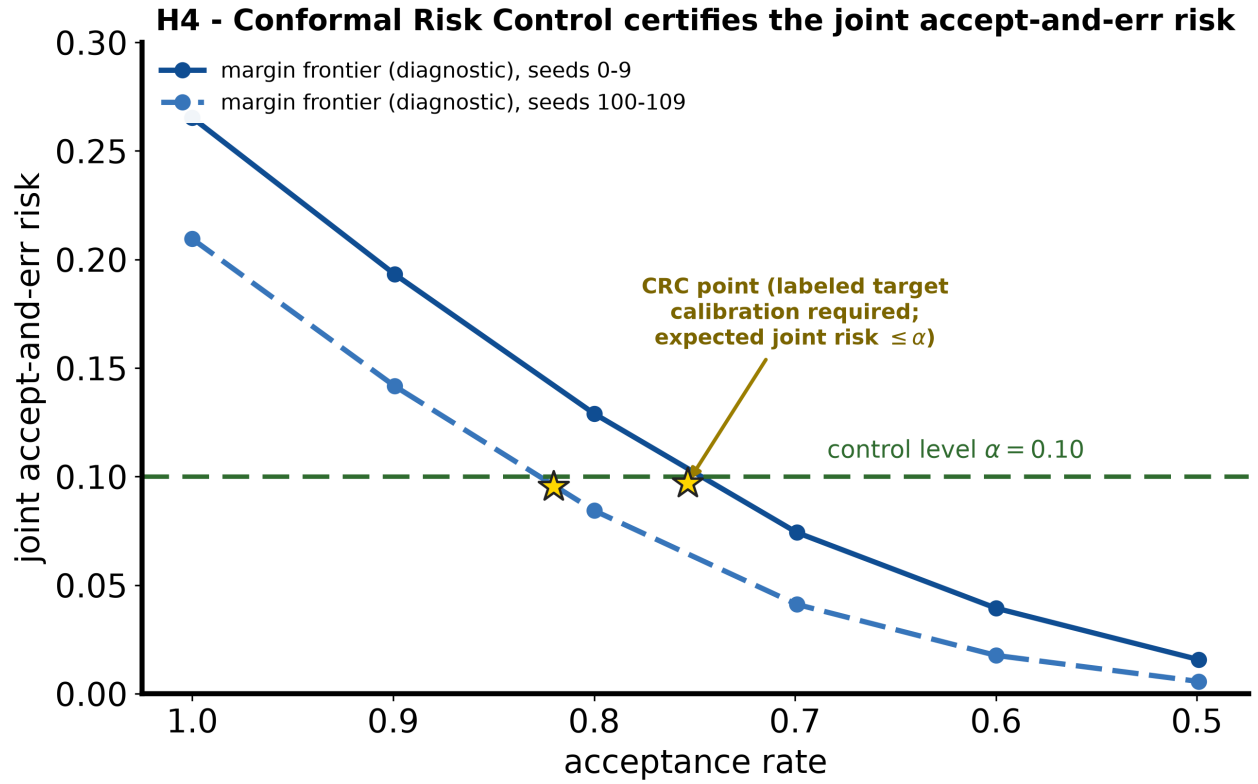


Figure S7: **Synthetic study. CRC certifies the joint risk.** Joint accept and err risk along the margin frontier vs. acceptance rate; CRC operating point (stars) at $\alpha=0.10$ control line. Threshold calibrated on labeled target pool. Synthetic setting: $K=5$, shift 0.3.

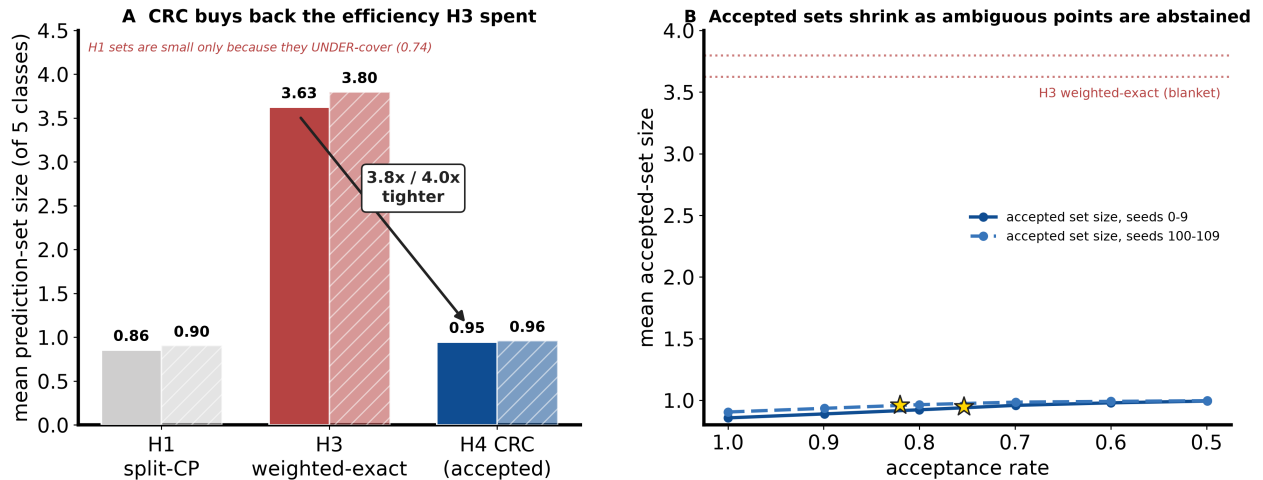


Figure S8: **Synthetic study. Accepted set size vs. acceptance rate.** (A) The CRC operating point achieves $3.82 \times / 3.96 \times$ smaller accepted sets than weighted exact, at the cost of abstaining on 24.6%/18.0% of points (acceptance 0.754/0.820). (B) Accepted set size along the margin frontier; the CRC point (star) is far below weighted exact's blanket size (dotted). Synthetic setting: $K=5$, shift 0.3.