

LoViF 2026 The First Challenge on Holistic Quality Assessment for 4D World Model (PhyScore): Methods and Results

Wei Luo[†] Yiting Lu[†] Xin Li[†] Haoran Li[†] Fengbin Guan[†]
 Chen Gao[†] Xin Jin[†] Yong Li[†] Zhibo Chen[†]
 Sijing Wu Kang Fu Yunhao Li Ziang Xiao Huiyu Duan
 Jing Liu Qiang Hu Xiongkuo Min Guangtao Zhai
 Manxi Sun Zixuan Guo Yun Li Ziyang Chen Manabu Tsukada
 Zhengyang Li Zhenglin Du Yi Wen Licheng Jiao Fang Liu Lingling Li
 Yiwen Ren Zhilong Song
 Dubing Chen Yucheng Zhou Tianyi Yan Huan Zheng

Abstract

This paper reports on the LoViF 2026 PhyScore challenge, a competition on holistic quality assessment of world-model-generated videos across both 2D and 4D generation settings. The challenge is motivated by a central gap in current evaluation practice: perceptual quality alone is insufficient to judge whether generated dynamics are physically plausible, temporally coherent, and consistent with input conditions. Participants are required to build a metric that jointly predicts four dimensions, i.e., Video Quality, Physical Realism, Condition-Video Alignment, and Temporal Consistency. Depart from that, participants also need to localize physical anomaly timestamps for fine-grained diagnosis.

The benchmark dataset contains 1,554 videos generated by seven representative world generative models, organized into three tracks (text-to-2D, image-to-4D, and video-to-4D) and spanning 26 categories. These categories explicitly cover physics-relevant scenarios, including dynamics, optics, and thermodynamics, together with diverse real-world and creative content. To ensure label reliability, scores and anomaly timestamps are produced through trained human annotation with an additional automated quality-control pass.

Evaluation is based on both score prediction and anomaly localization, with a composite protocol that com-

bines TimeStamp_IOU and SRCC/PLCC. This report summarizes the challenge design and provides method-level insights from submitted solutions.

1. Introduction

World models are evolving rapidly and are being adopted in increasingly broad scenarios, including content creation, virtual simulation, and embodied intelligence systems. A representative family in this line is the predictive generative model, which receives diverse conditions (e.g., text prompts, image prompts, or input videos) and predicts future scenes as outputs, such as video generation [1, 6, 21, 31, 36] 3D scene generation [7, 33, 37, 39] and 4D scene generation [2, 13, 18, 38, 44]. This trend pushes evaluation beyond appearance quality: a model’s understanding of the world should also be reflected in whether the generated evolution obeys physical regularities and remains coherent over time.

Evaluation practice has evolved in parallel with this generative progress. Traditional video quality assessment mainly focuses on perceptual quality in spatial and temporal domains, such as spatial fidelity and temporal stability [14, 20, 34, 35]. With the rise of AIGC, quality assessment has further incorporated condition consistency, measuring whether generated content aligns with prompts or other input conditions [16, 23, 24, 41]. Moving to world models, evaluation is shifting toward broader dimensions, including physical plausibility, temporal-causal coherence, assessment of generated 3D/4D content quality, and localized diagnosis of failure moments [10, 19, 25, 26, 30, 43]. This progression motivates a holistic evaluation protocol beyond appearance-only scoring.

[†]X. Li (xin.li@ustc.edu.cn), Y. Lu, W. Luo, H. Li, F. Guan, C. Gao, X. Jin, Y. Li, Z. Chen are challenge organizers.

Corresponding author: Zhibo Chen (chenzhibo@ustc.edu.cn)

Other authors are participants of this challenge.

The challenge homepage: <https://www.codabench.org/competitions/13622/>.

The LoViF 2026 workshop website: <https://lovif-cvpr2026-workshop.github.io/>.

Consequently, assessing world-model outputs cannot rely on visual fidelity alone. In realistic deployments, generated results are expected to be physically plausible, temporally coherent, and consistent with the provided conditions. Yet this remains difficult in practice: conventional perceptual metrics often miss subtle but critical physical violations (e.g., impossible interactions or inconsistent forces), and purely global scores provide limited diagnostic value when developers need to know where and when such violations occur.

To address this gap, we introduce the LoViF 2026 PhyScore challenge, a benchmark and competition on holistic quality assessment for 4D world model generated videos. Participants are required to design metric and reward models that predict four complementary dimensions: **VideoQuality** (visual fidelity), **PhysicalRealism** (physics adherence), **ConditionVideoAlignment** (consistency with input conditions), and **Consistency** (spatial-temporal coherence). In addition to score prediction, participants must identify **physical anomaly timestamps**, localizing time ranges where physical violations occur to enable fine-grained diagnosis.

The challenge dataset is curated to cover heterogeneous generation settings and includes **1,554** videos generated by **7** representative world/generative models. It spans three input modalities and corresponding tracks (text-2D, image-to-4D, and video-to-4D), and covers **26** categories ranging from real-world to creative scenarios. Importantly, physical categories explicitly include principles such as dynamics, optics, and thermodynamics, making the benchmark suitable for evaluating both perceptual quality and physics-related reasoning.

The evaluation protocol emphasizes not only predictive accuracy on the four quality dimensions, but also localization accuracy of anomaly timestamps. The final ranking combines correlation-based score quality and anomaly localization quality (IOU/SRCC/PLCC), encouraging methods that are both reliable and diagnostically informative. To ensure scientific rigor, reproducibility is mandatory for official ranking: top solutions must provide executable code and trained model weights (or equivalent artifacts) for verification.

This report summarizes the challenge setting, dataset construction, evaluation protocol, and performance of top-ranked solutions. We further analyze method trends and trade-offs observed on the leaderboard, highlighting practical insights for building physics-aware and generalizable assessment models for generative video systems.

This challenge is held with the LoViF Workshop, which contains a series of challenges: real-world all-in-one image restoration [8], efficient VLM for multimodal creative quality scoring [40], weather removal in videos [27], holistic

quality assessment for the 4D world model, and human-oriented semantic image quality assessment [22].

2. Challenge

The LoViF 2026 PhyScore challenge aims to advance holistic evaluation of videos generated by world models, including both 2D and 4D generative approaches. Participants are required to submit metric and reward models that can assess generated videos across four dimensions—**VideoQuality**, **PhysicalRealism**, **ConditionVideoAlignment**, and **Consistency**—and to localize **physical anomaly timestamps** where violations occur.

2.1. Datasets

The dataset is curated by the organizing committee and contains **1,554** generated videos in total. These videos are produced by **7 representative world generative models**, including CamI2V[44], Diffusion.as.Shader[13], ex4d[18], Recammaster[2], TrajectoryCrafter[38], HunyuanVideo[21] and others.

To comprehensively evaluate metric and reward models under heterogeneous generation settings, the dataset includes three input modalities: **text**, **image**, and **video**. Correspondingly, samples are organized into three model-type tracks: text-2D, image-to-4D, and video-to-4D.

The content spans **26 categories**, covering both physical and non-physical scenarios. In particular, the physical categories explicitly include **dynamics**, **optics**, and **thermodynamics**, each with both high-motion and low-motion cases. The remaining categories further broaden scene diversity with sports, games, movies, cartoons, egocentric views, and challenging environmental conditions such as rainy, foggy, and night scenes. Some thumbnails and multidimensional scores of the dataset are shown in Fig 1, 2, 3

Subjective Annotation Details. To ensure a high-quality benchmark, the ground-truth scores were collected through a rigorous subjective annotation process. We employed a specialized web-based annotation system. Four professional annotators were carefully trained with detailed scoring instructions before the task. They were asked to rate each video on a scale of 1 to 10 across the four dimensions: Video Quality, Physical Realism, Condition-Video Alignment, and Spatial-Temporal Consistency. Crucially, when evaluating Physical Realism, annotators were required to explicitly identify the specific time ranges (timestamps) where any physical violations occurred (e.g., "00:02-00:05").

After the initial human annotation phase, we performed an automated quality control pass. Specifically, we used the Gemini model to review the annotations, focusing on cases where there were inconsistencies between the given Physical Realism score and the annotated anomaly timestamps. This refinement step ensures that the temporal localization

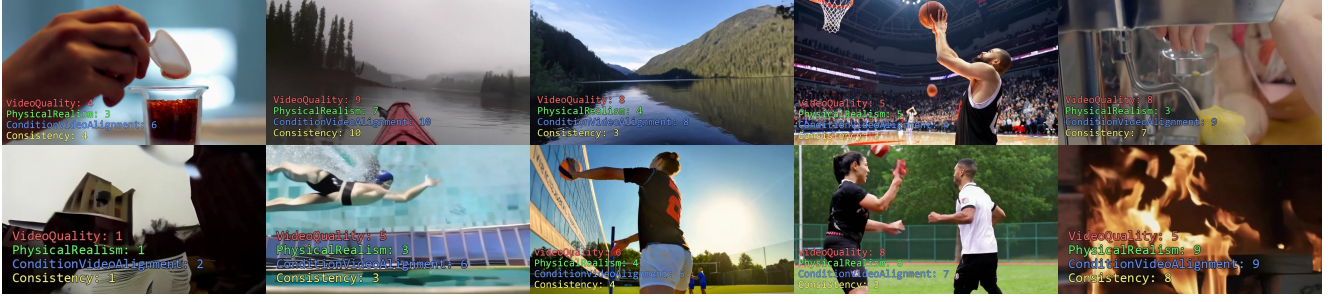


Figure 1. Thumbnails and multidimensional scores of 10 generated videos in the training set: example 1



Figure 2. Thumbnails and multidimensional scores of 10 generated videos in the training set: example 2

of physical violations strictly aligns with the corresponding holistic realism score, producing highly reliable labels for the challenge.

The released data is split into:

- **Train:** 863 videos with ground-truth annotations for the four dimension scores and anomaly timestamp labels.
- **Validation:** 298 videos (inputs only) for development and tuning.
- **Test:** 393 videos (inputs only) reserved for final evaluation.

2.2. Evaluation Protocol

For each test video, participants submit predicted scores for the four dimensions and an anomaly timestamp range (or None if no violation is present). The anomaly timestamp is used to compute the physical anomaly detection IoU (TimeStamp_IoU on the leaderboard). The overall ranking is based on a composite score that balances correlation with the ground truth scores and the anomaly localization quality:

$$\text{Final_Score} = 0.2 \times \text{IOU} + 0.4 \times \text{SRCC} + 0.4 \times \text{PLCC}, \quad (1)$$

where SRCC and PLCC are computed on the four dimension predictions (averaged across the four dimensions), and IOU is computed from the predicted anomaly timestamp ranges.

2.3. Challenge Phases

There are two phases in this challenge, *i.e.*, the development and testing phases. The details are as follows.

Development Phase: In the development phase, the training set (863 videos with ground truth) and the validation set (298 videos with inputs only) are provided. Participants can iteratively submit predictions to the validation server to tune their models. To encourage scientific rigor, participants are asked to prepare runnable code and model artifacts for later reproducibility verification.

Testing Phases: In the testing phase, the test set (393 videos with inputs only) is released for final evaluation. For official ranking and eligibility, participants must submit a factsheet and reproducible code/executable (e.g., Docker) for verification, consistent with the challenge rules on CodaBench. The final ranking is computed with Eq. 1.

3. Challenge Results

We have summarized the challenge results in Table 1. Overall, the leaderboard reflects diverse design choices for holistic evaluation. The top-ranked submission (SJTU-MM) achieves the best overall Final Score, driven by strong performance on **PhysicalRealism**, **Consistency**, and **TimeStamp_IoU**, while maintaining an efficient runtime. IHNI closely follows with consistently strong correlations across dimensions and competitive anomaly localization. Notably, different teams exhibit different strengths: zhilong achieves



Figure 3. Thumbnails and multidimensional scores of 10 generated videos in the training set: example 3

Table 1. Quantitative results on the PhyScore testing leaderboard (CodaBench). The best and second best values per column are highlighted in **red** and **blue**, respectively. For **ConditionVideoAlignment** (sorted ascending), **Runtime**, and **ExtraData**, lower is better as defined on the leaderboard. TimeStamp_IOU measures anomaly timestamp localization quality. The ranking index matches the numeric prefix of the corresponding team folder in this project.

Rank	Team	Final Score $\uparrow$	VideoQuality $\uparrow$	PhysicalRealism $\uparrow$	ConditionVideoAlignment $\downarrow$	Consistency $\uparrow$	TimeStamp_IOU $\uparrow$	Runtime [s] $\downarrow$	CPU[1]/GPU[0]	ExtraData[1]/No[0] $\downarrow$
1	SJTU_MM	0.532	0.457	0.497	0.582	0.519	0.607	12.0	0	1
2	IHNI	0.525	0.467	0.489	0.562	0.501	0.605	15.0	0	0
3	WDL	0.486	0.429	0.447	0.517	0.457	0.580	12.0	0	1
4	zhilong	0.484	0.478	0.417	0.528	0.460	0.536	12.0	0	1
5	DYTH	0.399	0.362	0.305	0.461	0.329	0.538	60.0	0	1

the best **VideoQuality** score, while DYTH obtains the lowest (best) **ConditionVideoAlignment** value as defined by the leaderboard sorting rule.

These results highlight key trade-offs in metric learning for world-model videos. Methods that emphasize physics-aware representations tend to benefit **PhysicalRealism** and anomaly timestamp localization, whereas specialized perceptual modeling can improve **VideoQuality**. In addition, runtime and extra-data usage further differentiate practical deployments, suggesting that effective holistic evaluators must balance accuracy, generalization, and efficiency.

3.1. Experimental Analysis

Drawing inspiration from recent short-form UGC video quality assessment challenges, we summarize several key findings and common practices from the submitted methods that lead to superior performance in holistic quality assessment for 4D world models.

1. Architectures and Feature Extractors: A majority of the participating teams utilize multi-branch architectures to capture different dimensions of video quality. Spatial features are frequently extracted using powerful backbones such as ConvNeXt or Swin Transformer, while temporal and motion distortions are captured via SlowFast networks or VideoMAE. Furthermore, the integration of Large Multi-Modality Models (LMMs) and foundational visual encoders has proven highly effective in aligning visual features with semantic and quality-aware representations, which is crucial for evaluating **ConditionVideoAlignment** and **VideoQuality**.

2. Physics-aware and Anomaly Localization Strate-

gies: Unlike traditional UGC video quality assessment, evaluating videos generated by 4D world models requires specialized modeling for physical realism and spatio-temporal consistency. Methods that explicitly incorporate physics-aware representations or optical flow modules tend to achieve better anomaly timestamp localization (**TimeStamp_IOU**) and higher **PhysicalRealism** scores. This indicates that tracking temporal dynamics and physical constraints is indispensable for holistic world-model evaluation.

3. Ensemble Methods and Training Strategies: Consistent with the findings in existing VQA challenges, ensemble strategies are widely adopted by the top teams to boost prediction accuracy and stability. Model ensembles across different network architectures or fusing model weights from different training epochs significantly enhance the robustness of the final predictions. Additionally, training tricks such as Exponential Moving Average (EMA), rank-aware loss optimization, and advanced data augmentation strategies are commonly utilized to prevent overfitting and ensure stable model convergence.

4. Extra Data and Pre-training: The employment of extra training data and pre-trained weights is prevalent among the leading submissions. Leveraging models pre-trained on large-scale natural or synthetic video datasets provides a strong prior for general video quality assessment. Specifically, utilizing additional datasets helps the models generalize better to the complex and diverse distortions generated by world models, thereby yielding more accurate predictions across the four evaluated dimensions.

5. Trade-offs between Accuracy and Efficiency:

These results highlight key trade-offs in metric learning for world-model videos. Methods that emphasize elaborate spatio-temporal tracking or physics-aware modules tend to benefit **PhysicalRealism** and anomaly localization, whereas specialized perceptual models directly improve **VideoQuality**. In addition, runtime and extra-data usage further differentiate practical deployments. As observed in the leaderboard, achieving a higher Final Score often involves increased computational complexity. This suggests that future effective holistic evaluators must balance accuracy, generalization, and computational efficiency for large-scale practical deployments.

4. Teams and Methods

4.1. SJTU_MM

This team proposed a method mainly utilizes multiple large multi-modal models (LMMs) and fine-tunes them on the training dataset. The whole framework is summarized in Figure 4 and it contains several steps: Data processing and augmentation (step I), Model selection and training (step II), and Score ensemble (step III).

Method Description. For step I, all videos are first uniformly sampled to 8 frames while preserving original resolutions, then expanded with higher-frame sampling (16 frames/video), four augmentations (brightness adjustment, temporal cropping, spatial cropping, and grid distortion), and resolution unification to fixed long-side resolutions (768 and 1440). For step II, the team uses Qwen3-VL-8B [3], Qwen2.5-VL-7B [4], InternVL3-38B [45], and UI-TARS-7B-SFT [28] as base LMMs to jointly predict video quality, physical realism, condition–video alignment, consistency, and timestamps. For step III, per-dimension score selection and averaging are applied to produce the final submission.

Training Information. The LMMs are fine-tuned with supervised fine-tuning (SFT) and low-rank adaptation (LoRA), optimizing the vision encoder, projector, and language model components. Training is implemented with MS-Swift [42] for 10 epochs. In parallel, the team trains FAST-VQA [34] specifically for the video-quality dimension and incorporates its predictions into the final ensemble.

Testing Information. During testing, predictions from multiple fine-tuned models are selectively fused for each evaluation dimension and then averaged for final outputs. According to the team factsheet, no extra challenge data is used beyond the official PhyScore setting.

4.2. IHNI

Method Description. IHNI proposes MOSAIC (*Multi-Observer Simulation via Adapter and Inference Configuration*) as Fig5, which emulates a panel of observers by combining heterogeneous adapter settings and con-

trolled inference temperatures. The method uses two vision-language backbones, VideoScore2 (Qwen2.5-VL-7B based) and Qwen3-VL-8B-Instruct [3, 15]. For each backbone, the team trains eight LoRA adapters, split into four 4dim adapters (for physical realism, condition–video alignment, consistency, and anomaly ranges) and four VQ adapters (video quality only), resulting in 16 adapters in total. Each adapter is queried at six temperatures ($T \in \{0.1, 0.2, 0.3, 0.4, 0.5, 0.6\}$), producing 96 prediction variants that provide complementary observer-like behaviors. For score fusion, PR/CA/CO predictions are aggregated by consistency-weighted rank averaging inspired by ITU-T P.910 [20], VQ is obtained by averaging VQ-specialist outputs, and anomaly ranges are generated from 4dim consensus with group-wise statistics and majority voting, followed by affine calibration.

Training Information. The team trains only on the official PhyScore training set (863 samples), without extra labeled data. LoRA configurations are diversified by rank and learning rate (ranks 64/128/256 with learning rates 1×10^{-4} or 5×10^{-5}), with dropout set to 0.05. Training runs for 3 epochs using AdamW (weight decay 0.01), cosine learning-rate decay, and 10% warmup, under bfloat16 precision. To match GPU memory constraints while keeping optimization stable, the per-step batch size is 1 and gradient accumulation is set to 16 (effective batch size 16). Input design is explicitly task-specific: the 4dim branch emphasizes temporal density (training fps sampled from [2.0, 6.0], inference at fps=4.0, max_pixels=129,600), whereas the VQ branch favors spatial fidelity (training fps sampled from [1.0, 3.0], inference at fps=2.0, max_pixels=360,000).

Testing Information. At inference, the full adapter-temperature pool is executed and fused in a task-aware manner: VQ predictions are averaged from VQ-specialist variants, PR/CA/CO are combined through consistency-weighted rank aggregation, and anomaly-related outputs are derived from 4dim consensus with group-wise statistics and majority voting before calibration. The factsheet reports a best test score of 0.525 (submission ID 649121), corresponding to second place, with per-metric values of 0.467 (video quality), 0.489 (physical realism), 0.562 (condition–video alignment), 0.501 (consistency), and 0.605 (timestamp IoU).

4.3. WDL

Method Description. WDL adopts a two-stage pipeline in Fig 6. First, a frozen InternVideo2 backbone [32] (Stage2, 1B-224p-f4) extracts 768-dimensional visual features from 8 uniformly sampled frames. Second, these features are concatenated with one-hot encodings of video *type* and generator *model name*, then fed into a lightweight multi-task head (*QualityHeadV2*, an MLP with LayerNorm and GELU) that contains three branches: 4D score regression,

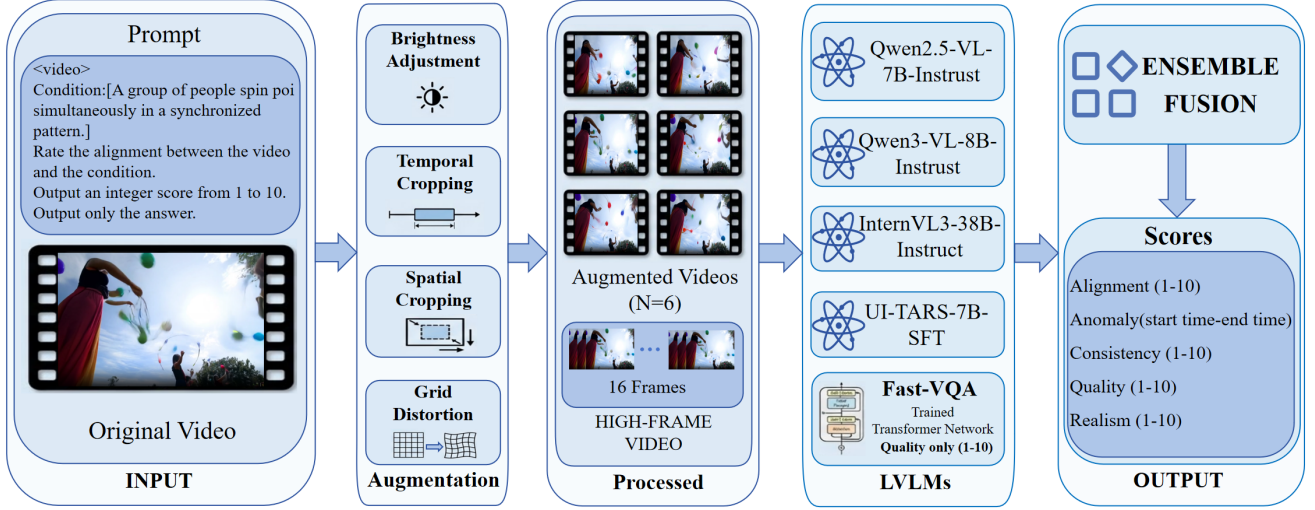


Figure 4. Overview of team SJTU-MM proposed method.

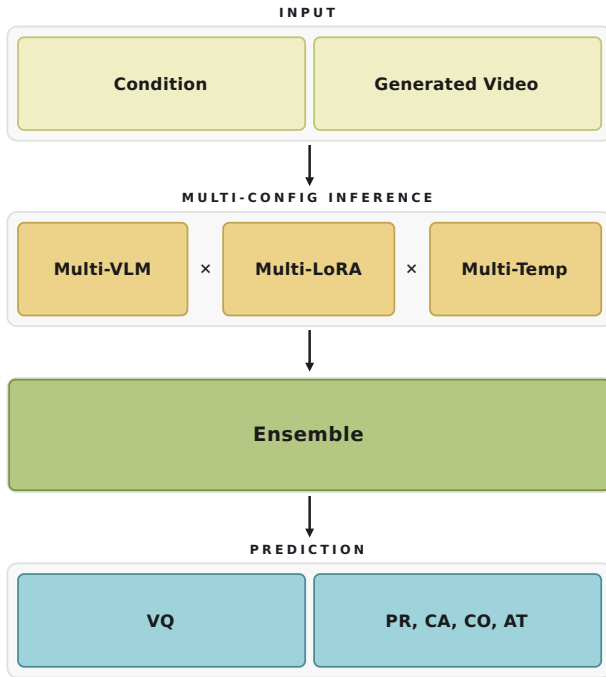


Figure 5. Overview of team INHI proposed method.

anomaly probability classification, and timestamp regression. The head outputs four quality scores, anomaly probability, and anomaly start/end timestamps.

Training Information. Training uses only official challenge data with no extra samples. The total loss is

$$\mathcal{L} = \mathcal{L}_{\text{score}} + 0.35 \mathcal{L}_{\text{prob}} + 0.40 \mathcal{L}_{\text{ts}},$$

where $\mathcal{L}_{\text{score}}$ is Huber loss on quality scores (VideoQual-

ity weighted by 1.8 and the other three dimensions by 1.0), $\mathcal{L}_{\text{prob}}$ is binary cross-entropy for anomaly probability, and $\mathcal{L}_{\text{ts}}$ is Smooth L1 loss for timestamps. Optimization uses AdamW with learning rate 3×10^{-4} and weight decay 10^{-4} , batch size 64, up to 220 epochs with early stopping patience 35. The team trains five models in 5-fold cross-validation, and monitors $\text{IoU} - 0.08 \times \text{MAE}$ as the early-stopping validation metric.

Testing Information. During inference, the five fold models are ensembled by arithmetic averaging of predictions, and no external data is used. The factsheet reports average validation composite score ≈ 0.420 and feature extraction speed of about 0.39 s per video. A public test leaderboard score is not provided in the official team factsheet.

4.4. zhilong

Method Description. Xidian University proposes a type-separated ensemble pipeline that keeps CLIP [29] frozen and combines deep features with hand-crafted statistics. The feature set includes frame-level CLIP embeddings, appearance statistics (e.g., brightness/contrast/saturation/sharpness), temporal descriptors (e.g., frame-difference energy and motion-related cues), and metadata-derived signals. For prediction, the team combines Random Forests [5], Extra Trees [12], Ridge regression [17], and histogram-based gradient boosting [11], with optional same-type k -NN refinement [9], plus a dedicated anomaly timestamp branch.

Training Information. The pipeline is trained and inferred separately for official data types (text-2D, image-4D, video-4D), which is a key design choice in this submission. The team reports 5-fold type-stratified cross-validation for hyperparameter selection and then retrain se-

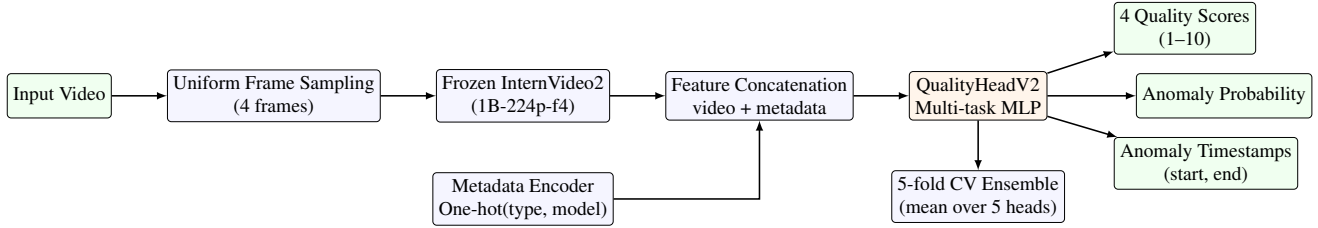


Figure 6. Overview of the WDL two-stage pipeline and multi-task outputs.

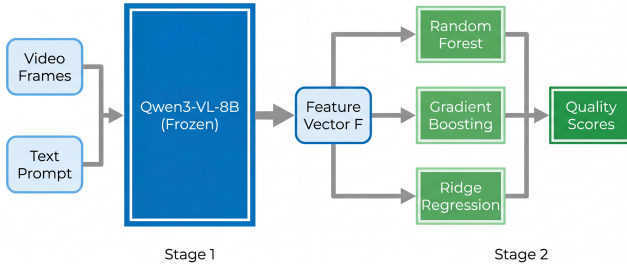


Figure 7. Overview of team DYTH proposed method.

lected settings on all official training data. No extra challenge data is used; external resources are limited to pre-trained CLIP weights.

Testing Information. The factsheet reports a public test score of 0.484 and a local cross-validation score of 0.4936 for the type-separated setting. Inference uses per-type models and an anomaly branch with post-hoc temporal correction based on motion dynamics.

4.5. DYTH

Method Description. DYTH proposes a decoupled pipeline where representation learning and regression are separated, shown as Fig 7. Qwen3-VL-8B-Instruct [3] is used as a frozen feature extractor: uniformly sampled keyframes are encoded jointly with text conditions, and penultimate hidden states are used as text-conditioned embeddings. A lightweight heterogeneous ensemble (Random Forest, Gradient Boosting, and Ridge) maps embeddings to five targets (four quality dimensions plus temporal IoU), followed by per-dimension averaging. Within the ensemble, Random Forest captures non-linear feature interactions, Gradient Boosting focuses on residual hard cases, and Ridge stabilizes linear trends to reduce extreme predictions.

Training Information. Only official competition data is used, and the VLM backbone remains frozen while lightweight prediction heads are trained. The team reports internal ablations over three system versions: Version 1 gives a baseline FinalScore of 0.3304, Version 2 improves alignment but causes a large PhysicalRealism drop (0.1249), and Version 3 (frozen backbone + heterogeneous ensemble) improves cross-metric balance. Detailed

optimizer-level hyperparameters are not provided in the official team factsheet.

Testing Information. The final submission follows the same frozen-backbone plus ensemble-head strategy at test time. According to the official team factsheet, the final submission reports 0.3616 (Video Quality), 0.3048 (Physical Realism), 0.4608 (Condition-Video Alignment), 0.3293 (Consistency), and 0.5380 (Temporal IoU), with FinalScore 0.3989.

Organizers

Title: LoViF 2026 The First Challenge on Holistic Quality Assessment for 4D World Model (PhyScore)@CVPR2026

Members:

Xin Li (xin.li@ustc.edu.cn),
Yiting Lu (luyt31415@mail.ustc.edu.cn),
Wei Luo (lw21@mail.ustc.edu.cn),
Haoran Li (lihr@mail.ustc.edu.cn),
Fengbin Guan (guanfb@mail.ustc.edu.cn),
Chen Gao (chgao96@tsinghua.edu.cn),
Xin Jin (jinxin@eitech.edu.cn),
Yong Li (liyong07@tsinghua.edu.cn),
Zhibo Chen (chenzhibo@ustc.edu.cn)

Website: <https://lovif-cvpr2026-workshop.github.io/>

Competition page: <https://www.codabench.org/competitions/13622/>

Participating Teams

SJTU_MM

Members: Sijing Wu, Kang Fu, Yunhao Li, Ziang Xiao, Huiyu Duan, Jing Liu, Qiang Hu, Xionguo Min, Guangtao Zhai

Affiliations: Shanghai Jiao Tong University; Tianjin University

IHNI

Members: Manxi Sun, Zixuan Guo, Yun Li, Ziyang Chen, Manabu Tsukada

Affiliations: Futian Lab; The University of Tokyo

WDL

Members: Zhengyang Li, Zhenglin Du, Yi Wen, Licheng Jiao, Fang Liu, Lingling Li

Affiliations: Xidian University

zhilong

Members: Yiwen Ren, Zhilong Song

Affiliations: Xidian University

DYTH

Members: Dubing Chen, Yucheng Zhou, Tianyi Yan, Huan Zheng

Affiliations: University of Macau

Acknowledgments

This work was supported by Grants of NSFC 62302246, 62371434, ZJNSFC LQ23F010008, Ningbo 2023Z237 & 2024Z284 & 2024Z289 & 2023CX050011 & 2025Z038 & 2025Z059, and supported by High Performance Computing Center at Eastern Institute of Technology and Ningbo Institute of Digital Twin, the Fundamental Research Funds for the Central Universities (No. WK2100250064) and ZGCA Project-C20250302.

References

- [1] Niket Agarwal, Arslan Ali, Maciej Bala, Yogesh Balaji, Erik Barker, Tiffany Cai, Prithvijit Chattopadhyay, Yongxin Chen, Yin Cui, Yifan Ding, et al. Cosmos world foundation model platform for physical ai. *arXiv preprint arXiv:2501.03575*, 2025. 1
- [2] Jianhong Bai, Menghan Xia, Xiao Fu, Xintao Wang, Lianrui Mu, Jinwen Cao, Zuozhu Liu, Haoji Hu, Xiang Bai, Pengfei Wan, et al. Recammaster: Camera-controlled generative rendering from a single video. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 14834–14844, 2025. 1, 2
- [3] Shuai Bai, Yuxuan Cai, Ruizhe Chen, Keqin Chen, Xionghui Chen, Zesen Cheng, Lianghao Deng, Wei Ding, Chang Gao, Chunjiang Ge, et al. Qwen3-vl technical report. *arXiv preprint arXiv:2511.21631*, 2025. 5, 7
- [4] Shuai Bai, Keqin Chen, Xuejing Liu, Jialin Wang, Wenbin Ge, Sibao Song, Kai Dang, Peng Wang, Shijie Wang, Jun Tang, Humen Zhong, Yuanzhi Zhu, Mingkun Yang, Zhao-hai Li, Jianqiang Wan, Pengfei Wang, Wei Ding, Zheren Fu, Yiheng Xu, Jiabo Ye, Xi Zhang, Tianbao Xie, Zesen Cheng, Hang Zhang, Zhibo Yang, Haiyang Xu, and Junyang Lin. Qwen2.5-vl technical report. *arXiv preprint arXiv:2502.13923*, 2025. 5
- [5] Leo Breiman. Random forests. *Machine Learning*, 45(1): 5–32, 2001. 6
- [6] Tim Brooks, Bill Peebles, Connor Holmes, Will DePue, Yu Guo, Li Jing, David Schnurr, Joe Taylor, Troy Luhman, Eric Luhman, et al. Video generation models as world simulators. *OpenAI*, 2024. 1
- [7] Luxi Chen, Zihan Zhou, Min Zhao, Yikai Wang, Ge Zhang, Wenhao Huang, Hao Sun, Ji-Rong Wen, and Chongxuan Li. Flexworld: Progressively expanding 3d scenes for flexible-view synthesis. *arXiv preprint arXiv:2503.13265*, 2025. 1
- [8] Xiang Chen, Hao Li, Jiangxin Dong, Jinshan Pan, Xin Li, et al. LoViF 2026 challenge on real-world all-in-one image restoration: Methods and results. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR) Workshops*, 2026. 2
- [9] Thomas Cover and Peter Hart. Nearest neighbor pattern classification. *IEEE Transactions on Information Theory*, 13(1): 21–27, 1967. 6
- [10] Haoyi Duan, Hong-Xing Yu, Sirui Chen, Li Fei-Fei, and Jiajun Wu. Worldscore: A unified evaluation benchmark for world generation. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 27713–27724, 2025. 1
- [11] Jerome H. Friedman. Greedy function approximation: A gradient boosting machine. *The Annals of Statistics*, 29(5): 1189–1232, 2001. 6
- [12] Pierre Geurts, Damien Ernst, and Louis Wehenkel. Extremely randomized trees. *Machine Learning*, 63(1):3–42, 2006. 6
- [13] Zekai Gu, Rui Yan, Jiahao Lu, Peng Li, Zhiyang Dou, Chenyang Si, Zhen Dong, Qifeng Liu, Cheng Lin, Ziwei Liu, et al. Diffusion as shader: 3d-aware video diffusion for versatile video generation control. In *Proceedings of the Special Interest Group on Computer Graphics and Interactive Techniques Conference Conference Papers*, pages 1–12, 2025. 1, 2
- [14] Fengbin Guan, Zihao Yu, Yiting Lu, Xin Li, and Zhibo Chen. Internvqa: Advancing compressed video quality assessment with distilling large foundation model. In *2025 IEEE International Symposium on Circuits and Systems (ISCAS)*, pages 1–5. IEEE, 2025. 1
- [15] Xuan He, Dongfu Jiang, Ping Nie, Minghao Liu, Zhengxuan Jiang, Mingyi Su, Wentao Ma, Junru Lin, Chun Ye, Yi Lu, et al. Videoscore2: Think before you score in generative video evaluation. *arXiv preprint arXiv:2509.22799*, 2025. 5
- [16] Jack Hessel, Ari Holtzman, Maxwell Forbes, Ronan Le Bras, and Yejin Choi. Clipscore: A reference-free evaluation metric for image captioning. In *Proceedings of the 2021 conference on empirical methods in natural language processing*, pages 7514–7528, 2021. 1
- [17] Arthur E. Hoerl and Robert W. Kennard. Ridge regression: Biased estimation for nonorthogonal problems. *Technometrics*, 12(1):55–67, 1970. 6
- [18] Tao Hu, Haoyang Peng, Xiao Liu, and Yuewen Ma. Ex-4d: Extreme viewpoint 4d video synthesis via depth watertight mesh. *arXiv preprint arXiv:2506.05554*, 2025. 1, 2
- [19] Ziqi Huang, Yinan He, Jiashuo Yu, Fan Zhang, Chenyang Si, Yuming Jiang, Yuanhan Zhang, Tianxing Wu, Qingyang Jin, Nattapol Chanpaisit, et al. Vbench: Comprehensive benchmark suite for video generative models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 21807–21818, 2024. 1
- [20] International Telecommunication Union. Subjective video quality assessment methods for multimedia applications.

- Technical Report P.910, ITU-T, 2023. Recommendation ITU-T P.910 (10/23). 1, 5
- [21] Weijie Kong, Qi Tian, Zijian Zhang, Rox Min, Zuozhuo Dai, Jin Zhou, Jiangfeng Xiong, Xin Li, Bo Wu, Jianwei Zhang, et al. Hunyuanvideo: A systematic framework for large video generative models. *arXiv preprint arXiv:2412.03603*, 2024. 1, 2
- [22] Xin Li, Daoli Xu, Wei Luo, Guoqiang Xiang, Haoran Li, Chengyu Zhuang, Zhibo Chen, Jian Guan, and Weipin-gang others Li. LoViF 2026 the first challenge on human-oriented semantic image quality assessment: Methods and results. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR) Workshops*, 2026. 2
- [23] Yiting Lu, Xin Li, Bingchen Li, Zihao Yu, Fengbin Guan, Xinrui Wang, Ruling Liao, Yan Ye, and Zhibo Chen. Aigc-vqa: A holistic perception metric for aigc video quality assessment. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 6384–6394, 2024. 1
- [24] Yiting Lu, Xin Li, Yajing Pei, Kun Yuan, Qizhi Xie, Yunpeng Qu, Ming Sun, Chao Zhou, and Zhibo Chen. Kvq: Kwei video quality assessment for short-form videos. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 25963–25973, 2024. 1
- [25] Yiting Lu, Wei Luo, Peiyan Tu, Haoran Li, Hanxin Zhu, Zihao Yu, Xingrui Wang, Xinyi Chen, Xinge Peng, Xin Li, et al. 4dworldbench: A comprehensive evaluation framework for 3d/4d world generation models. *arXiv preprint arXiv:2511.19836*, 2025. 1
- [26] Fanqing Meng, Jiaqi Liao, Xinyu Tan, Quanfeng Lu, Wenqi Shao, Kaipeng Zhang, Yu Cheng, Dianqi Li, and Ping Luo. Towards world simulator: Crafting physical commonsense-based benchmark for video generation. In *International Conference on Machine Learning*, pages 43781–43806. PMLR, 2025. 1
- [27] Chenghao Qian, Xin Li, Yeying Jin, Shangquan Sun, et al. LoViF 2026 the first challenge on weather removal in videos. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR) Workshops*, 2026. 2
- [28] Yujia Qin, Yining Ye, Junjie Fang, Haoming Wang, Shihao Liang, Shizuo Tian, Junda Zhang, Jiahao Li, Yunxin Li, Shijue Huang, et al. Ui-tars: Pioneering automated gui interaction with native agents. *arXiv preprint arXiv:2501.12326*, 2025. 5
- [29] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *International conference on machine learning*, pages 8748–8763. PmLR, 2021. 6
- [30] Yu Shang, Zhuohang Li, Yiding Ma, Weikang Su, Xin Jin, Ziyu Wang, Lei Jin, Xin Zhang, Yinzhou Tang, Haisheng Su, et al. Worldarena: A unified benchmark for evaluating perception and functional utility of embodied world models. *arXiv preprint arXiv:2602.08971*, 2026. 1
- [31] Kuaishou Technology. Kling: A powerful world model for video generation. 2024. 1
- [32] Yi Wang, Kunchang Li, Yizhuo Li, Yanan He, Bei Liu, Zhen Zhou, Jiannan Chen, Yi Zhou, Ziyu Wang, Chen Xiao, et al. Internvideo: General video foundation models via generative and discriminative learning. *arXiv preprint arXiv:2212.03191*, 2022. 5
- [33] Zhouxia Wang, Ziyang Yuan, Xintao Wang, Yaowei Li, Tianshui Chen, Menghan Xia, Ping Luo, and Ying Shan. Motionctrl: A unified and flexible motion controller for video generation. In *ACM SIGGRAPH 2024 Conference Papers*, pages 1–11, 2024. 1
- [34] Haoning Wu, Chaofeng Chen, Jingwen Hou, Liang Liao, Annan Wang, Wenxiu Sun, Qiong Yan, and Weisi Lin. Fastvqa: Efficient end-to-end video quality assessment with fragment sampling. In *European conference on computer vision*, pages 538–554. Springer, 2022. 1, 5
- [35] Haoning Wu, Erli Zhang, Liang Liao, Chaofeng Chen, Jingwen Hou, Annan Wang, Wenxiu Sun, Qiong Yan, and Weisi Lin. Exploring video quality assessment on user generated contents from aesthetic and technical perspectives. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 20144–20154, 2023. 1
- [36] Zhuoyi Yang, Jiayan Teng, Wendi Zheng, Ming Ding, Shiyu Huang, Jiazheng Xu, Yuanming Yang, Wenyi Hong, Xiaohan Zhang, Guanyu Feng, et al. Cogvideox: Text-to-video diffusion models with an expert transformer. *arXiv preprint arXiv:2408.06072*, 2024. 1
- [37] Hong-Xing Yu, Haoyi Duan, Junhwa Hur, Kyle Sargent, Michael Rubinstein, William T Freeman, Forrester Cole, Deqing Sun, Noah Snively, Jiajun Wu, et al. Wonderjourney: Going from anywhere to everywhere. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 6658–6667, 2024. 1
- [38] Mark Yu, Wenbo Hu, Jinbo Xing, and Ying Shan. Trajectorycrafter: Redirecting camera trajectory for monocular videos via diffusion models. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 100–111, 2025. 1, 2
- [39] Wangbo Yu, Jinbo Xing, Li Yuan, Wenbo Hu, Xiaoyu Li, Zhipeng Huang, Xiangjun Gao, Tien-Tsin Wong, Ying Shan, and Yonghong Tian. Viewcrafter: Taming video diffusion models for high-fidelity novel view synthesis. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 2025. 1
- [40] Jusheng Zhang, Qinhan Lyu, Sizhuo Ma, Sheng Cao, Jian Wang, Xin Li, Keze Wang, Yongsun Zheng, Jing Yang, et al. The 1st LoViF challenge on efficient vlm for multimodal creative quality scoring: Methods and results. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR) Workshops*, 2026. 2
- [41] Zicheng Zhang, Ziheng Jia, Haoning Wu, Chunyi Li, Zijian Chen, Yingjie Zhou, Wei Sun, Xiaohong Liu, Xiongkuo Min, Weisi Lin, et al. Q-bench-video: Benchmark the video quality understanding of llms. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pages 3229–3239, 2025. 1
- [42] Yuze Zhao, Jintao Huang, Jinghan Hu, Xingjun Wang, Yunlin Mao, Daoze Zhang, Zeyinzi Jiang, Zhikai Wu, Baole Ai,

- Ang Wang, et al. Swift: a scalable lightweight infrastructure for fine-tuning. In *Proceedings of the AAAI Conference on Artificial Intelligence*, pages 29733–29735, 2025. [5](#)
- [43] Dian Zheng, Ziqi Huang, Hongbo Liu, Kai Zou, Yinan He, Fan Zhang, Lulu Gu, Yuanhan Zhang, Jingwen He, Wei-Shi Zheng, et al. Vbench-2.0: Advancing video generation benchmark suite for intrinsic faithfulness. *arXiv preprint arXiv:2503.21755*, 2025. [1](#)
- [44] Guangcong Zheng, Teng Li, Rui Jiang, Yehao Lu, Tao Wu, and Xi Li. Cami2v: Camera-controlled image-to-video diffusion model. *arXiv preprint arXiv:2410.15957*, 2024. [1](#), [2](#)
- [45] Jinguo Zhu, Weiyun Wang, Zhe Chen, Zhaoyang Liu, Shenglong Ye, Lixin Gu, Hao Tian, Yuchen Duan, Weijie Su, Jie Shao, et al. Internv13: Exploring advanced training and test-time recipes for open-source multimodal models. *arXiv preprint arXiv:2504.10479*, 2025. [5](#)