

HAM-VLN: Harnessing Hierarchical Agentic Memory for Zero-Shot Vision-and-Language Navigation

An Liu¹, Bingxi Liu^{2,3}, Hongyu Ding^{1,4}, Yixuan Jiang^{1,4}, Yaran Chen⁵, Fulin Tang^{1*}, Cong Leng⁶,
Hong Zhang², Jian Cheng¹

¹Institute of Automation, Chinese Academy of Sciences, Beijing, China

²Southern University of Science and Technology, Shenzhen, China

³Pengcheng Laboratory, Shenzhen, China

⁴Nanjing University, Nanjing, China

⁵Xi'an Jiaotong-Liverpool University, Suzhou, China

⁶MAICRO, Nanjing, China

{liuan2026@ia, tangfulin2015@ia, jcheng@nlpr.ia}.ac.cn, {12231061, hzhang}@sustech.edu.cn,

{hongyuding, yixuanjiang}@smail.nju.edu.cn, Yaran.Chen@xjtlu.edu.cn, lengcong@airia.cn

Abstract

Vision-and-language navigation (VLN) enables robots to follow instructions in previously unseen environments. Recently, a training-free paradigm has emerged: the robot queries a multimodal LLM to understand its observations and plan the next action. However, long-horizon navigation based on either image streams or dense map inevitably introduces a growing memory and reasoning bottleneck. We present HAM-VLN, a decision-coupled, agent-authored memory that equips the robot with a persistent, depth-grounded world graph. In the same model call used to select the next action, HAM-VLN also records semantic and reflective information—including room type, objects, navigation progress, and failure notes. Recent waypoints remain verbatim within a bounded window, while older history re-enters the context only through retrieval scored by relevance, recency, and salience, together with one-hop topological expansion. This design requires no additional LLM calls beyond the per-waypoint decision. Compared to previous methods, HAM-VLN not only improves various navigation metrics but also reduces the context length by more than 65%. Specifically, HAM-VLN achieves 61.0% Success Rate (SR) on VLN-CE R2R, 52.7% SR on VLN-CE RxR, and 79.7% SR on HM3D-v2 ObjectNav without any training.

1 Introduction

Vision-and-Language Navigation (VLN) asks a robot to follow a natural-language instruction through an unseen environment and stop at the intended location or object (Anderson et al. 2018b; Krantz et al. 2020; Gu et al. 2022). Multimodal large language models (MLLMs) can provide the robot with agentic reasoning without any training: at each waypoint, the robot uses a model to understand its observation and choose the next action (Zhou, Hong, and Wu 2024). However, each model call can reason only over the information presented to it. Over a long trajectory, later decisions need to know where the robot has been, how the instruction has progressed, and which branches have failed. Providing this information without continually expanding the context is the memory bottleneck.

*Corresponding authors.

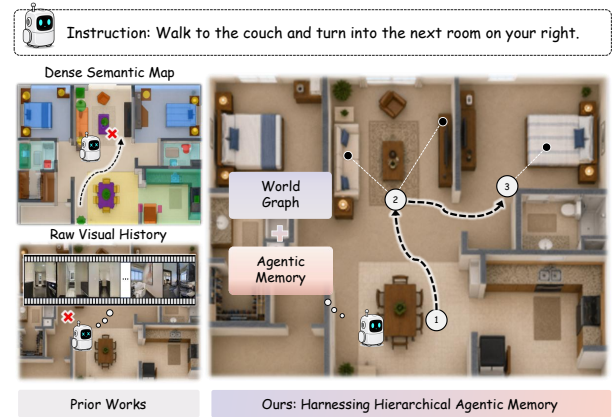


Figure 1: Prior systems (left) present navigation history through either a *dense semantic map*, whose storage grows with area, or the *raw visual history*, whose context grows with the trajectory. HAM-VLN (right) stores long-term navigation history in a depth-grounded world graph and uses hierarchical agentic memory to determine what remains in context and what is retrieved for each decision.

There are two common representations of navigation history in zero-shot VLN. **Dense semantic maps** store tensors aligned to pixels or voxels (Chaplot et al. 2020). Their size grows with the mapped area, and their contents—whether closed-category labels or open-vocabulary features (Huang et al. 2023)—are built separately from the navigation decision. Instructions such as “the table in the bedroom” or “the hallway toward the kitchen” must then be matched to metric cells. **Raw visual histories** instead append past panoramas to the model context. Important landmarks become buried in other visual details, context grows at every step, and a past dead end is not marked as a branch to avoid. Both make past observations available, but the MLLM does not decide what to retain for later decisions.

HAM-VLN brings agentic memory into the robot’s nav-

igation loop. It keeps observations from the most recent K waypoints in working memory and stores older experience in a depth-grounded world graph. When the MLLM selects the robot’s high-level action, the same call records place semantics, observed objects, instruction progress, and failure evidence. For each subgoal, a local encoder ranks places by relevance, recency, and salience, and HAM-VLN includes their topological neighbors. This design adapts the memory principles of generative agents (Park et al. 2023) by linking memory to the robot’s spatial experience and current subgoal.

Our contributions are as follows:

1. **A world graph for robot navigation.** We represent navigation history as a graph of places and objects located using depth, with edges that record topology. The graph grows with the places and objects discovered by the robot rather than with the mapped area, while preserving spatial and semantic information for navigation.
2. **Hierarchical agentic memory.** The MLLM call selects the robot’s action and records semantic state and failure notes. Working, episodic, semantic, and reflection views determine what remains in context, what is retrieved, and how failure evidence is reused, without extra LLM calls for memory maintenance.
3. **Results and memory efficiency.** Without any training, the same configuration reaches 61.0% and 52.7% success on R2R-CE and RxR-CE, respectively, and 79.7% success on HM3D-v2 ObjectNav. On R2R-CE, HAM-VLN improves all four navigation metrics over full raw history while reducing per-episode context by 67%.

2 Related Work

Vision-and-Language Navigation. Vision-and-Language Navigation (VLN) requires a robot to follow a natural-language instruction through a previously unseen environment (Anderson et al. 2018b; Krantz et al. 2020). While trained navigators learn temporal representations from navigation trajectories (Fang et al. 2019; Zhang et al. 2024; Wei et al. 2026b), recent zero-shot VLN methods use pretrained MLLMs to decompose instructions, reason over observations, refine plans, and select actions (Zhou, Hong, and Wu 2024; Long et al. 2025; Chen et al. 2025; Ding et al. 2026a). Zero-shot navigators must therefore expose trajectory state through observations, summaries, maps, or external memory. Over long trajectories, preserving visited places, instruction progress, and failed exploration without continually expanding the planning context becomes a central challenge.

Agentic Memory and Reflection. Long-horizon LLM agents address decision continuity by externalizing past experience into persistent memory. Generative agents organize a memory stream through relevance, recency, and importance, together with reflection over accumulated experience (Park et al. 2023); MemGPT manages bounded model context through external memory (Packer et al. 2023), while Reflexion retains verbal feedback from unsuccessful attempts to guide later behavior (Shinn et al. 2023). Embodied navigation adds a spatial requirement to this process. A useful

memory must preserve where objects were observed, how visited regions connect, how the instruction has progressed, and where previous decisions failed.

Grounded Memory for Embodied Navigation. Navigation systems provide history to the planner through representations with different balances of perceptual detail, spatial structure, and context cost. Raw visual histories retain direct evidence but grow with the trajectory and offer no explicit index over places, task progress, or failed branches. Dense semantic maps provide persistent metric structure (Chaplot et al. 2020), while open-vocabulary maps and online 3D scene graphs make objects and relations more accessible to language-based reasoning (Huang et al. 2023; Yin et al. 2024); 3D scene graphs have also served as substrates for LLM-based robot planning (Rana et al. 2023). Recent navigators further incorporate hierarchical memory and memory-augmented reasoning into zero-shot decision making (Lyu et al. 2026; Wu et al. 2026). HAM-VLN maintains semantic, progress, and failure state alongside navigation decisions, associates that state with a depth-grounded world graph, and recalls a subgoal-relevant graph slice for subsequent planning. Past experience returns as selected navigation state rather than as an accumulated visual transcript.

3 Method

HAM-VLN equips a zero-shot VLN agent with decision-coupled memory that preserves task-relevant state over long trajectories. Within its dual-process architecture, a world graph records agent-authored state and supports subgoal-conditioned retrieval and grounded backtracking, turning failed exploration into reusable evidence. Figure 2 illustrates how these components interact throughout a navigation episode.

3.1 Dual-Process Architecture

Deploying MLLMs for continuous navigation requires converting high-level semantic decisions into executable actions grounded in the robot’s current visual and geometric state. Inspired by hierarchical VLA (Shi et al. 2025a) and dual-system VLN (Wei et al. 2026a), HAM-VLN adopts a dual-process architecture. A slow, deliberative *System 2* determines where to go and why, while a fast, reactive *System 1* grounds this high-level intent in the current observation by predicting a pixel-space target, which is subsequently converted into executable motion commands. The policy at each step is factorized as

$$A_t = \pi_{\text{robot}}(\varphi_1(\varphi_2(\mathcal{T}, O_t, M_t)), D_t, P_t, \mathbf{K}_{\text{cam}}), \quad (1)$$

where $A_t \in \mathcal{A}_{\text{robot}}$ denotes the low-level action executed at step t in the simulator’s executable action space. Here, $\mathcal{T}$ denotes the navigation instruction, O_t the observation at the current waypoint, M_t the retrieved memory context, D_t the corresponding depth observation, P_t the robot’s odometric pose, and $\mathbf{K}_{\text{cam}}$ the camera intrinsic matrix. In the following, we use the lowercase a_t to denote the high-level decision produced by System 2.

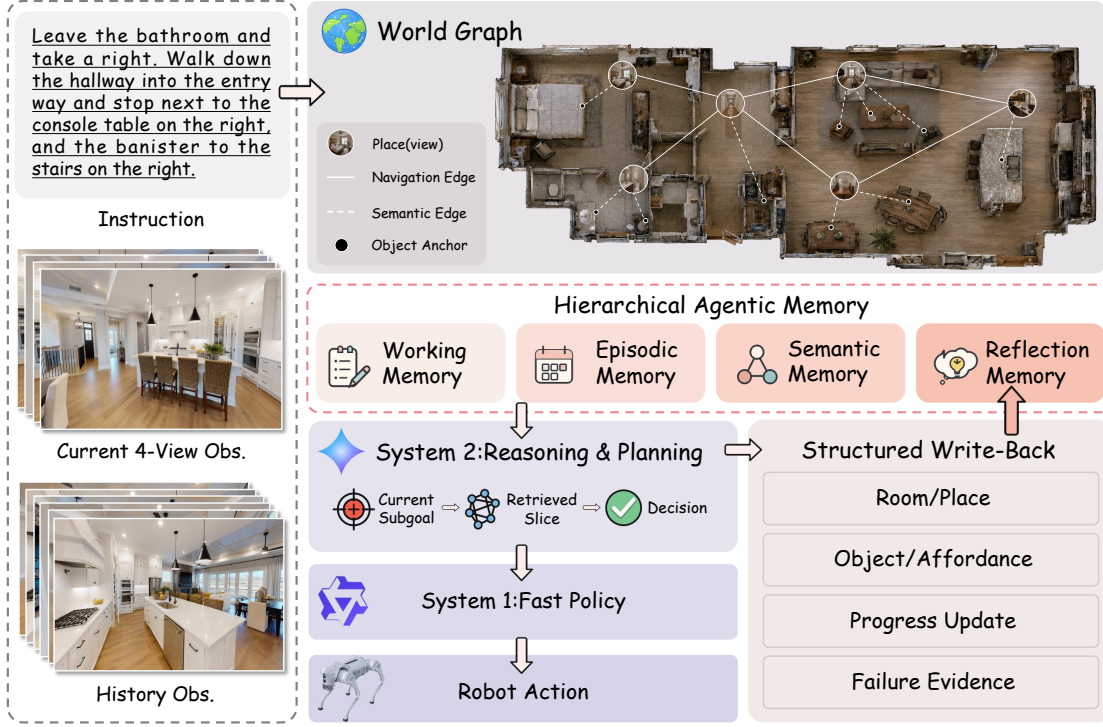


Figure 2: HAM-VLN overview. At each waypoint, System 2 reads the current panorama, the bounded K -waypoint working memory, and the retrieved graph slice, then emits the navigation action *and* the memory writes (room type, objects, progress, failure notes) in one structured call; System 1 grounds the chosen direction into pixels, and the controller executes. The current subgoal retrieves a task-relevant slice that re-enters the next planning context.

System 2: reasoning and planning. φ_2 is a large MLLM invoked once per waypoint—the pose where the robot stops, looks around, and decides. Reading $\mathcal{T}$, O_t , and M_t , it commits to one discrete decision: a direction to pursue, a backtrack to a previously visited waypoint, or a verified stop. The decision arrives wrapped in a structured JSON record carrying progress analysis and action reasoning.

System 1: fast policy. Once System 2 commits to a direction, the remaining challenge is to translate this high-level intent into fast perception-to-action execution. φ_1 is a lightweight grounding-specialized MLLM that observes the selected view along with the planner’s target description and predicts a bounding box for the intended target, without relying on a pretrained waypoint predictor. This design preserves the ability to ground distant semantic cues, such as a hallway opening, which may not correspond to explicit intermediate waypoints. The deterministic controller π_{robot} then selects a representative pixel within the predicted box, back-projects it into 3D using the depth map and camera intrinsics, and transforms the resulting point into the world frame using the robot’s odometry pose. Finally, it executes a short-horizon trajectory through fast-marching planning over a lightweight local traversability map.

3.2 Hierarchical Agentic Memory

The dual-process architecture separates deliberation from execution, but System 2 still requires navigation history beyond the current observation. HAM-VLN therefore uses hierarchical agentic memory: working memory retains recent frames, while an instruction-progress record and a depth-grounded world graph maintain instruction progress, visitation history, semantic state, and failure evidence. At each decision step, HAM-VLN retrieves a compact graph slice conditioned on the current subgoal.

Memory state. Formally, at decision waypoint t , let W_t denote the frame stream retained from the most recent K completed waypoint transitions. We use L_t for the ordered instruction-progress record and G_t for the long-term world graph accumulated during the episode. The current subgoal q_t is derived from L_t , and the memory context supplied to System 2 is

$$M_t = W_t \oplus L_t \oplus \mathcal{R}(G_t, q_t), \quad (2)$$

where $\mathcal{R}$ is the query-conditioned read operator defined in Section 3.3, and $\oplus$ denotes composition into the planning context. The current panorama O_t remains immediate perception and is supplied separately. The window size K therefore defines a *consolidation boundary*: visual history inside W_t remains verbatim, whereas older observations can return only through a structured readout of G_t .

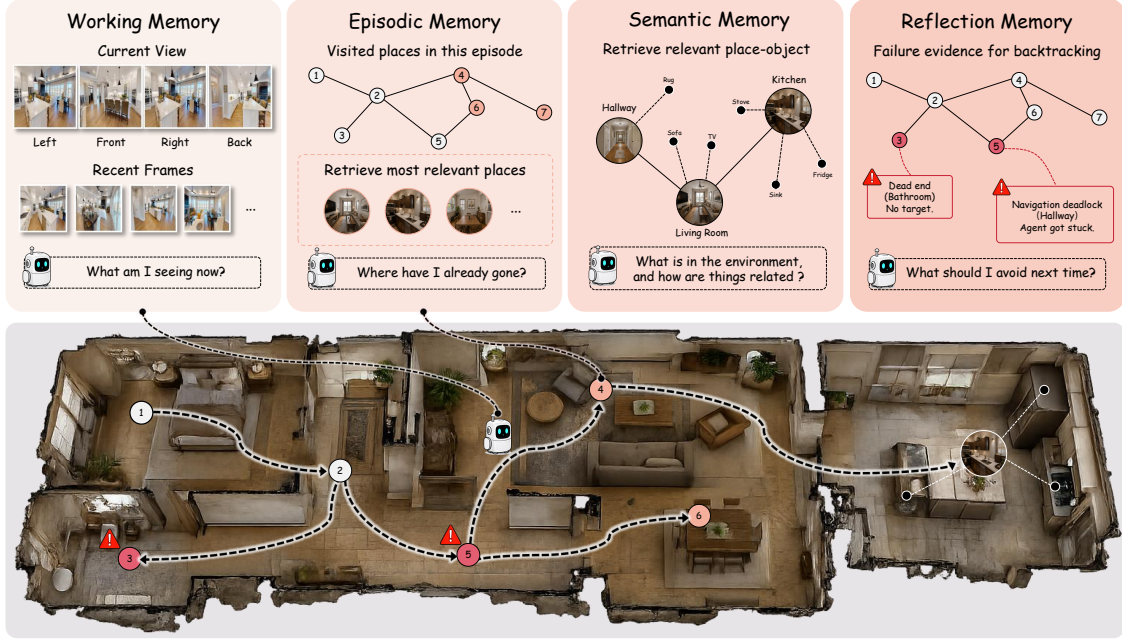


Figure 3: Four functional memory views over one episode. (1) *Working memory*: the recent egocentric frame stream inside the K -waypoint window—what the planner sees verbatim. (2) *Episodic memory*: temporal retrieval over visited places, supplying recency. (3) *Semantic memory*: content retrieval over the place–object graph, supplying relevance. (4) *Reflection memory*: notes attached to abandoned places that resurface verbatim on retrieval.

Sparse grounded world graph. We represent the persistent state as a typed place–object graph

$$G_t = (\mathcal{V}_t^P, \mathcal{V}_t^O, \mathcal{E}_t^{PP}, \mathcal{E}_t^{PO}). \quad (3)$$

Place states are formed by incremental single-link clustering. Each place state in $\mathcal{V}_t^P$ aggregates spatial anchors, agent-authored semantic context, visitation statistics, and optional failure evidence. Each object state in $\mathcal{V}_t^O$ associates a depth-grounded category observation with open-vocabulary descriptions and soft attributes at the place/category level. Place–place edges $\mathcal{E}_t^{PP}$ encode navigational connectivity, while place–object edges $\mathcal{E}_t^{PO}$ encode semantic containment and its confidence. This representation allocates persistent state only to discovered places and entities while retaining the geometry and topology needed for recall and backtracking.

Decision-coupled updates. The System 2 call produces a structured decision record $J_t = (a_t, w_t, r_t)$, where a_t is the high-level action, w_t contains place semantics, observed objects, and instruction-progress updates, and r_t is the action rationale. Let $\Gamma(O_t, D_t, P_t)$ denote the grounded geometric evidence extracted from the current RGB-D observation and pose. The routine task-progress and world-model states evolve jointly as

$$\begin{aligned} L_{t+1} &= \mathcal{U}_L(L_t, w_t), \\ G_{t+1} &= \mathcal{U}_G(G_t, w_t, \Gamma(O_t, D_t, P_t)), \end{aligned} \quad (4)$$

where $\mathcal{U}_L$ applies progress updates and $\mathcal{U}_G$ associates observations with places and objects, fuses repeated evidence,

and updates topology. When a_t is a backtrack, the event-specific update in Section 3.4 attaches r_t as failure evidence. The agent authors w_t and r_t , while grounding, association, projection, and graph maintenance are automatic operations. Grounding DINO (Liu et al. 2024) and SAM (Kirillov et al. 2023) provide open-set detections and masks that are projected through depth and consolidated into place-level object states.

Functional views of hierarchical memory. HAM-VLN exposes the state in Equation 2 through four functional views (Figure 3):

- **Working memory** retains recent verbatim frames in W_t , while O_t supplies immediate perception separately.
- **Episodic memory** reads the visitation trajectory and temporal metadata in G_t , supplying recency to retrieval.
- **Semantic memory** reads place–object content and topology in G_t , supplying relevance to retrieval.
- **Reflection memory** returns failure evidence attached to retrieved places, conditioning later decisions on previously abandoned branches.

Salience in the retrieval score is an importance term based on landmark and object evidence; reflection is orthogonal to scoring and re-enters context only when its associated place is retrieved.

3.3 Subgoal-Conditioned Memory Retrieval

Subgoal-conditioned place ranking. At waypoint t , the first pending item in L_t defines the current subgoal q_t . A

local sentence encoder (Xiao et al. 2024) embeds q_t and the summary of each place state $p \in \mathcal{V}_t^P$. We score each place by

$$s_t(p) = \alpha \text{rel}(q_t, p) + \beta \text{rec}_t(p) + \gamma \text{sal}(p), \quad (5)$$

where rel is query–place cosine similarity, $\text{rec}_t(p) = \rho^{t-\tau(p)}$ measures recency from the last visit $\tau(p)$, and sal combines landmark agreement with object richness. We use $(\alpha, \beta, \gamma) = (1.0, 0.3, 0.3)$ and a per-waypoint decay $\rho = 0.85$ in all experiments. These terms capture task relevance, temporal continuity, and perceptual importance, respectively.

Topology-aware memory readout. Using a seed budget $K_s = 3$ and final place budget $K_p = 5$, the read operator $\mathcal{R}(G_t, q_t)$ retains the K_s highest-scoring places as seeds, expands them by one hop, and includes the current-place neighborhood before keeping at most K_p places. The resulting place–object subgraph is serialized into M_t , including semantic content, relative geometry, topology, and any associated failure evidence.

3.4 Grounded Failure Memory for Backtracking

In partially observable navigation, an abandoned branch is not merely motion to undo; it is negative evidence about the compatibility between the current subgoal and an explored region. HAM-VLN therefore models backtracking as a coupled control–memory transition. When System 2 returns to a previously visited waypoint b_t , the abandoned suffix $\mathcal{B}_t$ is mapped to its associated place states and the decision rationale r_t is stored as grounded failure evidence. The return target remains waypoint-level to preserve executable geometry, while the evidence is place-level so that it can persist across repeated visits.

This evidence is advisory rather than prohibitive: it neither changes $s_t(p)$ nor blocks a place. It re-enters M_t only when $\mathcal{R}(G_t, q_t)$ retrieves the associated region, allowing System 2 to reinterpret the earlier failure under the current subgoal. Backtracking therefore changes both the agent’s pose and the memory state on which subsequent decisions are conditioned, closing the loop from action and failure to grounded write, conditional recall, and revised action.

Algorithm 1 summarizes how control, memory writing, retrieval, and backtracking interact over a navigation episode.

4 Experiments

We first describe the evaluation protocol (Section 4.1) and compare HAM-VLN against published trained and zero-shot methods on R2R-CE, RxR-CE, and HM3D-v2 ObjectNav (Section 4.2). We then examine inference cost and raw-history window sensitivity (Section 4.3), ablate the memory components (Section 4.4), and analyze backtracking through a real episode trace (Section 4.5).

4.1 Setup

Benchmarks and metrics. We evaluate HAM-VLN on R2R-CE (Krantz et al. 2020), RxR-CE (Ku et al. 2020), and HM3D-v2 ObjectNav (Ramakrishnan et al. 2021) using the same 100-episode subsets of the val-unseen splits as Ding et al. (2026b). For these three benchmarks, Ding et al.

Algorithm 1 One episode of HAM-VLN

Require: Navigation instruction $\mathcal{T}$

```

1: Initialize progress  $L_0$  from  $\mathcal{T}$ ;  $G_0, W_0 \leftarrow \emptyset$ 
2: for each decision waypoint  $t$  do
3:   Receive the current observation  $(O_t, D_t, P_t)$ 
4:    $q_t \leftarrow \text{CURRENTSUBGOAL}(L_t)$ 
5:    $M_t \leftarrow W_t \oplus L_t \oplus \mathcal{R}(G_t, q_t)$ 
6:    $(a_t, w_t, r_t) \leftarrow \varphi_2(\mathcal{T}, O_t, M_t)$ 
7:    $L_{t+1} \leftarrow \mathcal{U}_L(L_t, w_t)$ 
8:    $G_{t+1} \leftarrow \mathcal{U}_G(G_t, w_t, \Gamma(O_t, D_t, P_t))$ 
9:   if  $a_t = \text{STOP}$  then
10:    return
11:   else if  $a_t = \text{BACKTRACK}(b_t)$  then
12:      $\mathcal{B}_t \leftarrow \text{trajectory suffix after } b_t$ 
13:      $\mathcal{F}_t \leftarrow \text{PLACES}(\mathcal{B}_t) \setminus \{p(b_t)\}$ 
14:      $G_{t+1} \leftarrow \text{MARKFAILURE}(G_{t+1}, \mathcal{F}_t, r_t)$ 
15:     Return to the stored waypoint anchor  $b_t$  via  $\pi_{\text{robot}}$ 
16:   else
17:      $g_t \leftarrow \varphi_1(a_t, O_t)$ 
18:     Execute  $g_t$  via  $\pi_{\text{robot}}(g_t, D_t, P_t, \mathbf{K}_{\text{cam}})$ 
19:   end if
20:    $W_{t+1} \leftarrow \text{UPDATEWINDOW}(W_t, O_t; K)$ 
21: end for
```

(2026b) reported that the SR values reproduced on these subsets deviate from the corresponding full-split results by no more than 1.1 percentage points; the appendix summarizes these previously reported subset-to-full comparisons. For each benchmark, we conduct three independent runs on the corresponding subset and report the mean and standard deviation. For R2R-CE, we report navigation error (NE), oracle success rate (OSR), success rate (SR), and success weighted by path length (SPL) (Anderson et al. 2018a). For RxR-CE, we report NE, SR, SPL, and normalized dynamic time warping (nDTW) (Ilharco et al. 2019). For HM3D-v2 ObjectNav, we report SR and SPL. In addition, we report the mean number of context tokens used per episode.

Models and configurations. The agent is training-free: the System 2 planner is Gemini-3.1-Pro, the System 1 grounding model is Qwen3.6-35B, and a fast-marching controller executes motion (Section 3.1). The retrieval encoder is a local bge-large-en-v1.5 (Xiao et al. 2024) resident on each worker GPU, so per-step retrieval costs no API calls. A working-window size of $K=1$ is used consistently across all three benchmarks.

4.2 Main Results

Tables 1 and 2 compare HAM-VLN with both trained and zero-shot methods reported in prior work.

VLN-CE (R2R and RxR) On R2R, HAM-VLN outperforms the strongest previously reported training-free baseline across all metrics (Table 1): NE decreases from 5.87 to 3.92 m, whereas OSR, SR, and SPL increase by 27.7, 22.7, and 19.0 percentage points, respectively. On RxR, the same configuration reduces NE from 8.80 to 6.27 m and increases SR, SPL, and nDTW by 18.9, 19.6, and 8.6 percentage points,

Method	Source	VLN-CE R2R Val-Unseen				VLN-CE RxR Val-Unseen			
		NE ↓	OSR ↑	SR ↑	SPL ↑	NE ↓	SR ↑	SPL ↑	nDTW ↑
Supervised Learning (Training Method)									
NaVid (Zhang et al. 2024)	<i>RSS'24</i>	5.47	49.1	37.4	35.9	8.41	34.5	23.8	–
Uni-NaVid (Zhang et al. 2025a)	<i>RSS'25</i>	5.58	53.3	47.0	42.7	6.24	48.7	40.9	–
NaVILA (Cheng et al. 2025)	<i>RSS'25</i>	5.22	62.5	54.0	49.0	6.77	49.3	44.0	58.8
StreamVLN (Wei et al. 2026b)	<i>ICRA'26</i>	4.98	64.2	56.9	51.9	6.22	52.9	46.0	61.9
JanusVLN (Zeng et al. 2026)	<i>ICLR'26</i>	4.78	65.2	60.5	56.8	6.06	56.2	47.5	62.1
OmniNav (Xue et al. 2026)	<i>ICLR'26</i>	3.74	74.6	69.5	66.1	3.77	73.6	62.0	–
InternVLA-N1 (Intern Robotics 2025)	<i>arXiv</i>	4.83	63.3	58.2	54.0	5.91	53.5	46.1	65.3
ABot-N0 (Chu et al. 2026)	<i>arXiv</i>	3.78	70.8	66.4	63.9	3.83	69.3	60.0	–
SPAN-Nav (Liu et al. 2026)	<i>arXiv</i>	4.07	75.3	66.3	59.3	4.20	69.7	60.1	67.9
Zero-Shot (Training-Free)									
InstructNav (Long et al. 2025)	<i>CoRL'24</i>	6.89	47.0	31.0	24.0	–	–	–	–
Open-Nav (Qiao et al. 2025)	<i>ICRA'25</i>	6.70	23.0	19.0	16.1	–	–	–	–
CA-Nav (Chen et al. 2025)	<i>TPAMI'25</i>	7.58	48.0	25.3	10.8	10.4	19.0	6.0	13.5
SmartWay (Shi et al. 2025b)	<i>IROS'25</i>	7.01	<u>51.0</u>	29.0	22.5	–	–	–	–
GC-VLN (Yin et al. 2025)	<i>CoRL'25</i>	7.30	41.8	33.6	16.3	<u>8.80</u>	<u>33.8</u>	13.8	–
LaViRA (Ding et al. 2026a)	<i>ICRA'26</i>	6.54±0.27	48.7±2.1	<u>38.3±0.6</u>	28.3±0.9	–	–	–	–
Three-Step Nav (Zheng, Ge, and Itti 2026)	<i>AISTATS'26</i>	<u>5.87</u>	39.0	34.0	<u>29.1</u>	9.21	22.0	<u>16.1</u>	<u>45.7</u>
HiMemVLN (Lyu et al. 2026)	<i>arXiv</i>	6.65	36.0	30.0	26.9	–	–	–	–
HAM-VLN	<i>Ours</i>	3.92±0.15	78.7±3.1	61.0±1.7	48.1±0.2	6.27±0.23	52.7±1.5	35.7±2.6	54.3±0.3

Table 1: Main results on VLN-CE R2R and RxR val-unseen. Our numbers are mean $\pm$ std over three seeds.

respectively. These consistent gains demonstrate that the improvements extend to the RxR setting, which contains longer instructions, without benchmark-specific retuning. Although the resulting OSR of 78.7 on R2R exceeds those of all supervised methods reported in the table, the strongest trained systems continue to achieve higher SR and SPL on both benchmarks because agentic exploration samples next directions under uncertainty rather than following a learned shortcut.

HM3D-v2 ObjectNav HAM-VLN achieves an SR of 79.7 ± 0.5 and an SPL of 43.2 ± 0.6 on HM3D-v2 ObjectNav, as shown in Table 2. Compared with the strongest previously reported training-free result for each metric, HAM-VLN improves SR by 3.5 points and SPL by 4.5 points. These scores also exceed the best supervised results in the table by 2.7 and 1.9 points, respectively. The gains over both training-free and supervised methods suggest that agentic reasoning uses room-level semantic priors learned during MLLM pretraining to improve navigation success and path efficiency.

4.3 Inference Cost and Sensitivity to K

In Table 3, HAM-VLN achieves 61.0 SR and 48.1 SPL, outperforming the best raw-history result for each metric by 2.7 and 3.4 percentage points, respectively. It uses 17.9k System 2 tokens per decision and 244.9k API tokens per episode. Compared with the lowest-cost raw-history setting ($K=3$), HAM-VLN reduces these token counts by 45.1% and 34.8%, respectively; compared with full history, the reductions are 69.0% and 67.2%.

With raw history, expanding the window from $K=3$ to $K=5$, $K=10$, and full history monotonically increases both token counts without consistently improving SR or SPL. From $K=3$ to full history, API tokens per episode increase by

Method	SR ↑	SPL ↑
Supervised Learning (Training Method)		
DD-PPO (Wijmans et al. 2020)	27.9	14.2
Habitat-Web (Ramakranya et al. 2022)	57.6	23.8
PIRLNav (Ramakranya et al. 2023)	70.4	34.1
OVRL-v2 (Yadav et al. 2023)	64.7	28.1
Uni-NaVid (Zhang et al. 2025a)	73.7	37.1
FiLM-Nav (Yokoyama and Ha 2026)	77.0	41.3
Zero-Shot (Training-Free)		
L3MVN (Yu, Kasaei, and Cao 2023)	54.2	25.5
VLFM (Yokoyama et al. 2024)	62.6	31.0
OpenFMNav (Kuang, Lin, and Jiang 2024)	54.9	24.4
InstructNav (Long et al. 2025)	58.0	20.9
SG-Nav (Yin et al. 2024)	54.0	24.9
ApexNav (Zhang et al. 2025b)	<u>76.2</u>	38.0
DSCD-Nav (An et al. 2026)	73.0	<u>38.7</u>
ReMemNav (Wu et al. 2026)	67.8	36.6
HAM-VLN (Ours)	79.7±0.5	43.2±0.6

Table 2: Main results on HM3D-v2 ObjectNav.

98.7%, while SR and SPL decrease by 4.7 and 6.6 percentage points, respectively. Larger visual contexts alone therefore do not replace task-relevant memory selection. Raw history retains overlapping, subgoal-irrelevant panoramas but lacks a place-object index for selective retrieval. In contrast, HAM-VLN stores long-term navigation history in a depth-grounded world graph and retrieves a compact, subgoal-conditioned graph slice for each decision.

4.4 Ablations

Table 4 ablates the world graph and its episodic, semantic, and reflection memory views. All variants use the same

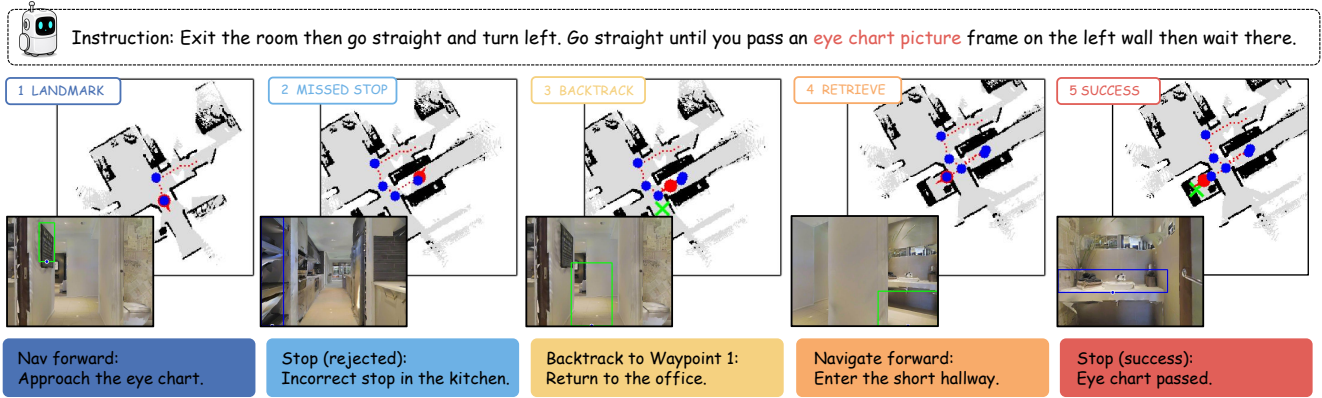


Figure 4: An example of reflection memory for backtracking.

Configuration	SR $\uparrow$	SPL $\uparrow$	S2 tok. / decision $\downarrow$	API tok. / episode $\downarrow$
HAM-VLN	61.0 $\pm$ 1.7	48.1 $\pm$ 0.2	17.9k	244.9k
Raw-history window sensitivity				
Raw history ($K=3$)	58.0 $\pm$ 1.4	44.7 $\pm$ 0.5	32.6k	375.5k
Raw history ($K=5$)	54.3 $\pm$ 2.1	38.4 $\pm$ 0.3	39.8k	457.8k
Raw history ($K=10$)	58.3 $\pm$ 0.9	41.6 $\pm$ 1.2	48.7k	534.0k
Raw history (Full)	53.3 $\pm$ 1.2	38.1 $\pm$ 0.7	57.7k	746.1k

Table 3: Controlled planner-memory comparison and inference cost on R2R-CE val-unseen.

Configuration	NE $\downarrow$	OSR $\uparrow$	SR $\uparrow$	SPL $\uparrow$
HAM-VLN	3.92 $\pm$ 0.15	78.7 $\pm$ 3.1	61.0 $\pm$ 1.7	48.1 $\pm$ 0.2
World Graph				
w/o WG ($K=1$)	4.97 $\pm$ 0.21	72.6 $\pm$ 1.8	51.7 $\pm$ 1.3	39.3 $\pm$ 1.2
w/o WG (Full)	4.62 $\pm$ 0.19	68.3 $\pm$ 0.9	53.3 $\pm$ 1.2	38.1 $\pm$ 0.7
Agentic Memory				
w/o EM	4.53 $\pm$ 0.37	72.0 $\pm$ 3.6	53.3 $\pm$ 2.6	41.6 $\pm$ 1.4
w/o SM	4.72 $\pm$ 0.29	74.0 $\pm$ 2.7	53.3 $\pm$ 0.5	42.1 $\pm$ 0.7
w/o RM	4.41 $\pm$ 0.17	76.0 $\pm$ 1.4	55.7 $\pm$ 1.3	36.9 $\pm$ 0.9
w/o all	4.63 $\pm$ 0.22	75.7 $\pm$ 1.9	50.7 $\pm$ 1.7	31.5 $\pm$ 1.1

Table 4: Component ablations on R2R-CE val-unseen.

planner, grounding model, and controller. The two *w/o WG* variants remove the graph and retain either the $K=1$ working window or the full raw visual history. The remaining variants keep the graph and remove EM, SM, RM, or all three; *w/o RM* preserves backtracking but disables failure-note writing and serialization.

World graph. Removing the world graph causes the largest loss in spatial accuracy. With the $K=1$ working window, NE increases from 3.92 to 4.97 m and SR decreases by 9.3 points to 51.7. Replacing the graph with full raw history increases SR to 53.3, still 7.7 points below the full model, and reduces SPL from 48.1 to 38.1.

Agentic memory. Removing episodic or semantic memory reduces SR from 61.0 to 53.3, while SPL decreases to 41.6 without EM and 42.1 without SM. These results show that both temporal visitation cues and place-object relevance contribute to retrieval. Removing reflection memory reduces SR by 5.3 points to 55.7 and SPL by 11.2 points to 36.9, indicating that failure notes primarily improve path efficiency. Removing all three views reduces SR by 10.3 points to 50.7 and SPL by 16.6 points to 31.5. The graph alone is therefore insufficient; the planner also requires its episodic, semantic, and reflection memory views.

4.5 Quantitative Analysis

Reflection memory. Across 100 R2R-CE episodes, the agent backtracked 175 times in 1,288 waypoint decisions, corresponding to 1.75 backtracks per episode and 13.6% of decisions. Figure 4 shows the process. After a rejected stop in the kitchen, the agent records: “I will backtrack to Waypoint 1 (office) to reorient myself and find the hallway with the eye chart picture frame on the left wall.” At the hallway intersection, System 2 retrieves this note, selects the short hallway, passes the eye chart, and stops successfully.

5 Conclusion

We introduce HAM-VLN, a framework that harnesses hierarchical agentic memory for zero-shot vision-and-language navigation. HAM-VLN represents navigation history in a depth-grounded world graph and uses working, episodic, semantic, and reflection memory views to retain recent observations, retrieve spatial and semantic information, and reuse failure evidence. Without task-specific training, HAM-VLN outperforms prior zero-shot methods and surpasses the full raw-history variant in navigation performance while requiring fewer inference-time tokens. Grounding agentic memory in a world graph allows HAM-VLN to reuse episode-specific evidence across long trajectories without continually expanding raw visual history.

References

- An, W.; Liu, Q.; Xu, C.; Chai, J.; Yang, X.; Wei, K.; and Deng, C. 2026. DSCD-Nav: Dual-Stance Cooperative Debate for Object Navigation. *arXiv:2601.21409*.
- Anderson, P.; Chang, A.; Chaplot, D. S.; Dosovitskiy, A.; Gupta, S.; Koltun, V.; Kosecka, J.; Malik, J.; Mottaghi, R.; Savva, M.; and Zamir, A. R. 2018a. On Evaluation of Embodied Navigation Agents. *arXiv:1807.06757*.
- Anderson, P.; Wu, Q.; Teney, D.; Bruce, J.; Johnson, M.; Sünderhauf, N.; Reid, I.; Gould, S.; and van den Hengel, A. 2018b. Vision-and-Language Navigation: Interpreting Visually-Grounded Navigation Instructions in Real Environments. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 3674–3683.
- Chaplot, D. S.; Gandhi, D.; Gupta, A.; and Salakhutdinov, R. 2020. Object Goal Navigation Using Goal-Oriented Semantic Exploration. In *Advances in Neural Information Processing Systems*.
- Chen, K.; An, D.; Huang, Y.; Xu, R.; Su, Y.; Ling, Y.; Reid, I.; and Wang, L. 2025. Constraint-aware zero-shot vision-language navigation in continuous environments. *IEEE Transactions on Pattern Analysis and Machine Intelligence*.
- Cheng, A.-C.; Ji, Y.; Yang, Z.; Gongye, Z.; Zou, X.; Kautz, J.; Biyik, E.; Yin, H.; Liu, S.; and Wang, X. 2025. NaVILA: Legged Robot Vision-Language-Action Model for Navigation. In *Proceedings of Robotics: Science and Systems*.
- Chu, Z.; Xie, S.; Wu, X.; Shen, Y.; Luo, M.; Wang, Z.; Liu, F.; Leng, X.; Hu, J.; Yin, M.; et al. 2026. ABot-N0: Technical Report on the VLA Foundation Model for Versatile Embodied Navigation. *arXiv:2602.11598*.
- Ding, H.; Xu, Z.; Fang, Y.; Wu, Y.; Chen, Z.; Shi, J.; Huo, J.; Zhang, Y.; and Gao, Y. 2026a. LaViRA: Language-Vision-Robot Actions Translation for Zero-Shot Vision Language Navigation in Continuous Environments. In *IEEE International Conference on Robotics and Automation (ICRA)*.
- Ding, H.; Zhang, S.; Xu, Z.; Guo, J.; Liu, H.; Cheng, X.; Chen, Z.; Qi, H.; Wang, D.; Xu, H.; et al. 2026b. Uni-LaViRA: Language-Vision-Robot Actions Translation for Unified Embodied Navigation. *arXiv:2605.27582*.
- Fang, K.; Toshev, A.; Fei-Fei, L.; and Savarese, S. 2019. Scene Memory Transformer for Embodied Agents in Long-Horizon Tasks. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*.
- Gu, J.; Stefani, E.; Wu, Q.; Thomason, J.; and Wang, X. 2022. Vision-and-Language Navigation: A Survey of Tasks, Methods, and Future Directions. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics*, 7606–7623.
- Huang, C.; Mees, O.; Zeng, A.; and Burgard, W. 2023. Visual Language Maps for Robot Navigation. In *IEEE International Conference on Robotics and Automation (ICRA)*.
- Ilharco, G.; Jain, V.; Ku, A.; Ie, E.; and Baldrige, J. 2019. General Evaluation for Instruction Conditioned Navigation using Dynamic Time Warping. In *NeurIPS Workshop on Visually Grounded Interaction and Language*.
- Intern Robotics. 2025. InternVLA-N1: An Open Dual-System Vision-Language Navigation Foundation Model with Learned Latent Plans. Technical report, Shanghai AI Laboratory.
- Kirillov, A.; Mintun, E.; Ravi, N.; Mao, H.; Rolland, C.; Gustafson, L.; Xiao, T.; Whitehead, S.; Berg, A. C.; Lo, W.-Y.; Dollár, P.; and Girshick, R. 2023. Segment Anything. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 4015–4026.
- Krantz, J.; Wijmans, E.; Majumdar, A.; Batra, D.; and Lee, S. 2020. Beyond the Nav-Graph: Vision-and-Language Navigation in Continuous Environments. In *European Conference on Computer Vision*, 104–120.
- Ku, A.; Anderson, P.; Patel, R.; Ie, E.; and Baldrige, J. 2020. Room-Across-Room: Multilingual Vision-and-Language Navigation with Dense Spatiotemporal Grounding. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing*, 4392–4412.
- Kuang, Y.; Lin, H.; and Jiang, M. 2024. OpenFMNav: Towards Open-Set Zero-Shot Object Navigation via Vision-Language Foundation Models. In *Findings of the Association for Computational Linguistics: NAACL 2024*.
- Liu, J.; Xu, T.; Chen, J.; Yue, L.; Zhang, J.; Wang, Z.; Li, M.; Zhao, Q.; Li, A.; Su, Q.; Zhang, Z.; and Wang, H. 2026. SPAN-Nav: Generalized Spatial Awareness for Versatile Vision-Language Navigation. *arXiv:2603.09163*.
- Liu, S.; Zeng, Z.; Ren, T.; Li, F.; Zhang, H.; Yang, J.; Jiang, Q.; Li, C.; Yang, J.; Su, H.; Zhu, J.; and Zhang, L. 2024. Grounding DINO: Marrying DINO with Grounded Pre-training for Open-Set Object Detection. In *European Conference on Computer Vision*.
- Long, Y.; Cai, W.; Wang, H.; Zhan, G.; and Dong, H. 2025. InstructNav: Zero-Shot System for Generic Instruction Navigation in Unexplored Environment. In *Proceedings of the 8th Conference on Robot Learning*, 2049–2060.
- Lyu, K.; Wu, K.; Li, P.; Hu, X.; Si, Q.; Miao, C.; Yang, N.; Wang, Z.; Xiao, L.; Hu, L.; Sun, J.; and Hao, C. 2026. HiMemVLN: Enhancing Reliability of Open-Source Zero-Shot Vision-and-Language Navigation with Hierarchical Memory System. *arXiv:2603.14807*.
- Packer, C.; Wooders, S.; Lin, K.; Fang, V.; Patil, S. G.; Stoica, I.; and Gonzalez, J. E. 2023. MemGPT: Towards LLMs as Operating Systems. *arXiv:2310.08560*.
- Park, J. S.; O’Brien, J. C.; Cai, C. J.; Morris, M. R.; Liang, P.; and Bernstein, M. S. 2023. Generative Agents: Interactive Simulacra of Human Behavior. In *Proceedings of the 36th Annual ACM Symposium on User Interface Software and Technology*, 2:1–2:22. ACM.
- Qiao, Y.; Lyu, W.; Wang, H.; Wang, Z.; Li, Z.; Zhang, Y.; Tan, M.; and Wu, Q. 2025. Open-Nav: Exploring Zero-Shot Vision-and-Language Navigation in Continuous Environment with Open-Source LLMs. In *Proceedings of the IEEE International Conference on Robotics and Automation*, 6710–6717.
- Ramakrishnan, S. K.; Gokaslan, A.; Wijmans, E.; Maksymets, O.; Clegg, A.; Turner, J.; Undersander, E.;

- Galuba, W.; Westbury, A.; Chang, A. X.; Savva, M.; Zhao, Y.; and Batra, D. 2021. Habitat-Matterport 3D Dataset (HM3D): 1000 Large-Scale 3D Environments for Embodied AI. In *Advances in Neural Information Processing Systems Datasets and Benchmarks Track*.
- Ramrakhya, R.; Batra, D.; Wijmans, E.; and Das, A. 2023. PIRLNav: Pretraining with Imitation and RL Finetuning for ObjectNav. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*.
- Ramrakhya, R.; Undersander, E.; Batra, D.; and Das, A. 2022. Habitat-Web: Learning Embodied Object-Search Strategies from Human Demonstrations at Scale. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*.
- Rana, K.; Haviland, J.; Garg, S.; Abou-Chakra, J.; Reid, I.; and Sünderhauf, N. 2023. SayPlan: Grounding Large Language Models using 3D Scene Graphs for Scalable Robot Task Planning. In *Conference on Robot Learning*.
- Shi, L. X.; Ichter, B.; Equi, M. R.; Ke, L.; Pertsch, K.; Vuong, Q.; Tanner, J.; Walling, A.; Wang, H.; Fusai, N.; Li-Bell, A.; Driess, D.; Groom, L.; Levine, S.; and Finn, C. 2025a. Hi Robot: Open-Ended Instruction Following with Hierarchical Vision-Language-Action Models. In *Proceedings of the 42nd International Conference on Machine Learning*, 54919–54933.
- Shi, X.; Li, Z.; Lyu, W.; Xia, J.; Dayoub, F.; Qiao, Y.; and Wu, Q. 2025b. SmartWay: Enhanced Waypoint Prediction and Backtracking for Zero-Shot Vision-and-Language Navigation. In *2025 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, 16923–16930. IEEE.
- Shinn, N.; Cassano, F.; Gopinath, A.; Narasimhan, K.; and Yao, S. 2023. Reflexion: Language Agents with Verbal Reinforcement Learning. In *Advances in Neural Information Processing Systems (NeurIPS)*.
- Wei, M.; Wan, C.; Peng, J.; Yu, X.; Yang, Y.; Feng, D.; Cai, W.; Zhu, C.; Wang, T.; Pang, J.; and Liu, X. 2026a. Ground Slow, Move Fast: A Dual-System Foundation Model for Generalizable Vision-and-Language Navigation. In *The Fourteenth International Conference on Learning Representations*.
- Wei, M.; Wan, C.; Yu, X.; Wang, T.; Yang, Y.; Mao, X.; Zhu, C.; Cai, W.; Wang, H.; Chen, Y.; Liu, X.; and Pang, J. 2026b. StreamVLN: Streaming Vision-and-Language Navigation via SlowFast Context Modeling. In *IEEE International Conference on Robotics and Automation*.
- Wijmans, E.; Kadian, A.; Morcos, A.; Lee, S.; Essa, I.; Parikh, D.; Savva, M.; and Batra, D. 2020. DD-PPO: Learning Near-Perfect PointGoal Navigators from 2.5 Billion Frames. In *International Conference on Learning Representations (ICLR)*.
- Wu, F.; Zuo, W.; Yang, W.; Xiao, J.; Liu, Y.; and Zeng, X. 2026. ReMemNav: A Rethinking and Memory-Augmented Framework for Zero-Shot Object Navigation. arXiv:2603.26788.
- Xiao, S.; Liu, Z.; Zhang, P.; Muennighoff, N.; Lian, D.; and Nie, J.-Y. 2024. C-Pack: Packed Resources for General Chinese Embeddings. In *Proceedings of the 47th International ACM SIGIR Conference on Research and Development in Information Retrieval*.
- Xue, X.; Hu, J.; Luo, M.; Xie, S.; Chen, J.; Xie, Z.; Quan, K.; Guo, W.; Chu, Z.; Xu, M.; and Zhu, Z. 2026. OmniNav: A Unified Framework for Prospective Exploration and Visual-Language Navigation. In *The Fourteenth International Conference on Learning Representations*.
- Yadav, K.; Majumdar, A.; Ramrakhya, R.; Yokoyama, N.; Baevski, A.; Kira, Z.; Maksymets, O.; and Batra, D. 2023. OVRL-V2: A Simple State-of-Art Baseline for ImageNav and ObjectNav. arXiv:2303.07798.
- Yin, H.; Wei, H.; Xu, X.; Guo, W.; Zhou, J.; and Lu, J. 2025. GC-VLN: Instruction as Graph Constraints for Training-free Vision-and-Language Navigation. In *Proceedings of the 9th Conference on Robot Learning*, volume 305 of *Proceedings of Machine Learning Research*, 1809–1824. PMLR.
- Yin, H.; Xu, X.; Wu, Z.; Zhou, J.; and Lu, J. 2024. SG-Nav: Online 3D Scene Graph Prompting for LLM-based Zero-shot Object Navigation. In *Advances in Neural Information Processing Systems (NeurIPS)*.
- Yokoyama, N.; and Ha, S. 2026. FiLM-Nav: Efficient and Generalizable Navigation via VLM Fine-tuning. In *IEEE International Conference on Robotics and Automation*.
- Yokoyama, N.; Ha, S.; Batra, D.; Wang, J.; and Bucher, B. 2024. VLFM: Vision-Language Frontier Maps for Zero-Shot Semantic Navigation. In *IEEE International Conference on Robotics and Automation*.
- Yu, B.; Kasaei, H.; and Cao, M. 2023. L3MVN: Leveraging Large Language Models for Visual Target Navigation. In *IEEE/RSJ International Conference on Intelligent Robots and Systems*.
- Zeng, S.; Qi, D.; Chang, X.; Xiong, F.; Xie, S.; Wu, X.; Liang, S.; Xu, M.; and Wei, X. 2026. JanusVLN: Decoupling Semantics and Spatiality with Dual Implicit Memory for Vision-Language Navigation. In *The Fourteenth International Conference on Learning Representations*.
- Zhang, J.; Wang, K.; Wang, S.; Li, M.; Liu, H.; Wei, S.; Wang, Z.; Zhang, Z.; and Wang, H. 2025a. Uni-NaVid: A Video-based Vision-Language-Action Model for Unifying Embodied Navigation Tasks. In *Robotics: Science and Systems*.
- Zhang, J.; Wang, K.; Xu, R.; Zhou, G.; Hong, Y.; Fang, X.; Wu, Q.; Zhang, Z.; and Wang, H. 2024. NaVid: Video-based VLM Plans the Next Step for Vision-and-Language Navigation. In *Proceedings of Robotics: Science and Systems*.
- Zhang, M.; Du, Y.; Wu, C.; Zhou, J.; Qi, Z.; Ma, J.; and Zhou, B. 2025b. Apexnav: An adaptive exploration strategy for zero-shot object navigation with target-centric semantic fusion. *IEEE Robotics and Automation Letters*.
- Zheng, W.; Ge, Y.; and Itti, L. 2026. Three-Step Nav: A Hierarchical Global-Local Planner for Zero-Shot Vision-and-Language Navigation. In *Proceedings of the 29th International Conference on Artificial Intelligence and Statistics*.
- Zhou, G.; Hong, Y.; and Wu, Q. 2024. NavGPT: Explicit Reasoning in Vision-and-Language Navigation with Large Language Models. *Proceedings of the AAAI Conference on Artificial Intelligence*, 38(7): 7641–7649.