

Photonic Quantum Computing vs. Classical Solvers in Constrained Factor Portfolio Optimization

Nirvik Sahoo*

Chyng Wen Tee†

Paul Griffin ‡

August 17, 2026

Key Findings

- ❑ Narrow Quantum Advantage Range The DIRAC-3 entropy photonic annealer achieves superior risk-adjusted performance, delivering a peak Sharpe ratio of 0.76 and Calmar ratio of 0.567 compared to classical benchmarks. Yet this performance is highly localized within a narrow hyperparameter calibration range.
- ❑ Robustness & Tail Risk Stability Mixed-integer programming (GUROBI) consistently delivers the most stable tail-risk protection ($\text{CVaR} = -0.863\%$) and portfolio diversification, maintaining consistently low concentration across all market regimes without catastrophic failure modes.
- ❑ Reinforcement Learning Vulnerabilities The Soft Actor-Critic (SAC) policy-gradient approach exhibits severe concentration failure under aggressive higher-moment penalties, highlighting the risks of unanchored policy-gradient methods in asset allocation.

Abstract

The authors present a rigorous empirical evaluation of three distinct optimization paradigms for institutional factor portfolio construction: an entropy-based photonic quantum annealer (DIRAC-3, Quantum Computing Inc.), a commercial mixed-integer programming solver (GUROBI), and a model-free deep reinforcement learning agent (SAC). Evaluating these pipelines on the Jensen–Kelly–Pedersen 13-factor equity library across 164 months test window, we implement a full factorial penalty sweep comprising 48 hyperparameter configurations that govern return, volatility, and skewness trade-offs. Our findings demonstrate that while photonic hardware can locate superior risk-return topologies within a narrow operating range, classical mixed-integer programming remains superior for risk-constrained mandates requiring tight tail-risk control and cross-seed stability. Furthermore, we document structural failure modes in reinforcement learning factor allocators under unanchored higher-moment shaping. We translate these empirical results into actionable, mandate-specific guidelines for quantitative portfolio managers deploying advanced optimization engines.

*Nirvik Sahoo is a research associate in the School of Computing and Information Systems at Singapore Management University in Singapore. 80 Stamford Road, Singapore 178902. Email: nirviks@smu.edu.sg

†Chyng Wen Tee is an associate professor in the Lee Kong Chian School of Business at Singapore Management University in Singapore. 50 Stamford Road, Singapore 178899. Email: cwtee@smu.edu.sg

‡Paul Griffin is an associate professor in the School of Computing and Information Systems at Singapore Management University in Singapore. 80 Stamford Road, Singapore 178902. Email: paulgriffin@smu.edu.sg

Introduction

The intersection of quantitative asset management and advanced computation has accelerated dramatically as portfolio managers seek to solve increasingly complex, non-convex, and combinatorial portfolio optimization problems. Recent surveys include Orús, Mugel, and Lizaso (2019) and Herman et al. (2023). Institutional asset allocation frequently incorporates cardinal constraints, including limits on active factor bets, turnover restrictions, transaction cost penalties, and higher-moment risk shaping, that transform standard mean-variance formulations into NP-hard mixed-integer problems, as detailed in Cornuejols and Tütüncü (2006) and Bertsimas and Farrokhnia (2023).

To navigate these non-parametric search spaces, quantitative researchers are exploring non-classical computing architectures, notably quantum annealers and photonic quantum processors (see Mugel et al. (2022)). Concurrently, deep reinforcement learning (DRL) has emerged as a dynamic approach to adaptive asset allocation, with recent results documented by Jiang, Xu, and Liang (2017) and Ye et al. (2020). However, despite considerable academic enthusiasm, rigorous, multi-metric head-to-head empirical evaluations comparing quantum hardware, commercial classical solvers, and deep reinforcement learning under identical financial constraints and factor universes remain scarce.

This paper addresses this gap by conducting a systematic empirical study of three architecturally distinct optimization pipelines evaluated on the Jensen–Kelly–Pedersen (JKP) 13-factor equity library over a 164-month live test window by Jensen, Kelly, and Pedersen (2023). The three architectures evaluated are: (1) DIRAC-3 (Quantum Computing Inc.): an entropy-based photonic quantum annealer that natively processes higher-order unconstrained binary optimization (HUBO) and continuous-variable objective functions without the limitations of qubit encoding (see Quantum Computing Inc. (2024)); (2) GUROBI: a commercial mixed-integer programming (MIP) solver operating via branch-and-bound algorithms, serving as our deterministic classical benchmark (see Gurobi Optimization, LLC (2024)); and (3) SAC (Soft Actor-Critic): an off-policy deep reinforcement learning agent designed to learn continuous portfolio weight policies directly from environmental rewards introduced by Haarnoja et al. (2018), and subsequently adapted for long-only allocation by Almahdi and Yang (2017) and Jiang, Xu, and Liang (2017).

To robustly assess how these solvers manage operational constraints and investor risk/reward preferences, we implement a comprehensive two-stage experimental design across 48 parameter configurations: a primary sweep over volatility-penalization intensity (β_1) and a joint sweep over volatility-penalization and skewness-shaping (β_2). Our empirical findings challenge common uncritical assumptions regarding quantum supremacy or reinforcement learning dominance in quantitative asset management. While DIRAC-3 captures the global optimum in Sharpe ratio (0.760) and Calmar ratio (0.567), its outperformance is restricted to a narrow hyperparameter range. Conversely, GUROBI provides superior tail-risk control (CVaR = -0.863%) and maintain a diversified holding across all parameter configurations. Finally, we identify a serious structural vulnerability in the SAC pipeline: under unanchored secondary moment penalties ($\beta_2 \geq 10$ with $\beta_1 = 0$), the RL agent suffers from severe portfolio concentration (HHI expanding to 0.593), leading to deep drawdowns due to a lack of diversification.

This paper makes three distinct contributions to the quantitative finance literature. First, we conduct a comprehensive, three-way empirical evaluation comparing an entropy-based photonic quantum annealer, a commercial branch-and-bound mixed-integer programming solver, and a model-free deep reinforcement learning agent over an established institutional equity factor library. By implementing a granular two-stage penalty sweep, we map the complete risk-return and higher-moment performance surface for each architecture. Second, we uncover critical structural concentration dynamics inherent to each solver class—most notably, the catastrophic factor concentration and drawdown collapse exhibited by Soft Actor-Critic agents under unanchored higher-moment shaping. These findings provide vital insights into model fragility independent of raw return maximization. Third, we translate these empirical insights into actionable, mandate-specific guidelines for quantitative portfolio managers and risk allocators deploying advanced computational optimization engines in production environments.

The remainder of this article is organised as follows. Section 2 provides a brief reviews of recent literature. Section 3 formalizes the mathematical framework of the constrained optimization problem, furnishes the economic interpretation of the hyperparameters along with the tuning procedure, and outlines the data-to-QUBO pipeline. Section 4 details the dataset and performance metrics, the empirical findings of the primary and joint hyperparameter sweeps, along with numerical analyses on factor concentration

dynamics. Section 5 discusses the practical implications and recommendations based on our empirical observation, and finally conclusions are drawn in Section 6.

Related Literature

Modern quantitative portfolio construction frequently uses both classical econometric models and machine learning paradigms. While factor specifications historically relied on linear models, the high-dimensional search space require algorithms capable of managing non-linearities, non-normality, and higher order combinatorial problems. The integration of traditional econometric approaches with modern machine learning frameworks in portfolio management need not be mutually exclusive. In fact, recent research by Cerniglia and Fabozzi (2020) suggests that these two methodologies are complementary. However, Lee, Thompson, et al. (2023) has pointed out that interpretability remains an ongoing issue. Kelly, Malamud, and Zhou (2024) challenge the conventional wisdom that simple, parsimonious models are superior for predicting financial market returns, with both Lee, Kim, et al. (2024) and Simonian (2024) highlighting the advantage of a more adaptive, data-driven approach guided by practical considerations and empirical results.

In quantitative asset management, robust regularization is vital to prevent overfitting of historical factor covariance matrices (see Ledoit and Wolf (2004) and De Miguel, Garlappi, and Uppal (2009) for detail). While shrinkage methodologies can address the estimation error in covariance inputs, the calibration of Lagrange multipliers governing portfolio constraints, such as turnover, volatility, and skewness, remains largely heuristic. This paper systematically explores the regularization surface defined by volatility penalties (β_1) and skewness incentives (β_2) across heterogeneous solver technologies.

To handle complex constraints, classical portfolio optimization relies heavily on exact branch-and-bound algorithms implemented via commercial MIP solvers such as GUROBI or CPLEX, which guarantee global optimality within specified tolerances for cardinality- and turnover-constrained problems (see Cornuejols and Tütüncü (2006) and Bertsimas and Farrokhnia (2023)). At the same time, the quantitative portfolio management space is also experiencing a paradigm shift from static, single-period optimization to dynamic,

sequential decision-making under uncertainty (see Kolm and Ritter (2025)). As Zhang, Zohren, and Roberts (2020) has highlighted, through the framing of portfolio allocation as a Markov Decision Process (MDP), reinforcement learning (RL) agents can interact with market environments to learn adaptive policies directly from reward streams, naturally accommodating multi-objective trade-offs, transaction costs, and feedback effects. While classical quantitative approaches rely on strict stationarity assumptions, RL frameworks excel in capturing temporal dependencies and market frictions.

Nevertheless, Bartram et al. (2021) has mentioned that institutional adoption of RL is frequently hindered by data inefficiency, black-box interpretability, and sensitivity to reward design. Among many actor-critic methods, Soft Actor-Critic (SAC) has been widely adopted due to its entropy-regularized exploration and stability in continuous action spaces (see Haarnoja et al. (2018) and Zarkias et al. (2019)). Practitioners often note that model-free RL agents suffer from high seed sensitivity and can learn fragile policies under poorly specified reward functions, a phenomenon we explicitly quantify in our multi-moment penalty sweeps. Nevertheless, both Jiang, Xu, and Liang (2017) and Ye et al. (2020) have identified that the dynamic asset allocation field has been increasingly their leverage on deep reinforcement learning technique more broadly. To address these implementation hurdles, recent literature has explored diverse architectures and hybrid paradigms. For instance, Han (2023) bypasses the instability of raw weight generation by utilizing deep deterministic policy gradients to dynamically optimize risk budgeting parameters, while Fjellavli et al. (2025) advance multi-objective portfolio optimization by integrating return, volatility, and liquidity objectives via Pareto Q-learning. Comprehensive reviews by Borkar and Jadhav (2024) categorize these underlying RL algorithms, ranging from Q-learning and deep Q-networks to actor-critic methods, while broader surveys by Kolm and Ritter (2025) emphasize that RL is most successfully deployed as a complementary decision engine that acts upon robust predictive signals within simulated or data-rich environments.

Beyond classical and learning-based solvers, Orús, Mugel, and Lizaso (2019) posit that the application of quantum-mechanical principles to financial economics has evolved from theoretical foundations to empirical validation. Quantum algorithms for derivative pricing, risk management (specifically Value-at-Risk and Conditional Value-at-Risk via amplitude estimation), and portfolio optimization have been extensively studied by Woerner and Egger (2019) and Herman et al. (2023). In portfolio theory, combinatorial selection

problems are naturally mapped to Quadratic Unconstrained Binary Optimization (QUBO) or Ising models. Early implementations on D-Wave quantum annealers by Mugel et al. (2022) demonstrated feasibility, but were frequently constrained by synthetic datasets, small asset universes, or a lack of direct comparison against commercial classical solvers under realistic transaction costs. Our study bridges this gap by evaluating photonic quantum hardware on a comprehensive equity factor library under full transaction-cost and turnover penalties.

Optimization Framework

We begin by presenting in full the mathematical framework behind our portfolio optimization problem. Let $\mathbf{w}_t \in \mathbb{R}^N$ denote the vector of portfolio weights across $N = 13$ equity factors at rebalancing period t , subject to the budget constraint $\sum_{i=1}^N w_{i,t} = 1$ and no-short-selling constraints $w_{i,t} \geq 0$. The portfolio optimization agent seeks to maximize an objective function that balances expected return against portfolio volatility, higher-order return asymmetry (skewness), and portfolio turnover:

$$\max_{\mathbf{w}_t} \mathcal{R}(\mathbf{w}_t) = \underbrace{\mathbf{r}_t^\top \mathbf{w}_t}_{\text{expected return}} - \underbrace{\beta_1 \hat{\sigma}_{t,m}}_{\text{volatility penalty}} + \underbrace{\beta_2 \hat{\kappa}_{t,m}}_{\text{skewness reward}} - \underbrace{c_{\text{tc}} \|\mathbf{w}_t - \mathbf{w}_{t-1}\|_1}_{\text{transaction cost penalty}}, \quad (1)$$

where $\mathbf{r}_t$ is the realized factor return vector at month t , $\hat{\sigma}_{t,m}$ is the rolling m -period realized volatility of the portfolio, $\hat{\kappa}_{t,m}$ is the rolling bias-corrected Fisher skewness coefficient of the portfolio return series, and $c_{\text{tc}} = 0.002$ represents proportional transaction costs. The economic roles of the penalty hyperparameters are defined as follows:

- **Primary Volatility Penalty (β_1):** Serves as the primary risk-aversion parameter. Setting $\beta_1 = 0$ maximizes net return without explicit volatility aversion. As β_1 increases, the objective penalizes return volatility with increasing severity, forcing the optimizer toward lower-volatility factor combinations and dampening turnover.
- **Secondary Skewness Incentive (β_2):** Governs preferences for return distribution asymmetry. Positive

values ($\beta_2 > 0$) reward positive realized skewness (fat right tails, mitigating drawdown risk), while negative values penalize right-skewed distributions.

To map factor selection and weighting into a format natively executable by the DIRAC-3 photonic annealer and GUROBI, we formulate the mean-variance factor-subset selection problem as a Quadratic Unconstrained Binary Optimization (QUBO) problem. Let $\mathbf{x} \in \{0, 1\}^N$ be a binary decision vector indicating whether factor i is included in the active portfolio ($\mathbf{x}_i = 1$) or excluded ($\mathbf{x}_i = 0$). The optimization objective is expressed as:

$$\min_{\mathbf{x} \in \{0, 1\}^N} \mathbf{x}^\top Q \mathbf{x} \quad \text{where} \quad Q_{ij} = \begin{cases} -\alpha_i + c_{\text{pos}} + \lambda \Sigma_{ii} + \delta_i & i = j \\ 2\lambda \Sigma_{ij} & i \neq j, \end{cases} \quad (2)$$

where $\alpha \in \mathbb{R}^N$ is the expected return vector generated by the policy model, $\Sigma \in \mathbb{R}^{N \times N}$ is the Ledoit–Wolf shrinkage covariance matrix of factor returns, $c_{\text{pos}} = 0.01$ is a fixed cardinality-opening cost, $\lambda = 1.0$ is the baseline risk-aversion scalar, and $\delta_i = \pm \tau_{\text{pen}}$ represents a dynamic turnover penalty that discourages style drift by penalizing newly introduced factors and rewarding retained factors from the prior period ($\tau_{\text{pen}} = 0.10$).

Once the optimal binary subset $\mathcal{S} = \{i : x_i^* = 1\}$ is determined by the solver, continuous portfolio weights $\mathbf{w}_{\mathcal{S}}$ are derived via restricted mean-variance optimization over the selected factor subset, subject to individual factor bounds $w_i \in [0.00, 0.60]$. Finally, an exponential smoothing filter is applied to transition portfolio weights smoothly between rebalancing dates:

$$\mathbf{w}_t = (1 - \eta) \mathbf{w}_{t-1} + \eta \mathbf{w}_{\mathcal{S}}, \quad (3)$$

with the smoothing parameter $\eta = 0.10$.

The solution $\mathbf{x}^*$ identifies the included factor subset. Given the selected subset $\mathcal{S} = \{i : x_i^* = 1\}$, continuous weights are determined by the restricted mean-variance allocation $\mathbf{w}_{\mathcal{S}} = \Sigma_{\mathcal{S}}^{-1} \alpha_{\mathcal{S}} / \mathbf{1}^\top \Sigma_{\mathcal{S}}^{-1} \alpha_{\mathcal{S}}$, clipped to $[w_{\min}, w_{\max}]$ and renormalized. The final portfolio weights $\mathbf{w}$ apply an exponential smoothing blend $\mathbf{w}_t = (1 - \eta) \mathbf{w}_{t-1} + \eta \mathbf{w}_{\mathcal{S}}$ with blend factor $\eta = 0.10$ to further dampen turnover.

Two nested experimental designs are studied. The β_1 sweep fixes $\beta_2 = 0$ and varies $\beta_1 \in \{0, 0.5, 1, 2, 5, 10, 20, 50\}$ (8 configurations per pipeline, 24 total). The joint sweep varies both: $\beta_1 \in \{0, 1\}$ and $\beta_2 \in \{0, 0.5, 1, 2, 5, 10, 20, 50\}$ (16 configurations per pipeline, 48 total). Independent seeds are used per configuration to estimate cross-seed variance: three for DIRAC-3 given the per-run computational cost of photonic hardware access, and five for GUROBI and SAC. All Dirac-3 jobs use a relaxation schedule of $RS = 2$, selected to balance solution quality against per-run wall-clock cost given the photonic hardware’s queue-based access model and the scale of the 48-configuration sweep.

Next, we proceed to describe in full the end-to-end computational pipeline through which raw monthly factor returns are transformed into a QUBO problem, dispatched to each solver, and converted back to portfolio weights. The three solvers share a common problem-construction stage and diverge only at the solver-dispatch step. Exhibit 1 provides an overview of the portfolio construction process, illustrating our six-stage architecture. To ensure fair comparisons, the experimental architecture executes across a six-stage data-to-portfolio pipeline that standardizes inputs across all three solver engines. The process begins with data ingestion and preprocessing, where monthly factor returns from the JKP library are filtered to isolate $N = 13$ value-weighted, capped US equity anomaly factors spanning a historical panel of $T = 164$ months ($\mathbf{R} \in \mathbb{R}^{T \times N}$). The dataset is partitioned chronologically using an 80/20 train-test split, reserving 131 months for model training and 33 months for out-of-sample evaluation. All reported performance metrics are computed exclusively over the test window. Following ingestion, the framework performs rolling covariance estimation at each rebalancing date t . To handle the relatively short 24-month lookback window ($m_{\text{cov}} = 24$) relative to the factor dimension, the covariance matrix $\hat{\Sigma}_t$ is estimated using the shrinkage approach introduced by Ledoit and Wolf (2004). The matrix is subsequently symmetrized via $\hat{\Sigma}_t \leftarrow \frac{1}{2}(\hat{\Sigma}_t + \hat{\Sigma}_t^\top) + \varepsilon \mathbf{I}$ with a small diagonal perturbation ($\varepsilon = 10^{-8}$) to ensure numerical positive definiteness and prevent conditioning instability.

The next two stages cover signal generation and problem formulation, where a fundamental structural distinction emerges between the pure reinforcement learning architecture and the solver-augmented hybrid pipelines. Under the standalone Soft Actor-Critic (SAC) agent, the policy network outputs a continuous action vector $\mathbf{a}_t \in \mathbb{R}^N$ at each step, directly parametrizing the portfolio weights through

a softmax transformation ($\mathbf{w}_t = \text{softmax}(\mathbf{a}_t)$) and calculating rewards directly from realized portfolio returns without formulating an intermediate optimization problem. Conversely, for DIRAC-3 and GUROBI, the policy network acts as a signal generator whose continuous action vector represents an expected return forecast ($\boldsymbol{\alpha} = \mathbf{a}_t$). This expected return signal, along with the shrinkage covariance matrix $\hat{\Sigma}_t$ and the preceding binary allocation vector $\mathbf{x}^{\text{prev}}$, is assembled into a sparse Quadratic Unconstrained Binary Optimization (QUBO) matrix Q . The resulting polynomial representation stores linear diagonal terms $Q_{ii} = -\alpha_i + c_{\text{pos}} + \lambda \Sigma_{ii} + \delta_i$ to capture return targets, position costs, individual variance, and turnover penalties, alongside non-zero quadratic off-diagonal terms $Q_{ij} = 2\lambda \Sigma_{ij}$ to model pairwise factor covariances.

In the execution phase, the formulated objective is dispatched according to each architecture’s specific solver interface. For the photonic quantum pipeline, the sparse polynomial is submitted to the DIRAC-3 photonic annealer, where returning candidate binary vectors from which the state yielding the lowest objective energy $\mathbf{x}^*$ is extracted. For the classical benchmark, the problem is formulated as a binary quadratic program and solved via branch-and-bound, thresholding the binary solution at $x_i^* = \mathbb{I}[x_i > 0.5]$. The pure SAC agent bypasses this dispatch phase entirely, relying on its internal policy network to emit direct weight updates evaluated over a 6-month rolling window for volatility and skewness penalties.

Finally, the pipeline concludes with weight reconstruction and portfolio evaluation. Using the binary factor subset $\mathcal{S} = \{i : x_i^* = 1\}$ identified by the solver, continuous weights $\mathbf{w}_{\mathcal{S}}$ are derived via restricted mean-variance optimization over the selected factors, subject to box constraints $[w_{\min}, w_{\max}] = [0.00, 0.60]$ and unit sum normalization. To dampen excessive trading activity, an exponential smoothing filter blends the newly optimized subset weights with prior allocations according to $\mathbf{w}_t = (1 - \eta)\mathbf{w}_{t-1} + \eta\mathbf{w}_{\mathcal{S}}$ using a smoothing factor of $\eta = 0.10$. These smoothed final weights are subsequently used to record realized portfolio returns $r_{\text{port},t} = \mathbf{w}_t^\top \mathbf{r}_t$, compute fractional L_1 -norm turnover $\text{TO}_t = \|\mathbf{w}_t - \mathbf{w}_{t-1}\|_1$, and supply state observations to feed the policy network for the subsequent step. A detailed schematic of the full pipeline is summarized in Exhibit 1.

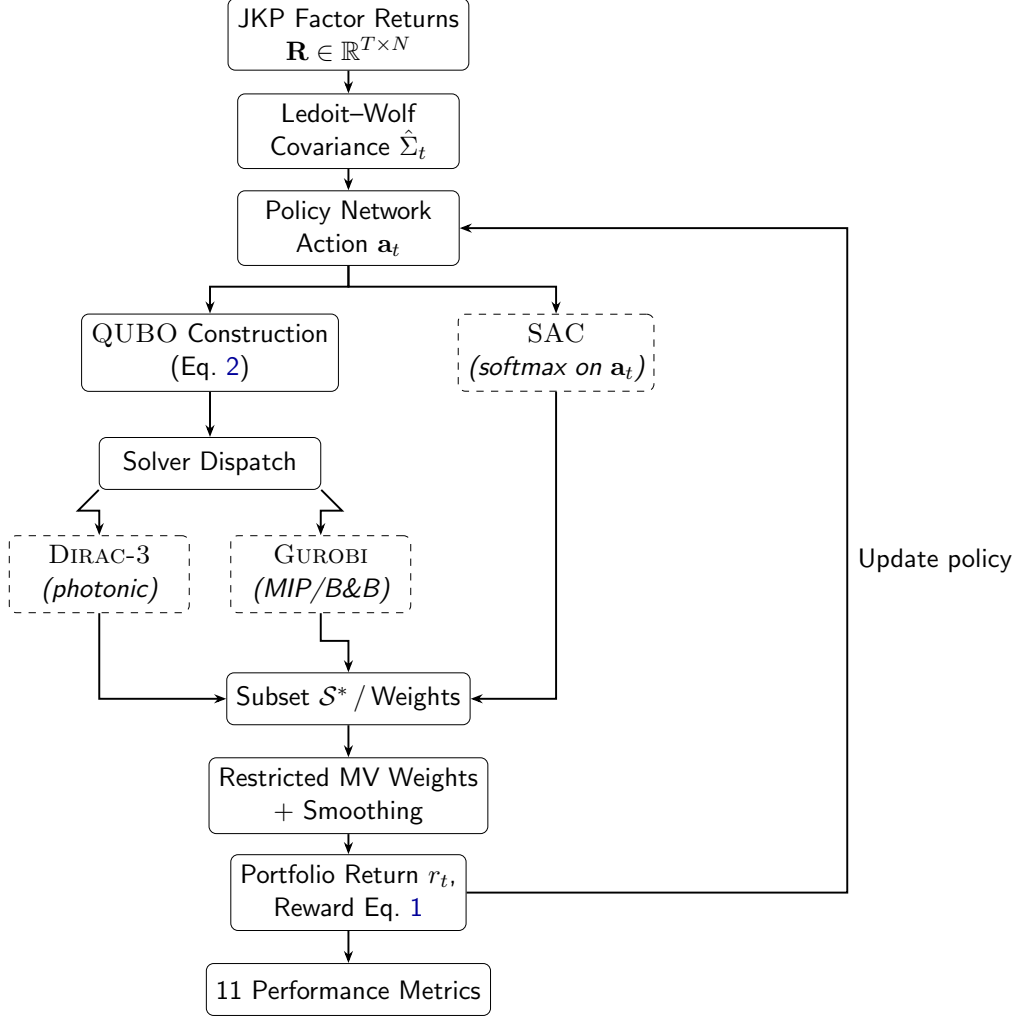


Exhibit 1: End-to-end data-to-portfolio pipeline. All three solvers share Stages 1–3 (data ingestion, covariance estimation, and policy action). DIRAC-3 and GUROBI proceed through Stage 4 (QUBO construction) and Stage 5 (solver dispatch): DIRAC-3 submits the polynomial to the photonic annealer API, while GUROBI solves the binary quadratic program via branch-and-bound. SAC bypasses both the QUBO construction and dispatch stages, applying a softmax directly to the raw policy action vector $\mathbf{a}_t$. Stages 6 onward (weight reconstruction, reward computation, metric aggregation) are shared.

Empirical Analyses

Data and Experimental Design

We use the Jensen–Kelly–Pedersen global factor library by Jensen, Kelly, and Pedersen (2023), restricting to 13 US equity anomaly factors: value, momentum, short-term reversal, quality, profitability, investment,

low-risk, low-leverage, seasonality, accruals, debt issuance, idiosyncratic volatility, and size. Monthly factor returns span 164 months (approximately 13.7 years) and cover a full market cycle including the 2020 COVID-19 drawdown and the 2022 rate-tightening episode. Returns are net of transaction costs imputed at the level of Jensen, Kelly, and Pedersen (2023). The factor universe is filtered to include only value-weighted, capped return series with no missing observations across the full panel.

To evaluate pipeline performance, we assess eleven financial metrics, categorized into return, risk-adjusted, tail-risk, and portfolio-composition measures. For returns and risk, we measure annual return (%), and annual volatility (%), both are annualized scaled from the mean monthly raw metrics. Risk-adjusted performance is evaluated using Sharpe Ratio (our primary metric) and Sortino Ratio, which replaces total volatility with downside deviation σ_{down} computed exclusively over negative returns.

Tail risks and distribution shapes are captured via realized skewness (the Fisher bias-corrected third standardised moment of monthly returns), conditional value-at-risk (CVaR_{5%}, %) expressed as the mean return over the worst 5% of observations, and max drawdown (% MDD), defined as the peak-to-trough percentage decline over the evaluation window. We also use Calmar Ratio which combines return and drawdown by dividing annualized return by the absolute maximum drawdown.

Finally, we track portfolio structure and execution friction through average turnover, measured as the mean L_1 -norm of weight changes $\|\mathbf{w}_t - \mathbf{w}_{t-1}\|_1$ between consecutive months. Concentration is quantified using the Herfindahl–Hirschman Index (HHI), calculated as $\sum_{i=1}^N w_i^2$, where a uniform allocation yields $1/N \approx 0.077$ for $N = 13$, and the CR-5 concentration ratio, defined as the sum of the top-5 factor weights.

Results Overview

Exhibit 2 reports peak metrics per pipeline across the β_1 sweep ($\beta_2 = 0$ throughout). The results reveal differentiated performance profiles that vary by metric and configuration. No single pipeline dominates on all metrics simultaneously: DIRAC-3 leads on Calmar ratio and maximum drawdown at its optimal settings, GUROBI leads on Sharpe ratio and CVaR_{5%}, and SAC records the best realized skewness at $\beta_1 = 0$ and the lowest HHI at high β_1 .

Exhibit 2: Peak performance across the β_1 sweep ($\beta_2 = 0$).

Metric	SAC	GUROBI	DIRAC-3	Winner
Peak Sharpe	0.572 ($\beta_1 = 50$)	0.718 ($\beta_1 = 5$)	0.715 ($\beta_1 = 2$)	GUROBI
Best Calmar	0.214 ($\beta_1 = 10$)	0.362 ($\beta_1 = 5$)	0.376 ($\beta_1 = 1$)	DIRAC-3
Best CVaR _{5%}	-1.223 ($\beta_1 = 50$)	-0.983 ($\beta_1 = 0$)	-1.015 ($\beta_1 = 1$)	GUROBI
Best Skewness	0.332 ($\beta_1 = 0$)	0.287 ($\beta_1 = 50$)	0.265 ($\beta_1 = 2$)	SAC
Lowest HHI	0.113 ($\beta_1 = 20$)	0.136 ($\beta_1 = 1$)	0.192 ($\beta_1 = 0$)	SAC
Lowest MDD	-5.99%	-4.33% ($\beta_1 = 5$)	-3.37% ($\beta_1 = 1$)	DIRAC-3

Exhibit 3 presents a granular, head-to-head performance comparison of the three execution pipelines across the primary penalty parameter grid ($\beta_1 \in \{0, 1, 2, 5, 10, 20, 50\}$ with $\beta_2 = 0$). This sweep allows us to trace the sensitivity of risk-adjusted returns, tail-risk profiles, and portfolio concentration to hyperparameter selection across distinct algorithmic paradigms: quantum-annealing heuristics (DIRAC-3), exact mixed-integer linear programming (GUROBI), and stochastic reinforcement learning (SAC).

DIRAC-3 demonstrates a highly localized optimal operating window concentrated at $\beta_1 \in \{1, 2\}$. At $\beta_1 = 1$, DIRAC-3 attains the sweep’s premier Calmar ratio of 0.376, accompanied by a maximum drawdown (MDD) of -3.37% and a robust annualized Sharpe ratio of 0.697. Moving to $\beta_1 = 2$, DIRAC-3 reaches its peak Sharpe ratio of 0.715, the highest achieved by any pipeline at this parameter setting, while maintaining a competitive annual volatility of 2.05% and positive realized skewness (+0.265). Factor attribution reveals that this optimal window is structurally anchored by quality-adjacent, persistent-signal factors, specifically accruals (20.5%), investment (14.5%), and low-leverage (10.2%). This structural tilt directly underpins the pipeline’s superior tail-risk attenuation.

Conversely, GUROBI achieves its apex performance at $\beta_1 = 5$, posting a Sharpe ratio of 0.718, a Sortino ratio of 0.764, and a muted annualized volatility of 1.81%. The economic mechanism driving GUROBI’s success at this setting is its exceptionally balanced factor distribution, highlighted by a Herfindahl-Hirschman Index (HHI) of 0.157 and a top-5 concentration ratio (CR-5) of 0.816. Low-leverage (13.9%) and debt-issuance (10.0%) serve as co-leaders within a broadly diversified multi-factor matrix, reflecting the deterministic convergence guarantees inherent to the branch-and-bound solver.

While SAC generates the highest nominal annualized return in the sweep (1.85% at $\beta_1 = 2$), this return is

Exhibit 3: All-pipeline comparison across $\beta_1 \in \{0, 1, 2, 5, 10, 20, 50\}$ at $\beta_2 = 0$.

Metric	$\beta_1 = 0$	$\beta_1 = 1$	$\beta_1 = 2$	$\beta_1 = 5$	$\beta_1 = 10$	$\beta_1 = 20$	$\beta_1 = 50$
<i>Ann. Return (%)</i>							
SAC	1.28	1.20	1.85	1.46	1.39	1.45	1.05
Gurobi	0.92	0.98	1.34	1.29	1.25	1.34	1.12
Dirac	1.27	1.29	1.46	1.43	1.67	1.51	1.20
<i>Ann. Volatility (%)</i>							
SAC	2.64	2.25	3.67	2.95	2.49	2.71	1.88
Gurobi	1.68	1.77	2.14	1.81	2.18	2.07	1.86
Dirac	1.86	1.86	2.05	2.51	2.82	2.23	1.86
<i>Sharpe ($\sqrt{12}$)</i>							
SAC	0.492	0.539	0.506	0.505	0.571	0.550	0.572
Gurobi	0.563	0.568	0.629	0.718	0.616	0.621	0.612
Dirac	0.630	0.697	0.715	0.551	0.610	0.692	0.652
<i>Sortino</i>							
SAC	0.536	0.561	0.544	0.530	0.603	0.573	0.598
Gurobi	0.600	0.600	0.671	0.764	0.643	0.659	0.638
Dirac	0.672	0.731	0.762	0.587	0.644	0.731	0.693
<i>Realized Skewness</i>							
SAC	0.332	0.014	-0.237	0.049	0.006	-0.131	-0.377
Gurobi	0.086	0.037	-0.434	0.159	0.197	0.013	0.287
Dirac	-0.157	0.263	0.265	0.016	-0.075	-0.308	0.014
<i>CVaR_{5%} (%)</i>							
SAC	-1.527	-1.335	-2.388	-1.991	-1.521	-1.690	-1.223
Gurobi	-0.983	-1.042	-1.334	-1.049	-1.154	-1.248	-1.052
Dirac	-1.221	-1.015	-1.176	-1.578	-1.678	-1.355	-1.201
<i>Max Drawdown (%)</i>							
SAC	-9.45	-6.50	-12.23	-10.35	-7.23	-7.96	-5.99
Gurobi	-5.77	-5.32	-6.14	-4.33	-6.67	-6.69	-5.63
Dirac	-4.48	-3.37	-6.48	-8.22	-7.79	-4.85	-6.00
<i>Calmar Ratio</i>							
SAC	0.143	0.205	0.181	0.167	0.214	0.190	0.200
Gurobi	0.181	0.205	0.271	0.362	0.205	0.224	0.224
Dirac	0.305	0.376	0.333	0.186	0.238	0.352	0.286
<i>Avg. Turnover</i>							
SAC	0.021	0.021	0.020	0.020	0.021	0.021	0.019
Gurobi	0.021	0.025	0.025	0.018	0.024	0.018	0.023
Dirac	0.017	0.021	0.024	0.022	0.021	0.028	0.019
<i>HHI</i>							
SAC	0.138	0.146	0.229	0.172	0.119	0.113	0.141
Gurobi	0.139	0.136	0.156	0.157	0.141	0.170	0.137
Dirac	0.192	0.218	0.210	0.225	0.212	0.240	0.245
<i>CR-5</i>							
SAC	0.686	0.725	0.723	0.724	0.662	0.642	0.707
Gurobi	0.719	0.715	0.821	0.816	0.735	0.782	0.674
Dirac	0.860	0.834	0.898	0.929	0.965	0.958	0.945

achieved at the expense of severe tail risk exposure and volatility expansion. The excess return over GUROBI at $\beta_1 = 2$ (1.85% vs. 1.34%) fails to compensate for a fourfold expansion in Conditional Value-at-Risk (CVaR_{5%} reaching -2.388%), a negative realized skewness (-0.237), and a significant volatility premium relative to the exact solver.

For institutional mandates operating under strict drawdown constraints, tail-risk metrics (CVaR_{5%} and MDD) are paramount. GUROBI exhibits the most stable downside profile across the board. At $\beta_1 = 0$, GUROBI records the sweep’s lowest CVaR_{5%} of -0.983% , supported by a tight compositional bandwidth where HHI remains bound between 0.136 and 0.170 across all β_1 specifications.

DIRAC-3 displays exceptional tail risk protection at $\beta_1 = 1$ (CVaR_{5%} of -1.015% and MDD of -3.37%). However, its downside metrics deteriorate rapidly outside its optimal window, particularly as portfolio concentration increases. At high penalty thresholds ($\beta_1 \in \{10, 20, 50\}$), DIRAC-3’s CR-5 climbs to extreme levels (peaking at 0.965 at $\beta_1 = 10$), indicating an over-concentration in a small subset of factors that erodes the benefit of diversification without yielding proportional gains in Sharpe or Calmar ratios.

SAC consistently trails in downside metrics. Although its CVaR_{5%} improves to -1.223% at $\beta_1 = 50$, confirming that the stochastic actor benefits from strong penalty regularization, its corresponding Sharpe (0.572) and Calmar (0.200) ratios remain sub-optimal compared to the deterministic and heuristic baselines.

Beyond point-estimate performance, reproducibility is a critical criterion for production deployment in quantitative finance. GUROBI and DIRAC-3 exhibit strong cross-seed stability. For instance, at $\beta_1 = 20$, GUROBI achieves a Calmar ratio of 0.224 with a cross-seed return standard deviation of just 0.10 percentage points, and its cross-seed Sharpe standard deviation remains strictly below 0.05. DIRAC-3 maintains a similarly controlled cross-seed Sharpe standard deviation (<0.08) across its entire β_1 grid.

In stark contrast, SAC suffers from pronounced seed instability. At $\beta_1 = 20$, the cross-seed standard deviation of SAC’s Sharpe ratio reaches 0.206, spanning a wide range from 0.168 to 0.718 (a spread of 0.55 points). This high variance introduces substantial model risk, rendering unconstrained reinforcement learning pipelines difficult to calibrate for live production without extensive ensemble regularization.

The comprehensive empirical evidence above indicates a clear bifurcation in pipeline utility: GUROBI is best suited for institutional mandates requiring deterministic feasibility certificates, low turnover stability, and predictable drawdown boundaries, with $\beta_1 = 5$ and $\beta_1 = 20$ representing the optimal operational setpoints. DIRAC-3 offers superior risk-adjusted alpha capture via its quantum-annealing heuristics, provided hyperparameter selection is strictly restricted to the narrow $\beta_1 \in \{1, 2\}$ sweet spot to avoid

hyper-concentration. SAC captures high absolute momentum returns but requires enhanced regularization and ensemble smoothing to overcome the seed-dependent variance that undermines its out-of-sample reliability.

Detailed Hyperparameter Sweep

Exhibit 4 reports peak metrics across the joint sweep. The introduction of the β_2 (skewness incentive) leads to substantially different performance across the three pipelines, and reveals both the global optimum configurations for each solver and the failure modes that arise under large penalty magnitudes.

Exhibit 4: Peak performance across the joint (β_1, β_2) sweep.

Metric	SAC	GUROBI	DIRAC-3	Winner
Peak Sharpe	0.602 at (1, 0.5)	0.715 at (0, 50)	0.760 at (0, 1)	DIRAC-3
Best Calmar	0.262 at (0, 0.5)	0.324 at (1, 50)	0.567 at (0, 1)	DIRAC-3
Best CVaR _{5%}	-1.228 at (0, 2)	-0.863 at (0, 1)	-0.895 at (1, 10)	GUROBI
Best Skewness	0.475 at (1, 20)	0.377 at (1, 5)	0.597 at (0, 50)	DIRAC-3
Lowest HHI	0.132 at (1, 0.5)	0.135 at (0, 0.5)	0.161 at (1, 0.5)	GUROBI
Lowest MDD	-5.99%	-4.95% at (0, 50)	-2.63% at (0, 0.5)	DIRAC-3

Exhibit 5 provide full per-configuration results for $\beta_1 = 0$ and $\beta_1 = 1$, respectively. DIRAC-3's global optimum in the full experiment is $(\beta_1 = 0, \beta_2 = 1)$: Sharpe 0.760, Sortino 0.841, Calmar 0.567, MDD -3.47%, and CVaR_{5%} -1.278%. Factor composition at this setting is highly concentrated: accruals (25.9%) and investment (19.6%) jointly account for 45.5% of total portfolio weight. This concentration in quality-adjacent factors is associated with superior skewness and CVaR_{5%} outcomes relative to failure-mode configurations where momentum or low-risk dominate.

The $(\beta_1 = 0, \beta_2 = 0.5)$ configuration achieves the lowest maximum drawdown of the entire combined experiment (-2.63%), with Calmar 0.538 and CVaR_{5%} -1.107%. These two adjacent β_2 values correspond to the “capital-preservation” range for DIRAC-3 at $\beta_1 = 0$: both configurations deliver MDD below -3.5% while retaining Sharpe above 0.72. Portfolio concentration at $(\beta_1 = 0, \beta_2 = 0.5)$ is also relatively contained for DIRAC-3: HHI 0.196 and CR-5 0.943.

Exhibit 6 provides a granular metric comparison between DIRAC-3's optimal configurations and the leading

Exhibit 5: All-pipeline comparison across β_2 at $\beta_1 = 0$ and $\beta_1 = 1$. All figures are seed means.

β_1	β_2	Sharpe			CVaR _{5%} (%)			HHI		
		SAC	GUROBI	DIRAC-3	SAC	GUROBI	DIRAC-3	SAC	GUROBI	DIRAC-3
0	0	0.536	0.603	0.646	-1.933	-1.115	-1.419	0.201	0.148	0.353
	0.5	0.521	0.507	0.721	-2.145	-1.135	-1.107	0.154	0.135	0.196
	1	0.453	0.565	0.760	-2.233	-0.863	-1.278	0.177	0.163	0.340
	2	0.485	0.590	0.590	-1.228	-1.081	-1.517	0.154	0.157	0.268
	5	0.436	0.568	0.720	-1.832	-1.440	-0.979	0.200	0.140	0.235
	10	0.304	0.605	0.666	-2.331	-1.360	-1.904	0.333	0.170	0.245
	20	0.088	0.617	0.421	-2.237	-1.230	-1.255	0.593	0.140	0.281
	50	0.163	0.715	0.575	-2.066	-0.911	-1.255	0.520	0.187	0.225
1	0	0.555	0.563	0.575	-1.339	-1.092	-1.157	0.153	0.138	0.181
	0.5	0.602	0.566	0.653	-1.363	-1.099	-1.099	0.132	0.163	0.161
	1	0.497	0.566	0.580	-1.260	-1.130	-1.169	0.173	0.153	0.176
	2	0.510	0.532	0.555	-1.520	-1.201	-1.601	0.153	0.175	0.251
	5	0.487	0.502	0.637	-1.389	-1.368	-0.895	0.163	0.202	0.279
	10	0.343	0.584	0.655	-2.370	-1.180	-0.895	0.373	0.228	0.254
	20	0.358	0.601	0.515	-2.505	-1.190	-0.989	0.537	0.170	0.245
	50	0.386	0.646	0.580	-2.224	-1.419	-1.450	0.344	0.182	0.198

alternatives from the classical pipelines within the joint hyperparameter sweep. Relative to GUROBI's best-Sharpe configuration located at $(\beta_1 = 0, \beta_2 = 50)$ (Sharpe 0.715), DIRAC-3 at $(\beta_1 = 0, \beta_2 = 1)$ delivers a Sharpe premium of +0.045, a Sortino premium of +0.100, a Calmar premium of +0.310, and an attenuation in Maximum Drawdown (MDD) of 1.48 percentage points. These risk-adjusted gains are achieved alongside a minor trade-off: a CVaR_{5%} differential of -0.367 percentage points and a significantly higher Herfindahl-Hirschman Index (0.340 vs. 0.187).

Exhibit 6: DIRAC-3 best configurations versus best classical configurations in the joint sweep.

Metric	DIRAC-3 (0, 0.5)	DIRAC-3 (0, 1)	GUROBI (0, 1)	GUROBI (0, 50)	SAC (1, 0.5)
Ann. Return (%)	1.39	1.70	0.84	1.09	1.34
Ann. Volatility (%)	1.96	2.23	1.53	1.57	2.23
Sharpe Ratio	0.721	0.760	0.565	0.715	0.602
Sortino Ratio	0.804	0.841	0.583	0.741	0.612
Realized Skewness	-0.014	-0.009	+0.263	-0.112	-0.143
CVaR _{5%} (%)	-1.107	-1.278	-0.863	-0.911	-1.363
Max Drawdown (%)	-2.63	-3.47	-5.37	-4.95	-6.99
Calmar Ratio	0.538	0.567	0.190	0.257	0.233
HHI	0.196	0.340	0.163	0.187	0.132
CR-5	0.943	0.895	0.842	0.792	0.700

Consequently, for unconstrained return-seeking mandates where mild tail-risk expansion can be absorbed, this performance profile decisively favors the DIRAC-3 pipeline. Conversely, for institutional mandates where strict Conditional Value-at-Risk or top-5 concentration ratio (CR-5) ceilings are binding, GUROBI configurations such as $(\beta_1 = 0, \beta_2 = 1)$ or $(\beta_1 = 0, \beta_2 = 50)$ remain the preferred operational choice.

At the specific joint setting $(\beta_1 = 1, \beta_2 = 10)$, DIRAC-3 achieves a $\text{CVaR}_{5\%}$ of -0.895% , marking the premier tail-risk attenuation within the $\beta_1 = 1$ sub-regime, accompanied by a Sharpe ratio of 0.655, an MDD of -3.41% , and a Calmar ratio of 0.381. This configuration warrants serious consideration as a deployment candidate for risk-adjusted mandates that can tolerate moderate portfolio concentration (HHI of 0.254, CR-5 of 0.933) while capturing the robust tail properties characteristic of a classical GUROBI-class solver.

GUROBI's most prominent advantage across the joint sweep is its deterministic tail-risk control. Its optimal $\text{CVaR}_{5\%}$ of -0.863% at $(\beta_1 = 0, \beta_2 = 1)$ is the lowest recorded across either sweep, an outcome underpinned by a broad factor distribution where accruals, investment, and quality share leadership at comparable weights. At $(\beta_1 = 0, \beta_2 = 50)$, GUROBI's peak Sharpe configuration in the joint sweep (0.715), the $\text{CVaR}_{5\%}$ remains highly contained at -0.911% , with an HHI of 0.187 driven compositionally by quality (17.1%), low-leverage (11.3%), and seasonality (10.9%).

Across all 16 joint configurations, GUROBI's HHI is tightly bounded between 0.135 and 0.228, confirming a structural concentration stability unattainable by stochastic or heuristic alternatives. For example, under $(\beta_1 = 0, \beta_2 = 20)$, a region where the SAC pipeline undergoes severe performance degradation, GUROBI preserves a Sharpe ratio of 0.617, a $\text{CVaR}_{5\%}$ of -1.230% , and an HHI of 0.140. This robustness is supported in part by the exact branch-and-bound solver, which enforces feasibility constraints and prevents optimization divergence under extreme penalty regimes.

The region defined by $\beta_1 = 0$ and $\beta_2 \geq 10$ constitutes a zone of structural degeneracy for the SAC pipeline. The underlying failure mechanism is rooted in objective-function misspecification: absent a binding primary β_1 penalty anchor, the policy gradient regularizes excessively toward low-activity factors irrespective of their marginal return contribution, thereby collapsing portfolio diversification entirely.

At $(\beta_1 = 0, \beta_2 = 20)$, the optimization collapses into a concentrated two-factor allocation comprising low-leverage (30.0%) and investment (27.9%), which jointly account for 57.9% of total portfolio weight. This structural concentration precipitates severe performance deterioration: the Sharpe ratio drops to 0.088, MDD expands to -14.64% , $\text{CVaR}_{5\%}$ deepens to -2.237% , HHI rises to 0.593, and CR-5 reaches 0.985. Pushing the secondary penalty to $(\beta_1 = 0, \beta_2 = 50)$ drives CR-5 to 0.996, degenerating the output into effectively a single-factor portfolio. A similar mode collapse recurs at $(\beta_1 = 1, \beta_2 = 20)$, where the low-risk factor alone commands 45.5% of the allocation, the highest single-factor weight observed across all 48 grid configurations, yielding a $\text{CVaR}_{5\%}$ of -2.505% and an HHI of 0.537. Empirically, the parameter spaces defined by $\beta_2 \geq 10$ under $\beta_1 = 0$, and $\beta_2 \geq 20$ under $\beta_1 = 1$, must be strictly excluded from any production SAC operating specification to prevent catastrophic out-of-sample drawdowns.

Unified Efficient Frontier Comparison

Exhibit 7 compares the unified efficient frontiers across all (β_1, β_2) configurations for the three architectures. The probabilistic nature of DIRAC-3 (Exhibit 7a) leads to a wider dispersion around the return–volatility spectrum, though it is able to explore and locate optimal points aligning with its peak Sharpe and Calmar ratios. In contrast, GUROBI (Exhibit 7b) displays tightly clustered points, reflecting its lower cross-seed variance and robust reproducibility. SAC (Exhibit 7c) demonstrates severe instability, evidenced by wide vertical dispersion at comparable volatility levels and negative-return outliers corresponding to the collapse region at $\beta_1 = 0, \beta_2 \geq 10$.

Concentration and Portfolio Composition

Portfolio concentration differs substantially and systematically across the three pipelines. Exhibits 8 and 9 report HHI and CR-5 across the β_1 and joint sweeps, respectively.

Cross-sectional comparison reveals three distinct characteristics across the optimization engines. First, DIRAC-3 portfolios are consistently more concentrated than the classical baselines, exhibiting a mean HHI of 0.228 in the β_1 sweep, compared to 0.150 for SAC and 0.152 for GUROBI. Furthermore, DIRAC-3's

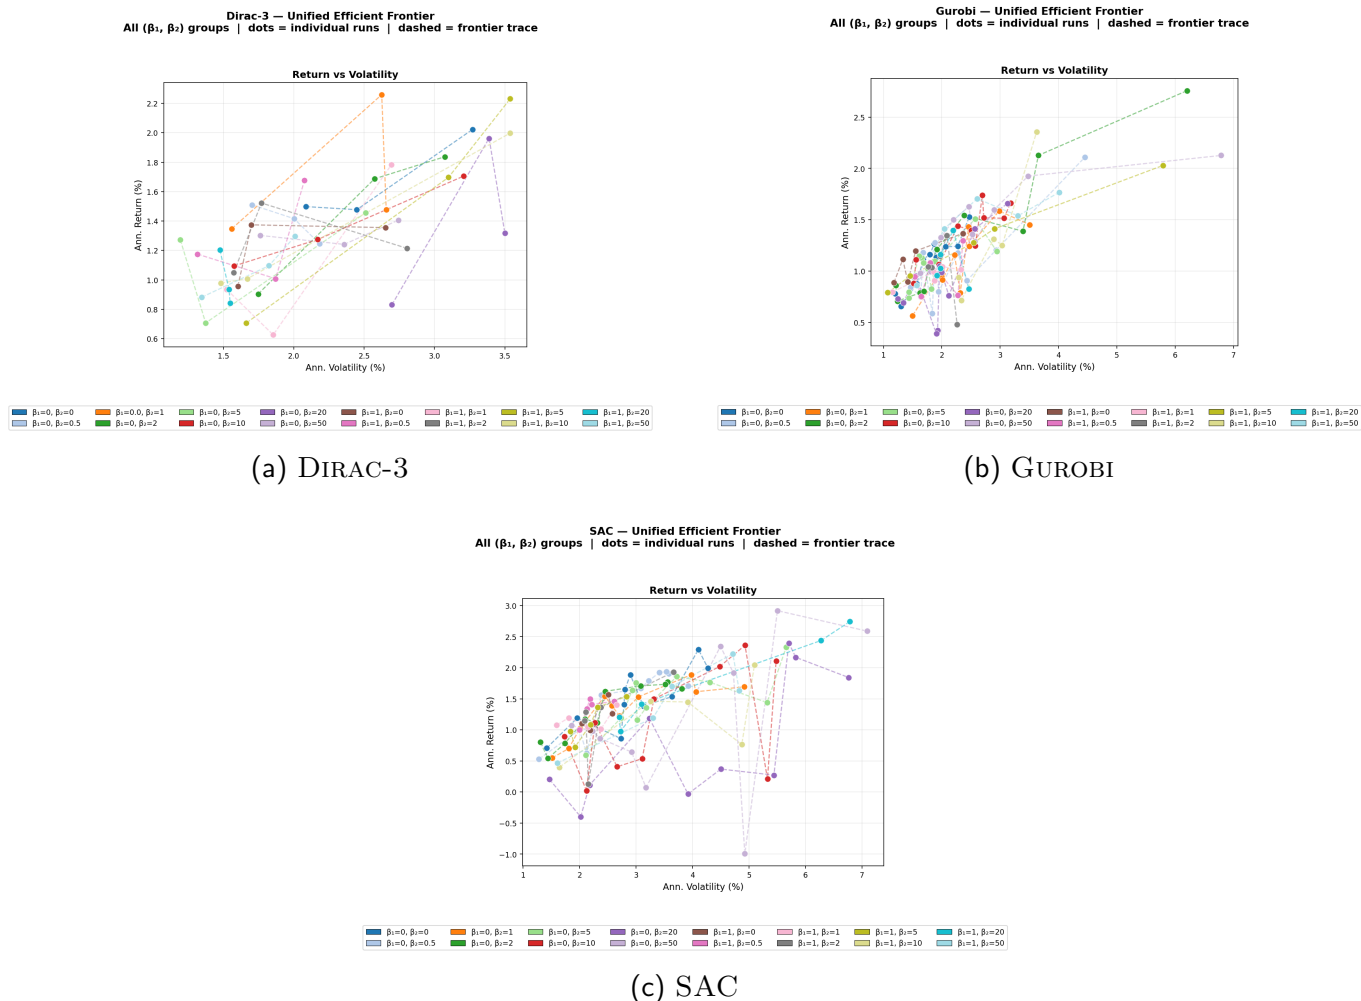


Exhibit 7: Unified efficient frontiers across all (β_1, β_2) configurations for DIRAC-3 (a), Gurobi (b), and SAC (c). Individual seed runs are shown as dots, configuration means as diamonds, and dashed lines trace the configuration sequence.

top-5 concentration ratio (CR-5) averages 0.916, indicating that the five largest factor allocations routinely capture over 90% of total portfolio weight. Institutional practitioners operating under strict mandate-mandated CR-5 ceilings should note that no DIRAC-3 configuration across either sweep achieves a CR-5 below 0.825. Second, Gurobi maintains the most stable diversification profile: its HHI is tightly bounded between 0.135 and 0.228 across the entire joint sweep, with no single factor exceeding 17.7% allocation in any configuration. This consistency is directly attributable to the exact branch-and-bound solver's ability to satisfy penalty objectives while preserving portfolio breadth. Third, SAC exhibits a bimodal concentration structure: it remains well-controlled (HHI between 0.113 and 0.229) in low- β_2 regimes, but experiences

Exhibit 8: Portfolio concentration across the β_1 sweep (seed means).

β_1	HHI			CR-5		
	SAC	GUROBI	DIRAC-3	SAC	GUROBI	DIRAC-3
0	0.138	0.139	0.192	0.686	0.719	0.860
0.5	0.134	0.161	0.281	0.727	0.752	0.936
1	0.146	0.136	0.218	0.725	0.715	0.834
2	0.229	0.156	0.210	0.723	0.821	0.898
5	0.172	0.157	0.225	0.724	0.816	0.929
10	0.119	0.141	0.212	0.662	0.735	0.965
20	0.113	0.170	0.240	0.642	0.782	0.958
50	0.141	0.137	0.245	0.707	0.674	0.945
Mean	0.150	0.152	0.228	0.700	0.752	0.916

Exhibit 9: HHI and CR-5 across the joint (β_1, β_2) sweep.

Config	HHI			CR-5		
	SAC	GUROBI	DIRAC-3	SAC	GUROBI	DIRAC-3
(0, 0)	0.201	0.148	0.353	0.758	0.758	0.957
(0, 0.5)	0.154	0.135	0.196	0.753	0.719	0.943
(0, 1)	0.177	0.163	0.340	0.721	0.842	0.895
(0, 2)	0.154	0.157	0.268	0.727	0.813	0.883
(0, 5)	0.200	0.140	0.235	0.811	0.736	0.966
(0, 10)	0.333	0.170	0.245	0.948	0.804	0.965
(0, 20)	0.593	0.140	0.281	0.985	0.723	0.919
(0, 50)	0.520	0.187	0.225	0.996	0.792	0.955
(1, 0)	0.153	0.138	0.181	0.735	0.706	0.825
(1, 0.5)	0.132	0.163	0.161	0.700	0.851	0.830
(1, 1)	0.173	0.153	0.176	0.707	0.784	0.880
(1, 2)	0.153	0.175	0.251	0.734	0.771	0.966
(1, 5)	0.163	0.202	0.279	0.792	0.885	0.966
(1, 10)	0.373	0.228	0.254	0.935	0.955	0.933
(1, 20)	0.537	0.170	0.245	0.976	0.875	0.933
(1, 50)	0.344	0.182	0.198	0.979	0.869	0.923

severe concentration (yielding an HHI of up to 0.593) when $\beta_2 \geq 10$ under $\beta_1 = 0$.

Across both sweeps, the three pipelines exhibit distinct factor allocation patterns that remain largely invariant within each solver architecture. High-performing DIRAC-3 configurations consistently converge on a concentrated handful of factors. At $\beta_1 = 1$ (the optimal Calmar setting in the primary sweep), the three largest allocations are accruals (20.5%), investment (14.5%), and low-leverage (10.2%). At the global

optimum ($\beta_1 = 0, \beta_2 = 1$), accruals (25.9%) and investment (19.6%) jointly command 45.5% of total weight. At ($\beta_1 = 0, \beta_2 = 0.5$), the configuration achieving the lowest MDD, investment and low-leverage each capture 20.0%. Note that these specific factors, like accruals and investment, are well-documented high-return, low-tail-risk anomalies within the JKP data library. The photonic solver’s stochastic search over the quadratic unconstrained binary optimization (QUBO) landscape appears to discover and exploit them more reliably than deterministic alternatives.

Deviations from this compositional pattern serve as reliable basis for operational diagnostics. When setting $\beta_1 = 0.5$, momentum spikes to 20.6% of total weight, coinciding directly with the observed volatility expansion and turnover anomalies. Similarly, at ($\beta_1 = 0, \beta_2 = 20$), the accruals allocation becomes fragmented and isolated, degrading Sharpe ratio to 0.421 and MDD to -11.09% . Consequently, tracking DIRAC-3 factor composition provides a valuable real-time operational signal: an undue dominance of momentum or low-risk factors indicates that the portfolio has drifted into a degraded transition-zone regime.

Factor weights evolve smoothly across penalty configurations, completely avoiding the single- or two-factor dominance observed in optimal DIRAC-3 or failure-state SAC portfolios. At ($\beta_1 = 0, \beta_2 = 1$) (optimal CVaR_{5%}), accruals, investment, and quality share leadership at comparable weights. At ($\beta_1 = 0, \beta_2 = 50$) (peak Sharpe in the joint sweep), quality (17.1%), low-leverage (11.3%), and seasonality (10.9%) co-lead the allocation. This compositional breadth directly underpins GUROBI’s narrow CVaR_{5%} bandwidth and minimal cross-seed variance across specifications.

In the $\beta_1 = 0$ regime, portfolio composition degrades progressively as the secondary penalty β_2 increases. At $\beta_2 = 0$, the portfolio is broadly diversified across 13 factors, with no single allocation exceeding 14.8%. However, at $\beta_2 = 20$, two factors, low-leverage (30.0%) and investment (27.9%), absorb 57.9% of total weight. A similarly severe mode collapse occurs under $\beta_1 = 1$; at (1, 20), the low-risk factor alone commands 45.5% of the allocation, representing the highest single-factor concentration recorded across all 48 grid configurations. Lacking the explicit constraint-handling mechanisms of the QUBO or MILP frameworks, the reinforcement learning policy gradient regularizes excessively toward low-activity factors under heavy penalty pressures, regardless of their underlying marginal return contributions.

Exhibit 10 synthesizes concentration profiles by pipeline. The key observation is that DIRAC-3's persistently high CR-5 (typically 0.83–0.97) may conflict with explicit diversification mandates. Practitioners with binding CR-5 limits should use GUROBI as the primary pipeline, or apply post-optimization weight capping to DIRAC-3 allocations.

Exhibit 10: Concentration profile summary by pipeline across both sweeps.

	HHI Range	HHI Mean	CR-5 Range	Dominant failure mode
SAC	0.113–0.593	0.211	0.642–0.996	High- β_2 collapse at $\beta_1 = 0$
GUROBI	0.135–0.228	0.163	0.674–0.955	None observed
DIRAC-3	0.161–0.353	0.234	0.825–0.966	Momentum/low-risk tilt

Discussions

Performance Characteristics by Pipeline

Across 48 configurations and 164 months, the three pipelines exhibit distinct and largely non-overlapping comparative advantages and weaknesses. DIRAC-3 achieves the highest values for Sharpe ratio, Calmar ratio, and maximum drawdown protection at its respective optima, but these results are concentrated in two narrow penalty windows: $\beta_1 \in \{1, 2\}$ in the primary sweep, and $\beta_2 \in \{0.5, 1\}$ at $\beta_1 = 0$ in the joint sweep. The underlying mechanism, as revealed by the composition analysis, is that the photonic solver preferentially selects portfolios concentrated in accruals and investment (factors with documented positive-return persistence) when the penalty regime is correctly calibrated. Outside this calibration window, performance degrades materially. The concentration-performance link is a defining characteristic of DIRAC-3: its advantages are inseparable from its concentration tendency, and both are configuration-sensitive.

GUROBI's advantage is in tail-risk control and reproducibility. It achieves the best CVaR_{5%} in the combined sweep (−0.863%), and its cross-seed variance is the narrowest of the three architectures. These properties are mechanistically linked to the deterministic feasibility certificate of the branch-and-bound solver, which prevents compositional collapse at extreme penalty settings. GUROBI's compositional stability under all

16 joint configurations (HHI never exceeding 0.228 even at $(\beta_1 = 0, \beta_2 = 20)$ where SAC collapses to HHI 0.593) is unique among the three pipelines. For portfolio managers who prioritize predictable and stable performance, GUROBI is the most suitable primary pipeline even if its peak Sharpe and Calmar lag DIRAC-3 at optimal settings.

SAC's utility is limited to low-penalty regimes. As a return-seeking pipeline with moderate β_2 , it is competitive on raw return figures but consistently inferior on tail-risk and seed-stability metrics. Its structural disadvantage relative to the QUBO-augmented pipelines stems from the absence of the factor selection layer: the policy gradient is regularized under large penalties toward low-activity factors (low-risk, low-leverage) not because these factors offer superior risk-adjusted return but because they generate the smallest step-change in the penalty objective. The result is a portfolio that concentrates for the wrong reasons and generates poor risk-adjusted outcomes.

Mandate-Specific Recommendations

Exhibit 11 consolidates solver-configuration recommendations by mandate type. These are derived directly from the empirical evidence in preceding analyses and should be treated as starting points for further validation in out-of-sample testing.

Operational Monitoring & Limitations

Given the configuration sensitivity of the DIRAC-3 pipeline and the structural failure modes of SAC, live production deployment necessitates explicit risk-monitoring protocols:

1. Composition alerts for DIRAC-3: Any operational portfolio in which momentum or low-risk emerges as the single largest factor weight should trigger an immediate regime review. This compositional signature has consistently preceded performance degradation across both hyperparameter sweeps, providing a leading indicator of regime instability before quantitative drawdown metrics deteriorate.
2. HHI thresholding for DIRAC-3: Configurations where the Herfindahl-Hirschman Index exceeds 0.30

Exhibit 11: Recommended solver-configuration pairs by mandate type.

Mandate	Configuration	Key metrics
Return-seeking, balanced	DIRAC-3 (0, 1)	Sharpe 0.760, Calmar 0.567, MDD -3.47% . Best overall risk-adjusted configuration.
Lowest drawdown	DIRAC-3 (0, 0.5)	MDD -2.63% (best in both sweeps), Calmar 0.538.
Best tail-risk control	GUROBI (0, 1)	CVaR _{5%} -0.863% (best in both sweeps), seed-stable.
Balanced risk, classical	GUROBI $\beta_1 = 5$	Sharpe 0.718, CVaR _{5%} -1.049% , MDD -4.33% . Best primary-sweep Gurobi result.
Maximum reproducibility	GUROBI $\beta_1 = 20$	Return std 2.10pp; tightest cross-seed variance in either sweep.
CVaR at moderate concentration	DIRAC-3 (1, 10)	CVaR _{5%} -0.895% , Calmar 0.381; warrants further out-of-sample evaluation.
Avoid (concentration risk)	DIRAC-3 $\beta_1 = 0.5$	Transition instability; momentum tilt, HHI 0.281, turnover 0.044. Exclude from all operating sets.
Avoid (concentration risk)	DIRAC-3 (0, 0)	HHI = 0.353, CR-5 = 0.957; extreme concentration without commensurate return.
Avoid (catastrophic failure)	SAC $\beta_1 = 0, \beta_2 \geq 10$	Sharpe < 0.31 , HHI > 0.33 , MDD up to -14.64% . Non-deployable.
Avoid (high seed risk)	SAC $\beta_1 \geq 10$	Sharpe std 0.206 at $\beta_1 = 20$. Cross-seed range 0.55 Sharpe points.

(such as at $(\beta_1 = 0, \beta_2 = 0)$ and $(\beta_1 = 0, \beta_2 = 1)$) require post-optimization weight capping or tactical rebalancing toward an anchor benchmark. Imposing a composite concentration ceiling of $\text{HHI} < 0.25$ effectively isolates the vast majority of DIRAC-3's well-performing specifications while screening out mandate-non-compliant tail concentrations.

3. Single-factor exposure limits for SAC: For reinforcement-learning-driven pipelines, any single factor breaching 30% of total portfolio weight should serve as a hard stop. In both identified failure configurations (low-leverage capturing 30.0% at $(\beta_1 = 0, \beta_2 = 20)$ and low-risk reaching 45.5% at $(\beta_1 = 1, \beta_2 = 20)$) this factor concentration threshold was breached immediately prior to catastrophic metric collapse.

Finally, three primary considerations of this study merit explicit acknowledgment. The first concerns historical path dependency. The 164-month backtest window represents a single realization of historical market paths. Assessing the out-of-sample stability of solver performance rankings across distinct macro-regimes (e.g., structural interest rate shifts or prolonged liquidity crunches) remains an essential area for future research. The second consideration concerns hardware evolution. The DIRAC-3 evaluations reflect a specific generational iteration of photonic hardware. Algorithmic efficiency and sample convergence may scale materially on future device generations offering expanded entropy bandwidth and reduced sampling noise. The final consideration is about execution friction and latency. The economic impact of cloud API latency and execution friction associated with the photonic solver has not been modeled. For higher-frequency mandates or capacity-constrained strategies, network round-trip times could introduce implementation drag that alters the net-of-cost performance frontier.

Conclusion

This study provides a rigorous, large-scale empirical evaluation of three distinct optimization paradigms, photonic quantum annealing (DIRAC-3), exact mixed-integer programming (GUROBI), and stochastic reinforcement learning (SAC), applied to constrained equity factor allocation. By mapping performance across 48 hyperparameter configurations over a 164-month horizon, our findings demonstrate that portfolio optimization topology is profoundly architecture-dependent. Rather than identifying a single universally dominant solver, the empirical evidence reveals a clear institutional trade-off between heuristic-driven alpha capture, deterministic tail-risk resilience, and stochastic policy regularization.

At the frontier of risk-adjusted performance, DIRAC-3 establishes superior metrics, delivering a peak Sharpe ratio of 0.760, a Calmar ratio of 0.567, and a maximum drawdown attenuation of -2.63% . However, these efficiencies are strictly bounded within narrow operational sweet spots and are compromised by high factor concentration (mean HHI > 0.228 ; CR-5 > 0.90), driven by the photonic solver's selection of persistent, quality-adjacent signals like accruals and investment. In contrast, GUROBI serves as the benchmark for institutional stability. By guaranteeing feasibility via branch-and-bound solving, GUROBI

achieves superior conditional Value-at-Risk ($\text{CVaR}_{5\%}$ of -0.863%), minimal cross-seed variance, and a tightly bounded compositional breadth across the entire grid, degrading gradually under penalty stress rather than experiencing sudden collapse. Meanwhile, SAC captures high nominal returns in unconstrained regimes but exhibits severe structural fragility. In the absence of a binding primary volatility anchor, high secondary skewness penalties trigger objective-function misspecification, forcing the policy gradient to regularize excessively toward low-activity factors and resulting in catastrophic concentration failure.

For institutional practitioners and quantitative researchers evaluating quantum and advanced machine learning solvers for live deployment, these findings translate into concrete operational guidelines. Portfolio managers must carefully match solver architecture to the constraints of their investment mandate, choosing DIRAC-3 for return-seeking mandates where maximizing Sharpe and Calmar ratios justifies accepting higher portfolio concentration and active post-optimization weight capping. Conversely, fiduciary mandates bound by strict drawdown limits, regulatory diversification ceilings, and requirements for reproducible, cross-seed stability are best served by GUROBI, whereas SAC deployments must be strictly restricted to tightly regularized regimes unless backed by robust ensemble averaging and explicit constraint enforcement. Furthermore, portfolio managers must treat hyperparameter calibration as a primary risk factor, recognizing that optimization engines relying on heuristic sampling or policy gradients require dedicated validation layers to prevent transitions into degraded parameter zones.

To safeguard live execution, quantitative systems should implement real-time compositional circuit breakers. Because factor-weight concentration consistently precedes quantitative metric degradation, live systems should monitor portfolio composition continuously, triggering automated reviews whenever a DIRAC-3 configuration is dominated by momentum or low-risk factors, or whenever a SAC allocation breaches a 30% single-factor threshold. Finally, while DIRAC-3 demonstrates clear statistical advantages in out-of-sample risk-adjusted returns, live implementation must weigh these against cloud API latency, rebalancing frequency, and turnover constraints.

Ultimately, this study demonstrates that photonic annealing offers a viable, high-performing alternative to classical solvers in constrained multi-factor equity portfolio construction, provided its configuration sensitivity is actively managed. As quantum hardware scales in entropy bandwidth and sampling fidelity,

the integration of QUBO-based solvers into institutional asset management pipelines will increasingly depend on rigorous operational guardrails, bridging the gap between mathematical optimization and robust real-world execution.

References

- Almahdi, S. and S. S. Yang (2017). "An adaptive portfolio trading system: a risk-return portfolio optimization using recurrent reinforcement learning with expected maximum drawdown". In: *Expert Systems with Applications* 87, pp. 267–279.
- Bartram, S. M., J. Branke, G. De Rossi, and M. Motahari (2021). "Machine Learning for Active Portfolio Management". In: *Journal of Financial Data Science* 3.3, pp. 9–30.
- Bertsimas, D. and N. Farrokhnia (2023). "Portfolio optimization with factor models and mixed-integer programming". In: *Operations Research* 71.1, pp. 1–18.
- Borkar, S. and A. Jadhav (2024). "Reinforcement Learning Techniques for Stock Trading: A Survey of Current Research". In: *Journal of Financial Data Science* 6.3, pp. 38–56.
- Cerniglia, J. A. and F. J. Fabozzi (2020). "Selecting computational models for asset management: financial econometrics versus machine—is there a conflict?" In: *Journal of Portfolio Management* 47.1, pp. 107–118.
- Cornuejols, G. and R. Tütüncü (2006). *Optimization Methods in Finance*. Cambridge: Cambridge University Press.
- De Miguel, V., L. Garlappi, and R. Uppal (2009). "Optimal versus naive diversification: how inefficient is the $1/N$ portfolio strategy?" In: *Review of Financial Studies* 22.5, pp. 1915–1953.
- Fjellavli, M., C. Oliveira, R. Pimentel, and D. Schiøtz (2025). "Mean–Variance–Liquidity Portfolio Optimization with Reinforcement Learning". In: *Journal of Financial Data Science* 7.2, pp. 124–145.
- Gurobi Optimization, LLC (2024). *Gurobi Optimizer Reference Manual*.
- Haarnoja, T., A. Zhou, P. Abbeel, and S. Levine (2018). "Soft actor-critic: off-policy maximum entropy deep reinforcement learning with a stochastic actor". In: *Proceedings of the 35th International Conference on Machine Learning (ICML)*, pp. 1861–1870.
- Han, S. (2023). "Risk Budgeting Portfolio Optimization with Deep Reinforcement Learning". In: *Journal of Financial Data Science* 5.4, pp. 86–99.
- Herman, D., C. Googin, X. Liu, A. Galda, I. Safro, Y. Sun, M. Pistoia, and Y. Alexeev (2023). "A survey of quantum computing for finance". In: *Nature Reviews Physics* 5, pp. 450–465.
- Jensen, T. I., B. T. Kelly, and L. H. Pedersen (2023). "Is there a replication crisis in finance?" In: *Journal of Finance* 78.5, pp. 2465–2518.
- Jiang, Z., D. Xu, and J. Liang (2017). "A deep reinforcement learning framework for the financial portfolio management problem". In: *arXiv preprint arXiv:1706.10059*.
- Kelly, B., S. Malamud, and K. Zhou (2024). "The virtue of complexity in return prediction". In: *Journal of Finance* 79.1, pp. 459–503.
- Kolm, P. N. and G. Ritter (2025). "Reinforcement Learning for Asset and Portfolio Management". In: *Journal of Portfolio Management* 52.2, pp. 81–95.
- Ledoit, O. and M. Wolf (2004). "Honey, I shrunk the sample covariance matrix". In: *Journal of Portfolio Management* 30.4, pp. 110–119.
- Lee, Y., J. H. Kim, W. C. Kim, and F. J. Fabozzi (2024). "An overview of machine learning for portfolio optimization". In: *Journal of Portfolio Management* 51.2, pp. 131–148.
- Lee, Y., J. R. J. Thompson, J. H. Kim, W. C. Kim, and F. A. Fabozzi (2023). "An overview of machine learning for asset management". In: *Journal of Portfolio Management* 49.9, pp. 31–63.

- Mugel, S., C. Kuchkovsky, E. Sánchez, S. Fernandez-Lorenzo, J. Luis-Hita, E. Lizaso, and R. Orús (2022). “Dynamic portfolio optimization with real datasets using quantum processors and quantum-inspired tensor networks”. In: *Physical Review Research* 4.1, p. 013006.
- Orús, R., S. Mugel, and E. Lizaso (2019). “Quantum computing for finance: overview and prospects”. In: *Reviews in Physics* 4, p. 100028.
- Quantum Computing Inc. (2024). *Dirac-3 Technical Reference*.
- Simonian, J. (2024). “Using econometrics vs. machine learning: what, when and how”. In: *Journal of Portfolio Management* 51.2, pp. 118–130.
- Woerner, S. and D. J. Egger (2019). “Quantum risk analysis”. In: *npj Quantum Information* 5.1, pp. 1–8.
- Ye, Y., H. Pei, B. Wang, P. Chen, Y. Zhu, J. Xiao, and B. Li (2020). “Reinforcement-learning based portfolio management with augmented asset movement prediction states”. In: *Proceedings of the AAAI Conference on Artificial Intelligence*. Vol. 34. 1, pp. 1112–1119.
- Zarkias, K. S., N. Passalis, A. Tsantekidis, and A. Tefas (2019). “Deep reinforcement learning for financial trading using price trailing”. In: *IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pp. 3067–3071.
- Zhang, Z., S. Zohren, and S. Roberts (2020). “Deep Reinforcement Learning for Trading”. In: *Journal of Financial Data Science* 2.2, pp. 25–40.