

On the Identifiability of Controlled World Models

Xiangteng Zhang^{1*}, Yang Guan^{1*}, Bo Zhang², Ya-Qin Zhang³, and Shengbo Eben Li^{1,4†}

¹School of Vehicle and Mobility, Tsinghua University ²Voyager Research, Didi Chuxing

³Institute for AI Industry Research (AIR), Tsinghua University ⁴College of AI, Tsinghua University

Abstract

Learning world models that infer environment dynamics from high-dimensional observations and predict outcomes under candidate actions is central to planning and control. Joint-Embedding Predictive Architectures (JEPAs) provide a compelling framework for learning such models in representation space. Recent action-conditioned extensions perform promisingly in visual control and latent-space planning, but leave a fundamental question unresolved: when does controlled latent prediction identify both the underlying state and the controlled dynamics? This is challenging under nonlinear observations and behavior policies with limited conditional action variation, where state-dependent evolution and action effects can be statistically confounded. We establish a joint identifiability theory for controlled world models with Gaussian latent states under state-dependent Gaussian behavior policies. We identify two policy-dependent conditions: spectral separation of the predictable signal governs representation identifiability, while non-degenerate conditional action variation governs transition identifiability. We prove that when both conditions hold, every global minimizer of the JEPA objective identifies the latent state and controlled transition up to an orthogonal transformation. We further derive quantitative bounds on representation and transition identifiability under approximate optimization. Finally, we construct predictor perturbations along weakly excited action directions whose counterfactual-to-on-policy error ratio is the inverse transition-identifiability margin, revealing the cost of limited action coverage. Experiments across nonlinear observation maps and behavior policies corroborate the theory and demonstrate implications for transition identifiability, counterfactual prediction, and goal-conditioned latent planning.

1 Introduction

World models seek to capture how an environment evolves over time, enabling an agent to anticipate future states, simulate the consequences of its behavior, and support decision-making and planning through an internal predictive model. They have become increasingly important in embodied intelligence, autonomous driving, data generation, and game-playing agents. Latent world models encode images, videos, or sensory measurements into compact state representations and learn environmental dynamics in the resulting latent space. Such representations can subsequently support latent prediction, policy learning, value estimation, and trajectory optimization. In control settings, these capabilities require a

model that captures how the future state varies across candidate actions.

Controlled world models are a set of models that consist a latent transition predictor conditioned on both the current latent state and action. By explicitly relating states, actions, and future states, they provide the structure needed to compare candidate actions, evaluate counterfactual outcomes, and support model-based planning. A prominent framework for learning such models from high-dimensional observations is the Joint-Embedding Predictive Architecture (JEPA), which predicts the latent representation of a target observation from the current context while using regularization or distributional constraints to prevent representational collapse (LeCun 2022; Assran et al. 2023; Bardes et al. 2024; Balestrierio and LeCun 2025). Recent methods, including LeWorldModel, V-JEPA 2-AC, and Delta-JEPA, incorporate actions into latent prediction and have demonstrated promising performance in visual control, policy learning, and latent-space planning (Hafner et al. 2025; Zhan et al. 2025; Maes et al. 2026). Despite these empirical advances, the identifiability of controlled world models remains theoretically underexplored.

Recent work in data-driven control has examined controllability from sampled transitions (Yang et al. 2024), stability certification from finite data (Yang, Zheng, and Li 2024), and canonical representations of transition data (Zhan, Zheng, and Li 2025). These analyses presuppose direct access to system states and transitions. In controlled world models, however, the latent state must be inferred from nonlinear observations, making identifiability a prerequisite for characterizing the underlying system. Identifiability in this setting comprises two components. Representation identifiability concerns whether the encoder identifies the latent state, which is generally impossible without additional structure (Hyvärinen and Pajunen 1999; Locatello et al. 2019; Khemakhem et al. 2020; Hyvärinen, Khemakhem, and Monti 2024). Under Gaussian dynamics and suitable spectral conditions, recent LeJEPA theory establishes representation identifiability up to an orthogonal transformation (Klindt, LeCun, and Balestrierio 2026), yet leaves action-dependent state evolution unidentified. Transition identifiability concerns whether the predictor identifies the full controlled conditional-mean dynamics. An action-agnostic predictor identifies only dynamics averaged over the behavior policy, while action con-

*These authors contributed equally.

†Corresponding author.

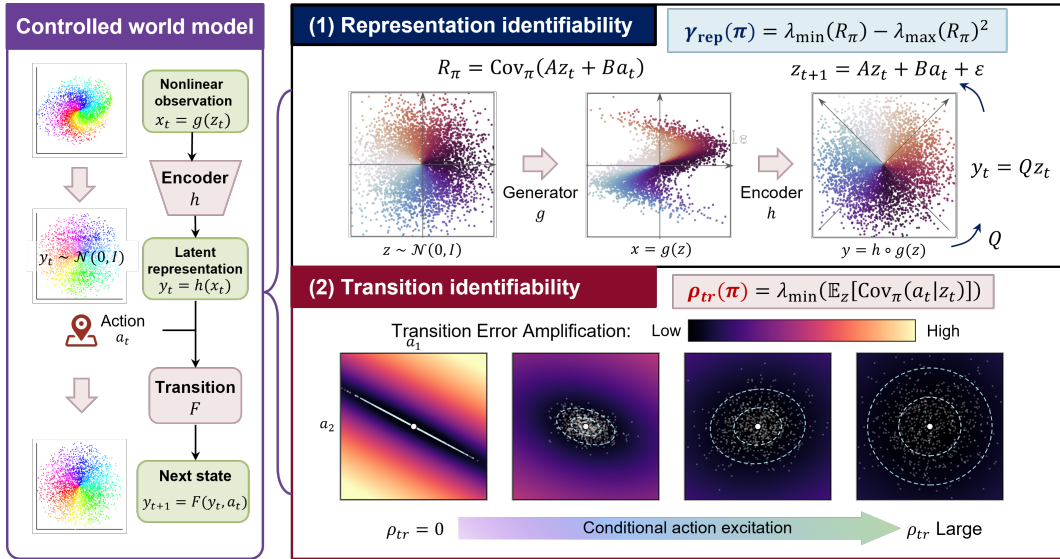


Figure 1: Overview of controlled world-model identifiability. An encoder maps nonlinear observations to a standard-Gaussian latent representation, and an action-conditioned predictor models the next representation. Representation identifiability is governed by the predictable-signal margin $\gamma_{\text{rep}}(\pi)$, while transition identifiability additionally depends on the conditional action-excitation margin $\rho_{\text{tr}}(\pi)$.

ditioning remains insufficient when limited conditional action variation confounds autonomous evolution with action-induced effects, paralleling persistent excitation in classical system identification (Van Overschee and De Moor 1996; Willems et al. 2005). Consequently, existing theory does not establish when action-conditioned latent prediction jointly identifies the state representation and controlled dynamics.

In this paper, we fill the gap by developing a systematic identifiability theory for controlled world models under nonlinear observations. Representation identifiability is characterized by a spectral separation property of the predictable signal induced by the behavior policy, whereas transition identifiability is governed by the non-degeneracy of conditional action variation given the current state. Under controlled spectral separation and sufficient conditional action excitation, we prove that every global minimizer of the population objective identifies the true latent state and the full controlled conditional-mean dynamics under a common orthogonal transformation. We then establish quantitative identifiability guarantees in the presence of encoder excess risk and predictor error. Our analysis further shows that conditional action excitation determines the strength of transition identification: weakly excited action directions can admit small training error while producing substantially larger errors in counterfactual action responses. Finally, we connect the identified transition model to goal-conditioned latent planning and empirically examine how action coverage affects representation identifiability, transition identifiability, counterfactual prediction, and planning across nonlinear observation maps and behavior policies.

Our main contributions are summarized as follows:

- We establish a joint identifiability framework for controlled world models. Spectral separation of the controlled

predictable signal characterizes representation identifiability, while the minimum eigenvalue of the conditional action covariance characterizes transition identifiability. Together, these conditions guarantee joint identification of the true latent state and the complete controlled conditional-mean transition under a common orthogonal transformation.

- We derive quantitative identifiability bounds under imperfect optimization, separately characterizing how encoder and predictor errors affect latent-state and in-distribution transition identification under the behavior policy.
- We characterize an attainable amplification of counterfactual prediction error caused by limited action coverage. Perturbations along weakly excited action directions yield an error ratio governed by the covariance mismatch.

2 Related Work

Latent world models for planning. World models have been widely studied as internal predictive models for planning and control. Early neural world models learned compact latent dynamics for imagination-based policy learning (Ha and Schmidhuber 2018; Hafner et al. 2019; Mu et al. 2020), while later model-based reinforcement learning methods developed probabilistic latent dynamics, value-aware dynamics, and model-predictive control (Hansen, Su, and Wang 2022, 2024; Zhan et al. 2025; Li 2023) in learned state spaces (Hafner et al. 2020, 2025; Schrittwieser et al. 2020). These results establish that learned latent dynamics can be useful for planning, but not that the learned state or controlled transition is identifiable from nonlinear observations. Our work targets this missing structural question: when does a latent world model identify both the state and the controlled conditional-mean transition?

Joint-embedding predictive learning and latent prediction. Joint-embedding predictive architectures learn by predicting target representations rather than reconstructing pixels, making them attractive for representation learning and latent world modeling (Assran et al. 2025; Bardes et al. 2024). Recent reconstruction-free world models extend this principle to predictive latent dynamics, often relying on regularization or target-network mechanisms to avoid collapse and stabilize end-to-end training (Balestrierio and LeCun 2025; Maes et al. 2026). On the theoretical side, recent analyses of LeJEPa show that, under Gaussian latent assumptions and suitable regularization, passive positive-pair prediction identifies latent state coordinates up to an orthogonal transformation (Klindt, LeCun, and Balestrierio 2026). This theory explains representation identifiability for passive predictive pairs, but not whether a predictor identifies a controlled mechanism. We study the step it leaves open: joint identifiability of the state representation and the action-conditioned transition.

Action-conditioned and latent-action world models. A growing body of work incorporates actions into latent world models so that different candidate actions induce different predicted futures. This includes action-conditioned predictors for robot planning, end-to-end latent world models with action-sensitive objectives, and latent-action models that infer abstract actions from videos or visual feature differences (Assran et al. 2025; Maes et al. 2026). These methods reflect an important shift from passive future prediction to controlled prediction, where the model is expected to represent how the world responds to alternative actions. However, action conditioning is usually justified empirically, through action sensitivity, rollout quality, or downstream planning performance. The gap is not whether actions can be inserted into latent predictors, but when action-conditioned prediction makes the action effect itself identifiable.

Identifiability and system identification. Identifiability is a central difficulty in nonlinear representation learning. Classical results in nonlinear ICA and unsupervised disentanglement show that latent variables are generally not identifiable from nonlinear observations without additional assumptions or structural signals (Hyvärinen and Pajunen 1999; Locatello et al. 2019). Positive identifiability results introduce such structure through temporal dependence, auxiliary variables, conditional latent distributions, or interventions (Hyvarinen and Morioka 2016; Hyvarinen, Sasaki, and Turner 2019; Khemakhem et al. 2020; Schölkopf et al. 2021; von Kügelgen et al. 2023; Varici et al. 2024). In parallel, classical system identification emphasizes that identifying controlled dynamics requires sufficiently informative inputs, often formalized through persistent excitation or related rank conditions (Van Overschee and De Moor 1996; Willems et al. 2005). These literatures cover complementary pieces of the problem, but neither directly gives identifiability for controlled world models: representation-learning results usually do not identify controlled transitions, while system-identification results often assume observed or linearly measured states. Our analysis combines the two perspectives under nonlinear observations, showing when sufficient action excitation and

a transition-identifiability spectral condition make the representation and controlled conditional-mean transition jointly identifiable.

3 Method

3.1 Problem Formulation

We formulate controlled latent prediction to separate two identification problems that are entangled in observations: identifying a valid state coordinate and identifying how that state responds to actions. An action-conditioned predictor is necessary because a state-only predictor sees only the transition averaged over the behavior policy; however, conditioning on the action is informative only to the extent that the data contain action variation conditional on the state.

World and behavior distribution. Let $z_t \in \mathbb{R}^d$ be the latent state and $x_t = g(z_t)$ its observation under an unknown invertible map g . Invertibility isolates the representation problem from information loss in the observation process: the learner must undo a nonlinear change of coordinates, but the observation still contains the full state. Trajectories are collected under a behavior policy $\pi(a_t | z_t)$, which, together with the environment, induces the training distribution P_π . Making this distribution explicit is essential because transition identification depends on the policy’s conditional action support.

We use a stationary linear–Gaussian latent system as the minimal setting in which these effects can be analyzed exactly. Gaussianity gives a tractable spectral decomposition and is compatible with the standard–Gaussian representation constraint; linear controlled dynamics keep state and action effects separate; and stationarity provides a common marginal distribution across consecutive representations.

Assumption 1 (Jointly Gaussian behavior distribution). *The latent state satisfies $z_t \sim \mathcal{N}(0, I_d)$, and the behavior policy induces a centered jointly Gaussian distribution $P_\pi(z_t, a_t)$. The state and action may be dependent, and the conditional action covariance may be singular.*

Assumption 2 (Stationary controlled transition). *The latent dynamics are $z_{t+1} = Az_t + Ba_t + \xi_t$, where ξ_t is zero-mean Gaussian noise independent of (z_t, a_t) . The process is stationary with $z_{t+1} \sim \mathcal{N}(0, I_d)$.*

Learner. The learner consists of an encoder $h : \mathcal{X} \rightarrow \mathbb{R}^d$ and a deterministic action-conditioned predictor F . We study its population objective, defined as the expected prediction loss under the stationary data-generating distribution P_π induced by the behavior policy:

$$\mathcal{L}_\pi(h, F) = \mathbb{E}_{P_\pi} [\|h(x_{t+1}) - F(h(x_t), a_t)\|_2^2]. \quad (1)$$

The squared loss makes the predictor target the conditional mean in representation space rather than the full conditional distribution. We constrain $h(x_t) \sim \mathcal{N}(0, I_d)$, as in JEPa-style Gaussianization, to prevent collapse and fix the representation scale while retaining the unavoidable rotational symmetry of the latent distribution.

Assumption 3 (Predictor richness and continuity). *For every admissible encoder h , the predictor class can realize*

the optimal conditional-mean predictor $F_h^*(h(x_t), a_t) := \mathbb{E}[h(x_{t+1}) \mid h(x_t), a_t]$. The learned predictor is continuous in its representation and action inputs.

3.2 Identifiability of Controlled World Models

Representation identifiability. We define representation identifiability as the existence of an orthogonal matrix $Q \in O(d)$ such that

$$h(g(z)) = Qz.$$

This defines latent-state identifiability up to an orthogonal transformation.

Transition identifiability. We define transition identifiability under P_π as

$$F(y, a) = QAQ^\top y + QBa$$

This definition can also be denoted as $F(h(g(z)), a) = Q(Az + Ba)$. This concerns the controlled conditional mean in the identified coordinates.

Identification margins. Representation identifiability is governed by the predictable signal available under the behavior policy:

$$R_\pi := \text{Cov}_{P_\pi}(\mathbb{E}[z_{t+1} \mid z_t, a_t]) = \text{Cov}_{P_\pi}(Az_t + Ba_t),$$

$$\gamma_{\text{rep}}(\pi) := \lambda_{\min}(R_\pi) - \lambda_{\max}(R_\pi)^2.$$

(2)

Stationarity gives $\text{Cov}(\xi_t) = I_d - R_\pi \succeq 0$. The representation margin $\gamma_{\text{rep}}(\pi)$ compares the weakest first-order predictable direction with the strongest higher-order nonlinear alternative.

Transition identifiability is governed by the action variation that remains after conditioning on the current state:

$$\begin{aligned} \Sigma_{\text{tr}}(\pi) &:= \mathbb{E}_{z_t}[\text{Cov}_\pi(a_t \mid z_t)], \\ \rho_{\text{tr}}(\pi) &:= \lambda_{\min}(\Sigma_{\text{tr}}(\pi)). \end{aligned} \quad (3)$$

The transition margin $\rho_{\text{tr}}(\pi)$ is the weakest conditional action excitation. Under the jointly Gaussian behavior model, $\text{Cov}_\pi(a_t \mid z_t)$ does not depend on z_t ; hence, $\rho_{\text{tr}}(\pi) > 0$ gives full conditional support over the action space.

The two margins address different failure modes. A positive $\gamma_{\text{rep}}(\pi)$ separates the latent coordinates from nonlinear predictive features. A positive $\rho_{\text{tr}}(\pi)$ distinguishes the controlled response in every action direction and gives full support to the joint Gaussian state-action distribution. Together with continuity of F , this support extends transition identification from an almost-sure statement under P_π to the entire state-action space.

We can now state the main identification result. In the Gaussian setting, the eigenvalues of R_π determine the predictability of the first-order latent components, whereas any higher-order component has predictable energy at most $\lambda_{\max}(R_\pi)^2$. A positive representation margin therefore makes every true latent direction more predictable than any nonlinear alternative.

Theorem 1 (Identifiability of state and controlled transition). *Suppose Assumptions 1–3 hold and the observation map g*

is invertible. Consider the objective in Eq. (1) over encoders satisfying $h(x_t) \sim \mathcal{N}(0, I_d)$. If

$$\gamma_{\text{rep}}(\pi) > 0 \quad \text{and} \quad \rho_{\text{tr}}(\pi) > 0,$$

then every global minimizer (h, F) of $\mathcal{L}_\pi$ identifies the latent state and the controlled conditional mean up to an orthogonal transformation. Specifically, there exists $Q \in O(d)$ such that

$$h(g(z_t)) = Qz_t,$$

$$F(h(g(z_t)), a_t) = Q(Az_t + Ba_t), \quad \text{a.s.}$$

Moreover, in the identified coordinates, the predictor satisfies $F(y, a) = QAQ^\top y + QBa$ for every $(y, a) \in \mathbb{R}^d \times \mathbb{R}^m$.

The optimal objective value is $\text{tr}(\text{Cov}(\xi_t)) = d - \text{tr}(R_\pi)$. Conversely, for any $Q \in O(d)$, the encoder defined by $h_Q(g(z)) = Qz$ and the predictor $F_Q(y, a) = QAQ^\top y + QBa$ attain this minimum.

The theorem separates two identification problems that are often conflated. The representation margin rules out nonlinear reparameterizations and identifies the latent state up to an orthogonal transformation. Conditional action excitation then identifies how that state responds to every action. Positive excitation gives full state-action support; together with continuity of F , this upgrades an almost-sure on-policy statement to identification over the entire state-action space.

Proof sketch. For a fixed encoder, squared loss is minimized by the conditional mean of $h(x_{t+1})$ given $(h(x_t), a_t)$. Minimizing prediction risk is thus equivalent to maximizing the predictable energy of the representation. Expand $h \circ g$ in the Gaussian Hermite basis. First-order components are governed by the eigenvalues of R_π , while every higher-order component contributes at most $\lambda_{\max}(R_\pi)^2$ times its variance. When $\gamma_{\text{rep}}(\pi) > 0$, an optimum can therefore contain only first-order components. The Gaussian constraint makes the resulting linear map orthogonal, so $h(g(z)) = Qz$. Substitution into the dynamics yields the predictor $Q(Az + Ba)$; positive conditional excitation and continuity extend the identity to every $(y, a) \in \mathbb{R}^d \times \mathbb{R}^m$. The full proof appears in the first proof section of the appendix.

3.3 Approximate Identifiability

The preceding result assumes exact global optimality. To quantify graceful degradation away from this ideal, let $F_h^*(h(x_t), a_t) := \mathbb{E}[h(x_{t+1}) \mid h(x_t), a_t]$ denote its optimal conditional-mean predictor, and let $\mathcal{L}^* := d - \text{tr}(R_\pi)$ denote the minimum risk in Theorem 1. We separate error due to the representation from error due to the learned predictor by defining $\Delta_{\text{enc}} := \mathcal{L}_\pi(h, F_h^*) - \mathcal{L}^*$ and the predictor-side error as $\Delta_{\text{pred}} := \mathbb{E}_{P_\pi} \|F(h(x_t), a_t) - F_h^*(h(x_t), a_t)\|^2$.

Theorem 2 (Quantitative identifiability under the behavior policy). *Suppose the conditions of Theorem 1 hold except that (h, F) need not be a global minimizer of $\mathcal{L}_\pi$. There exist universal constants $c, C > 0$ such that, if $h(x_t) \sim \mathcal{N}(0, I_d)$ and $\Delta_{\text{enc}} \leq c \gamma_{\text{rep}}(\pi)$, then there exists $Q \in O(d)$ such that, with $\eta := \Delta_{\text{enc}} / \gamma_{\text{rep}}(\pi)$,*

$$\mathbb{E} \|h(g(z_t)) - Qz_t\|^2 \leq C\eta,$$

Moreover, defining $\varepsilon_F(z, a) := F(h(g(z)), a) - Q(Az + Ba)$, we have

$$\mathbb{E}_{P_\pi} [\|\varepsilon_F(z_t, a_t)\|^2] \leq C\Delta_{\text{pred}} + C(1 + \|A\|_{\text{op}}^2)\eta. \quad (4)$$

The two errors affect different parts of the learned world model. The encoder excess risk controls deviation from an orthogonal copy of the latent state; the predictor error captures the additional cost of using F rather than the optimal predictor for that representation. The factor $1/\gamma_{\text{rep}}(\pi)$ exposes the conditioning of approximate representation identification: as the spectral gap narrows, nonlinear features become nearly as predictive as the true latent directions.

Proof sketch. The risk attained by F_h^* is determined by the predictable energy of $h(x_{t+1})$. Its Hermite expansion shows that the representation margin bounds the total variance in higher-order components by $O(\Delta_{\text{enc}}/\gamma_{\text{rep}}(\pi))$. The remaining first-order component is close to an orthogonal map because $h(x_t) \sim \mathcal{N}(0, I_d)$, which gives the representation bound. Combining this error with the deviation of F from F_h^* gives the predictor bound. The full proof is provided in the corresponding appendix section.

3.4 Counterfactual Error Amplification

Theorem 2 provides an in-distribution transition-error guarantee under P_π . Planning and control, however, require predictions for actions that may be rare under this distribution, so small on-policy error need not imply reliable counterfactual prediction. We characterize this gap in the identified coordinates $y = Qz$, where the true conditional-mean predictor is $F^*(y, a) = QAQ^\top y + QBa$.

For a predictor F , define its on-policy excess risk relative to F^* as

$$\mathcal{E}_\pi(F) := \mathbb{E}_{P_\pi} [\|Qz_{t+1} - F(Qz_t, a_t)\|^2] - \mathbb{E}_{P_\pi} [\|Qz_{t+1} - F^*(Qz_t, a_t)\|^2]. \quad (5)$$

Let $\mu_\pi(z) := \mathbb{E}_\pi[a_t \mid z_t = z]$. To isolate the role of conditional coverage, consider a counterfactual distribution with the same conditional mean but identity covariance: $a_{\text{cf}} = \mu_\pi(z) + \eta_{\text{cf}}$, where $\eta_{\text{cf}} \sim \mathcal{N}(0, I_m)$ is independent of z . Its transition error is

$$\mathcal{E}_{\text{cf}}(F) := \mathbb{E} [\|F(Qz, a_{\text{cf}}) - F^*(Qz, a_{\text{cf}})\|^2]. \quad (6)$$

For this counterfactual analysis, we additionally assume that the predictor class contains $F^*(y, a) + D(a - \mu_\pi(Q^\top y))$ for every matrix $D \in \mathbb{R}^{d \times m}$.

Theorem 3 (Counterfactual error amplification). *Suppose the conditions of Theorem 1 and the additional predictor-class condition above hold. For every $\delta > 0$, the predictor class contains a continuous predictor F_δ satisfying*

$$\mathcal{E}_\pi(F_\delta) = \delta, \quad \mathcal{E}_{\text{cf}}(F_\delta) = \frac{\delta}{\rho_{\text{tr}}(\pi)}.$$

The theorem shows that exact transition identifiability does not imply well-conditioned approximate identification. When $\rho_{\text{tr}}(\pi) > 0$, every action direction has nonzero conditional variation, so the controlled transition is identified at

a global optimum. However, when $\rho_{\text{tr}}(\pi)$ is small, the behavior policy provides little variation along the least-excited action direction, and the training objective weakly penalizes errors in the corresponding action response. The constructed rank-one perturbation exploits precisely this direction: it incurs on-policy excess risk δ , while its counterfactual error is $\delta/\rho_{\text{tr}}(\pi)$. Thus, $\rho_{\text{tr}}(\pi)$ acts as a conditioning parameter for approximate transition identification. This construction provides an attainable lower bound on counterfactual error amplification, rather than a uniform upper bound over the predictor class.

Proof sketch. The conditional-mean orthogonality identity rewrites the on-policy excess risk as the mean squared deviation from F^* . Let $v_{\min}$ be a unit eigenvector of $\Sigma_{\text{tr}}(\pi)$ with eigenvalue $\rho_{\text{tr}}(\pi)$, and perturb F^* in this action direction by a rank-one map scaled by $\sqrt{\delta/\rho_{\text{tr}}(\pi)}$. Under the behavior policy, the residual action has covariance $\Sigma_{\text{tr}}(\pi)$, so the perturbation contributes exactly δ ; under the counterfactual distribution its covariance is I_m , giving error $\delta/\rho_{\text{tr}}(\pi)$. The full proof is provided in the Appendix C.

At $\rho_{\text{tr}}(\pi) = 0$, some action direction has no residual variation once the state is fixed. Predictors may then agree exactly on the behavior distribution while disagreeing under counterfactual actions, making the controlled transition structurally non-identifiable outside the behavior support.

For the following state-dependent Gaussian policy, we show that the transition margin reduces directly to the exploration-noise variance.

Corollary 1 (Exploration-noise scaling). *Consider the behavior-policy family $a_t = \sqrt{1 - \sigma^2} Kz_t + \sigma\eta_t$, where $\eta_t \sim \mathcal{N}(0, I_m)$, $\eta_t \perp z_t$, and $\sigma \in [0, 1]$. Then*

$$\Sigma_{\text{tr}}(\pi_\sigma) = \sigma^2 I_m, \quad \rho_{\text{tr}}(\pi_\sigma) = \sigma^2.$$

Consequently, for every $\sigma > 0$ and $\delta > 0$, the predictor class contains a continuous predictor F_δ satisfying $\mathcal{E}_{\pi_\sigma}(F_\delta) = \delta$ and $\mathcal{E}_{\text{cf}}(F_\delta) = \delta/\sigma^2$. Thus the construction attains a counterfactual amplification factor of $1/\sigma^2$. At $\sigma = 0$, the behavior policy is deterministic given the state, and the controlled transition is not identifiable outside its support.

Thus, any positive exploration noise gives full conditional action support, yet transition identification becomes increasingly ill-conditioned as σ decreases. The attainable factor in this construction grows as $1/\sigma^2$ and diverges in the deterministic-policy limit.

4 Experiments

The experiments test three implications of the theory through controlled comparisons. The representation-margin sweep varies spectral separation while maintaining non-degenerate conditional action excitation. The behavior-policy sweep varies conditional action excitation while keeping the representation regime fixed. The planning evaluation then measures how counterfactual transition errors affect downstream action selection. Together, these experiments distinguish the roles of γ_{rep} and ρ_{tr} and evaluate their consequences for control.

4.1 Representation Identifiability

To examine how spectral separation affects representation identifiability, actions are sampled independently from a standard Gaussian, fixing $\rho_{\text{tr}} = 1$, while the predictable-signal spectrum is varied across the sufficient-condition boundary $\gamma_{\text{rep}} = 0$. Conditional action excitation therefore remains non-degenerate throughout, so changes in identification quality can be attributed to the representation regime. The sweep is repeated for all four observation maps.

Spectral separation consistently improves identification across observation maps. In the identifiable regime, the encoder inverts each nonlinear observation map and identifies the latent polar structure up to an approximately orthogonal transformation (Figure 2). As shown in Figure 3, both representation and controlled transition errors decrease as the weakest predictable direction strengthens. By fixing the action excitation, this joint improvement supports the predicted role of spectral separation in identifying the latent coordinates and the dynamics expressed in those coordinates. It should be noticed that the estimation error changes smoothly through $\gamma_{\text{rep}} = 0$, indicating that the theorem is providing only a sufficient condition.

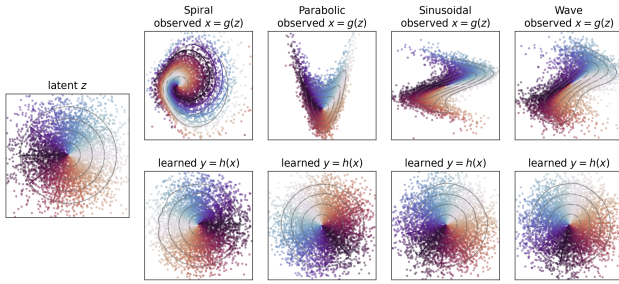


Figure 2: Representation geometry across nonlinear observation maps. The left panel shows the latent state z ; each remaining column shows the observation $x = g(z)$ above and the learned representation $y = h(x)$ below. Shared colors and polar calibration curves track corresponding latent locations.

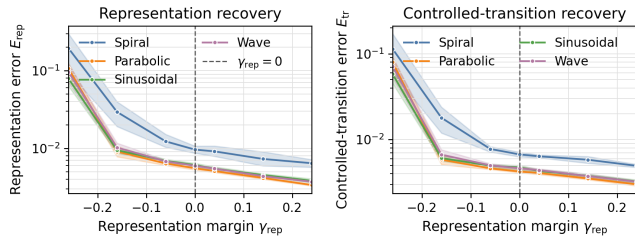


Figure 3: Identification performance as the representation margin γ_{rep} increases. Left: normalized representation error E_{rep} ; right: normalized controlled-transition error E_{tr} . Lines and shading show means and 95% confidence intervals over five runs.

4.2 Transition Identifiability and Counterfactual Prediction

The transition experiment keeps the representation regime and controlled conditional mean fixed while varying only the conditional action excitation induced by the behavior policy. The policy family preserves a standard-Gaussian action marginal while satisfying

$$\text{Cov}(a_t | z_t) = \sigma^2 I, \quad \rho_{\text{tr}}(\pi_\sigma) = \sigma^2. \quad (7)$$

Thus, σ changes conditional coverage without changing the marginal action scale. At $\sigma = 0$, the data constrain only the closed-loop map $A + BK$; positive σ restores full conditional support, although identification remains poorly conditioned under weak excitation. The representation margin stays positive and the state marginal remains fixed across the sweep. To distinguish behavioral fit from transition identification, we compare error on behavior actions with error under a broader intervention distribution and separately estimate the state and action components of the learned transition. The complete construction and metric definitions are given in Appendix D.

Conditional action coverage determines whether behavioral accuracy extends to counterfactual actions. Under deterministic behavior, the learned predictor is constrained only at the action selected by the policy, and its error grows away from this supported region; stochastic exploration progressively expands the region of accurate action responses (Figure 4). The same separation appears quantitatively: prediction remains accurate on behavior actions at $\sigma = 0$, even though counterfactual error is amplified and the state and action components are not separately identifiable (Figure 5). Increasing conditional excitation reduces this discrepancy and improves both components of the controlled transition. Because representation error remains low and γ_{rep} remains positive throughout, the improvement is attributable to transition excitation rather than representation quality. Action conditioning and low behavioral prediction error therefore do not, by themselves, certify a reliable response to alternative controls.

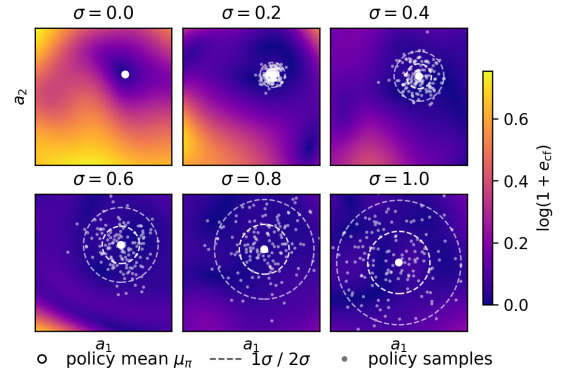


Figure 4: Counterfactual transition error across actions at a fixed state. Predicted next states are orthogonally aligned with the latent coordinates for evaluation.

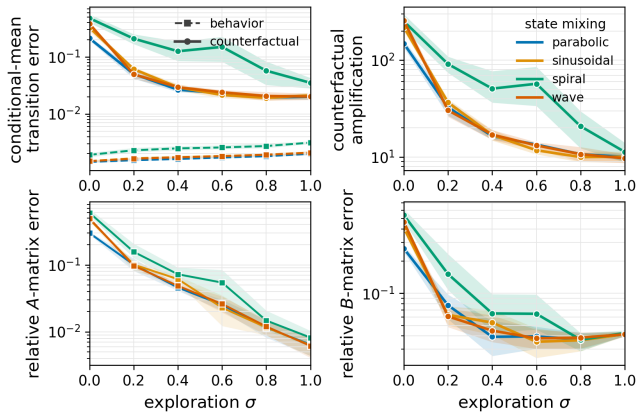


Figure 5: Transition identification as conditional action coverage increases. Top: conditional-mean transition error and empirical counterfactual amplification. Bottom: relative estimation errors for the state and action components, represented by matrices A and B , respectively. Lines and shading show means and 95% confidence intervals over five runs.

4.3 Consequences for Goal-Conditioned Planning

Counterfactual transition errors matter for planning because the planner must compare action sequences that may depart from the behavior distribution. We test this mechanism with a goal-conditioned planner that encodes the current and goal observations, rolls out a shared bank of bounded action sequences, and selects the sequence whose predicted endpoint is closest to the encoded goal. The selected sequence is then evaluated under the true conditional-mean dynamics. The candidate bank is fixed across models so that performance differences reflect the learned rollouts rather than the search distribution.

The improvement in transition identification carries over to planning performance. Under limited conditional coverage, inaccurate rollouts distort the predicted reachable set and the selected sequence can execute far from its predicted endpoint. As coverage increases, the predicted and true reachable sets become progressively better aligned (Figure 6). This geometric improvement is reflected in action-selection performance across all observation maps: mean terminal error over a shared set of reachable goals decreases sharply and is nearly eliminated in the well-excited regime (Figure 7). Averaging over goals rules out the accidental success that can occur for an individual discrete target. These results show that counterfactual transition errors under limited conditional excitation have measurable consequences for control: they distort candidate evaluation and increase the terminal error of model-based action selection.

5 Conclusion

This paper establishes a joint identifiability theory for controlled world models from nonlinear observations. State-only prediction generally represents the behavior-policy-averaged future and therefore does not identify how alternative actions change the next state, even when its representation is identi-

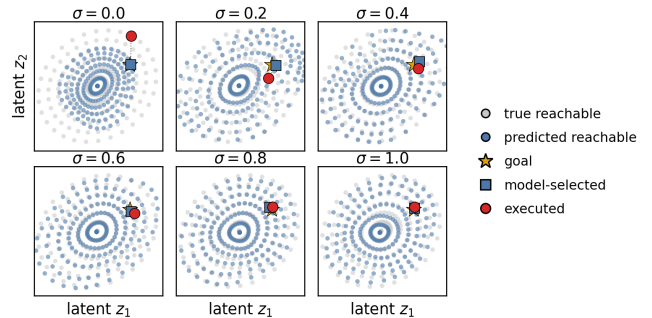


Figure 6: Predicted and true terminal sets across conditional action coverage. Predicted endpoints are orthogonally aligned with the latent coordinates for visualization. The dotted segment indicates the prediction error for the selected sequence.

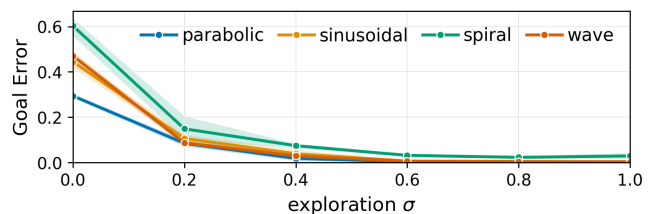


Figure 7: Goal-conditioned planning error as conditional action coverage increases. Curves report mean terminal error across goals reachable by the candidate bank; shading shows 95% confidence intervals across five runs.

fiable. Under a predictable-signal spectral-separation condition and exploratory actions, we show that action-conditioned latent prediction jointly identifies the representation up to an orthogonal transformation and the controlled conditional-mean transition in the same identified coordinates. We further establish quantitative identifiability bounds and explain why the remaining orthogonal ambiguity is compatible with goal-conditioned latent planning. Our experiments distinguish representation from transition identifiability and show that explicit action conditioning remains insufficient when the behavior policy provides inadequate action variation. A world model becomes useful for control not merely by predicting the future observed in the data, but by identifying how alternative actions change that future. It should also be mentioned that our results are established under invertible observations, linear Gaussian latent dynamics, and an exact representation constraint, and identify only the controlled conditional mean. Future work should develop policy-relative finite-sample guarantees and extend joint identification to nonlinear or partially observed dynamics.

References

- Assran, M.; Duval, Q.; Misra, I.; Bojanowski, P.; Vincent, P.; Rabbat, M.; LeCun, Y.; and Ballas, N. 2023. Self-Supervised Learning From Images With a Joint-Embedding Predictive Architecture. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 15619–15629.
- Assran, M.; et al. 2025. V-JEPA 2: Self-Supervised Video Models Enable Understanding, Prediction and Planning. arXiv:2506.09985.
- Balestriero, R.; and LeCun, Y. 2025. LeJEPA: Provable and Scalable Self-Supervised Learning Without the Heuristics. arXiv:2511.08544.
- Bardes, A.; Garrido, Q.; Ponce, J.; Chen, X.; Rabbat, M.; LeCun, Y.; Assran, M.; and Ballas, N. 2024. Revisiting Feature Prediction for Learning Visual Representations from Video. ICLR 2025.
- Ha, D.; and Schmidhuber, J. 2018. World Models.
- Hafner, D.; Lillicrap, T.; Ba, J.; and Norouzi, M. 2020. Dream to Control: Learning Behaviors by Latent Imagination. ICLR 2020.
- Hafner, D.; Lillicrap, T.; Fischer, I.; Villegas, R.; Ha, D.; Lee, H.; and Davidson, J. 2019. Learning Latent Dynamics for Planning from Pixels. In *International Conference on Machine Learning*, 2555–2565. PMLR.
- Hafner, D.; Pasukonis, J.; Ba, J.; and Lillicrap, T. 2025. Mastering Diverse Control Tasks through World Models. *Nature*, 640(8059): 647–653.
- Hansen, N.; Su, H.; and Wang, X. 2024. TD-MPC2: Scalable, Robust World Models for Continuous Control. *International Conference on Learning Representations*, 2024: 47376–47405.
- Hansen, N. A.; Su, H.; and Wang, X. 2022. Temporal Difference Learning for Model Predictive Control. In *Proceedings of the 39th International Conference on Machine Learning*, 8387–8406. PMLR.
- Hyvärinen, A.; Khemakhem, I.; and Monti, R. 2024. Identifiability of Latent-Variable and Structural-Equation Models: From Linear to Nonlinear. *Annals of the Institute of Statistical Mathematics*, 76(1): 1–33.
- Hyvarinen, A.; and Morioka, H. 2016. Unsupervised Feature Extraction by Time-Contrastive Learning and Nonlinear ICA. In *Advances in Neural Information Processing Systems*, volume 29. Curran Associates, Inc.
- Hyvärinen, A.; and Pajunen, P. 1999. Nonlinear Independent Component Analysis: Existence and Uniqueness Results. *Neural Networks*, 12(3): 429–439.
- Hyvarinen, A.; Sasaki, H.; and Turner, R. 2019. Nonlinear ICA Using Auxiliary Variables and Generalized Contrastive Learning. In *Proceedings of the Twenty-Second International Conference on Artificial Intelligence and Statistics*, 859–868. PMLR.
- Khemakhem, I.; Kingma, D.; Monti, R.; and Hyvarinen, A. 2020. Variational Autoencoders and Nonlinear ICA: A Unifying Framework. In *Proceedings of the Twenty Third International Conference on Artificial Intelligence and Statistics*, 2207–2217. PMLR.
- Klindt, D.; LeCun, Y.; and Balestriero, R. 2026. When Does LeJEPA Learn a World Model? arXiv:2605.26379.
- LeCun, Y. 2022. A Path towards Autonomous Machine Intelligence Version 0.9. 2, 2022-06-27. *Open Review*, 62(1): 1–62.
- Li, S. E. 2023. *Reinforcement Learning for Sequential Decision and Optimal Control*. Springer. ISBN 978-981-19-7784-8.
- Locatello, F.; Bauer, S.; Lucic, M.; Raetsch, G.; Gelly, S.; Schölkopf, B.; and Bachem, O. 2019. Challenging Common Assumptions in the Unsupervised Learning of Disentangled Representations. In *Proceedings of the 36th International Conference on Machine Learning*, 4114–4124. PMLR.
- Maes, L.; Lidec, Q. L.; Scieur, D.; LeCun, Y.; and Balestriero, R. 2026. LeWorldModel: Stable End-to-End Joint-Embedding Predictive Architecture from Pixels. arXiv:2603.19312.
- Mu, Y.; Peng, B.; Gu, Z.; Li, S. E.; Liu, C.; Nie, B.; Zheng, J.; and Zhang, B. 2020. Mixed Reinforcement Learning for Efficient Policy Optimization in Stochastic Environments. In *2020 20th International Conference on Control, Automation and Systems (ICCAS)*, 1212–1219.
- Schölkopf, B.; Locatello, F.; Bauer, S.; Ke, N. R.; Kalchbrenner, N.; Goyal, A.; and Bengio, Y. 2021. Toward Causal Representation Learning. *Proceedings of the IEEE*, 109(5): 612–634.
- Schrittwieser, J.; Antonoglou, I.; Hubert, T.; Simonyan, K.; Sifre, L.; Schmitt, S.; Guez, A.; Lockhart, E.; Hassabis, D.; Graepel, T.; Lillicrap, T.; and Silver, D. 2020. Mastering Atari, Go, Chess and Shogi by Planning with a Learned Model. *Nature*, 588(7839): 604–609.
- Van Overschee, P.; and De Moor, B. 1996. *Subspace Identification for Linear Systems*. Boston, MA: Springer US. ISBN 978-1-4613-8061-0 978-1-4613-0465-4.
- Varici, B.; Acartürk, E.; Shanmugam, K.; and Tajer, A. 2024. General Identifiability and Achievability for Causal Representation Learning. In *Proceedings of The 27th International Conference on Artificial Intelligence and Statistics*, 2314–2322. PMLR.
- von Kügelgen, J.; Besserve, M.; Wendong, L.; Gresele, L.; Kekić, A.; Bareinboim, E.; Blei, D.; and Schölkopf, B. 2023. Nonparametric Identifiability of Causal Representations from Unknown Interventions. In *Advances in Neural Information Processing Systems*, volume 36, 48603–48638. Curran Associates, Inc.
- Willems, J. C.; Rapisarda, P.; Markovsky, I.; and De Moor, B. L. M. 2005. A Note on Persistency of Excitation. *Systems & Control Letters*, 54(4): 325–329.
- Yang, Y.; Tao, L.; Wang, L.; and Li, S. E. 2024. Controllability Test for Nonlinear Datatic Systems. *Communications in Transportation Research*, 4: 100143.
- Yang, Y.; Zheng, Z.; and Li, S. E. 2024. On the Stability of Datatic Control Systems. arXiv:2401.16793.
- Zhan, G.; Wang, L.; Zhang, X.; Gao, J.; TOMIZUKA, M.; and Li, S. E. 2025. Bootstrap Off-policy with World Model. In *Advances in Neural Information Processing Systems*, volume 38, 134093–134121. Curran Associates, Inc.

A Proof of Theorem 1

Throughout the proof, equalities between measurable functions are understood up to the relevant Gaussian measure. Let $w = (z_t^\top, a_t^\top)^\top$, $C = [A \ B]$, and $\Sigma_w := \text{Cov}(w)$. Under Assumptions 1–2, $w \sim \mathcal{N}(0, \Sigma_w)$, $z_{t+1} = Cw + \xi_t$, and

$$R_\pi := \text{Cov}(\mathbb{E}[z_{t+1} \mid z_t, a_t]) = C\Sigma_w C^\top.$$

The independent-noise special case $\Sigma_w = I_{d+m}$ gives $R_\pi = CC^\top = AA^\top + BB^\top$.

Lemma 1 (Optimal predictor and predictable energy). *For any admissible encoder h , the squared-loss optimal predictor is $F_h^*(h(z_t), a_t) = \mathbb{E}[h(z_{t+1}) \mid h(z_t), a_t]$. Moreover, minimizing the prediction loss over F is equivalent to maximizing*

$$J(h) := \mathbb{E}[\|\mathbb{E}[h(z_{t+1}) \mid h(z_t), a_t]\|^2].$$

Proof. The first claim follows from the conditional-mean optimality of squared loss. By the Pythagorean identity for conditional expectation,

$$\inf_F \mathcal{L}(h, F) = \mathbb{E}\|h(z_{t+1})\|^2 - J(h).$$

Since h is standard Gaussian and the process is stationary, $\mathbb{E}\|h(z_{t+1})\|^2 = d$. Thus minimizing prediction loss is equivalent to maximizing $J(h)$. $\square$

Lemma 2 (Controlled Hermite energy bound). *Let $h(z) = \sum_{k \geq 1} h_k(z)$ be the vector-valued Hermite decomposition under $z \sim \mathcal{N}(0, I_d)$, and write the linear component as $h_1(z) = Lz$. Let $\tau_1 := \mathbb{E}\|h_1(z)\|^2 = \text{tr}(LL^\top)$. If the eigenvalues of R_π are $1 > \lambda_1 \geq \dots \geq \lambda_d > 0$, then every admissible h satisfies*

$$J(h) \leq \text{tr}(R_\pi) - (\lambda_d - \lambda_1^2)(d - \tau_1).$$

Proof. Since $h(z_t)$ is a function of z_t , conditioning on (z_t, a_t) can only increase predictable energy, so

$$J(h) \leq \mathbb{E}[\|\mathbb{E}[h(z_{t+1}) \mid z_t, a_t]\|^2].$$

Write $w = \Sigma_w^{1/2}u$ for $u \sim \mathcal{N}(0, I_{d+m})$, and set $M := C\Sigma_w^{1/2}$. Then $z_{t+1} = Mu + \xi_t$ is a Gaussian channel with $MM^\top = R_\pi$. Its canonical correlations are therefore the square roots of the eigenvalues of R_π . By the standard Hermite–Mehler decomposition for Gaussian channels, the first-order Hermite component is contracted according to R_π , while every Hermite component of degree at least two has predictable energy at most λ_1^2 times its variance. Therefore,

$$J(h) \leq \text{tr}(LR_\pi L^\top) + \lambda_1^2(d - \tau_1).$$

It remains to control the linear term. Whitening gives $I_d = \mathbb{E}[h(z)h(z)^\top]$, and Hermite orthogonality implies $LL^\top \preceq I_d$. Hence

$$\text{tr}(LR_\pi L^\top) \leq \text{tr}(R_\pi) - \lambda_d(d - \tau_1).$$

Combining the two inequalities gives the result. $\square$

Proof of Theorem 1. For any orthogonal $Q \in O(d)$, the encoder $h_Q(z) = Qz$ is admissible. Its optimal predictor is $F_Q(h_Q(z_t), a_t) = Q(Az_t + Ba_t)$, and the corresponding predictable energy is

$$J(h_Q) = \mathbb{E}\|Q(Az_t + Ba_t)\|^2 = \text{tr}(R_\pi).$$

Thus the maximum value of $J(h)$ is at least $\text{tr}(R_\pi)$.

By Lemma 2, every admissible encoder satisfies

$$J(h) \leq \text{tr}(R_\pi) - (\lambda_d - \lambda_1^2)(d - \tau_1).$$

Under the controlled spectral separation condition $\lambda_d - \lambda_1^2 > 0$, any global maximizer must have $\tau_1 = d$. Since the total Hermite energy of h is d , all higher-order Hermite components vanish, and hence $h(z) = Lz$ a.s. The standard-Gaussian constraint gives $LL^\top = I_d$, so $L \in O(d)$. Setting $Q = L$ proves state identifiability.

Finally, for $y_t = h(z_t) = Qz_t$, the optimal predictor satisfies

$$F^*(y_t, a_t) = \mathbb{E}[Qz_{t+1} \mid Qz_t, a_t] = QAQ^\top y_t + QBa_t.$$

This proves controlled transition identifiability. Moreover, $\rho_{\text{tr}}(\pi) > 0$ makes the conditional covariance $\text{Cov}(a_t \mid z_t)$ positive definite. Since $\text{Cov}(z_t) = I_d$, the Schur-complement criterion implies that Σ_w is positive definite, so the jointly Gaussian behavior distribution has a strictly positive density on $\mathbb{R}^{d+m}$. The continuous difference between $F(Qz, a)$ and $Q(Az + Ba)$ therefore vanishes everywhere once it vanishes. Equivalently, in identified coordinates, $F(y, a) = QAQ^\top y + QBa$ for every $(y, a) \in \mathbb{R}^d \times \mathbb{R}^m$. The remaining prediction loss is the irreducible noise variance, namely $\text{tr}(\text{Cov}(\xi_t)) = d - \text{tr}(R_\pi)$. $\square$

B Proof of Theorem 2

We use the notation of Theorem 2. Let $R_\pi := \text{Cov}(Az_t + Ba_t) = C\Sigma_w C^\top$, with eigenvalues $1 > \lambda_1 \geq \dots \geq \lambda_d > 0$, and let $\gamma_{\text{rep}}(\pi) := \lambda_d - \lambda_1^2$. For an encoder satisfying $h(z_t) \sim \mathcal{N}(0, I_d)$, write $h(z) = Lz + g(z)$ for its Hermite decomposition and $F_h^*(h(z_t), a_t) := \mathbb{E}[h(z_{t+1}) \mid h(z_t), a_t]$. Define $J(h) := \mathbb{E}\|F_h^*(h(z_t), a_t)\|^2$.

Lemma 3 (Approximate predictable-energy gap). *Let $r := \mathbb{E}\|g(z)\|^2$. If $\mathcal{L}(h, F_h^*) \leq \mathcal{L}^* + \Delta_{\text{enc}}$, then*

$$r \leq C \frac{\Delta_{\text{enc}}}{\gamma_{\text{rep}}(\pi)}.$$

Proof. Since $h(z_t) \sim \mathcal{N}(0, I_d)$, $\mathcal{L}(h, F_h^*) = d - J(h)$. The excess-risk assumption therefore gives $J(h) \geq \text{tr}(R_\pi) - \Delta_{\text{enc}}$.

On the other hand, the controlled Hermite contraction used in the exact proof gives

$$J(h) \leq \text{tr}(LR_\pi L^\top) + \lambda_1^2 r.$$

$$\text{tr}(LR_\pi L^\top) \leq \text{tr}(R_\pi) - \lambda_d r.$$

Combining the two displays yields $(\lambda_d - \lambda_1^2)r \leq \Delta_{\text{enc}}$, which proves the claim. $\square$

Lemma 4 (Approximate orthogonal identification). *Under the assumptions of Lemma 3, there exists $Q \in O(d)$ such that*

$$\mathbb{E}\|h(z_t) - Qz_t\|^2 \leq C \frac{\Delta_{\text{enc}}}{\gamma_{\text{rep}}(\pi)}.$$

Proof. Since $h(z_t) \sim \mathcal{N}(0, I_d)$, Hermite orthogonality gives

$$I_d = LL^\top + \text{Cov}(g(z)).$$

Therefore

$$\|LL^\top - I_d\|_F = \|\text{Cov}(g(z))\|_F \leq r.$$

By stability of the polar decomposition, there exists $Q \in O(d)$ such that $\|L - Q\|_F^2 \leq Cr$. Using again the orthogonality between the linear and higher-order Hermite components,

$$\mathbb{E}\|h(z_t) - Qz_t\|^2 = \|L - Q\|_F^2 + \mathbb{E}\|g(z_t)\|^2 \leq Cr.$$

The result follows from Lemma 3 and $\gamma_{\text{rep}}(\pi) \leq 1$. $\square$

Proof of Theorem 2. Let $\eta := \Delta_{\text{enc}}/\gamma_{\text{rep}}(\pi)$. Lemma 4 gives an orthogonal matrix $Q \in O(d)$ such that $\mathbb{E}\|h(z_t) - Qz_t\|^2 \leq C\eta$. This proves the state-identification bound.

It remains to prove the transition-identification bound. Let $e(z) := h(z) - Qz$. For the optimal predictor F_h^* , we decompose

$$\begin{aligned} F_h^*(h(z_t), a_t) - Q(Az_t + Ba_t) \\ = \mathbb{E}[e(z_{t+1}) \mid h(z_t), a_t] \\ + \mathbb{E}[QAz_t \mid h(z_t), a_t] - QAz_t. \end{aligned} \quad (8)$$

The first term is bounded by Jensen's inequality and stationarity:

$$\mathbb{E}\|\mathbb{E}[e(z_{t+1}) \mid h(z_t), a_t]\|^2 \leq \mathbb{E}\|e(z_{t+1})\|^2 = \mathbb{E}\|e(z_t)\|^2.$$

For the second term, conditional expectation is the best L^2 approximation by functions of $(h(z_t), a_t)$. Using $QAA^\top h(z_t)$ as a candidate, and writing $r_t := \mathbb{E}[QAz_t \mid h(z_t), a_t] - QAz_t$, gives

$$\mathbb{E}\|r_t\|^2 \leq \|A\|_{\text{op}}^2 \mathbb{E}\|h(z_t) - Qz_t\|^2. \quad (9)$$

Thus

$$\mathbb{E}\|F_h^*(h(z_t), a_t) - Q(Az_t + Ba_t)\|^2 \leq C(1 + \|A\|_{\text{op}}^2)\eta.$$

Finally, for a learned predictor F satisfying $\mathbb{E}\|F(h(z_t), a_t) - F_h^*(h(z_t), a_t)\|^2 \leq \Delta_{\text{pred}}$, the triangle inequality yields

$$\begin{aligned} \mathbb{E}\|F(h(z_t), a_t) - Q(Az_t + Ba_t)\|^2 &\leq C\Delta_{\text{pred}} \\ &+ C(1 + \|A\|_{\text{op}}^2)\eta. \end{aligned} \quad (10)$$

This completes the proof. $\square$

C Proof of Theorem 3

Proof. Let $Y_t = Qz_t$. Under the identified coordinates,

$$Y_{t+1} = QAz_t + QBa_t + Q\xi_t = F^*(Y_t, a_t) + Q\xi_t.$$

Since ξ_t is independent of (z_t, a_t) and has zero mean, $F^*(Y_t, a_t)$ is the conditional mean of Y_{t+1} given (Y_t, a_t) .

Consequently, the conditional-mean orthogonality identity gives, for every square-integrable predictor F . Let $d_F(y, a) := F(y, a) - F^*(y, a)$.

$$\mathcal{E}_\pi(F) = \mathbb{E}_{P_\pi} [\|d_F(Y_t, a_t)\|^2]. \quad (11)$$

Indeed, expanding the squared error yields

$$\begin{aligned} \mathbb{E}_{P_\pi} [\|Y_{t+1} - F(Y_t, a_t)\|^2] \\ = \mathbb{E}_{P_\pi} [\|Y_{t+1} - F^*(Y_t, a_t)\|^2] + \mathbb{E}_{P_\pi} [\|d_F(Y_t, a_t)\|^2], \end{aligned}$$

because the cross term vanishes after conditioning on (Y_t, a_t) .

Let $v_{\min} \in \mathbb{R}^m$ be a unit eigenvector of $\Sigma_{\text{tr}}(\pi)$ associated with its smallest eigenvalue $\rho_{\text{tr}}(\pi) > 0$, and let $u \in \mathbb{R}^d$ be any unit vector. Define

$$D_\delta := \sqrt{\frac{\delta}{\rho_{\text{tr}}(\pi)}} uv_{\min}^\top$$

and construct

$$F_\delta(y, a) := F^*(y, a) + D_\delta(a - \mu_\pi(Q^\top y)).$$

Because (z_t, a_t) is jointly Gaussian, the conditional mean $\mu_\pi(z) = \mathbb{E}[a_t \mid z_t = z]$ is linear in z . Hence F_δ is continuous and square-integrable.

Let $r_t := a_t - \mu_\pi(z_t)$. By definition, $\mathbb{E}[r_t \mid z_t] = 0$, and

$$\mathbb{E}[r_t r_t^\top] = \mathbb{E}_{z_t} [\text{Cov}_\pi(a_t \mid z_t)] = \Sigma_{\text{tr}}(\pi).$$

Using Eq. (11),

$$\begin{aligned} \mathcal{E}_\pi(F_\delta) &= \mathbb{E} [\|D_\delta r_t\|^2] \\ &= \text{tr}(D_\delta \Sigma_{\text{tr}}(\pi) D_\delta^\top) \\ &= \frac{\delta}{\rho_{\text{tr}}(\pi)} \text{tr}(uv_{\min}^\top \Sigma_{\text{tr}}(\pi) v_{\min} u^\top) \\ &= \frac{\delta}{\rho_{\text{tr}}(\pi)} \rho_{\text{tr}}(\pi) \|u\|^2 = \delta. \end{aligned}$$

Under the counterfactual distribution, $a_{\text{cf}} - \mu_\pi(z) = \eta_{\text{cf}}$ with $\eta_{\text{cf}} \sim \mathcal{N}(0, I_m)$. Therefore,

$$\begin{aligned} \mathcal{E}_{\text{cf}}(F_\delta) &= \mathbb{E} [\|D_\delta \eta_{\text{cf}}\|^2] \\ &= \text{tr}(D_\delta D_\delta^\top) \\ &= \|D_\delta\|_F^2 \\ &= \frac{\delta}{\rho_{\text{tr}}(\pi)} \|u\|^2 v_{\min}^\top v_{\min} \\ &= \frac{\delta}{\rho_{\text{tr}}(\pi)}. \end{aligned}$$

This proves the result. $\square$

Proof of Corollary 1. For the behavior policy

$$a_t = \sqrt{1 - \sigma^2} K z_t + \sigma \eta_t,$$

the conditional mean is $\mu_{\pi_\sigma}(z_t) = \sqrt{1 - \sigma^2} K z_t$. Since $\eta_t \sim \mathcal{N}(0, I_m)$ is independent of z_t ,

$$\text{Cov}_{\pi_\sigma}(a_t \mid z_t) = \sigma^2 I_m.$$

It follows immediately that

$$\Sigma_{\text{tr}}(\pi_\sigma) = \mathbb{E}_{z_t} [\text{Cov}_{\pi_\sigma}(a_t \mid z_t)] = \sigma^2 I_m$$

and hence

$$\rho_{\text{tr}}(\pi_\sigma) = \lambda_{\min}(\Sigma_{\text{tr}}(\pi_\sigma)) = \sigma^2.$$

For every $\sigma > 0$, applying Theorem 3 gives $\mathcal{E}_{\text{cf}}(F_\delta) = \delta/\sigma^2$.

When $\sigma = 0$, the action is the deterministic function $a_t = Kz_t$, so $a_t - \mu_{\pi_0}(z_t) = 0$. Let $u \in \mathbb{R}^d$ and $v \in \mathbb{R}^m$ be arbitrary unit vectors, and define

$$\tilde{F}(y, a) := F^*(y, a) + uv^\top (a - \mu_{\pi_0}(Q^\top y)).$$

Then $\tilde{F} = F^*$ under P_{π_0} , and therefore $\mathcal{E}_{\pi_0}(\tilde{F}) = 0$. Under the counterfactual action distribution,

$$\mathcal{E}_{\text{cf}}(\tilde{F}) = \mathbb{E}[\|uv^\top \eta_{\text{cf}}\|^2] = 1.$$

Thus distinct continuous predictors attain the same on-policy risk while producing different counterfactual predictions, proving structural non-identifiability at $\sigma = 0$. $\square$

D Experimental Details

Model, optimization, and evaluation. All experiments use two-dimensional latent states, observations, and actions. The encoder and action-conditioned predictor use 8-layer SiLU MLPs with hidden width 512. Both representation and coverage runs use 100,000 one-step transitions, 5,000 AdamW updates, gradient clipping at 1.0, and a 500-step warmup followed by cosine decay. They use batch size 1024, learning rate 10^{-3} , and weight decay 10^{-5} . The objective is

$$\mathcal{L} = \mathcal{L}_{\text{pred}} + \lambda_{\text{white}} \mathcal{L}_{\text{white}} + \lambda_{\text{gauss}} \mathcal{L}_{\text{gauss}}, \quad (12)$$

$$\lambda_{\text{white}} = 1, \quad \lambda_{\text{gauss}} = 50.$$

where $\mathcal{L}_{\text{gauss}}$ is a sliced characteristic-function regularizer toward a standard Gaussian. Each run uses 10,000 evaluation transitions and a separate set of 5,000 states to fit the orthogonal Procrustes alignment Q^* . Both sweeps use five independent runs for each observation map.

For $y_i = h(g(z_i))$, the normalized representation and controlled-transition errors are

$$E_{\text{rep}} := \frac{\sum_i \|y_i - Q^* z_i\|^2}{\sum_i \|z_i\|^2}, \quad (13)$$

$$E_{\text{tr}} := \frac{\sum_i \|F(y_i, a_i) - Q^*(Az_i + Ba_i)\|^2}{\sum_i \|Az_i + Ba_i\|^2}.$$

All transition metrics compare predictions with the noise-free conditional mean, not with sampled next states.

D.1 Representation Sweep

Let R_θ denote a two-dimensional rotation and define

$$\begin{aligned} A(q) &= R_{30^\circ} D(q) R_{20^\circ}^\top, \\ B(q) &= R_{30^\circ} D(q) R_{-20^\circ}^\top, \\ D(q) &= \text{diag}(\sqrt{0.30}, \sqrt{q/2}). \end{aligned} \quad (14)$$

Actions are independent standard Gaussian, and the process covariance is $\text{Cov}(\xi_t) = I - AA^\top - BB^\top$. Consequently, z_t , a_t , and z_{t+1} are standard Gaussian in marginal distribution, while

$$\text{spec}(AA^\top + BB^\top) = \{0.6, q\}, \quad \gamma_{\text{rep}}(q) = q - 0.36.$$

We use

$$q \in \{0.1, 0.2, 0.3, 0.36, 0.4, 0.5, 0.6\}.$$

The four observation maps are:

$$\begin{aligned} \text{spiral: } & u = R_{0.8\pi\|z\|} z, \\ & g(z) = (1 + 0.45 \tanh(u_1))u, \\ \text{parabolic: } & g(z) = (z_1, z_2 + 0.75z_1^2), \\ \text{sinusoidal: } & g(z) = (z_1 + 1.75 \sin(1.5z_2), z_2), \\ \text{wave: } & u_1 = z_1 + 0.65 \sin(1.4z_2), \\ & u_2 = z_2 + 0.55 \sin(1.2u_1 + 0.4), \\ & g(z) = (u_1 + 0.40 \sin(1.7u_2 - 0.3), u_2). \end{aligned}$$

Figure 2 uses $q = 0.50$.

D.2 Coverage Sweep

We use the state-dependent Gaussian behavior policy

$$\begin{aligned} a_t &= \sqrt{1 - \sigma^2} Kz_t + \sigma \eta_t, \\ \eta_t &\sim \mathcal{N}(0, I), \quad \eta_t \perp z_t, \quad KK^\top = I. \end{aligned} \quad (15)$$

The coverage levels and feedback matrix are

$$\sigma \in \{0, 0.2, 0.4, 0.6, 0.8, 1\}, \quad K = R_{45^\circ},$$

We reuse Eq. (14) with $q = 0.50$ and run the coverage sweep independently for all four observation maps listed above. Under the state-dependent policy in Eq. (15), the predictable covariance is

$$R_\pi(\sigma) = AA^\top + BB^\top + \sqrt{1 - \sigma^2} (AK^\top B^\top + BKA^\top). \quad (16)$$

For each σ , we set the independent zero-mean process-noise covariance to

$$\text{Cov}(\xi_t) = I - R_\pi(\sigma)$$

so that current and next states have the same standard-Gaussian marginal. The controlled conditional mean $Az + Ba$, observation map, and action marginal are fixed across the sweep, but the full stochastic transition kernel is therefore indexed by σ through this stationarity-preserving noise adjustment. The process-noise trace changes mildly, from 0.8 at $\sigma = 0$ to 0.9 at $\sigma = 1$. The representation margin $\gamma_{\text{rep}}(\sigma) = \lambda_{\min}(R_\pi(\sigma)) - \lambda_{\max}(R_\pi(\sigma))^2$ ranges from 0.118 to 0.140 and is not used as a training or model-selection gate.

The counterfactual actions are sampled once from $\mathcal{N}(0, 2^2 I)$ and shared across all coverage levels and training runs. This intervention probes weakly covered parts of the action plane while keeping the evaluation distribution fixed across the sweep. For held-out states z_i , let $y_i = h(g(z_i))$, let a_i^{beh} denote the corresponding behavior action, and let $a_i^{\text{cf}} \sim \mathcal{N}(0, 2^2 I)$ denote the counterfactual action. The per-coordinate transition errors are

$$\begin{aligned} E_{\text{trans}}^{\text{beh}} &= \frac{1}{nd} \sum_{i=1}^n \|F(y_i, a_i^{\text{beh}}) - Q^*(Az_i + Ba_i^{\text{beh}})\|^2, \\ E_{\text{trans}}^{\text{cf}} &= \frac{1}{nd} \sum_{i=1}^n \|F(y_i, a_i^{\text{cf}}) - Q^*(Az_i + Ba_i^{\text{cf}})\|^2. \end{aligned} \quad (17)$$

Their ratio $E_{\text{trans}}^{\text{cf}}/E_{\text{trans}}^{\text{beh}}$ is the empirical counterfactual amplification.

To assess identification of the state and action components separately, we sample independent probe actions $a_i^{\text{probe}} \sim \mathcal{N}(0, I)$ and fit

$$F(y_i, a_i^{\text{probe}}) \approx \widehat{M}y_i + \widehat{N}a_i^{\text{probe}}$$

by least squares. The relative component error is

$$E_T = \frac{\|\widehat{T} - T^*\|_F}{\|T^*\|_F}, \quad (18)$$

$$(\widehat{T}, T^*) \in \left\{ \left(\widehat{M}, Q^* A Q^{*\top} \right), \left(\widehat{N}, Q^* B \right) \right\}.$$

The counterfactual field in Figure 4 uses $z_0 = (1, 0)$ and an action grid over $[-2.2, 2.2]^2$.

D.3 Planning Probe

The planning visualization uses the seed-0 spiral-map model at each coverage level. We set $z_{\text{init}} = (0, 0)$, horizon $H = 6$, and visualization goal $z_g = (0.85, 0.55)$. The current and goal observations are encoded as $y_{\text{init}} = h(g(z_{\text{init}}))$ and $y_g = h(g(z_g))$. The common candidate bank contains 210 constant-action sequences: seven radii uniformly spaced from 0 to 1.4, crossed with 30 uniformly spaced directions. For each candidate, the learned model is rolled forward from y_{init} , and the selected sequence minimizes $\|\widehat{y}_H - y_g\|$. Thus neither the true latent coordinates nor Q^* enter action selection. After selection, $Q^{*\top}$ is used only to display predicted endpoints in the latent coordinate system. The executed endpoint is obtained from the true noise-free recursion $z_{t+1} = Az_t + Ba_t$.

The aggregate evaluation uses all five seeds for all four observation maps. Each of the 180 nonzero endpoints reachable by the common candidate bank is used once as a goal, and we report the mean executed terminal error over this goal set for each checkpoint. Because every goal is generated by a candidate in the bank, the candidate-bank oracle error is zero. Figure 7 reports the mean and bootstrap 95% confidence interval across seeds.