

Susceptible Reservoir Architectures for Regime-Conditional Volatility Forecasting

Aliaksei Kaliutau^{1*}

¹Monodromy, London, United Kingdom.

Corresponding author(s). E-mail(s):
aliaksei.kaliutau24@alumni.imperial.ac.uk;

Abstract

Volatility forecasting is dominated by persistence and measurement noise, leaving limited residual structure for nonlinear models to exploit. We introduce Susceptible Architectures (SUSA), a reservoir-design principle for volatility forecasting, and its two concrete implementations, based on complex-valued open-chain and periodic reservoirs and regime-conditioned experts to interpret reservoir features across calm, onset, recovery, and persistent-stress states. We also implement open-system q -qubit counterparts in Qiskit while retaining a common AR-Ridge anchor and a bounded residual correction trained under QLIKE.

We evaluate models on 16 U.S. equity and exchange-traded-fund series using three disjoint chronological training, validation, and test folds, a 12-observation input window, and a five-observation forecast horizon.

The proposed models perform competitively with GARCH, achieving statistically significant QLIKE improvements for specific assets (IWM, XLP). Also models' forecasts complement HARQ-style predictions: a stacked ensemble improves mean QLIKE by 0.0116 over its strongest constituent and wins in 75% of test scenarios.

Keywords: volatility forecasting, reservoir computing, structural susceptibility, mixture of experts, quantum reservoir computing

1 Introduction

Volatility forecasting is an unusually hard task in for ML models. The target is often persistent, heteroskedastic, heavy-tailed, and regime dependent.

There are several strong classical models that explain a large part of the log volatility with acceptable accuracy. For example, GARCH encodes conditional variance recursion [1]; HAR represents heterogeneous daily, weekly, and monthly persistence [2]; HARQ-style version of HAR focusing on the reliability of realized-variance measurements [3]. Any competitive non-linear model should beat all these baselines and improve on the residual tail. However, due to the complexity of the target signal and the extremely low SNR ratio, this became a long-standing *quaestio vexata* of the financial forecast.

In this work, we explore the deep connection between the susceptibility of complex dynamic systems and the market signals.

Susceptibility measures how strongly a system’s observable response changes when a parameter or structure is perturbed. Therefore, specifically designed critical systems can play the role of an amplifier. For example, near quantum critical points and driven-dissipative transitions, susceptibilities can become strongly enhanced because a small perturbation reorganizes a large part of the state. This is why critical systems are studied as resources for quantum sensing and metrology [4].

We want to use the susceptibility in computational sense rather than ontological: we do not assume that a financial market is a quantum system or that market regimes map directly to quantum states. We instead explore the idea that deliberately susceptible reservoirs can transform weak differences between volatility paths into structured contrasts that are easier for a low-capacity (usually a 1-layer) readout to detect.

The susceptibility of complex systems is a very generic and unifying concept. To narrow the scope and to define a starting point, we begin with quantum-inspired classical model, whose architecture can be easily re-formulated in quantum terms later.

A generic reservoir is usually selected for memory, nonlinearity, expressivity, or state-space dimension. In comparison, a susceptible reservoir is selected for the geometry/dynamics of its response under matched interventions. In other words, we want to see and exploit the difference between the trajectories generated from the same input when we apply controlled changes to the reservoir. We call this design principle SUSceptible Architectures (SUSA).

SUSA generalizes a set of increasingly broad ideas. The narrowest form is parameter susceptibility: the reservoir is evaluated at nearby operating points, and their finite difference can be defined as a sensitivity along one physical parameter. The next form is structural susceptibility when a boundary pattern is changed. The broadest form is regime-conditional susceptibility: the same response contrast is interpreted differently according to the inferred state of the forecasting process.

In our initial experiments we studied reservoir tuned near quantum EP points and we found that parameter susceptibility has too many limitations to beat the strong baselines. In this paper, we focus on the boundary and regime susceptibility.

We start from the classically tractable complex reservoir that acts as a proxy, so we can quickly test the architectural contribution of directional transport, open-versus-periodic counterfactuals, and regime-conditioned readouts without invoking quantum dynamics. We then lift the same architecture to an open quantum reservoir. In the quantum version, we replace the q -node complex state with a q -qubit density operator evolving under coherent interactions and CPTP channels [5, 6]. The resulting

tensor-product state space supports a much richer family of coherence and many-body correlation responses.

As we will show later, there is no single road to conduct this classical to quantum translation; instead we have to deal with potentially infinite number of variants. Enhanced susceptibility can occur in many places: near degeneracies, gap closings, exceptional points, bifurcations, or sharp changes in stationary state (Figure 1).

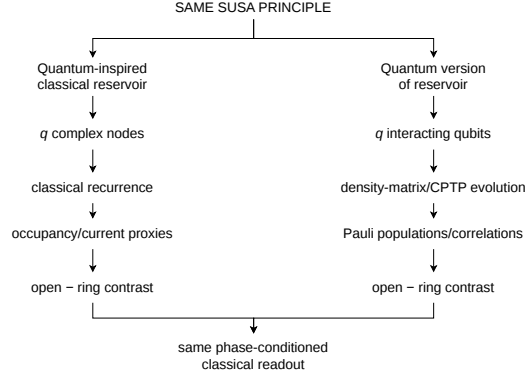


Fig. 1 We can design many different architectures, which are exploiting effectively the same idea

In our design philosophy, the quantum version of QRC architecture is not a different forecasting idea - it is a richer physical version of the same susceptibility principle.

Note that the larger quantum state space only provides extra representational capacity, but it does not guaranty predictive advantage. Articles on expressivity analysis show that performance depends jointly on encoding, memory, size, and scrambling; larger reservoirs can become obstructive [7], [8].

Recent work has applied quantum reservoir computing directly to realized-volatility forecasting [8]. Our contribution differs by constructing matched open-chain and periodic counterfactuals, interpreting their response contrast conditionally on market phase, and retaining a common classical persistence anchor.

In our paper, we explore and answer the following 2 research questions:

- Can structural susceptibility extract stable residual information beyond econometric, autoregressive, and classical-reservoir baselines?
- Can phase-conditioned interpretation improve the accuracy and tail robustness of susceptibility features relative to a single global readout?

2 Methods

2.1 Core Architectures

In this chapter, we design quantum-inspired models and their full quantum variants.

Boundary susceptibility is modeled under the open chain and close ring dynamics of the reservoir states. This idea is implemented in CF-LSE, a quantum-inspired

complex-valued reservoir that measures structural susceptibility through an open-versus-periodic counterfactual.

This reservoir contains two chains (each is a vector of complex node states). The input values modulate both the amplitude and phase of the injected signal. The open chain contains directional nearest-neighbor interactions with two physical boundaries. The periodic chain uses the same input masks, local dynamics, node count, and coupling construction but adds the closing edge that connects the last node to the first. The model then forms signed and normalized open-minus-ring contrasts. These features measure how strongly the encoded input path responds to the removal or insertion of a boundary connection (Figure 2).

In CF-OSQRC-Qiskit, the q -node complex state is replaced by the q -qubit density operator. Sequential inputs are encoded through local rotations. Coherent field terms and two-qubit interactions propagate information, while directional trace-preserving channels model asymmetric transfer and amplitude damping supplies fading memory (Figure 3).

The quantum reservoir is observed through local Pauli populations, adjacent correlations, coherence proxies, directed-current observables, boundary imbalance, spatial concentration, and entropy-like summaries. Measurements collected across the input sequence produce final-state and temporal statistics. As in CF-LSE, the model forms open-minus-ring and normalized contrast features, projects them to low rank, and learns a bounded residual correction trained by minimizing QLIKE over the same classical anchor.

Phase-QRC-MoE has a similar architecture, but it is complemented by applying a regime-conditioned readout. Several phase-specialized QLIKE readouts learn four transition states: calm, onset, recovery, and persistent stress (Figure 4). The output is the probability-weighted combination of their outputs. Calm and persistent-stress experts can learn different mappings for otherwise similar reservoir responses, while onset and recovery experts can distinguish increasing from decreasing instability. On implementation level of Phase-QRC-MoE, we are using complex node states as well, so that this quantum-inspired architecture easily translatable into full quantum model.

Phase-OSQRC-MoE-Qiskit differs from Phase-QRC-MoE only in the presence of the quantum reservoir that supplies a fixed nonlinear temporal transformation, and optimization occurs in a small 4-head classical layer.

In both models, we do not try to predict the raw volatility from scratch. Instead, we use AR-Ridge as the common anchor and measure only small nonlinear incremental values beyond the raw volatility.

2.2 Testing methodology

We chose a set of canonical and structurally relevant benchmarks: AR-Ridge for linear persistence, GARCH(1,1) for conditional-variance recursion, HAR/HARQ-style models for heterogeneous multi-horizon persistence. ESN is the closest conventional reservoir comparator because it also uses fixed recurrent dynamics followed by a trained linear readout.

Autoregressive Ridge (AR, regularized linear persistence baseline) is used as an anchor and a basic baseline. We use AR as an absolute baseline because it provides

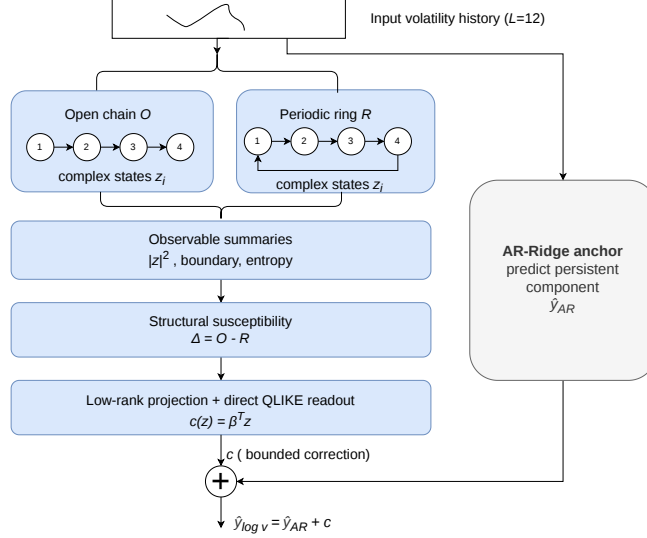


Fig. 2 The architecture of CF-LSE. The input volatility window first enters a classical anchor branch and a susceptibility branch. The anchor branch produces the baseline log-variance forecast. The susceptibility branch divides into two matched reservoirs: an open chain and a periodic ring. In the quantum-inspired model, these blocks contain complex recurrent nodes; in the quantum model, they contain a density operator evolving under coherent interactions and CPTP channels. Both branches emit state and temporal observables. A contrast block computes their signed and normalized differences. A low-rank QLIKE readout converts this susceptibility representation into a bounded residual correction.

a transparent reference point; the relative performance of GARCH- and HARQ-style models can vary depending on market (Table 1).

Comparison	Scientific meaning
QRC vs AR-Ridge	Does the reservoir add nonlinear temporal information beyond lagged log variance?
QRC vs HAR/HARQ	Does it add value beyond volatility-specific multi-horizon features and stress proxies?
QRC vs GARCH	Does it add value beyond a standard conditional-variance recursion?

Table 1 The benchmark is designed as a hierarchy rather than a flat leaderboard.

For our experiments, we selected 16 symbols, representing different U.S. equity exposures (SPY, QQQ, IWM, XLB, XLE, XLF, XLI, XLK, XLP, XLU, XLV, XLY, AAPL, MSFT, JPM, NVDA).

For each symbol, we construct a versioned daily market dataset from canonicalized OHLCV observations, then calculate close-to-close log returns, squared returns as a daily realized-variance proxy, and causal trailing volatility features. We split the original training data into 3 folds, each of which is split into training/test windows ($L=12, H=5$). Thus, the input window for models is previous 12 log-variance observations, and the target is mean variance over the horizon of next 5 observations.

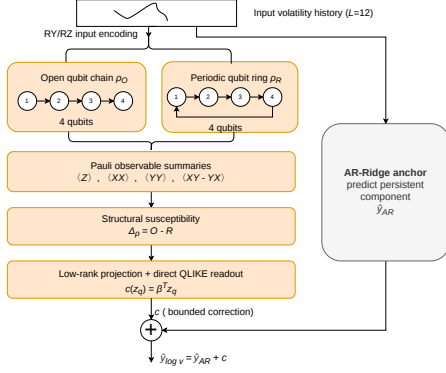


Fig. 3 Architecture of CF-OSQRC-Qiskit.

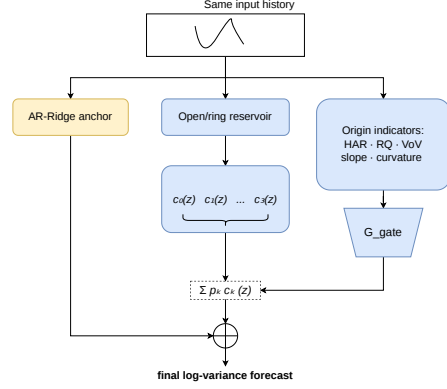


Fig. 4 Architecture of Phase-QRC-MoE.

Fold	Training		Validation		Test	
	First	Last	First	Last	First	Last
1	2006-01-26	2010-02-16	2010-02-23	2011-02-24	2011-03-03	2012-11-08
2	2012-11-15	2016-12-05	2016-12-12	2017-12-14	2017-12-21	2019-09-03
3	2019-09-10	2023-09-28	2023-10-05	2024-10-09	2024-10-16	2026-06-30

Table 2 Chronological outer folds used for model selection and evaluation. Dates are inclusive. Purge intervals separate the training, validation, and test segments. Folds have very different market conditions.

Dataset quality and leakage are controlled at both dataset-construction level and evaluation stages. Variance smoothing and all features are computed using trailing information only, and no observation from the forecast horizon is included in its corresponding input window (i.e. we do not use centered mean calculation, etc). The standardization parameters and the stress threshold are estimated from training observations only and subsequently applied without refitting to validation or test data. Handcrafted HAR, quarticity, draw-down, and gating variables are aligned to the forecast origin rather than the target date, ensuring that every model input would have been observable when the forecast was issued. We validate strictly positive variance targets, monotonically ordered dates, contiguous chronological source splits, and stores file hashes.

The dataset for each symbol is divided into disjoint chronological outer folds. Each fold contains its own training/validation/test segment, with purge intervals inserted between adjacent segments and between outer folds.

We quantify uncertainty in loss differentials using dependence-aware confidence intervals and tests of equal predictive accuracy. We use the Holm-Bonferroni adjustment [9] as a multi-comparison correction tool to prevent false positives. Failing this gate means that when controlling for data mining bias, the model’s performance is not statistically differentiable from random noise on almost all individual stocks.

3 Results

Based on specific diagnostic metrics, our QRC models (both quantum and quantum-inspired) show forecasting potential beating AR baseline in all experiments and showing better results than GARCH baseline on 8/16 symbols: AAPL, IWM, MSFT, NVDA, QQQ, SPY, XLP, XLK.

In particular, our model wins on the biggest individual equities, but the 95% CI for ΔQLIKE crosses zero:

- AAPL: 95% CI (-0.225 to 0.0192) - Not significant.
- MSFT: 95% CI (-0.203 to 0.043) - Not significant.
- NVDA: 95% CI (-0.221 to 0.115) - Not significant.
- QQQ: 95% CI (-0.270 to 0.001) - Not significant, boundary.

Because the upper bound of these intervals is positive, we cannot reject the null hypothesis that GARCH is just as good/better on these high-volume assets.

When averaged across different markets, Phase-QRC-MoE effectively did not show a statistically detectable average difference with GARCH (Figure 5).

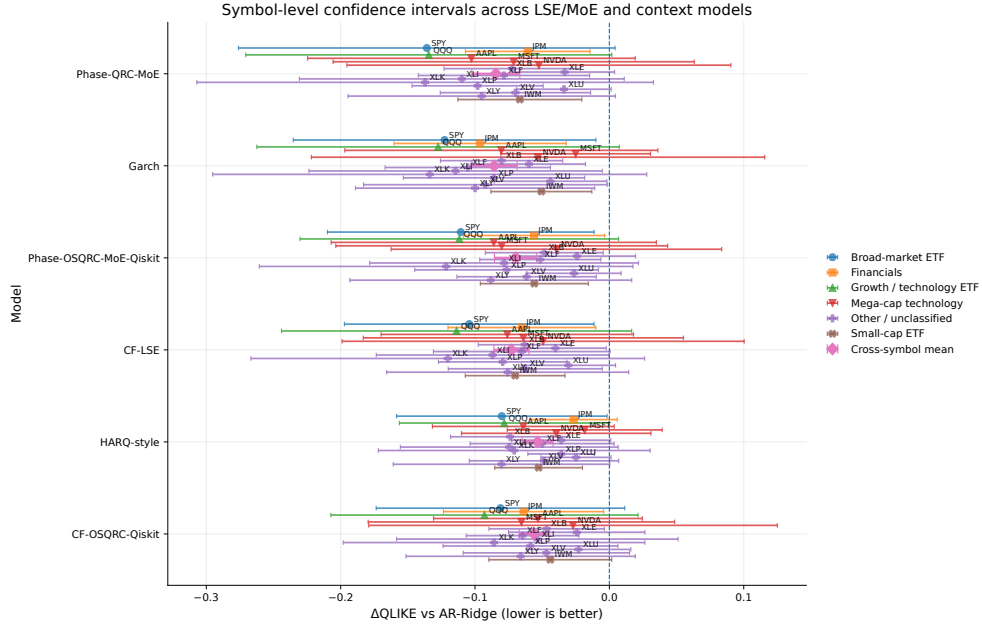


Fig. 5 Symbol-level confidence intervals for the QLIKE loss differential relative to AR-Ridge. Each point denotes the estimated mean $\Delta\text{QLIKE} = \text{QLIKE}_{\text{model}} - \text{QLIKE}_{\text{AR}}$ for one symbol, aggregated across the held-out folds, and each horizontal bar shows its 95% CI. Intervals crossing the vertical zero line do not provide statistically detectable evidence of a difference. Colors label the corresponding symbol class. The substantial variation across individual equities and ETFs illustrates the cross-sectional heterogeneity of forecasting performance and motivates evaluation across multiple assets rather than reliance on a single aggregate result.

Rigorous statistical tests show that model performance was heterogeneous across markets, and detailed analysis revealed interesting behavior.

Models achieved a "Robust, consistent, tail-safe" evidence tier with a 95% CI entirely below zero on two symbols, also significantly outperforming GARCH at the same time on all 3 folds over all held-out test periods:

- IWM (Small Caps): ΔQLIKE -0.070 (95% CI -0.107 to -0.033)
- XLP (Consumer Goods): ΔQLIKE -0.098 (95% CI -0.146 to -0.049)

These results provide evidence that the proposed architecture can outperform GARCH in specific market segments rather than uniformly across all markets (Figure 6). For robust claims we will need more tests across larger set of symbols and more targeted ablation tests.

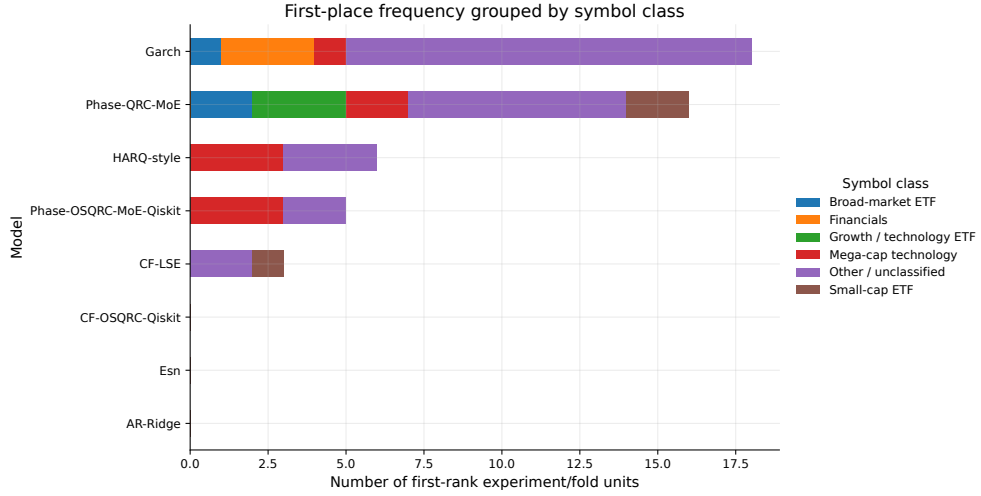


Fig. 6 Each bar represents the number of times when a model achieved the best QLIKE. Tied winners are counted as first-place occurrences.

To evaluate more accurately the potential for immediate usage of models to improve the accuracy of predictions via stacking, we calculated pointwise disagreement between SUSA models and GARCH/HARQ baselines. The results are summarized in Table 3.

Method	Stack QLIKE	Mean Gain	Win Share	DM p-value
CF-LSE + HARQ	-7.762	0.0116	75.0%	< 0.001
HARQ + Phase-OSQRC-MoE-Qiskit	-7.763	0.0114	79.2%	< 0.001
HARQ + Phase-QRC-MoE	-7.767	0.0077	75.0%	0.0046

Table 3 Stacking performance compared to the best individual model member. Mean gain and win share highlight robust improvements, supported by Diebold-Mariano significance.

The analysis reveals a forecast complementarity between HARQ and the proposed QRC architectures. The strongest deployable result is an equal-weight CF-LSE-HARQ ensemble, which improves QLIKE over its better constituent by 0.0116 on average, wins in 75% of symbol/fold units, and has a block-bootstrap confidence interval entirely favoring the stack. The equal-weight ensemble captures approximately 70% of the improvement available to a test-fitted convex oracle, suggesting that most of the attainable diversification benefit can be obtained without unstable weight estimation.

4 Conclusion

We introduced SUSA as a reservoir-design principle based on controlled response contrasts and regime-conditioned interpretation. We showed that these architectures can extract residual information that is not fully represented by a persistence anchor (like AR) or by volatility-specific linear features. Performance is heterogeneous across markets: aggregate differences from GARCH are often statistically inconclusive, while the reported confidence intervals for IWM and XLP favor the proposed models. The complementarity observed with HARQ-style forecasts proves that the topological/dynamical features extracted by the complex-valued and periodic reservoirs, and/or quantum systems, are partially non-redundant and that the susceptibility representation captures information complementary to standard volatility features.

As a result, we can conclude with reasonable level of confidence that our empirical results validate the core hypothesis: these novel architectures can successfully isolate and extract residual information that linear volatility models miss.

SUSA models are stable and flexible: a susceptibility branch can be attached to a reliable classical anchor as a bounded correction, contributing value through forecast combinations even when its standalone advantage is modest. While our quantum implementations successfully extend this principle to open-system qubit dynamics and richer observable families, the present experiments do not yet establish a quantum advantage.

The mathematical richness of this architecture is now established; the primary challenge moving forward is identifying the optimal concrete implementations. Both the classical regime-conditioned reservoirs and their open-system quantum counterparts demonstrate immense theoretical potential for handling low signal-to-noise financial data. However, translating this potential into consistent dominance requires further refinement of model design. Future work must focus on studies to isolate the exact drivers of performance. The next question is no longer whether susceptibility architectures can model financial noise, but how to parameterize and physically implement them to fully unleash their advantage.

5 Code availability

Code, split metadata, experiment configurations, random seeds, and scripts used to reproduce the tables and figures will be released at <https://github.com/akaliutau/qrc-susa>. The repo also contains the detailed analysis of experiments, along with results themselves.

References

- [1] Bollerslev, T.: Generalized autoregressive conditional heteroskedasticity. *Journal of Econometrics* **31**(3), 307–327 (1986) [https://doi.org/10.1016/0304-4076\(86\)90063-1](https://doi.org/10.1016/0304-4076(86)90063-1)
- [2] Corsi, F.: A simple approximate long-memory model of realized volatility. *Journal of Financial Econometrics* **7**(2), 174–196 (2009) <https://doi.org/10.1093/jjfinec/nbp001>
- [3] Bollerslev, T., Patton, A.J., Quaedvlieg, R.: Exploiting the errors: A simple approach for improved volatility forecasting. *Journal of Econometrics* **192**(1), 1–18 (2016) <https://doi.org/10.1016/j.jeconom.2015.10.007>
- [4] Di Candia, R., Minganti, F., Petrovnin, K.V., Paraoanu, G.S., Felicetti, S.: Critical parametric quantum sensing. *npj Quantum Information* **9**(1), 23 (2023) <https://doi.org/10.1038/s41534-023-00690-z>
- [5] Jaeger, H.: The “echo state” approach to analysing and training recurrent neural networks. GMD Report 148, German National Research Center for Information Technology (2001). Corrected version with an erratum note released in 2010
- [6] Martínez-Peña, R., Ortega, J.-P.: Quantum reservoir computing in finite dimensions. *Physical Review E* **107**(3), 035306 (2023) <https://doi.org/10.1103/PhysRevE.107.035306>
- [7] Schütte, N.-E., Götting, N., Müntinga, H., List, M., Brunner, D., Gies, C.: Expressivity of quantum reservoir computers. Preprint at <https://arxiv.org/abs/2501.15528>; version 3 revised 10 June 2026 (2025). <https://doi.org/10.48550/arXiv.2501.15528>
- [8] Li, Q., Mukhopadhyay, C., Bayat, A., Habibnia, A.: Quantum reservoir computing for realized volatility forecasting. *Physical Review Research* **8**(2), 023028 (2026) <https://doi.org/10.1103/rbj7-4wnq> [arXiv:2505.13933](https://arxiv.org/abs/2505.13933) [quant-ph]
- [9] Holm, S.: A simple sequentially rejective multiple test procedure. *Scandinavian Journal of Statistics* **6**(2), 65–70 (1979)