
Understanding Multimodal Failure in Action-Chunking Behavioral Cloning

Lorenzo Mazza^{1,†}
lorenzo.mazza@nct-dresden.de

Massimiliano Datres^{2,†}
datres@math.lmu.de

Ariel Rodriguez^{1,3}

Sebastian Bodendstedt^{1,4}

Gitta Kutyniok^{2,5,6}

Stefanie Speidel^{1,3,4,7}

Abstract

Behavioral cloning becomes difficult when the same observation admits several valid actions. We study this problem for action-chunking policies and show that different multimodal parameterizations fail in different ways. For latent-variable policies, posterior–prior regularization makes deployment-time sampling more reliable, but excessive regularization removes the action-conditioned information needed to distinguish demonstrated modes. Reducing this regularization can preserve mode information, but then success depends on whether the prior covers the relevant latent regions. For action-space generative policies, multimodality is constrained by the smoothness of the base-to-action transport: a map with small Lipschitz constant cannot assign substantial probability to many well-separated modes. Covering many modes therefore requires either sharp transitions in base space or off-support bridge regions in action space. Experiments on synthetic multimodal tasks and robotic simulation benchmarks support these mechanisms.

1 Introduction

Imitation learning trains a robot policy directly from expert demonstrations [18, 21, 11]. A standard approach is behavioral cloning (BC), which fits a policy to observation–action pairs collected under an expert policy, without the need for online interaction, reward engineering, or exploration. Due to its practical appeal, BC has become a dominant paradigm for training deep visuomotor policies in robotic manipulation [31, 6, 28, 15, 2]. A central challenge in behavioral cloning is multimodality in the expert’s conditional action distribution: for the same observation, the dataset may contain multiple valid actions. This may arise from different expert styles, equally good choices, or latent factors absent from the observation space [17]. Under an L_2 or unimodal-Gaussian behavioral-cloning head, the maximum-likelihood solution regresses to the conditional *mean* of the modes, which is typically not an element of any mode’s support [9]. A canonical example is inverse kinematics in robot control[1]: the same end-effector target may admit disconnected joint-space solutions. Averaging can yield a joint command that lies on none of the inverse-kinematics branches, while filtering to one branch removes feasible alternatives needed under constraints such as obstacles or joint limits.

Contemporary multimodal BC methods typically predict short chunks of future actions rather than single-step actions, improving temporal coherence while enabling one-shot non-autoregressive inference over the chunk [31, 6]. There are two broad approaches to making such policies multimodal: *latent-variable methods* and *action-space generative methods*, as illustrated in Fig. 4. Latent-variable methods introduce an unobserved code, continuous or discrete, from which different action chunks can be decoded [31, 16]. Action-space generative methods instead model the distribution over action

[†]Corresponding authors. ¹NCT/UCC Dresden, UKDD Dresden, TU Dresden, DKFZ Heidelberg. ²Ludwig-Maximilians-Universität München, Munich Center for Machine Learning (MCML). ³BMFTR Research Hub 6G-Life. ⁴Cluster of Excellence CeTI. ⁵University of Tromsø. ⁶German Aerospace Center (DLR). ⁷HZDR Dresden.

chunks directly, using flows or diffusion models [6, 2]. Both approaches can generate diverse actions, and their multimodality is typically evaluated by rollout performance.

In both approaches, however, it remains unclear which model- and training-level quantities control the multimodality of the learned policy. Our goal is to fill this gap by providing a precise definition of multimodality. Furthermore, we identify the key quantities that must be controlled to preserve multimodality: the posterior–prior regularization strength in CVAE-based policies, and the Lipschitz constant of the base-to-action map in action-space generators.

Contribution. We study how posterior–prior regularization affects multimodality in action-chunking behavioral cloning. For latent-variable policies, we show that preserving demonstrated modes requires action-conditioned latent information, see Proposition 1. We then show that pointwise posterior–prior regularization can suppress this information as its strength increases, giving the multimodality collapse criterion in Corollary 2. For action-space generators, we show that a deterministic sampler with small Lipschitz constant is more likely to assign a small probability to many modes, see Proposition 2, losing multimodality. Therefore, regularization methods that enforce a small Lipschitz constant tend to suppress multimodality. We empirically validate our claims, and release the code used in the experiments.

Structure of the paper. Section 2 defines multimodal behavioral cloning over actions and the generative policy families considered in the paper. Section 4 formalizes mode preservation and proves that latent policies must carry action-conditioned mode information, leading to a collapse criterion for pointwise prior regularization, a latent-geometry condition for aggregate matching, and bridge bounds for action-space generators. Section 5 introduces controlled synthetic benchmarks with ground-truth mode labels and evaluates representative methods on synthetic and robotic simulation tasks to test whether these mechanisms explain practical failures.

2 Background

For any notation that may be unclear, we refer the reader to Appendix A.

Offline imitation learning. We consider a finite-horizon Markov decision process $(\mathcal{S}, \mathcal{A}, P, r, \rho_0, \mathsf{T})$, where $\mathcal{S}$ is the state or observation space, $(\mathcal{A}, d_{\mathcal{A}})$ is the (metric) action space, $P(\cdot \mid s, a) \in \mathcal{P}(\mathcal{S})$ is the transition kernel, $r : \mathcal{S} \times \mathcal{A} \rightarrow \mathbb{R}$ is the reward, $\rho_0 \in \mathcal{P}(\mathcal{S})$ is the initial-state distribution, and $\mathsf{T} \in \mathbb{N}$ is the horizon. A stochastic policy $\pi : \mathcal{S} \rightarrow \mathcal{P}(\mathcal{A})$ maps each state s to a probability distribution $\pi(\cdot \mid s)$ over actions. In the offline-imitation-learning setting, the reward signal r is not observed. Instead, we are given demonstrations generated by an expert policy π_E . A trajectory realization is $\tau = (s_0, a_0, \dots, s_{\mathsf{T}-1}, a_{\mathsf{T}-1}, s_{\mathsf{T}}) \in \mathcal{T}_{\mathsf{T}} := (\mathcal{S} \times \mathcal{A})^{\mathsf{T}} \times \mathcal{S}$. The expert policy, together with P and ρ_0 , induces a trajectory law $p_E \in \mathcal{P}(\mathcal{T}_{\mathsf{T}})$. When the relevant densities or probability mass functions exist, this law factorizes as $p_E(\tau) = \rho_0(s_0) \prod_{t=0}^{\mathsf{T}-1} \pi_E(a_t \mid s_t) P(s_{t+1} \mid s_t, a_t)$. We denote by $p_{\mathcal{D}} \in \mathcal{P}(\mathcal{S} \times \mathcal{A})$ the time-marginal expert state-action distribution:

$$p_{\mathcal{D}}(s, a) := \frac{1}{\mathsf{T}} \sum_{t=0}^{\mathsf{T}-1} p_E(S_t = s, A_t = a),$$

where $p_E(S_t = s, A_t = a)$ denotes the t -step state-action marginal induced by the trajectory law p_E . The goal of offline imitation learning is to learn a policy $\pi_{\theta}(\cdot \mid s)$ from samples drawn from this expert state-action law. Let $T_1, \dots, T_N \stackrel{\text{iid}}{\sim} p_E$ be independent expert trajectory random variables. The dataset of expert demonstrations is one realization $\tilde{\mathcal{D}} = \{\tau_i\}_{i=1}^N = \{(s_0^i, a_0^i, \dots, s_{\mathsf{T}-1}^i, a_{\mathsf{T}-1}^i, s_{\mathsf{T}}^i)\}_{i=1}^N$. Using $\tilde{\mathcal{D}}$, we construct the empirical state-action distribution $p_{\tilde{\mathcal{D}}} := \frac{1}{N\mathsf{T}} \sum_{i=1}^N \sum_{t=0}^{\mathsf{T}-1} \delta_{(s_t^i, a_t^i)}$.

Remark 1. In practice, action-chunk BC heads $a_{t:t+\mathsf{H}-1} \in \mathcal{A}^{\mathsf{H}}$ are commonly used. Action-chunk BC is executed open-loop between observations, to retain temporal dependence absent from $p_{\mathcal{D}}$ and reduce rollout error [31, 26]. All definitions and results extend by replacing $\mathcal{A}$ with $\mathcal{A}^{\mathsf{H}}$, so samples become $(s_t^i, a_{t:t+\mathsf{H}-1}^i)$.

Multimodal imitation learning. We formalize *multimodality* as a property of $p_{\mathcal{D}}(\cdot | s)$. For each observation $s \in \mathcal{S}$, the support of the expert conditional action distribution is contained in finitely many well-separated valid mode sets. In other words, for each $s \in \mathcal{S}$, there exists a natural number $K(s) \geq 1$ and a family of covering sets $C_1(s), \dots, C_{K(s)}(s) \subseteq \mathcal{A}$ of $\text{supp } p_{\mathcal{D}}(\cdot | s)$ such that

$$\text{supp } p_{\mathcal{D}}(\cdot | s) \subseteq \bigcup_{k=1}^{K(s)} C_k(s), \quad \Delta(s) := \min_{k \neq k'} \text{dist}_{\mathcal{A}}(C_k(s), C_{k'}(s)) > 0. \quad (1)$$

Each set $C_k(s)$ represents one valid strategy or trajectory mode for observation s . The mode sets have disjoint closures. We further define the *mode-assignment* function $g : \mathcal{A} \times \mathcal{S} \rightarrow \mathbb{N}_0$ as

$$g(a, s) = \sum_{k=1}^{K(s)} k \mathbf{1}_{\{a \in C_k(s)\}}, \quad \mathbf{1}_{\{a \in C_k(s)\}} = \begin{cases} 1, & a \in C_k(s), \\ 0, & \text{otherwise.} \end{cases} \quad (2)$$

The function g is a mode-level labeling of expert actions used for the analysis. For each realized pair (s, a) , $g(a, s)$ is the deterministic index of the mode containing a . Under the data distribution $(S, A) \sim p_{\mathcal{D}}$, we denote the induced mode-label random variable by $M := g(A, S)$. Here $K(s) = 1$ gives the unimodal case, while $K(s) \geq 2$ is the setting of interest.

Behavioral cloning. Behavioral cloning instantiates offline imitation learning as supervised learning on state-action pairs extracted from expert trajectories. Let $\pi_{\theta}(a | s)$ be the conditional action distribution given a state s and parametrized by θ . In practice, π_{θ} is represented by a neural network parametrized by θ , which maps each state s to a distribution over actions. The parameters θ are usually determined by minimizing the standard maximum-likelihood objective

$$\mathcal{L}_{\text{BC}}(\theta) = -\mathbb{E}_{(S,A) \sim p_{\mathcal{D}}} [\log \pi_{\theta}(A | S)], \quad (3)$$

which, in the infinite-data limit, is equivalent [13] up to an additive constant to minimizing the Kullback-Leibler (KL) divergence between the expert data and the model distribution $\mathbb{E}_{S \sim p_{\mathcal{D}}, S} \text{KL}(p_{\mathcal{D}}(\cdot | S) \| \pi_{\theta}(\cdot | S))$, where $p_{\mathcal{D}, S}$ denotes the state marginal of $p_{\mathcal{D}}$.

Conditional latent-variable policies. Latent-variable BC policies introduce an auxiliary random variable $Z \in \mathbb{R}^{d_z}$ to represent action ambiguity not resolved by the observation. They consist of a posterior encoder $q_{\phi}(\cdot | a, s)$, a conditional prior $p_{\psi}(\cdot | s)$, and a latent-conditioned decoder policy $\pi_{\theta}(\cdot | z, s)$. At deployment, $Z \sim p_{\psi}(\cdot | s)$, $A \sim \pi_{\theta}(\cdot | Z, s)$. We write their training objective in the generic regularized form

$$\mathcal{L}_{\text{var}}^{\beta}(\theta, \phi, \psi) = \mathbb{E}_{(S,A) \sim p_{\mathcal{D}}} [-\mathbb{E}_{Z \sim q_{\phi}(\cdot | A, S)} \log \pi_{\theta}(A | Z, S)] + \beta D(q_{\phi}, p_{\psi}), \quad (4)$$

where $D(q_{\phi}, p_{\psi})$ couples the posterior encoder to the deployment prior and $\beta > 0$ controls its strength.

Action-space generative policies. Action-space generative policies sample actions directly by transforming base noise into actions. For fixed s , we write the full deterministic sampler as $G_{\theta, s}(u) := G_{\theta}(s, u)$, $U \sim p_0$, $A = G_{\theta, s}(U)$. The induced conditional policy is therefore the push-forward $\pi_{\theta}(\cdot | s) = (G_{\theta, s})_{\#} p_0$. This abstraction covers deterministic samplers obtained from diffusion or flow-matching policies.

3 Related work

Multimodal BC has been modeled through several policy families. ACT uses a KL-regularized CVAE with an explicit latent variable to represent trajectory style [31]. VQ-BeT represents multimodality through learned discrete latent tokens and a two-stage training recipe [16, 23]. Q-FAT uses continuous Gaussian-mixture heads in an autoregressive transformer [24], which is structurally slower than parallel action-chunk decoding. Implicit BC parameterizes the policy as a conditional energy function, requiring sampling or gradient-based optimization at inference rather than a single decoder pass [9]. Across these approaches, comparisons remain largely task-driven and empirical, with limited theoretical guidance on which training quantities affect multimodality. More recent methods shift multimodality directly into action-space denoising or flow matching [6, 20, 19, 2, 14, 25].

For one-shot push-forward generators $A = G_\theta(s, U)$, existing results show that separated multimodal targets force a trade-off between approximation error and generator smoothness [22]. For iterative samplers such as DDIM [6] or deterministic flow solvers [2, 14, 25], we study this trade-off for the composed deterministic sampling map induced by the denoising or flow updates. A parallel gap appears in latent-based policies: pointwise KL regularization is standard, but its weight is usually treated as an empirical hyperparameter.

4 Main Results

We analyze how the cost of multimodality appears in the action-chunking generative policy families. For latent-variable policies, preserving mode identity requires action-conditioned information in the latent variable. For action-space generative policies, the constraint is geometric: separated modes must be realized by the sampling map from base noise to action chunks. These are not the same notion of cost, but complementary ways in which multimodal structure must be represented by the policy.

Multimodality in latent-variable policies. Latent-variable policies route multimodal action ambiguity through an explicit latent random variable Z . We first quantify the information required to preserve the demonstrated mode. Let

$$q_{\phi, \mathcal{D}}(s, a, z) := p_{\mathcal{D}}(s, a) q_{\phi}(z | a, s) = p_{\mathcal{D}, S}(s) p_{\mathcal{D}}(a | s) q_{\phi}(z | a, s)$$

denote the posterior-encoder-induced joint distribution over (S, A, Z) . Unless stated otherwise, all probabilities, mutual informations, expectations and conditional distributions involving (S, A, Z) in this subsection are taken under $q_{\phi, \mathcal{D}}$. We write the state-conditioned aggregated posterior as $q_{\phi, \mathcal{D}}(z | s) := \mathbb{E}_{A \sim p_{\mathcal{D}}(a | s)}[q_{\phi}(z | A, s)]$. The conditional mutual information between A and Z given S is denoted by $I(A; Z | S)$. From [12], it holds

$$\mathbb{E}_{(S, A) \sim p_{\mathcal{D}}} \text{KL}(q_{\phi}(\cdot | A, S) \| p_{\psi}(\cdot | S)) = I(A; Z | S) + \mathbb{E}_{S \sim p_{\mathcal{D}, S}} \text{KL}(q_{\phi, \mathcal{D}}(\cdot | S) \| p_{\psi}(\cdot | S)).$$

The first term measures how much information Z must encode about the demonstrated action A beyond what is already determined by the state S , while the second term measures aggregated posterior–prior mismatch. Thus $I(A; Z | S)$ captures the action information available to preserve the demonstrated mode: if S already determines A uniquely, then Z need not contain additional information about A .

In the rest of the analysis, we assume that the latent-conditioned decoder policy $\pi_{\theta}(\cdot | z, s)$ is concentrated on the graph of a neural network f_{θ} , that is $\pi_{\theta}(\cdot | z, s) = \delta_{f_{\theta}(z, s)}$, with decoded action $a = f_{\theta}(z, s)$. Therefore, given a sample $(s, a) \in \text{supp}(p_{\mathcal{D}})$, the training-time prediction law is $p_{\theta, \phi}(\cdot | s, a) := (f_{\theta, s})_{\#} q_{\phi}(\cdot | a, s)$, where $f_{\theta, s}(z) := f_{\theta}(z, s)$. A realized action prediction $\hat{a} \sim p_{\theta, \phi}(\cdot | s, a)$ is correct if and only if $\hat{a} \in C_{g(a, s)}(s)$.

For a measurable function $\rho : S \rightarrow [0, 1]$ representing a state-dependent mode-identification error, we define the Fano-corrected lower bound as

$$B_{\rho} := \mathbb{E}_{S \sim p_{\mathcal{D}, S}}[H(M | S)] - \mathbb{E}_{S \sim p_{\mathcal{D}, S}} \left[H_b(\rho(S)) + \rho(S) \log(K(S) - 1) \right],$$

where $H_b(p) = -p \log p - (1 - p) \log(1 - p)$ is the entropy of a Bernoulli(p) random variable, and the bracketed term is taken to be zero when $K(S) = 1$. The quantity B_{ρ} measures the portion of the expected conditional mode entropy $\mathbb{E}_{S \sim p_{\mathcal{D}, S}}[H(M | S)]$ that remains after applying a Fano correction for $\rho(S)$. A positive value indicates that, under the data distribution, the mode M cannot be resolved from S alone up to the specified error $\rho(S)$, providing a certificate of unresolved conditional multimodality.

The next result lower bounds $I(A; Z | S)$ by the Fano-corrected entropy of the demonstrated mode label M .

Proposition 1 (Mode-information lower bound). Under the setting introduced above, for each $s \in S$, let

$$\rho(s) := \Pr(f_{\theta}(Z, s) \notin \mathcal{C}_M(s) | S = s). \quad (5)$$

For all $s \in \text{supp}(p_{\mathcal{D}, S})$ with $K(s) > 1$, assume $\rho(s) \leq 1 - 1/K(s)$. Then $I(A; Z | S) \geq B_{\rho}$. Consequently, it holds $\mathbb{E}_{(S, A) \sim p_{\mathcal{D}}} \text{KL}(q_{\phi}(\cdot | A, S) \| p_{\psi}(\cdot | S)) \geq B_{\rho}$.

The detailed proof of Proposition 1 is given in Appendix B. We note that the assumption of Proposition 1 ensures that, for all $s \in \text{supp}(p_{\mathcal{D},S})$ with $K(s) > 1$, the induced mode-recovery rule is nontrivial: its error probability $\rho(s)$ is no larger than the error rate $1 - 1/K(s)$ of uniform random guessing among the $K(s)$ admissible modes. The result shows that accurate mode recovery forces the posterior latent to retain action-conditioned information: the better the decoder preserves the demonstrated mode, the larger the lower bound B_ρ .

Corollary 1 (Uniform exact-recovery case). Under the setting of Proposition 1, if $\rho(s) = 0$ for $p_{\mathcal{D},S}$ -almost every s , and $M \mid S = s$ is uniform over $K(s)$ modes, then

$$I(A; Z \mid S) \geq \mathbb{E}_{S \sim p_{\mathcal{D},S}} \log K(S).$$

Corollary 1 isolates the maximum-ambiguity case: exact recovery of $K(s)$ equiprobable modes requires the latent to carry on average the cost of the full mode entropy, $\log K(s)$ nats.

We recall that CVAEs are usually trained using a regularized objective $\mathcal{L}_{\text{var}}^\beta(\theta, \phi, \psi)$ defined in (4). A widely used regularizer [31] is given by

$$D(q_\phi, p_\psi) = \mathbb{E}_{(S,A) \sim p_{\mathcal{D}}} \text{KL}(q_\phi(\cdot \mid A, S) \parallel p_\psi(\cdot \mid S)). \quad (6)$$

Corollary 2. Let us fix $\beta > 0, b_0 > 0$. Let us denote with

$$(\hat{\theta}, \hat{\phi}, \hat{\psi}) := \arg \min_{\theta, \phi, \psi} \mathcal{L}_{\text{var}}^\beta(\theta, \phi, \psi), \quad \hat{\mathcal{L}}^\beta := \mathcal{L}_{\text{var}}^\beta(\hat{\theta}, \hat{\phi}, \hat{\psi})$$

the solution of the learning problem and the achieved training loss, respectively. Let us assume that: (H1) there exists $(\theta_0, \phi_0, \psi_0)$ such that $D(q_{\phi_0}, p_{\psi_0}) = 0$, and denote by $\mathcal{L}^0 = \mathcal{L}_{\text{var}}^0(\theta_0, \phi_0, \psi_0)$ the corresponding training loss; (H2) the mode-recovery error $\hat{\rho}(s) := \Pr(f_{\hat{\rho}}(Z, s) \notin C_M(s) \mid S = s)$ satisfies $\hat{\rho}(s) \leq 1 - 1/K(s)$ for all $s \in \text{supp}(p_{\mathcal{D},S})$ with $K(s) > 1$. Then there exists a constant $C > 0$, independent of β , such that $B_{\hat{\rho}} \leq I(A; Z \mid S) \leq \frac{C}{\beta}$. Consequently, a necessary condition for achieving a certificate $B_{\hat{\rho}} > b_0$ is $\beta < \frac{C}{b_0}$.

Remark 2. We note that the Fano term is what turns the information bound into a mode-recovery statement: $I(A; Z \mid S)$ may encode any action-dependent variation, whereas B_ρ is positive only when unresolved mode entropy $H(M \mid S)$ is recovered with sufficiently small error ρ .

Assumption (H1) requires q_{ϕ_0} and p_{ψ_0} to coincide for some parameter values (ϕ_0, ψ_0) , so that $D(q_{\phi_0}, p_{\psi_0}) = 0$. For the pointwise KL regularizer, this means that $q_{\phi_0}(\cdot \mid a, s) = p_{\psi_0}(\cdot \mid s)$ on the data support, and therefore Z does not encode additional information about A beyond S . This collapse behavior is observed in practice; see, for instance, [3, 5]. Assumption (H2) ensures that the learned mode-recovery rule is nontrivial, since its error probability is no larger than that of uniform random guessing among the $K(s)$ admissible modes.

Corollary 2 shows that the strength of the variational regularization directly limits the amount of certified conditional multimodality that the learned latent representation can retain. In particular, as β increases, the conditional mutual information $I(A; Z \mid S)$ is forced to decrease at rate $1/\beta$. Since $B_{\hat{\rho}}$ is upper-bounded by this information term, strong regularization can prevent the latent variable from encoding the action-dependent mode information needed to represent multiple plausible actions at the same state. Therefore, obtaining a nontrivial multimodality certificate $B_{\hat{\rho}} > b_0$ requires the regularization strength to be sufficiently small, namely $\beta < C/b_0$.

Remark 3. Corollary 2 is specific to regularizers of the form (6). For other regularization strategies, an analogous relation between the regularization strength β and the certified multimodality does not follow in general. Aggregate matching objectives provide a counterexample to this behavior; see Appendix B.2 for details.

Multimodality in action-space generative policies. Action-space generative policies remove the explicit posterior latent, but not the geometric problem of routing samples to separated action modes. In this paragraph, we investigate when multimodality is preserved by such generative policies.

We consider a generative policy defined as follows. Let us fix $s \in \mathcal{S}$ and let $p_0 := \mathcal{N}(0, 1)$, $U \sim p_0$. The transport map, or deterministic sampler, at state s with parameters θ is defined as $G_{\theta,s}(u) := G_\theta(s, u)$. The induced conditional policy is the push-forward of the Gaussian base distribution

$\pi_\theta(\cdot | s) = (G_{\theta,s})_\# p_0 = (G_{\theta,s})_\# \mathcal{N}(0, 1)$. In other words, for any measurable set $B \subseteq \mathcal{A}$, $\pi_\theta(\cdot | s)$ is defined by

$$\pi_\theta(B | s) = \Pr_{U \sim \mathcal{N}(0,1)} (G_\theta(s, U) \in B) = \int_{\{u: G_\theta(s,u) \in B\}} \frac{1}{\sqrt{2\pi}} e^{-u^2/2} du.$$

In practice, G_θ is parameterized by a neural network and trained to transform Gaussian samples into actions whose conditional distribution approximates $p_{\mathcal{D}}(\cdot | s)$.

We first introduce the notion of a τ -represented mode.

Definition 1. Let $\tau \in (0, 1]$ and $s \in \mathcal{S}$, and assume that $p_{\mathcal{D}}(\cdot | s)$ is multimodal, see 1. We say that a mode $C_k(s)$ is τ -represented by the policy distribution induced by $G_{\theta,s}$ if and only if $\pi_\theta(C_k(s) | s) > \tau$.

This definition means that a mode is considered represented whenever the learned policy places sufficiently large probability, greater than τ , on actions belonging to that mode. We define the number of τ -represented modes by

$$N_\theta^{(\tau)}(s) := |\{k \in \{1, \dots, K(s)\} : \pi_\theta(C_k(s) | s) > \tau\}|.$$

The Lipschitz constant of the map $u \mapsto G_{\theta,s}(u)$ strongly controls the number of modes that the policy distribution generates with sufficiently large probability.

Proposition 2. Let us fix $s \in \mathcal{S}$, $\tau \in (0, 1)$. Let us assume that the transport map $G_{\theta,s} : u \mapsto G_\theta(s, u)$ is $L_{\theta,s}$ -Lipschitz. Then

$$N_\theta^{(\tau)}(s) \leq 1 + \left\lceil \frac{2\Phi^{-1}\left(1 - \frac{\tau}{2}\right) L_{\theta,s}}{\Delta(s)} \right\rceil,$$

where $\Delta(s)$ is the mode separation defined above and Φ^{-1} is the quantile of the standard normal distribution.

We note that the $L_{\theta,s}$ -Lipschitz assumption on $G_{\theta,s}$ is broadly satisfied in practical applications, as it only requires the neural network to employ Lipschitz activation functions. Most commonly used activation functions satisfy this property. If the modes are well separated, a generator with a small Lipschitz constant cannot assign probability mass larger than τ to many different modes at the same time. In other words, covering many separated modes requires the generator to stretch the latent space sufficiently. The number of τ -represented modes grows with the ratio $L_{\theta,s}/\Delta(s)$. This result can be interpreted as a mode-representation limitation for Lipschitz generators. A smoother or less expansive generator is more constrained in the number of modes it can represent, while a generator with larger Lipschitz constant has more capacity to spread probability mass across distant regions of the action space. In continuous-time diffusion and flow matching policies, separating modes requires extreme spatial stretching near the terminal sampling steps [27]. Consequently, applying any stabilization or regularization technique that overly restricts the network’s Lipschitz constant will inevitably compromise this stretching mechanism and force the generative model into mode collapse [22, 27].

5 Experiments

Our experiments test four predictions of the theory: (i) mode coverage is necessary but not sufficient for successful rollout; (ii) pointwise KL penalizes mode-preserving latent codes in proportion to conditional mode entropy; (iii) aggregate posterior matching can preserve latent mode information, but deployment succeeds only when the prior covers the corresponding posterior-induced latent regions; and (iv) action-space generators express multimodality through bridge regions or sharp transitions in the base-to-action map. We evaluate these predictions on four synthetic 2D multimodal navigation tasks (Figure 1) and on standard multimodal robotics benchmarks: Push-T [6], UR3 BlockPush [9], and Kitchen [10]. Due to space constraints, the main text focuses on (i), (ii), and (iv), while the latent-prior analysis in (iii) is reported in Appendix D.4.

Baselines We instantiate the policy families in Figure 4 as non-autoregressive action-chunking transformer decoders with the same observation encoder and training pipeline. Only the multimodal

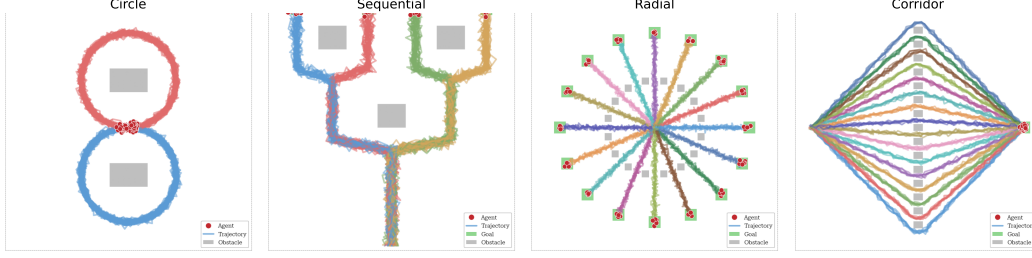


Figure 1: Synthetic datasets. Each panel shows expert trajectories for one task, color-coded by ground-truth mode. Grey rectangles denote obstacles, green rectangles denote goal regions, and red dots denote final agent positions. Policies receive a single RGB observation at $t = 0$ and predict the full open-loop chunk $a_{0:H-1} \in \mathbb{R}^{60 \times 2}$ without replanning.

output parameterization changes. BCAT is the deterministic unimodal baseline. Latent-variable policies add a posterior transformer encoder for the latent code. KL-CVAE uses pointwise KL regularization to a fixed standard Gaussian prior, while MMD-CWAE and Sinkhorn-CWAE use aggregate matching with MMD or Sinkhorn divergence. We also evaluate learned-prior variants on simulation benchmarks. LAT-Flow replaces the fixed prior with a learned flow-matching prior in latent space. VQ-VAE uses a residual vector-quantized transformer posterior with a uniform codebook prior [16]. Action-space policies generate chunks directly: Act-Flow learns a conditional velocity field with flow matching, and Act-Diff learns a sample-prediction diffusion model with a DDIM scheduler. Further architectural, training, benchmark, and hyperparameter details are given in Appendices C.1, C.2, C.3, and E.

Mode coverage is necessary but not sufficient. Full per-task synthetic results are reported in Appendix D, while here we summarize the findings. Deterministic BCAT collapses on all four tasks, achieving zero success. The generative policies recover high valid mode coverage, but this does not guarantee successful rollout: on the two hardest $K = 16$ tasks, success ranges from 0.37 to 0.52 despite near-complete coverage for most continuous models. This supports the first prediction: diverse mode sampling must be accompanied by trajectory validity and increasing K introduces a trade-off between the two. Among the latent models, LAT-Flow obtains the best macro-averaged success while maintaining full mode coverage. VQ-VAE obtains the highest hard-task success, but has lower coverage and substantial seed-level instability. We therefore omit VQ-VAE from the simulation sweep and use Act-Flow as the simulation action-space transport baseline.

Latent policies: KL collapse and mode information. We then test the pointwise-KL collapse mechanism from Proposition 1 and Corollary 2. Figure 2 decomposes the KL-CVAE regularizer across a sweep of β . For each checkpoint, we estimate the posterior-induced information terms and validate they follow the predicted ordering

$$B_{\rho_z} \leq I(M; Z | S) \leq I(A; Z | S) \leq \mathcal{K}_{\text{pt}},$$

where B_{ρ_z} is the Fano lower bound computed from the error ρ_z of the latent-space Bayes mode classifier

$$\hat{m}_z(z, s) = \arg \max_{m \in \{1, \dots, K(s)\}} [\log q_{\phi, \mathcal{D}}(z | M = m, S = s) + \log p_{\mathcal{D}}(M = m | S = s)].$$

At small β , the mode information $I(M; Z | S)$ approaches $H(M | S)$, indicating that the latent nearly identifies the demonstrated mode. As β increases, both $I(M; Z | S)$ and $I(A; Z | S)$ decrease sharply and eventually collapse toward zero. This is consistent with Corollary 2: pointwise KL regularization penalizes the action-conditioned information needed for mode preservation, and when β is set too large, the objective favors low-information collapsed solutions over mode-preserving ones. The effect is especially severe on the higher-cardinality tasks, where reducing the KL below the log K -scale mode entropy coincides with loss of mode information. The gap between B_{ρ_z} and $I(M; Z | S)$ shows the looseness of the Fano bound, while the gap between $\mathcal{K}_{\text{pt}}$ and $I(A; Z | S)$ is the aggregated posterior–prior mismatch term from [12].

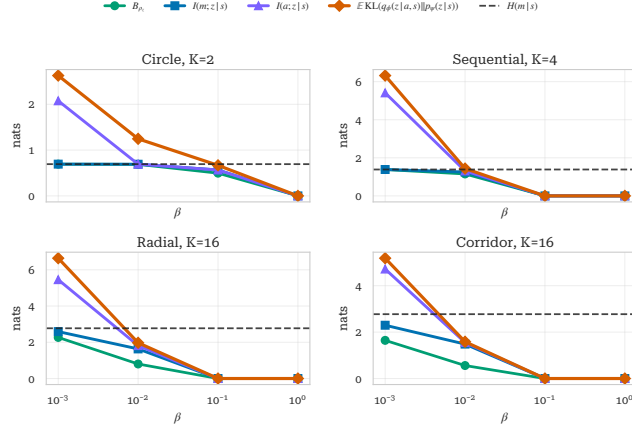


Figure 2: **Pointwise KL can suppress latent mode information.** Information decomposition for KL-CVAE under increasing pointwise KL regularization. For each task, we estimate the latent-space Fano lower bound B_{ρ_z} , the mode information $I(M; Z | S)$, the action information $I(A; Z | S)$, and the pointwise KL regularizer $\mathcal{K}_{\text{pt}} = \mathbb{E}_{(S,A) \sim p_D} \text{KL}(q_\phi(\cdot | A, S) \| p_\psi(\cdot | S))$. The dashed line denotes the empirical mode entropy $H(M | S) \approx \log K$, which is the exact-recovery reference in Corollary 1.

Action-space transport trades bridge mass for sensitivity. We estimate whether the empirical transport cost increases with the number of modes $K(s)$, as suggested by the ratio $L_{\theta,s}/\Delta(s)$ in Proposition 2. Proposition states indeed that a Lipschitz base-to-action map cannot place non-negligible mass on many well-separated modes unless its Lipschitz constant is sufficiently large. We test how this cost appears empirically: along a base-space segment connecting samples decoded to different modes, the sampler must either pass through invalid bridge trajectories or transition sharply between modes, producing a large finite-difference sensitivity. We fix s , sample base noises u , and select pairs (u_1, u_2) whose decoded trajectories $G_{\theta,s}(u_1)$ and $G_{\theta,s}(u_2)$ land in different valid modes. Along the interpolation $u_\lambda = (1 - \lambda)u_1 + \lambda u_2$, we mark each decoded trajectory $G_{\theta,s}(u_\lambda)$ as valid or invalid according to the synthetic success criterion. We define the *bridge fraction* as the fraction of interior interpolation points that decode to invalid trajectories. We then identify λ_- and λ_+ as the last point in the first mode and the first later point in the second mode. With $w = \|u_{\lambda_+} - u_{\lambda_-}\|$, we measure the empirical *mode-transition sensitivity*, defined as $S_{\text{seg}} = \frac{d_{\text{tra}}(G_{\theta,s}(u_{\lambda_+}), G_{\theta,s}(u_{\lambda_-}))}{w}$, where d_{tra} is the root-mean-square pointwise Euclidean distance between trajectories. This quantity is a finite-difference Lipschitz quotient of the sampler over that segment. We estimate the corresponding mode separation Δ_{ij} from the known synthetic modes using the same metric. The pathwise bound predicts $S_{\text{seg}} \geq \Delta_{ij}/w$. Figure 3 plots S_{seg} against this threshold for all cross-mode interpolation paths. The points lie above the diagonal, with grouped ratios $S_{\text{seg}}/(\Delta_{ij}/w)$ ranging from 1.18 to 4.94, consistent with the bound. For $K = 2$, both samplers have essentially zero bridge fraction and high transition sensitivity. For $K = 16$, bridge fraction rises to about 0.51 while S_{seg} drops to about 0.02. Thus, in the harder high-cardinality tasks, action-space samplers pay the cost mostly through broad off-support bridges rather than sharp local transitions.

External validation. Table 1 validates the synthetic findings on standard robotic simulation benchmarks. Four trends emerge. First, on the nearly unimodal UR3 BlockPush benchmark, deterministic BCAT outperforms all generative variants, showing that multimodal policy classes are not automatically beneficial when the data do not require them (Appendix D.6). Second, learned-prior variants improve over KL-CVAE on multimodal tasks, supporting the role of inference-time conditional prior coverage. Third, aggregate-matched latent policies remain competitive, especially on Kitchen, suggesting that relaxing pointwise KL can preserve useful latent structure when the prior is sufficiently aligned. Fourth, action-space transport is strong but not uniformly dominant: Act-Flow is best on PushT State and Kitchen Image, while latent policies remain competitive or better on PushT Image and Kitchen State. Overall, the best policy class depends on the ambiguity structure, not model expressivity alone. Action-space transport is also roughly $6\times$ slower at chunk generation, making inference throughput a second cost axis to consider at deployment time.

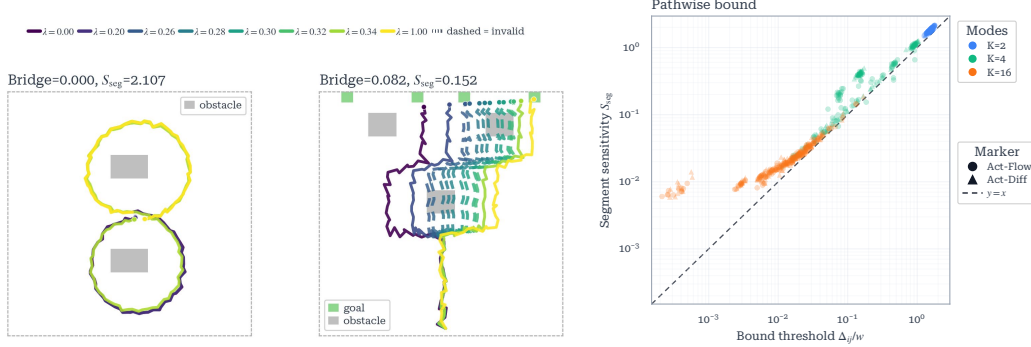


Figure 3: **Action-space bridge-sensitivity diagnostic.** Left: cross-mode interpolations in base space. Colors denote λ ; dashed curves are invalid trajectories and therefore part of the bridge. Right: empirical mode-transition sensitivity S_{seg} versus the bound threshold Δ_{ij}/w , with dashed line $y = x$.

Table 1: Simulation results where each column is a different benchmark. Rollout metrics are averaged over 200 policy rollouts and 3 seeds. Avg. chunks/s is inference throughput, measured as the inverse wall time to generate one action chunk and averaged over the five settings. 'F. IoU' stands for final intersection-over-union, 'LP' for learned prior. Additional evaluation details in Appendix C.5.

Method	PushT		Kitchen		UR3 BlockPush	Avg. chunks/s $\uparrow$
	State F. IoU $\uparrow$	Image F. IoU $\uparrow$	State Goals $\uparrow$	Image Goals $\uparrow$	Goals $\uparrow$	
BCAT	0.72	0.73	2.78	1.86	1.98	33.79
KL-CVAE	0.63	0.67	1.78	1.12	1.90	31.70
KL-CVAE-LP	0.80	0.80	3.06	1.66	1.54	29.59
MMD-CWAE-LP	0.74	0.65	2.88	2.22	1.62	29.02
Sinkhorn-CWAE-LP	0.74	0.75	3.16	2.04	1.78	23.49
Act-Flow	0.83	0.79	2.70	2.60	0.82	5.89
LAT-Flow	0.70	0.76	3.14	1.86	1.50	14.20

6 Conclusion

In this work, we formalize multimodality in imitation learning and show that, for both CVAE-based and action-space generative policies, mode preservation is governed by explicit quantities. For CVAEs, the key factor is posterior-prior regularization: stronger regularization improves alignment but can remove the action-conditioned information needed to recover distinct modes. For action-space generative policies with deterministic samplers, the key factor is the Lipschitz constant of the base-to-action map: excessive smoothness prevents assigning significant mass to many well-separated modes. To further emphasize the practical relevance of our analysis, we note that the default choice of β is 10 in ACT [31]. Our analysis points out that this choice is likely to produce unimodal policies. We empirically validate this in Section 5.

Limitations and Future Work Our results are training-independent: Corollary 2 does not ensure that training finds an optimizer $(\hat{\theta}, \hat{\phi}, \hat{\psi})$ with the desired multimodal properties, while Proposition 2 only identifies a structural limitation of low-Lipschitz samplers. Since common regularizers penalize Lipschitz behavior, they may bias policies toward mode collapse. Although β is crucial for multimodality in CVAE-based policies, we do not provide a practical selection rule, which would require estimating task ambiguity, mode number, and conditional mode entropy from demonstrations. Future work includes such criteria, together with training procedures that balance sampler smoothness and mode preservation.

7 Acknowledgements

Lorenzo Mazza, Massimiliano Datres, Sebastian Bodenstedt, Gitta Kutyniok and Stefanie Speidel acknowledge support by the project "Next Generation AI Computing (gAI_n)," funded by the Bavarian Ministry of Science and the Arts and the Saxon Ministry for Science, Culture, and Tourism as well as by the Hightech Agenda Bavaria.

Gitta Kutyniok is also grateful for partial support from the Konrad Zuse School of Excellence in Reliable AI (DAAD).

Additionally, Gitta Kutyniok and Massimiliano Datres acknowledge support by the Munich Center for Machine Learning (MCML).

Gitta Kutyniok furthermore acknowledges support by the German Research Foundation under Grants DFG-SPP-2298, KU 1446/31-1 and KU 1446/32-1, and by the Bavarian Ministry for Digital Affairs.

Ariel Rodriguez, Sebastian Bodenstedt and Stefanie Speidel acknowledge the support by the German Research Foundation (DFG, Deutsche Forschungsgemeinschaft) as part of Germany's Excellence Strategy – EXC 2050/1 – Project ID 390696704 – Cluster of Excellence "Centre for Tactile Internet with Human-in-the-Loop" (CeTI) of Technische Universität Dresden.

Ariel Rodriguez and Stefanie Speidel would additionally like to thank the Federal Ministry of Research, Technology, and Space (BMFTR) for its support as part of the research program Communication Systems "Souverän. Digital. Vernetzt." Joint project 6G-life, project identification number: 16KIS2413K.

This work has been partially supported by the German Federal Ministry of Research, Technology and Space (BMFTR) under the Robotics Institute Germany (RIG).

References

- [1] Christopher M Bishop. Mixture density networks. 1994.
- [2] Kevin Black, Noah Brown, Danny Driess, Adnan Esmail, Michael Equi, Chelsea Finn, Niccolo Fusai, Lachy Groom, Karol Hausman, Brian Ichter, et al. π_0 : A Vision-Language-Action Flow Model for General Robot Control. *arXiv preprint arXiv:2410.24164*, 2024.
- [3] Samuel Bowman, Luke Vilnis, Oriol Vinyals, Andrew Dai, Rafal Jozefowicz, and Samy Bengio. Generating sentences from a continuous space. In *Proceedings of the 20th SIGNLL conference on computational natural language learning*, pages 10–21, 2016.
- [4] Alexander Buslaev, Vladimir I Iglovikov, Eugene Khvedchenya, Alex Parinov, Mikhail Druzhinin, and Alexandr A Kalinin. Albuumentations: fast and flexible image augmentations. *Information*, 11(2):125, 2020.
- [5] Xi Chen, Diederik P Kingma, Tim Salimans, Yan Duan, Prafulla Dhariwal, John Schulman, Ilya Sutskever, and Pieter Abbeel. Variational lossy autoencoder. *arXiv preprint arXiv:1611.02731*, 2016.
- [6] Cheng Chi, Zhenjia Xu, Siyuan Feng, Eric Cousineau, Yilun Du, Benjamin Burchfiel, Russ Tedrake, and Shuran Song. Diffusion policy: Visuomotor policy learning via action diffusion. *The International Journal of Robotics Research*, 44(10-11):1684–1704, 2025.
- [7] Patrick Esser, Sumith Kulal, Andreas Blattmann, Rahim Entezari, Jonas Müller, Harry Saini, Yam Levi, Dominik Lorenz, Axel Sauer, Frederic Boesel, et al. Scaling rectified flow transformers for high-resolution image synthesis. In *Forty-first international conference on machine learning*, 2024.
- [8] Jean Feydy, Thibault Séjourné, François-Xavier Vialard, Shun-ichi Amari, Alain Trounev, and Gabriel Peyré. Interpolating between optimal transport and MMD using sinkhorn divergences. In *AISTATS*, 2019.
- [9] Pete Florence, Corey Lynch, Andy Zeng, Oscar A Ramirez, Ayzaan Wahid, Laura Downs, Adrian Wong, Johnny Lee, Igor Mordatch, and Jonathan Tompson. Implicit behavioral cloning. In *Conference on robot learning*, pages 158–168. PMLR, 2022.

- [10] Abhishek Gupta, Vikash Kumar, Corey Lynch, Sergey Levine, and Karol Hausman. Relay policy learning: Solving long-horizon tasks via imitation and reinforcement learning. *arXiv preprint arXiv:1910.11956*, 2019.
- [11] Jonathan Ho and Stefano Ermon. Generative adversarial imitation learning. *Advances in neural information processing systems*, 29, 2016.
- [12] Matthew D Hoffman and Matthew J Johnson. Elbo surgery: yet another way to carve up the variational evidence lower bound. In *Workshop in advances in approximate Bayesian inference, NIPS*, volume 1, 2016.
- [13] Matthew D Hoffman, David M Blei, Chong Wang, and John Paisley. Stochastic variational inference. *Journal of machine learning research*, 2013.
- [14] Physical Intelligence, Kevin Black, Noah Brown, James Darpinian, Karan Dhabalia, Danny Driess, Adnan Esmail, Michael Equi, Chelsea Finn, Niccolo Fusai, et al. $\pi_{0.5}$: A Vision-Language-Action Model with Open-World Generalization. *arXiv preprint arXiv:2504.16054*, 2025.
- [15] Moo Jin Kim, Karl Pertsch, Siddharth Karamcheti, Ted Xiao, Ashwin Balakrishna, Suraj Nair, Rafael Rafailov, Ethan Foster, Grace Lam, Pannag Sanketi, et al. Openvla: An open-source vision-language-action model. *arXiv preprint arXiv:2406.09246*, 2024.
- [16] Seungjae Lee, Yibin Wang, Haritheja Etukuru, H Jin Kim, Nur Muhammad Mahi Shafiullah, and Lerrel Pinto. Behavior generation with latent actions. *arXiv preprint arXiv:2403.03181*, 2024.
- [17] Yunzhu Li, Jiaming Song, and Stefano Ermon. Infogail: Interpretable imitation learning from visual demonstrations. *Advances in neural information processing systems*, 30, 2017.
- [18] Dean A Pomerleau. Alvin: An autonomous land vehicle in a neural network. *Advances in neural information processing systems*, 1, 1988.
- [19] Moritz Reuss and Rudolf Lioutikov. Multimodal diffusion transformer for learning from play. In *2nd Workshop on Language and Robot Learning: Language as Grounding*, 2023.
- [20] Moritz Reuss, Maximilian Li, Xiaogang Jia, and Rudolf Lioutikov. Goal-conditioned imitation learning using score-based diffusion policies. *arXiv preprint arXiv:2304.02532*, 2023.
- [21] Stéphane Ross, Geoffrey Gordon, and Drew Bagnell. A reduction of imitation learning and structured prediction to no-regret online learning. In *Proceedings of the fourteenth international conference on artificial intelligence and statistics*, pages 627–635. JMLR Workshop and Conference Proceedings, 2011.
- [22] Antoine Salmona, Valentin De Bortoli, Julie Delon, and Agnes Desolneux. Can push-forward generative models fit multimodal distributions? *Advances in Neural Information Processing Systems*, 35:10766–10779, 2022.
- [23] Nur Muhammad Shafiullah, Zichen Cui, Ariuntuya Arty Altanzaya, and Lerrel Pinto. Behavior transformers: Cloning k modes with one stone. *Advances in neural information processing systems*, 35:22955–22968, 2022.
- [24] Ziyad Sheebaelhamd, Michael Tschannen, Michael Muehlebach, and Claire Vernade. Quantization-free autoregressive action transformer. *arXiv preprint arXiv:2503.14259*, 2025.
- [25] Mustafa Shukor, Dana Aubakirova, Francesco Capuano, Pepijn Kooijmans, Steven Palma, Adil Zouitine, Michel Aractingi, Caroline Pascal, Martino Russi, Andres Marafioti, et al. Smolvla: A vision-language-action model for affordable and efficient robotics. *arXiv preprint arXiv:2506.01844*, 2025.
- [26] Max Simchowitz, Daniel Pfrommer, and Ali Jadbabaie. The pitfalls of imitation learning when actions are continuous. *arXiv preprint arXiv:2503.09722*, 2025.
- [27] Arthur Stéphanovitch. Lipschitz regularity in flow matching and diffusion models: sharp sampling rates and functional inequalities. *arXiv preprint arXiv:2604.06065*, 2026.

- [28] Octo Model Team, Dibya Ghosh, Homer Walke, Karl Pertsch, Kevin Black, Oier Mees, Sudeep Dasari, Joey Hejna, Tobias Kreiman, Charles Xu, et al. Octo: An open-source generalist robot policy. *arXiv preprint arXiv:2405.12213*, 2024.
- [29] Ilya Tolstikhin, Olivier Bousquet, Sylvain Gelly, and Bernhard Schölkopf. Wasserstein auto-encoders. *arXiv preprint arXiv:1711.01558*, 2017.
- [30] Aaron Van Den Oord, Oriol Vinyals, et al. Neural discrete representation learning. *Advances in neural information processing systems*, 30, 2017.
- [31] Tony Z Zhao, Vikash Kumar, Sergey Levine, and Chelsea Finn. Learning fine-grained bimanual manipulation with low-cost hardware. *arXiv preprint arXiv:2304.13705*, 2023.

Appendix Overview

A	Notation, Definitions, and Known Results	14
B	Proofs	16
B.1	Latent-Variable Information Bounds and Collapse	16
B.2	Aggregate Matching	18
B.3	Action-Space Generative Policies	20
C	Experimental Details	22
C.1	Methods	22
C.2	Network Architectures	27
C.3	Benchmarks	29
C.4	Training Details	30
C.5	Evaluation Details	30
D	Additional Results	31
D.1	Complete Synthetic Benchmarks Results	31
D.2	Collapse Diagnostics for Baseline Policies	31
D.3	Mode Collapse Under Pointwise KL	31
D.4	Aggregate Matching and Prior Coverage	31
D.5	Action-Space Bridge–Sensitivity Diagnostic	34
D.6	Quantifying Multimodality of Simulation Benchmarks	35
D.7	Simulation Inference Throughput	37
E	Experiment Hyperparameters	38

A Notation, Definitions, and Known Results

We denote generic spaces with calligraphic letters, random variables with uppercase letters, their realizations with lowercase letters, and fixed problem constants with sans-serif capital letters. Generic measurable sets are denoted by uppercase letters such as B, C . Given a space $\mathcal{X}$, $\mathcal{X}^T$ denotes the space of length- T sequences with entries in a generic space $\mathcal{X}$, namely $x = (x_1, \dots, x_T)$ with $x_i \in \mathcal{X}$. Event probabilities are written as $\Pr(\cdot)$ while expectations are denoted with $\mathbb{E}$. We use subscripts to indicate the random variable with respect to which $\Pr$ and $\mathbb{E}$ are taken whenever this is not clear from the context. Let $(\mathcal{A}, d_{\mathcal{A}})$ be a metric space. For $B, C \subseteq \mathcal{A}$, their distance is

$$\text{dist}_{\mathcal{A}}(B, C) = \inf_{b \in B, c \in C} d_{\mathcal{A}}(b, c).$$

When $\mathcal{A} \subseteq \mathbb{R}^{d_a}$, we set $d_{\mathcal{A}}(a, a') = \|a - a'\|_2$. For notational simplicity, we denote the Euclidean norm simply by $\|\cdot\|$. All logarithms are natural, so information quantities are measured in nats. The support of a random variable X , denoted by $\text{supp}(X)$, is the support of its law μ_X . In particular, in the discrete case, $\text{supp}(X) = \{x : p_X(x) > 0\}$.

We write $X \sim \mu$ to mean that the random variable X has distribution μ ; that is, for every measurable set B , $\Pr(X \in B) = \mu(B)$. When μ is absolutely continuous with respect to the Lebesgue measure, we denote its density by $p(x)$. Equivalently, in this case we may write $X \sim p$ meaning that $\mu(B) = \int_B p(x) dx$. If the support of μ is discrete, then μ does not admit a density with respect to the Lebesgue measure. In this case, writing $\text{supp}(\mu) = \{x_i\}_{i \in I}$ where I is finite or countable, we identify μ with its probability mass function

$$p(x_i) = \mu(\{x_i\}), \quad i \in I.$$

Equivalently, in the sense of measures, one may write $\mu = \sum_{i \in I} p_{\mu}(x_i) \delta_{x_i}$, where δ_{x_i} denotes the Dirac measure at x_i . We write $\mu \ll \nu$ to mean that μ is absolutely continuous with respect to ν , namely, for every measurable set A , $\nu(A) = 0$ implies $\mu(A) = 0$. We denote by $\mu_{X,Y}$ the joint law of a pair of random variables (X, Y) , by $\mu_{X|Y=y}$ the conditional law of X given $Y = y$, and by $p_{X,Y}$ and $p_{X|Y}(\cdot | y)$ their corresponding densities, with

$$p_{X|Y}(x | y) = \frac{p_{X,Y}(x, y)}{p_Y(y)} \quad \text{for } p_Y(y) > 0.$$

We will measure the discrepancy between probability measures using the Kullback-Leibler divergence, defined as follows.

Definition 2 (Kullback-Leibler divergence). Let $X \sim \mu$ and $Y \sim \nu$ be random variables such that $\mu \ll \nu$. The Kullback-Leibler divergence from ν to μ is defined as

$$\text{KL}(\mu \| \nu) = \int \log \left(\frac{d\mu}{d\nu} \right) d\mu.$$

We define next the notions of Shannon entropy, differential entropy, conditional entropy, and conditional mutual information. For a discrete random variable, the Shannon entropy $H(X)$ measures the uncertainty of the probability mass assigned to its possible values. For a continuous random variable, the differential entropy $h(X)$ measures the spread of its density. Conditional entropy measures the remaining uncertainty after observing another variable. Conditional mutual information $I(X; Y | Z)$ measures how much information X and Y share once Z is known.

Definition 3 (Entropy and conditional entropy). Let $X \sim \mu$, $Y \sim \nu$ be random variables. The entropy of X is defined as

$$H(X) := - \int \log p_X(x) \mu(dx),$$

with the convention $0 \log 0 = 0$. The conditional entropy of X given Y is defined as

$$H(X | Y) := - \int \log p_{X|Y}(x | y) \mu_{X,Y}(dx, dy).$$

We note that, for any random variable X supported on a finite set $\mathcal{X}$,

$$H(X) \leq \log |\mathcal{X}|,$$

with equality if and only if X is uniformly distributed on $\mathcal{X}$. For $p \in [0, 1]$, we denote by $H_b(p)$ the binary entropy function,

$$H_b(p) = -p \log p - (1 - p) \log(1 - p).$$

Equivalently, if $X \sim \text{Ber}(p)$, then $H(X) = H_b(p)$.

Mutual information provides a measure of statistical dependence between random variables, quantifying how much knowing one variable reduces uncertainty about another.

Definition 4 (Conditional mutual information). For random variables X, Y, Z , the *conditional mutual information* between X and Y given Z is

$$I(X; Y | Z) := H(X | Z) - H(X | Y, Z),$$

whenever X is discrete and the conditional entropy terms are well defined. If X is continuous, the same identity holds with differential entropies $h(\cdot)$ in place of $H(\cdot)$, whenever the terms are well defined. When X, Y, Z are continuous and admit densities, this is equivalently

$$I(X; Y | Z) = \int p(x, y, z) \log \frac{p(x, y | z)}{p(x | z)p(y | z)} dx dy dz.$$

Two standard properties of mutual information that will be used throughout are the following:

(P1) For random variables X, Y , mutual information is symmetric:

$$I(X; Y) = I(Y; X).$$

(P2) For random variables X, Y, Z , conditional mutual information satisfies

$$I(X; Y | Z) = H(X | Z) - H(X | Y, Z),$$

whenever X is discrete and the entropy terms are well defined. For continuous X , the analogous identity holds with differential entropies.

Of particular interest in this work are Markov chains of random variables.

Definition 5 (Markov chain). Let p be a joint distribution on $\mathcal{X} \times \mathcal{Y} \times \mathcal{Z}$. We write $X \rightarrow Y \rightarrow Z$ if X and Z are conditionally independent given Y , denoted by $X \perp Z | Y$. Equivalently, the conditional distribution of Z given (X, Y) depends only on Y , that is

$$p(z | x, y) = p(z | y) \quad p\text{-a.s.}$$

A fundamental standard consequence of the Markov-chain structure is the following inequality, called data-processing inequality.

Lemma 1 (Data-processing inequality). *Let $(X, Y, Z) \sim p$ such that $X \rightarrow Y \rightarrow Z$ forms a Markov chain. Then*

$$I(X; Z) \leq I(X; Y).$$

Fano's inequality relates the probability of incorrectly estimating a discrete random variable to its remaining conditional entropy given the estimator.

Lemma 2 (Fano's inequality). *Let M be a random variable taking values in a finite set C with $|C| = K$, where $K > 1$. Let $\hat{M}$ be an estimator of M , that is, a random variable taking values in C . Define the probability of error*

$$e := \Pr(\hat{M} \neq M).$$

Then

$$H(M | \hat{M}) \leq H_b(e) + e \log(K - 1),$$

where

$$H_b(e) = -e \log e - (1 - e) \log(1 - e)$$

is the binary entropy function.

B Proofs

B.1 Latent-Variable Information Bounds and Collapse

We first prove the latent-variable results from §4. The subsection has three parts. We prove the mode-information lower bound, then specialize it to the uniform exact-recovery case, and finally derive the objective-level collapse criterion for pointwise-KL regularization. Let

$$q_{\phi, \mathcal{D}}(s, a, z) := p_{\mathcal{D}}(s, a) q_{\phi}(z | a, s) = p_{\mathcal{D}, S}(s) p_{\mathcal{D}}(a | s) q_{\phi}(z | a, s)$$

denote the posterior-encoder-induced joint distribution over (S, A, Z) . Conditioning the joint law $q_{\phi, \mathcal{D}}$ on $S = s$ gives

$$q_{\phi, \mathcal{D}}(a, z | S = s) = p_{\mathcal{D}}(a | s) q_{\phi}(z | a, s).$$

Throughout the subsection, all statewise probabilities, entropies, and mutual informations below are taken under this conditional law.

Proof of Proposition 1 We prove Proposition 1. The proof rests on two Markov chains, $M \rightarrow A \rightarrow Z$ and $M \rightarrow Z \rightarrow \hat{M}$, each yielding a data-processing inequality. Combining them with Fano's inequality gives the bound. We now make this precise. Fix $s \in \text{supp}(p_{\mathcal{D}, S})$ with $K(s) > 1$. Under the conditional law at $S = s$, we have

$$A \sim p_{\mathcal{D}}(\cdot | s), \quad Z \sim q_{\phi}(\cdot | A, s), \quad M = g(A, s), \quad \hat{A} = f_{\theta}(Z, s).$$

Let $\hat{M}$ be the mode label induced by $\hat{A}$: if $\hat{A} \in C_j(s)$, set $\hat{M} = j$; if $\hat{A} \notin \bigcup_{j=1}^{K(s)} C_j(s)$, assign $\hat{M}$ arbitrarily in $\{1, \dots, K(s)\}$. We start by noticing that since $M = g(A, s)$ is a deterministic function of A at fixed s , the conditional law of M given $A = a$ is degenerate:

$$q_{\phi, \mathcal{D}}(M = m | A = a, S = s) = \mathbf{1}_{\{m=g(a, s)\}}.$$

Moreover, Z is sampled from $q_{\phi}(\cdot | A, s)$, so conditioning additionally on M does not change its law:

$$q_{\phi, \mathcal{D}}(z | A = a, M = m, S = s) = q_{\phi, \mathcal{D}}(z | A = a, S = s) = q_{\phi}(z | a, s).$$

Therefore, at fixed s , we have the Markov chain

$$M \rightarrow A \rightarrow Z.$$

Since $M = g(A, s)$ is a deterministic function of A , we also have $Z \rightarrow A \rightarrow M$ at fixed s . By data processing,

$$I(Z; M | S = s) \leq I(Z; A | S = s).$$

By symmetry of mutual information, this gives

$$I(M; Z | S = s) \leq I(A; Z | S = s). \quad (7)$$

Similarly, at fixed s , $\hat{M}$ is a deterministic function of Z , hence

$$M \rightarrow Z \rightarrow \hat{M}.$$

Therefore, by Lemma 1, it holds

$$I(M; \hat{M} | S = s) \leq I(M; Z | S = s). \quad (8)$$

Combining (7) and (8), it holds

$$I(A; Z | S = s) \geq I(M; Z | S = s) \geq I(M; \hat{M} | S = s). \quad (9)$$

Let

$$e(s) := \Pr(\hat{M} \neq M | S = s)$$

be the conditional decoded-mode error. By construction of $\hat{M}$, see (2), if $\hat{A} \in C_M(s)$, then $\hat{M} = M$. Hence

$$\{\hat{M} \neq M\} \subseteq \{\hat{A} \notin C_M(s)\} = \{f_{\theta}(Z, s) \notin C_M(s)\}.$$

Therefore, by the definition of $\rho(s)$ in (5),

$$e(s) = \Pr(\hat{M} \neq M \mid S = s) \leq \Pr(f_\theta(Z, s) \notin C_M(s) \mid S = s) = \rho(s).$$

Given s , since M takes values in $\{1, \dots, K(s)\}$, Lemma 2 gives, for $K(s) > 1$,

$$\begin{aligned} H(M \mid \hat{M}, S = s) &\leq H_b(e(s)) + e(s) \log(K(s) - 1) \\ &\leq H_b(\rho(s)) + \rho(s) \log(K(s) - 1). \end{aligned} \tag{10}$$

The last inequality follows from $e(s) \leq \rho(s)$ and from the fact that, if $\rho(s) \leq 1 - 1/K(s)$, then

$$p \mapsto H_b(p) + p \log(K(s) - 1)$$

is non-decreasing on $[0, \rho(s)]$.

Combining (P2), (9), and (10), we obtain

$$\begin{aligned} I(A; Z \mid S = s) &\geq I(M; \hat{M} \mid S = s) \\ &= H(M \mid S = s) - H(M \mid \hat{M}, S = s) \\ &\geq H(M \mid S = s) - H_b(\rho(s)) - \rho(s) \log(K(s) - 1). \end{aligned}$$

Averaging over $S \sim p_{\mathcal{D}, S}$ gives

$$I(A; Z \mid S) \geq B_\rho,$$

which proves the first claim of Proposition 1.

By the definition of B_ρ , this gives

$$I(A; Z \mid S) \geq B_\rho.$$

Recall that $q_{\phi, \mathcal{D}}(s, a, z)$ denotes the posterior-encoder-induced joint distribution and $q_{\phi, \mathcal{D}}(z \mid s)$ is the state-conditional aggregated posterior. The pointwise latent regularizer decomposes into a mutual-information term between the action and latent code, and a mismatch term between the aggregated posterior and the prior:

$$\mathbb{E}_{(S, A) \sim p_{\mathcal{D}}} \text{KL}(q_\phi(\cdot \mid A, S) \parallel p_\psi(\cdot \mid S)) = I(A; Z \mid S) + \mathbb{E}_{S \sim p_{\mathcal{D}, S}} \text{KL}(q_{\phi, \mathcal{D}}(\cdot \mid S) \parallel p_\psi(\cdot \mid S)). \tag{11}$$

The full derivation of this decomposition can be found, for example, in Hoffman and Johnson [12]. The second term in (11) is nonnegative. Hence

$$\mathbb{E}_{(S, A) \sim p_{\mathcal{D}}} \text{KL}(q_\phi(\cdot \mid A, S) \parallel p_\psi(\cdot \mid S)) \geq I(A; Z \mid S) \geq B_\rho,$$

which concludes the proof. $\square$

Proof of Corollary 1. Using $\rho(s) = 0$ for $p_{\mathcal{D}, S}$ -almost every s , we have

$$H_b(\rho(s)) + \rho(s) \log(K(s) - 1) = 0$$

for every s with $K(s) > 1$, where we recall that $H_b(p) = -p \log p - (1 - p) \log(1 - p)$ and the usual convention $H_b(0) = 0$.

Moreover, since $M \mid S = s \sim \text{Unif}(\{1, \dots, K(s)\})$, we have

$$\mathbb{E}_{S \sim p_{\mathcal{D}, S}} [H(M \mid S)] = \mathbb{E}_{S \sim p_{\mathcal{D}, S}} [\log K(S)].$$

These two observations, combined with Proposition 1, imply

$$I(A; Z \mid S) \geq \mathbb{E}_{S \sim p_{\mathcal{D}, S}} \log K(S).$$

$\square$

Proof of Corollary 2 Let us denote with

$$\hat{\rho}(s) := \Pr(f_{\hat{\theta}}(Z, s) \notin C_M(s) \mid S = s).$$

Assume that

$$\hat{\rho}(s) \leq 1 - \frac{1}{K(s)}$$

for all $s \in \text{supp}(p_{\mathcal{D}, S})$ with $K(s) > 1$. By (H1) and the optimality of $(\hat{\theta}, \hat{\phi}, \hat{\psi})$, we have

$$\begin{aligned} \hat{\mathcal{L}}^\beta &= \mathcal{L}_{\text{var}}^\beta(\hat{\theta}, \hat{\phi}, \hat{\psi}) \leq \mathcal{L}_{\text{var}}^\beta(\theta_0, \phi_0, \psi_0) \\ &= \mathcal{L}_{\text{var}}^0(\theta_0, \phi_0, \psi_0) =: C, \end{aligned} \quad (12)$$

where the equality follows from $D(q_{\phi_0}, p_{\psi_0}) = 0$, and $C > 0$ is independent of β .

By (H2) and Proposition 1, it holds that

$$I(A; Z \mid S) \geq B_{\hat{\rho}}, \quad (13)$$

On the other hand, by the decomposition in (11), applied to $(\hat{\phi}, \hat{\psi})$, we have

$$\begin{aligned} I(A; Z \mid S) &= \mathbb{E}_{(S, A) \sim p_{\mathcal{D}}} \text{KL}(q_{\hat{\phi}}(\cdot \mid A, S) \parallel p_{\hat{\psi}}(\cdot \mid S)) - \mathbb{E}_{S \sim p_{\mathcal{D}, S}} \text{KL}(q_{\hat{\phi}, \mathcal{D}}(\cdot \mid S) \parallel p_{\hat{\psi}}(\cdot \mid S)) \\ &\leq \mathbb{E}_{(S, A) \sim p_{\mathcal{D}}} \text{KL}(q_{\hat{\phi}}(\cdot \mid A, S) \parallel p_{\hat{\psi}}(\cdot \mid S)) = D(q_{\hat{\phi}}, p_{\hat{\psi}}). \end{aligned} \quad (14)$$

Since the reconstruction loss is nonnegative, the objective satisfies

$$\hat{\mathcal{L}}^\beta = \mathcal{L}_{\text{rec}}(\hat{\theta}, \hat{\phi}) + \beta D(q_{\hat{\phi}}, p_{\hat{\psi}}) \geq \beta D(q_{\hat{\phi}}, p_{\hat{\psi}}).$$

Together with $\hat{\mathcal{L}}^\beta \leq C$, this gives

$$\beta D(q_{\hat{\phi}}, p_{\hat{\psi}}) \leq C.$$

Therefore,

$$I(A; Z \mid S) \leq D(q_{\hat{\phi}}, p_{\hat{\psi}}) \leq \frac{C}{\beta}.$$

Combining this with (13) gives

$$B_{\hat{\rho}} \leq I(A; Z \mid S) \leq \frac{C}{\beta}.$$

Consequently, if $B_{\hat{\rho}} > b_0$, then it follows trivially that

$$\beta < \frac{C}{b_0}.$$

□

B.2 Aggregate Matching

We next show why aggregate matching can preserve mode information even when pointwise KL would penalize it. The key observation is that the aggregated posterior is a mixture over mode-conditioned latent distributions.

We write $\mathcal{Z} := \mathbb{R}^{d_z}$ for the latent space.

Proposition 3 (Aggregate matching can preserve mode information). *Under the setting introduced above, fix $s \in \text{supp}(p_{\mathcal{D}, S})$. For each mode index $k \in \{1, \dots, K(s)\}$ with $p_{\mathcal{D}}(M = k \mid S = s) > 0$, define*

$$q_k(\cdot \mid s) := q_{\phi, \mathcal{D}}(\cdot \mid M = k, S = s).$$

That is, $q_k(\cdot \mid s)$ is the latent distribution induced by the posterior encoder when the demonstrated action belongs to mode k . Then the state-conditioned aggregated posterior is

$$q_{\phi, \mathcal{D}}(\cdot \mid S = s) = \sum_{k=1}^{K(s)} p_{\mathcal{D}}(M = k \mid S = s) q_k(\cdot \mid s).$$

If the prior satisfies

$$p_\psi(\cdot | s) = \sum_{k=1}^{\mathsf{K}(s)} p_{\mathcal{D}}(M = k | S = s) q_k(\cdot | s),$$

then the aggregated posterior–prior mismatch is zero. Moreover, if the supports of the components $q_k(\cdot | s)$ are mutually disjoint, then there exists a deterministic decoder $h_s : \mathcal{Z} \rightarrow \{1, \dots, \mathsf{K}(s)\}$ such that

$$\Pr(h_s(Z) = M | S = s) = 1,$$

and therefore

$$I(M; Z | S = s) = H(M | S = s).$$

Proof. We first compute the state-conditional aggregated posterior and then show that disjoint latent supports make the mode recoverable from Z .

By the law of total probability over the discrete mode label M ,

$$q_{\phi, \mathcal{D}}(\cdot | S = s) = \sum_{k=1}^{\mathsf{K}(s)} p_{\mathcal{D}}(M = k | S = s) q_{\phi, \mathcal{D}}(\cdot | M = k, S = s).$$

By definition,

$$q_k(\cdot | s) = q_{\phi, \mathcal{D}}(\cdot | M = k, S = s),$$

and hence

$$q_{\phi, \mathcal{D}}(\cdot | S = s) = \sum_{k=1}^{\mathsf{K}(s)} p_{\mathcal{D}}(M = k | S = s) q_k(\cdot | s).$$

Thus, if

$$p_\psi(\cdot | s) = \sum_{k=1}^{\mathsf{K}(s)} p_{\mathcal{D}}(M = k | S = s) q_k(\cdot | s),$$

then

$$q_{\phi, \mathcal{D}}(\cdot | S = s) = p_\psi(\cdot | s),$$

so the aggregated posterior–prior mismatch is zero.

Recall now that, by definition of $q_k(\cdot | s)$, for each $k \in \{1, \dots, \mathsf{K}(s)\}$ with $p_{\mathcal{D}}(M = k | S = s) > 0$, we have

$$Z | (M = k, S = s) \sim q_k(\cdot | s).$$

Let

$$E_k(s) := \text{supp } q_k(\cdot | s).$$

If the sets $E_1(s), \dots, E_{\mathsf{K}(s)}(s)$ are mutually disjoint, define $h_s : \mathcal{Z} \rightarrow \{1, \dots, \mathsf{K}(s)\}$ by $h_s(z) = k$ whenever $z \in E_k(s)$, with arbitrary values outside $\bigcup_k E_k(s)$. Since $Z | (M = k, S = s)$ is supported on $E_k(s)$, it follows that

$$\Pr(h_s(Z) = M | S = s) = 1.$$

Therefore, at fixed s , the mode label M is determined by Z , and hence

$$H(M | Z, S = s) = 0.$$

By Definition 4, it follows trivially that

$$I(M; Z | S = s) = H(M | S = s).$$

This concludes the proof. $\square$

Remark 4 (Deployment-time prior coverage). Proposition 3 shows that the prior can match the aggregated posterior while the latent variable still identifies the demonstrated mode, avoiding the pointwise-KL pressure on $I(A; Z | S)$. The limitation is that aggregate matching constrains only the state-conditioned marginal

$$q_{\phi, \mathcal{D}}(\cdot | S = s) = \int q_\phi(\cdot | a, s) p_{\mathcal{D}}(a | s) da,$$

and not each action-conditioned posterior $q_\phi(\cdot \mid a, s)$. Thus two encoder families can have identical, or very similar, aggregated marginals while having very different conditionals $q_\phi(\cdot \mid a, s)$. Consequently, matching $p_\psi(\cdot \mid s)$ to the aggregated posterior does not by itself guarantee that prior samples decode to valid actions.

We can see this by defining, for a fixed observation s and mode index $k \in \{1, \dots, K(s)\}$, the decoder-induced latent region

$$R_k(s) := \{z \in \mathcal{Z} : f_\theta(z, s) \in C_k(s)\}.$$

Deployment covers mode k only if $p_\psi(R_k(s) \mid s)$ is sufficiently large. Thus aggregate matching must align the prior with the posterior mass on the decoder-induced regions $\{R_k(s)\}_{k=1}^{K(s)}$, and not only match aggregate latent marginals in regions irrelevant to the decoder.

B.3 Action-Space Generative Policies

Proof of Proposition 2 Let us fix $s \in \mathcal{S}$, $\tau \in (0, 1)$, and a parameter vector θ . We denote the set of τ -represented modes by

$$\mathcal{I}_\tau^\theta(s) := \{k \in \{1, \dots, K(s)\} : \pi_\theta(C_k(s) \mid s) > \tau\},$$

and define the preimage of mode k under the state-conditioned sampler $G_{\theta,s}$ by

$$G_{\theta,s}^{-1}(C_k(s)) := \{u \in \mathbb{R} : G_{\theta,s}(u) \in C_k(s)\}.$$

Let

$$r_\tau := \Phi^{-1}\left(1 - \frac{\tau}{2}\right).$$

For every $k \in \mathcal{I}_\tau^\theta(s)$, we must have

$$G_{\theta,s}^{-1}(C_k(s)) \cap [-r_\tau, r_\tau] \neq \emptyset.$$

Indeed, if for some $k \in \mathcal{I}_\tau^\theta(s)$,

$$G_{\theta,s}^{-1}(C_k(s)) \cap [-r_\tau, r_\tau] = \emptyset,$$

then, by definition of $\pi_\theta(\cdot \mid s)$, it holds that

$$\begin{aligned} \tau &< \pi_\theta(C_k(s) \mid s) \\ &= \Pr_{U \sim \mathcal{N}(0,1)}(G_{\theta,s}(U) \in C_k(s)) \\ &= \Pr_{U \sim \mathcal{N}(0,1)}(U \in G_{\theta,s}^{-1}(C_k(s))) \\ &\leq \Pr_{U \sim \mathcal{N}(0,1)}(|U| \geq r_\tau) = \tau, \end{aligned}$$

which is a contradiction. Therefore, for every $k \in \mathcal{I}_\tau^\theta(s)$, there exists $u^k \in [-r_\tau, r_\tau]$ such that

$$G_{\theta,s}(u^k) \in C_k(s).$$

Now take two distinct represented modes $k, k' \in \mathcal{I}_\tau^\theta(s)$. Since the modes are separated by at least $\Delta(s)$, we have

$$d_{\mathcal{A}}(G_{\theta,s}(u^k), G_{\theta,s}(u^{k'})) \geq \Delta(s). \quad (15)$$

On the other hand, the $L_{\theta,s}$ -Lipschitzianity of $G_{\theta,s}$ implies

$$d_{\mathcal{A}}(G_{\theta,s}(u^k), G_{\theta,s}(u^{k'})) \leq L_{\theta,s}|u^k - u^{k'}|. \quad (16)$$

Combining (15) and (16), we obtain

$$|u^k - u^{k'}| \geq \frac{\Delta(s)}{L_{\theta,s}}.$$

Thus, the selected points corresponding to represented modes are pairwise separated by at least $\Delta(s)/L_{\theta,s}$ inside the interval $[-r_\tau, r_\tau]$, whose length is $2r_\tau$. The maximum number of points in an interval of length $2r_\tau$ with pairwise separation at least $\Delta(s)/L_{\theta,s}$ is at most

$$1 + \left\lfloor \frac{2r_\tau L_{\theta,s}}{\Delta(s)} \right\rfloor.$$

Since $N_\theta^{(\tau)}(s) = |\mathcal{I}_\tau^\theta(s)|$, we conclude

$$N_\theta^{(\tau)}(s) \leq 1 + \left\lfloor \frac{2\Phi^{-1}\left(1 - \frac{\tau}{2}\right) L_{\theta,s}}{\Delta(s)} \right\rfloor,$$

which concludes the proof.

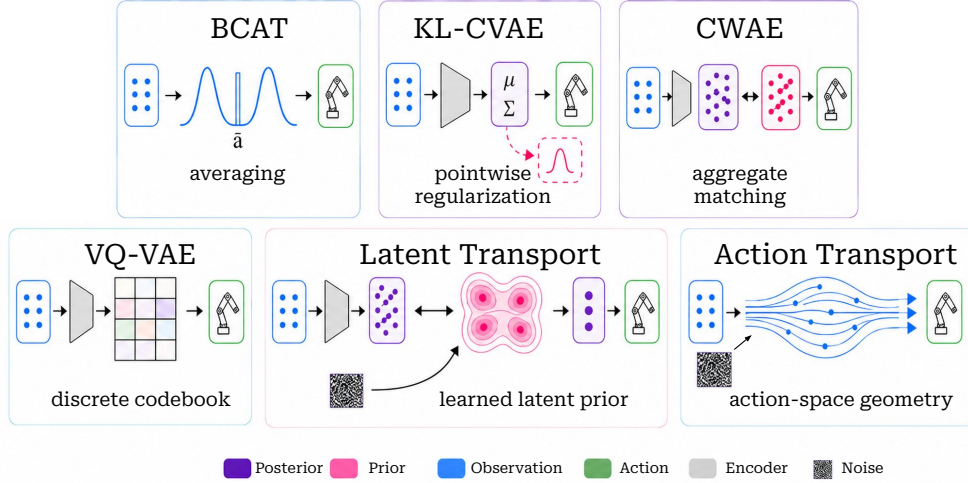


Figure 4: **Parameterizations of multimodal conditional action distributions.** Behavioral-cloning action-chunking policies represent multimodal conditionals through collapsed average point estimates (deterministic BCAT), pointwise-regularized continuous latents (KL-CVAE), aggregate-matched latents (CWAE), discrete codes (VQ-VAE), learned latent flow priors (latent transport), or direct action-space diffusion/flow transport (action transport).

C Experimental Details

C.1 Methods

This section specifies the policy parameterizations and training objectives used in the experiments, using the notation introduced in Appendix A. We write objectives with respect to the population expert state-action law p_D ; in implementation, these objectives are optimized using minibatches $\{(s_i, a_i)\}_{i=1}^B$ from the realized dataset $\tilde{D}$. All methods use the same observation encoder and action-chunking interface, and differ only in how they parameterize the conditional distribution over action chunks.

We write

$$\mathcal{L}_{\text{rec}}(\hat{a}, a)$$

for the action-chunk reconstruction loss, instantiated as an L_1 loss in all deterministic-decoder latent policies unless stated otherwise. For latent-variable policies, training uses posterior latents $Z \sim q_\phi(\cdot | A, S)$, while deployment uses prior latents $Z \sim p_\psi(\cdot | S)$.

Deterministic behavioral cloning The deterministic baseline represents the conditional policy by a Dirac distribution,

$$\pi_\theta(\cdot | s) = \delta_{f_\theta(s)}.$$

It is trained with

$$\mathcal{L}_{\text{BC}} = \mathbb{E}_{(S,A) \sim p_D} [\mathcal{L}_{\text{rec}}(f_\theta(S), A)].$$

KL-CVAE KL-CVAE uses a continuous Gaussian posterior, a Gaussian prior, and a latent-conditioned action decoder. The posterior encoder receives the demonstrated action chunk together with the observation representation and outputs a diagonal Gaussian

$$q_\phi(\cdot | a, s) = \mathcal{N}(\mu_\phi(a, s), \text{diag} \exp \ell_\phi(a, s)),$$

where $\ell_\phi(a, s)$ denotes the posterior log-variance. Posterior samples are obtained by reparameterization,

$$z_q = \mu_\phi(a, s) + \exp\left(\frac{1}{2}\ell_\phi(a, s)\right) \odot \epsilon, \quad \epsilon \sim \mathcal{N}(0, I_{d_z}),$$

and decoded as

$$\hat{a} = f_\theta(z_q, s).$$

We use two prior parameterizations. The fixed-prior variant uses

$$p_\psi(\cdot | s) = \mathcal{N}(0, I_{d_z}).$$

The learned-Gaussian variant uses an observation-conditioned diagonal Gaussian prior,

$$p_\psi(\cdot | s) = \mathcal{N}(\mu_\psi(s), \text{diag exp } \ell_\psi(s)),$$

where $\mu_\psi(s)$ and $\ell_\psi(s)$ are predicted from the observation representation. In practice, we observe that learning the variance and fixing the variance to I_{d_z} yields similar performance for the simulation benchmarks in Section 5. Thus, the reported learned-prior KL-CVAE uses a learned-mean Gaussian prior,

$$p_\psi(\cdot | s) = \mathcal{N}(\mu_\psi(s), I_{d_z}),$$

where $\mu_\psi(s)$ is predicted from the observation representation.

The training objective is

$$\mathcal{L}_{\text{KL}} = \mathbb{E}_{(S,A) \sim p_D} \mathbb{E}_{Z_q \sim q_\phi(\cdot | A, S)} [\mathcal{L}_{\text{rec}}(f_\theta(Z_q, S), A)] + \beta \mathbb{E}_{(S,A) \sim p_D} \text{KL}(q_\phi(\cdot | A, S) \| p_\psi(\cdot | S)).$$

At inference, actions are generated by sampling from the prior,

$$Z_p \sim p_\psi(\cdot | s), \quad \hat{a} = f_\theta(Z_p, s).$$

Aggregate-matched latent policies MMD-CWAE and Sinkhorn-CWAE use the same latent-conditioned decoder as KL-CVAE, but replace the pointwise KL term by an aggregate posterior matching objective, following the WAE formulation [29]. For these variants, the posterior encoder is deterministic. Given a minibatch $\{(s_i, a_i)\}_{i=1}^B$, the posterior latents are

$$z_i^q = e_\phi(a_i, s_i), \quad i = 1, \dots, B.$$

Prior latents are sampled as

$$z_i^p \sim p_\psi(\cdot | s_i), \quad i = 1, \dots, B.$$

The corresponding empirical posterior and prior latent measures are

$$\hat{Q}_Z = \frac{1}{B} \sum_{i=1}^B \delta_{z_i^q}, \quad \hat{P}_Z = \frac{1}{B} \sum_{i=1}^B \delta_{z_i^p}.$$

For MMD-CWAE, the aggregate penalty is the squared maximum mean discrepancy

$$\text{MMD}_k^2(\hat{Q}_Z, \hat{P}_Z) = \frac{1}{B^2} \sum_{i,j=1}^B \left[k(z_i^q, z_j^q) + k(z_i^p, z_j^p) - 2k(z_i^q, z_j^p) \right],$$

where k is the latent kernel. For Sinkhorn-CWAE, the aggregate penalty is the debiased Sinkhorn divergence [8]

$$\text{Sink}_{\varepsilon,c}(\hat{Q}_Z, \hat{P}_Z) = \text{OT}_{\varepsilon,c}(\hat{Q}_Z, \hat{P}_Z) - \frac{1}{2} \text{OT}_{\varepsilon,c}(\hat{Q}_Z, \hat{Q}_Z) - \frac{1}{2} \text{OT}_{\varepsilon,c}(\hat{P}_Z, \hat{P}_Z),$$

where $\text{OT}_{\varepsilon,c}$ denotes entropic optimal transport with cost c and entropic regularization strength ε .

The aggregate-matched objective is

$$\mathcal{L}_{\text{CWAE}} = \frac{1}{B} \sum_{i=1}^B \mathcal{L}_{\text{rec}}(f_\theta(z_i^q, s_i), a_i) + \beta D(\hat{Q}_Z, \hat{P}_Z),$$

where

$$D(\hat{Q}_Z, \hat{P}_Z) = \text{MMD}_k^2(\hat{Q}_Z, \hat{P}_Z)$$

for MMD-CWAE, and

$$D(\hat{Q}_Z, \hat{P}_Z) = \text{Sink}_{\varepsilon,c}(\hat{Q}_Z, \hat{P}_Z)$$

for Sinkhorn-CWAE.

The fixed-prior variants use

$$p_\psi(\cdot | s) = \mathcal{N}(0, I_{d_z}), \quad z_i^p \sim \mathcal{N}(0, I_{d_z}).$$

The learned-prior variants use an observation-conditioned prior $p_\psi(\cdot | s)$, so that

$$z_i^p \sim p_\psi(\cdot | s_i).$$

At inference, actions are generated by sampling from the prior and decoding,

$$z_p \sim p_\psi(\cdot | s), \quad \hat{a} = f_\theta(z_p, s).$$

Conditional aggregate matching In the synthetic benchmark, each task is evaluated under a fixed layout, so matching the marginal latent distribution is often sufficient. In the simulation benchmarks, the observation s varies substantially across episodes and determines which action chunks are valid. Matching only the marginal latent distribution can therefore mix latent samples coming from different conditioning states. We address this by matching joint condition–latent samples.

Let

$$h_i = h_\eta(s_i)$$

be the action-free condition embedding emitted by the prior network. In the conditional matching loss, this vector is L_2 -normalized and scaled by a state-weight parameter $\lambda_s \geq 0$:

$$\tilde{h}_i = \frac{h_i}{\|h_i\|_2}, \quad \bar{h}_i = \sqrt{\lambda_s} \tilde{h}_i.$$

The empirical joint posterior and prior measures are

$$\hat{Q}_{\bar{h},Z} = \frac{1}{B} \sum_{i=1}^B \delta_{(\bar{h}_i, z_i^q)}, \quad \hat{P}_{\bar{h},Z} = \frac{1}{B} \sum_{i=1}^B \delta_{(\bar{h}_i, z_i^p)}.$$

For conditional MMD-CWAE, we use a product kernel on condition–latent pairs,

$$k((\bar{h}, z), (\bar{h}', z')) = k_s(\bar{h}, \bar{h}') k_z(z, z').$$

The conditional MMD penalty is

$$\text{MMD}_{\text{cond}}^2(\hat{Q}_{\bar{h},Z}, \hat{P}_{\bar{h},Z}) = \frac{1}{B^2} \sum_{i,j=1}^B k_s(\bar{h}_i, \bar{h}_j) [k_z(z_i^q, z_j^q) + k_z(z_i^p, z_j^p) - 2k_z(z_i^q, z_j^p)].$$

The objective is

$$\mathcal{L}_{\text{cMMD}} = \frac{1}{B} \sum_{i=1}^B \mathcal{L}_{\text{rec}}(f_\theta(z_i^q, s_i), a_i) + \beta \text{MMD}_{\text{cond}}^2(\hat{Q}_{\bar{h},Z}, \hat{P}_{\bar{h},Z}).$$

For relaxed conditional Sinkhorn-CWAE, we perform transport in the joint condition–latent space. Define

$$x_i^q = \begin{bmatrix} \bar{h}_i \\ z_i^q \end{bmatrix}, \quad x_i^p = \begin{bmatrix} \bar{h}_i \\ z_i^p \end{bmatrix}.$$

Since $\bar{h}_i = \sqrt{\lambda_s} \tilde{h}_i$, the squared Euclidean cost between posterior sample i and prior sample j is

$$c_{ij} = \lambda_s \|\tilde{h}_i - \tilde{h}_j\|_2^2 + \|z_i^q - z_j^p\|_2^2.$$

The conditional Sinkhorn penalty is the debiased Sinkhorn divergence

$$\text{Sink}_{\varepsilon,c}(\hat{Q}_{\bar{h},Z}, \hat{P}_{\bar{h},Z}) = \text{OT}_{\varepsilon,c}(\hat{Q}_{\bar{h},Z}, \hat{P}_{\bar{h},Z}) - \frac{1}{2} \text{OT}_{\varepsilon,c}(\hat{Q}_{\bar{h},Z}, \hat{Q}_{\bar{h},Z}) - \frac{1}{2} \text{OT}_{\varepsilon,c}(\hat{P}_{\bar{h},Z}, \hat{P}_{\bar{h},Z}),$$

where $\text{OT}_{\varepsilon,c}$ denotes entropic optimal transport with cost c and entropic regularization strength ε . The objective is

$$\mathcal{L}_{\text{cSink}} = \frac{1}{B} \sum_{i=1}^B \mathcal{L}_{\text{rec}}(f_\theta(z_i^q, s_i), a_i) + \beta \text{Sink}_{\varepsilon,c}(\hat{Q}_{\bar{h},Z}, \hat{P}_{\bar{h},Z}).$$

Posterior geometry regularization Aggregate matching constrains the batch-level distribution of posterior latents, but it does not by itself control the local geometry of the posterior codes used by the decoder. In practice, the deterministic posterior can become poorly conditioned, for example by concentrating in thin directions, drifting away from the prior scale, or developing strong correlations across latent dimensions. We therefore add a simple minibatch moment regularizer on the posterior latents, together with optional decoder-side jitter. The regularizer keeps the posterior codes approximately centered, controls their per-dimension scale, caps excessive spread, and penalizes off-diagonal covariance.

For aggregate-matched variants, the posterior encoder is deterministic, so each demonstration pair produces a latent

$$z_i^q = e_\phi(a_i, s_i).$$

Let

$$\bar{z}^q = \frac{1}{B} \sum_{i=1}^B z_i^q, \quad \tilde{z}_i^q = z_i^q - \bar{z}^q.$$

For each latent dimension d , define the minibatch standard deviation

$$\hat{\sigma}_d = \left(\frac{1}{B} \sum_{i=1}^B (\tilde{z}_{i,d}^q)^2 + \varepsilon_{\text{num}} \right)^{1/2},$$

and define the empirical covariance

$$\hat{C} = \frac{1}{B-1} \sum_{i=1}^B \tilde{z}_i^q (\tilde{z}_i^q)^\top.$$

The posterior geometry regularizer is

$$\mathcal{L}_{\text{geom}} = \beta_{\text{mean}} \|\bar{z}^q\|_2^2 + \beta_{\text{std}} \frac{1}{d_z} \sum_{d=1}^{d_z} (\hat{\sigma}_d - \sigma_\star)^2 + \beta_{\text{max}} \frac{1}{d_z} \sum_{d=1}^{d_z} [\hat{\sigma}_d - \sigma_{\text{max}}]_+^2 + \beta_{\text{cov}} \frac{1}{d_z} \left\| \text{offdiag}(\hat{C}) \right\|_F^2.$$

Here $\sigma_\star$ is the target per-dimension standard deviation, σ_{max} is the maximum allowed standard deviation, and $\varepsilon_{\text{num}} > 0$ is a numerical stabilizer. When this regularizer is enabled, it is added to the corresponding aggregate-matched objective:

$$\mathcal{L} = \mathcal{L}_{\text{CWAE}} + \mathcal{L}_{\text{geom}}.$$

We also optionally apply decoder-side latent jitter during training. The latent used for aggregate matching remains z_i^q , while the latent consumed by the decoder is

$$z_i^{\text{dec}} = z_i^q + \sigma_{\text{dec}} \epsilon_i, \quad \epsilon_i \sim \mathcal{N}(0, I_{d_z}).$$

Thus, the aggregate posterior measure is still constructed from $\{z_i^q\}_{i=1}^B$, while reconstruction is computed with $f_\theta(z_i^{\text{dec}}, s_i)$.

Latent flow prior (LAT-Flow) LAT-Flow uses a deterministic posterior encoder and a latent-conditioned decoder,

$$z_i^q = e_\phi(a_i, s_i), \quad \hat{a}_i = f_\theta(z_i^{\text{dec}}, s_i).$$

The prior $p_\psi(\cdot | s)$ is parameterized by a conditional flow-matching model in latent space. During training, sample

$$u_i \sim \mathcal{N}(0, I_{d_z}), \quad t_i \sim p(t),$$

and construct the interpolation

$$z_{t_i} = (1 - t_i)u_i + t_i z_i^q.$$

For the linear path, the target velocity is

$$v_i^\star = z_i^q - u_i.$$

The flow prior predicts

$$v_\psi(z_{t_i}, t_i, s_i),$$

and is trained with

$$\mathcal{L}_{\text{flow}} = \frac{1}{B} \sum_{i=1}^B \|v_\psi(z_{t_i}, t_i, s_i) - v_i^\star\|_2^2.$$

The full training objective is

$$\mathcal{L}_{\text{LAT}} = \frac{1}{B} \sum_{i=1}^B \mathcal{L}_{\text{rec}}(f_\theta(z_i^{\text{dec}}, s_i), a_i) + \beta \mathcal{L}_{\text{flow}}.$$

When enabled, the posterior geometry regularizer $\mathcal{L}_{\text{geom}}$ is added to this objective.

At inference, sample

$$z_0 \sim \mathcal{N}(0, I_{d_z})$$

and integrate

$$\frac{dz_t}{dt} = v_\psi(z_t, t, s)$$

from $t = 0$ to $t = 1$. The resulting latent prior sample z_1 is decoded as

$$\hat{a} = f_\theta(z_1, s).$$

Residual VQ-VAE VQ-VAE uses the same latent-conditioned action decoder as the continuous latent policies, but replaces the continuous posterior sample by a residual vector-quantized latent. Given a minibatch $\{(s_i, a_i)\}_{i=1}^B$, the posterior encoder first produces continuous latents

$$z_{e,i} = e_\phi(a_i, s_i) \in \mathbb{R}^{d_z}, \quad i = 1, \dots, B.$$

A residual vector quantizer with L_{vq} layers and C_{vq} codes per layer maps each $z_{e,i}$ to a quantized latent $z_{q,i}$. Let $\mathcal{E}_\ell = \{e_{\ell,1}, \dots, e_{\ell,C_{\text{vq}}}\}$ denote the codebook of layer ℓ . Starting with residual $r_{i,1} = z_{e,i}$, each layer selects the nearest code

$$c_{i,\ell} = \arg \min_{j \in \{1, \dots, C_{\text{vq}}\}} \|r_{i,\ell} - e_{\ell,j}\|_2^2, \quad q_{i,\ell} = e_{\ell,c_{i,\ell}},$$

and updates the residual as

$$r_{i,\ell+1} = r_{i,\ell} - \text{sg}(q_{i,\ell}),$$

where $\text{sg}(\cdot)$ denotes stop-gradient. The final quantized latent is the sum of residual code contributions,

$$z_{q,i} = \sum_{\ell=1}^{L_{\text{vq}}} q_{i,\ell},$$

with straight-through gradients used through the quantization operation.

The action decoder receives $z_{q,i}$ and predicts

$$\hat{a}_i = f_\theta(z_{q,i}, s_i).$$

The minibatch training objective is

$$\mathcal{L}_{\text{VQ}} = \frac{1}{B} \sum_{i=1}^B \mathcal{L}_{\text{rec}}(f_\theta(z_{q,i}, s_i), a_i) + \beta_{\text{vq}} \frac{1}{B L_{\text{vq}}} \sum_{i=1}^B \sum_{\ell=1}^{L_{\text{vq}}} \|r_{i,\ell} - \text{sg}(q_{i,\ell})\|_2^2.$$

The codebooks are updated by exponential moving averages of assigned encoder outputs, with first-batch initialization and dead-code replacement, following vector-quantized autoencoders [30, 16].

At inference, we use a fixed uniform prior over codebook indices. For each residual layer,

$$c_\ell^p \sim \text{Unif}\{1, \dots, C_{\text{vq}}\}, \quad \ell = 1, \dots, L_{\text{vq}},$$

and reconstruct the prior latent by decoding the sampled code indices,

$$z_p = \sum_{\ell=1}^{L_{\text{vq}}} e_{\ell, c_\ell^p}.$$

The predicted action chunk is then

$$\hat{a} = f_\theta(z_p, s).$$

Action-space flow and diffusion policies Act-Flow and Act-Diff model the action chunk directly in $\mathcal{A}^H$, without an explicit posterior latent variable. For a fixed observation s , both methods define a deterministic sampler

$$G_{\theta,s}(u) := G_{\theta}(s, u),$$

which pushes forward a simple Gaussian base distribution $p_0 = \mathcal{N}(0, I)$ on the flattened action-chunk space to the conditional action chunk distribution:

$$\pi_{\theta}(\cdot | s) = (G_{\theta,s})_{\#} p_0.$$

Equivalently, sampling from the policy is written as

$$U \sim p_0, \quad A = G_{\theta,s}(U).$$

For Act-Flow, $G_{\theta,s}$ is the ODE solution map induced by the learned velocity field. For Act-Diff, $G_{\theta,s}$ is the full composition of deterministic DDIM denoising steps. Both variants use the same conditional action transformer backbone: noisy or interpolated action tokens attend jointly with observation tokens, and the network is conditioned on a timestep embedding.

For Act-Flow, we train a conditional flow-matching model in action space. Given a minibatch $\{(s_i, a_i)\}_{i=1}^B$, sample

$$u_i \sim \mathcal{N}(0, I), \quad t_i \sim p(t),$$

and form the linear interpolation

$$a_{t_i} = (1 - t_i)u_i + t_i a_i.$$

For this path, the target velocity is

$$v_i^* = a_i - u_i.$$

The model predicts a velocity field

$$v_{\theta}(a_{t_i}, t_i, s_i),$$

and is trained with

$$\mathcal{L}_{\text{ActFlow}} = \frac{1}{B} \sum_{i=1}^B \|v_{\theta}(a_{t_i}, t_i, s_i) - v_i^*\|_2^2.$$

At inference, we sample $a_0 \sim \mathcal{N}(0, I)$ and integrate

$$\frac{da_t}{dt} = v_{\theta}(a_t, t, s)$$

from $t = 0$ to $t = 1$. The resulting a_1 is used as the predicted action chunk.

For Act-Diff, we train a denoising diffusion model in action space. Let $\bar{\alpha}_t$ denote the cumulative noise schedule. Given a minibatch $\{(s_i, a_i)\}_{i=1}^B$, sample a timestep t_i and noise $\epsilon_i \sim \mathcal{N}(0, I)$, and construct

$$a_{t_i} = \sqrt{\bar{\alpha}_{t_i}} a_i + \sqrt{1 - \bar{\alpha}_{t_i}} \epsilon_i.$$

The model predicts the clean action chunk directly,

$$\hat{a}_i = g_{\theta}(a_{t_i}, t_i, s_i),$$

and is trained with the sample-prediction objective

$$\mathcal{L}_{\text{ActDiff}} = \frac{1}{B} \sum_{i=1}^B \|g_{\theta}(a_{t_i}, t_i, s_i) - a_i\|_2^2.$$

At inference, we initialize $a_{\tau_{\text{diff}}} \sim \mathcal{N}(0, I)$ and apply the deterministic DDIM sampler to obtain the final action chunk. The full composition of denoising steps defines the sampling map $G_{\theta,s} : u \mapsto a$ used in Section 4.

C.2 Network Architectures

This section describes the neural implementations, the benchmarks, and the training and evaluation details of the experiments. All policies predict action chunks non-autoregressively. Within each benchmark, methods share the same observation encoder, action representation, normalization pipeline, and training loop, and differ only in the output parameterization.

Observation encoders. Image observations are encoded with a convolutional encoder, initialized from pretrained weights and fine-tuned during policy training. The encoder preserves the spatial feature map, uses no global pooling, and uses frozen batch-normalization statistics. Proprioceptive and state observations are encoded with a single projection layer.

Action decoder. The deterministic and latent-variable policies use non-autoregressive action transformer decoders. Encoded observations are first converted into a token sequence. Spatial feature maps receive two-dimensional sinusoidal positional encodings, while flat features receive one-dimensional positional encodings. Let

$$Q \in \mathbb{R}^{H \times d}$$

denote the learnable action-query sequence, with one query embedding per predicted action timestep. Given the observation-token sequence, the decoder maps Q to H action embeddings in parallel, and task-specific action heads map these embeddings to the predicted action components.

The deterministic baseline uses the non-latent version of this decoder. For an observation s , the action transformer produces action embeddings

$$U_{1:H} = D_\theta(Q, X_s),$$

where $X_s \in \mathbb{R}^{N_s \times d}$ denotes the encoded observation tokens. The action heads then produce a single predicted chunk,

$$\hat{a} = \text{Head}_\theta(U_{1:H}) = f_\theta(s).$$

LACT. Latent-variable policies use LACT, a latent-conditioned variant of the previous action decoder. Given a latent z , LACT conditions each decoder block through AdaLN-Zero-style modulation, as used in DiT-style transformers. The conditioning network maps z to scale, shift, and residual-gating parameters, which modulate the normalization and residual branches of the self-attention, cross-attention, and feedforward blocks. Thus, the latent affects the full action-query decoding process, and the decoder implements the map

$$\hat{a} = f_\theta(z, s).$$

MMDiT action decoder. Action-space flow and diffusion policies use an MMDiT-style dual-stream transformer [7]. The model receives observation tokens and action tokens as separate streams. The action stream contains either interpolated actions for flow matching or noisy actions for diffusion. A timestep embedding conditions the transformer layers through adaptive normalization. The dual-stream decoder allows bidirectional attention between observation and action tokens, and a final prediction layer maps the action-token outputs to either velocities for Act-Flow or denoising targets for Act-Diff.

For Act-Flow, the MMDiT predicts the action-space velocity field used by the flow solver. For Act-Diff, the MMDiT predicts the diffusion training target and is sampled with a deterministic DDIM scheduler.

Latent encoders. Latent-variable policies use transformer encoders to parameterize the posterior and, when used, the learned prior. The posterior encoder receives a sequence of tokens containing the ground-truth action sequence together with the encoded observation tokens. A learnable class token is appended to the sequence, and a transformer encoder maps the final class-token representation to the latent output.

For KL-CVAE, the posterior projection has output dimension $2d_z$ and is split into a mean and log-variance,

$$(\mu_\phi(a, s), \ell_\phi(a, s)) = P_\phi(\text{CLS}_\phi(a, s)),$$

which define the diagonal Gaussian posterior $q_\phi(\cdot \mid a, s)$. For aggregate-matched variants and LAT-Flow, the projection has output dimension d_z and directly returns

$$z^q = e_\phi(a, s).$$

The VQ-VAE posterior uses the same action-plus-observation transformer encoder, but replaces the continuous latent output by a residual vector-quantized bottleneck. The class-token representation is first projected to a continuous vector

$$z^{\text{cont}} = P_\phi(\text{CLS}_\phi(a, s)),$$

which is then quantized by a residual codebook stack. The quantized latent z^q is passed to the action decoder.

Learned priors use a separate transformer encoder that receives only observation tokens. A class token is appended to the observation sequence, and the final class-token representation is projected to prior parameters,

$$(\mu_\psi(s), \ell_\psi(s)) = P_\psi(\text{CLS}_\psi(s)),$$

defining

$$p_\psi(\cdot | s) = \mathcal{N}(\mu_\psi(s), \text{diag exp } \ell_\psi(s)).$$

For conditional aggregate matching, the same prior encoder also emits an action-free condition vector $h_\eta(s)$. This vector is obtained by pooling the observation tokens and used to compute the conditional MMD/Sinkhorn losses.

C.3 Benchmarks

All benchmarks use observation horizon $T_{\text{obs}} = 1$. Thus, each policy conditions on a single current observation, without observation history. The action horizon depends on the benchmark. Synthetic tasks use $H = 60$, corresponding to the full task trajectory. Simulation benchmarks use $H = 10$; at evaluation time, we execute the first two actions from each predicted chunk before replanning.

Synthetic benchmark. The synthetic benchmark consists of four 2D navigation tasks. All trajectories lie in the unit square $[0, 1]^2$. Each task contains 1000 demonstrations. Policies receive a single 64×64 RGB rendering at $t = 0$, showing the agent initial position, obstacles, and goal regions, and predict the complete trajectory chunk $a_{0:H-1} \in \mathbb{R}^{60 \times 2}$, with $H = 60$, without replanning. Thus, each trajectory effectively contains one single training sample pair.

The four tasks differ in their mode structure. *Circle* has $K = 2$ circular trajectory modes around obstacles. *Sequential* has two consecutive binary decisions, yielding $K = 4$ modes separated by three obstacles. *Radial* has $K = 16$ modes from a common start to sixteen evenly spaced radial goals, with obstacles between neighboring directions. *Corridor* has $K = 16$ valid routes from a common start to a common endpoint through sixteen corridors induced by fifteen obstacles.

For synthetic evaluation, a generated trajectory is successful if it satisfies all three criteria: it does not collide with obstacles; its endpoint is within distance 0.1 of one valid mode endpoint; and its path length is at least 0.8 times the mean expert path length. The path-length condition rules out trivial collapsed trajectories that reach an endpoint without following a valid path. We also report valid mode coverage and valid mode entropy ratio, computed only over successful trajectories.

Simulation benchmarks. We use PushT, Franka Kitchen, and UR3 BlockPush as robotic simulation benchmarks previously employed in the literature [9, 6, 23, 16, 24]. A snapshot of all simulation environments is shown in Figure 5.

PushT requires pushing a T-shaped block to a target pose using 2D end-effector control [6]. We use both image and state variants. The image observation is a single 96×96 RGB agent-view image. The state observation contains the end-effector position, block position, block angle, block keypoints, and contact indicator. PushT performance is measured by final intersection-over-union (IoU) between the block pose and target pose.

Franka Kitchen [10] is a long-horizon manipulation environment in which a Franka arm completes a subset of kitchen subtasks in sequence. We use state and image variants. The state observation contains 9 robot-arm configuration variables and 21 object configuration variables. The image observation is a single 112×112 RGB rendering. Performance is reported as the number of completed goals out of four.

UR3 BlockPush requires moving two blocks to two target regions. The task is multimodal because the blocks can be pushed in different orders. We use the unconditional state variant. The state contains the 2D end-effector position and the 2D positions of both blocks; the action is a 2D end-effector target. Performance is reported as the number of achieved goals out of two.



Figure 5: Simulation environments: PushT (left), Kitchen (center), UR3 BlockPush (right)

Table 2: Benchmark summary.

Benchmark	Demonstrations	Observation	Horizon H	Evaluation
Synthetic	1000 per task	RGB 64×64	60	success, valid coverage, valid entropy
PushT-State	206	state, 24-d	10	final IoU
PushT-Image	206	RGB 96×96	10	final IoU
Kitchen-State	566	state, 30-d	10	goals achieved out of 4
Kitchen-Image	566	RGB 112×112	10	goals achieved out of 4
UR3 BlockPush	600	state, 6-d	10	goals achieved out of 2

C.4 Training Details

All runs used 32-bit precision. All policies in a given benchmark share the same observation representation, normalization, action horizon, data loader, optimizer, and training loop. The network architectures are described in Appendix C.2. The full hyperparameter tables are reported in Appendix E. Each experiment was executed as a single-GPU job on an NVIDIA H100 94GB GPU. The available memory was not fully utilized for smaller models; in particular, synthetic runs required less than 4GB of VRAM. Synthetic experiments used 8 CPU workers per job and required approximately 20–40 minutes of wall-clock time. Simulation experiments used 14 CPU workers per job and required approximately 10–20 hours of wall-clock time, depending on the benchmark and model family.

C.5 Evaluation Details

Policies are evaluated by rolling them out in the benchmark environments on which they were trained. For the synthetic benchmarks, we perform 200 rollouts per policy every 100 epochs and report each metric as the average over the last five evaluation checkpoints, corresponding to $5 \times 200 = 1000$ rollouts.

For the simulation benchmarks, we evaluate each policy on 200 rollout trials using a reproducible random seed that is varied per each roll-out, in order to sample reproducibly randomized initial conditions. We evaluate policies at fixed checkpoint intervals and report the best-performing checkpoint.

D Additional Results

D.1 Complete Synthetic Benchmarks Results

Table 3 reports the complete per-task synthetic results. Valid mode coverage is the fraction of ground-truth modes reached by at least one successful rollout, so invalid or colliding trajectories do not increase coverage. The valid mode-entropy ratio (MER) is the entropy of the empirical distribution $\hat{p}_{\text{valid}}$ over successful mode labels M , normalized by the maximum entropy $\log K$:

$$\text{MER} = \frac{H(\hat{p}_{\text{valid}})}{\log K}.$$

When no rollout is successful, both coverage and entropy ratio are set to zero.

Table 3: Full synthetic results: **success rate (SR) / valid mode coverage (Cov) / valid mode-entropy ratio (MER)**. Values are 3-seed means, each run summarized by the running mean over the last five rollout checkpoints, with 200 episodes per checkpoint. Bold indicates the best value per task and metric.

Method	Circle	Sequential	Corridor	Radial
BCAT (deterministic)	0.00/0.00/0.00	0.00/0.00/0.00	0.00/0.00/0.00	0.00/0.00/0.00
KL-CVAE	0.96/ 1.00 /0.99	0.94/ 1.00 / 0.99	0.47/0.94/0.92	0.48/ 1.00 /0.95
MMD-CWAE	0.92/ 1.00 / 1.00	0.94/ 1.00 / 0.99	0.40/0.98/0.94	0.34/ 1.00 / 0.98
Sinkhorn-CWAE	0.88/ 1.00 /0.98	0.93/ 1.00 / 0.99	0.43/ 0.99 /0.95	0.47/ 1.00 /0.96
VQ-VAE	0.57/0.60/0.59	0.67/0.67/0.67	0.52 /0.94/0.93	0.52 /0.99/0.95
Act-Flow	0.94/ 1.00 /0.99	0.91/ 1.00 /0.97	0.44/0.98/ 0.96	0.49/0.99/0.96
Act-Diff	1.00 / 1.00 /0.99	0.89/ 1.00 /0.94	0.41/0.95/0.93	0.44/0.97/0.93
LAT-Flow	1.00 / 1.00 / 1.00	0.96 / 1.00 / 0.99	0.48/ 0.99 / 0.96	0.46/0.99/0.96

D.2 Collapse Diagnostics for Baseline Policies

Deterministic behavioral cloning exhibits complete collapse on all four synthetic benchmarks. As expected from the unimodal regression discussion in Section 1, the policy predicts an averaged trajectory between valid modes, and consequently fails to produce a single successful rollout on any task. Figure 6 visualizes representative collapsed predictions for the four synthetic tasks. The VQ-VAE baseline was considerably less stable during training. While it achieved some of the strongest success rates on the more challenging $K = 16$ tasks, it also collapsed completely on the easier Sequential task ($K = 4$), indicating high sensitivity to optimization dynamics and codebook usage. A representative failure run is shown in Figure 6. In preliminary PushT experiments, the same policy also performed poorly, reaching a score below 0.05 final IoU. We therefore did not pursue a broader simulation evaluation for this baseline. A plausible explanation is training instability in the single-stage setup. More structured two-stage training procedures may be beneficial here, as also adopted in prior vector-quantized imitation learning methods such as VQ-BeT [16], but we did not investigate further due to time constraints.

D.3 Mode Collapse Under Pointwise KL

Figure 7 provides a qualitative view of the mechanism quantified in Figure 2. We visualize posterior latent samples $Z \sim q_\phi(\cdot | A, S)$ on the synthetic benchmark *Sequential* using PCA, with points colored by the ground-truth mode label. At $\beta = 0.01$, posterior latents form mode-separated clusters, indicating that Z retains information about which demonstrated branch is being reconstructed. At $\beta = 0.1$, the posterior latents collapse into an overlapping cloud, so the latent no longer separates the four modes. This visualizes the loss of $I(M; Z | S)$ under stronger pointwise KL regularization.

D.4 Aggregate Matching and Prior Coverage

As discussed in Appendix B.2, the critical- β collapse criterion is specific to pointwise KL and does not apply to aggregate matching. For aggregate-matched objectives, the relevant deployment question is whether prior samples cover the decoder-valid latent regions learned from posterior samples.

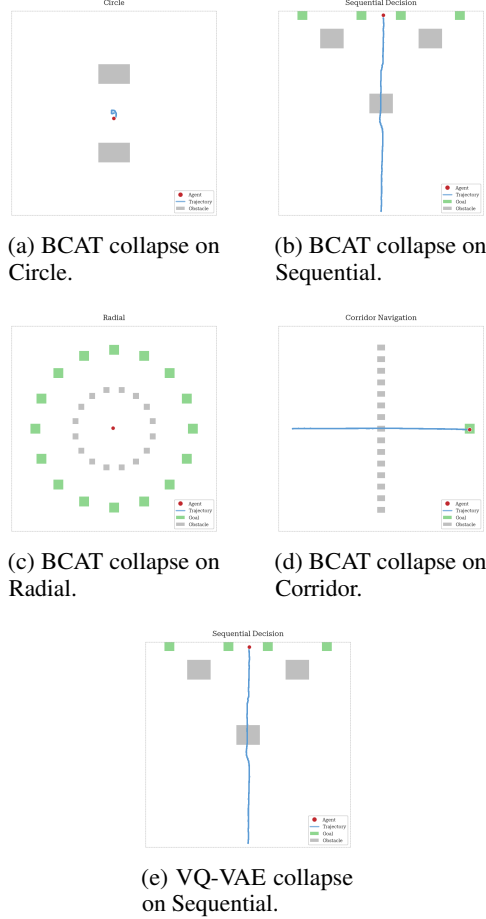


Figure 6: Collapse diagnostics for baseline policies. The first four panels show representative predictions from deterministic BCAT on the four synthetic benchmarks. In all cases, the policy collapses to an averaged trajectory between valid modes and yields no successful rollouts. The fifth panel shows a representative VQ-VAE collapsed run on the Sequential task, illustrating the training instability observed for this baseline.

Posterior–prior valid-mass gap. We test the deployment caveat from Appendix B.2: aggregate matching can preserve mode information in the posterior, but successful inference also requires the prior to place mass on decoder-valid latent regions. We therefore compare posterior-sampled and prior-sampled valid mass. Posterior evaluation samples $Z \sim q_\phi(\cdot | A, S)$ after drawing $(S, A) \sim p_{\mathcal{D}}$, whereas prior evaluation samples $Z \sim p_\psi(\cdot | S)$, as at deployment. Since each synthetic action chunk is a complete trajectory, valid mass is the probability that the decoded trajectory satisfies the synthetic success criterion. We report

$$\Delta_{\text{valid}} = \mathbb{E}_{(S,A) \sim p_{\mathcal{D}}} \Pr_{Z \sim q_\phi(\cdot | A, S)} \left[f_\theta(Z, S) \in \bigcup_{k=1}^{\kappa(S)} C_k(S) \right] - \mathbb{E}_{S \sim p_{\mathcal{D}}, S} \Pr_{Z \sim p_\psi(\cdot | S)} \left[f_\theta(Z, S) \in \bigcup_{k=1}^{\kappa(S)} C_k(S) \right].$$

Table 4 shows that aggregate matching changes the failure mode rather than removing it. KL-CVAE has the smallest gap, consistent with pointwise KL keeping posterior latents close to the prior, but it also has lower posterior valid mass. MMD-CWAE attains the highest posterior valid mass, indicating that its posterior latents contain useful decoder-valid regions, but it has the largest posterior–prior gap. LAT-Flow gives the highest prior valid mass and a smaller gap than MMD/Sinkhorn, suggesting that

Posterior latent samples, Sequential task

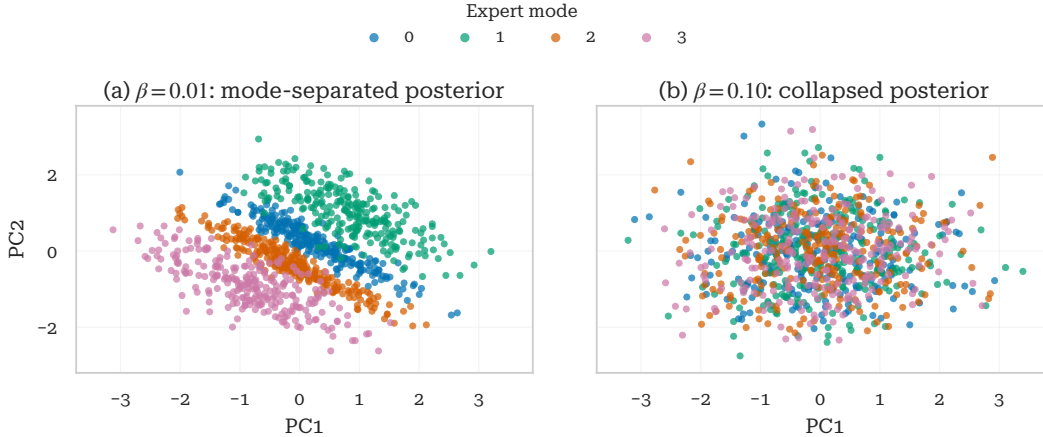


Figure 7: **Posterior latent geometry under pointwise KL pressure.** PCA projection of posterior latent samples $Z \sim q_\phi(\cdot | A, S)$ on the synthetic benchmark *Sequential* task, colored by ground-truth mode label. At $\beta = 0.01$, the posterior separates according to the demonstrated mode. At $\beta = 0.1$, the posterior collapses into an overlapping cloud, consistent with the loss of $I(M; Z | S)$ in Figure 2.

Table 4: Posterior–prior valid-mass gap on synthetic tasks. We report macro averages across all four synthetic tasks and averages on the two hardest $K = 16$ tasks. Posterior evaluation samples $Z \sim q_\phi(\cdot | A, S)$ after drawing $(S, A) \sim p_D$; prior evaluation samples $Z \sim p_\psi(\cdot | S)$, as at deployment. A larger Δ_{valid} indicates that posterior latents decode to valid trajectories more often than prior samples.

Method	Post. valid	Prior valid	Avg. Δ_{valid}	Hard Δ_{valid}
KL-CVAE	0.65	0.61	0.03	0.03
MMD-CWAE	0.72	0.57	0.14	0.21
Sinkhorn-CWAE	0.69	0.57	0.12	0.14
LAT-Flow	0.70	0.64	0.06	0.09

learning the prior improves coverage of decoder-valid regions. We also find that this gap is sensitive to latent-space regularization during training: removing these regularizers substantially increases Δ_{valid} , widening the gap.

Posterior-geometry ablation. Aggregate matching constrains a batch-level latent distribution, but it does not by itself control whether the deterministic posterior codes have a geometry that is easy for the prior to sample. We therefore use dropout, decoder latent jitter, and posterior geometry regularization mentioned in C.1 to stabilize the posterior regions seen by the decoder. Table 5 ablates these regularizers. Removing them increases the posterior–prior valid-mass gap, especially on the $K = 16$ tasks. The effect is largest for MMD-CWAE and Sinkhorn-CWAE: their posterior latents can still decode to valid trajectories, but prior samples miss the same decoder-valid regions much more often. Figure 8 shows the same failure mode qualitatively for Sinkhorn-CWAE on the synthetic *Sequential* task. Without posterior regularization, prior-sampled reconstructions degrade quickly and become highly noisy. With these regularizers, prior-sampled trajectories become substantially sharper and remain concentrated on the valid branches.

Conditional aggregate matching As mentioned in C.1, in simulation benchmarks the observation s changes the valid action distribution, so marginal latent matching can mix posterior and prior samples across incompatible conditioning states. Table 6 ablates the prior parameterization used by Sinkhorn-CWAE on PushT Image environment. All variants obtain similar posterior-sampled L1 error, indicating that the posterior encoder and decoder can reconstruct the demonstrated chunks. The difference appears at deployment: the fixed Gaussian prior produces very poor prior-sampled

Table 5: Effect of removing latent-space regularizers. We remove dropout, decoder latent jitter, and the posterior geometry regularizer, and report the posterior–prior valid-mass gap. Larger values indicate that posterior latents decode to valid trajectories more often than prior samples, revealing a prior-coverage failure.

Method	Avg. Δ_{valid}	Hard Δ_{valid}
KL-CVAE	0.04	0.05
MMD-CWAE	0.32	0.57
Sinkhorn-CWAE	0.32	0.58
LAT-Flow	0.18	0.30

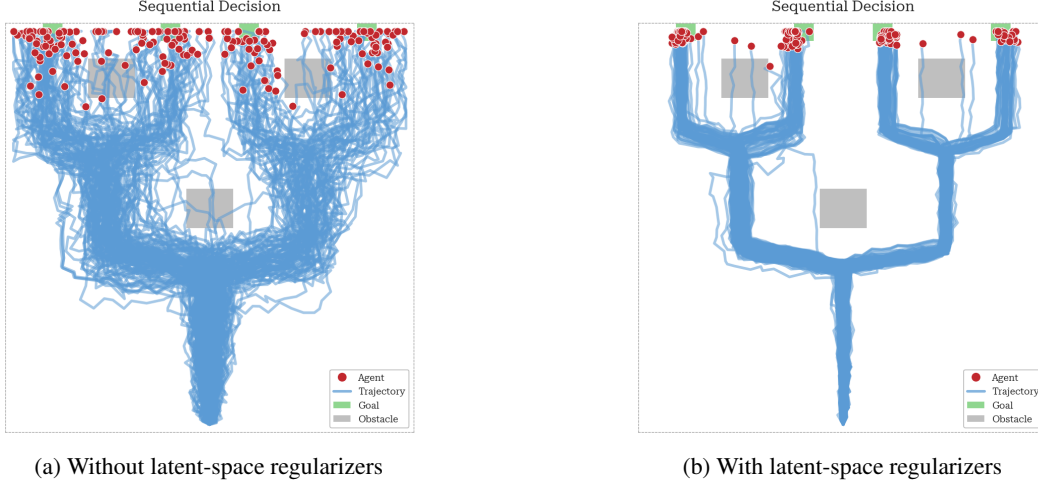


Figure 8: **Effect of latent-space regularization on Sinkhorn-CWAE.** Prior-sampled trajectories on the *Sequential* task. Each policy is rolled out 200 times. Without dropout, decoder latent jitter, and posterior geometry regularization, prior samples generate many dispersed and invalid trajectories. With the regularizers enabled, prior samples concentrate on valid trajectory branches and reach the goal regions more consistently. This qualitative behavior is consistent with Table 5: removing the regularizers increases the posterior–prior valid-mass gap, revealing that the posterior can define useful latent regions while the deployment prior fails to sample them reliably.

chunks and near-zero rollout performance. Learning the prior substantially reduces the posterior–prior sample gap and improves final IoU. Adding conditional aggregate matching gives the best closed-loop performance, suggesting that matching the state–latent coupling is more important for deployment than marginal latent matching alone.

D.5 Action-Space Bridge–Sensitivity Diagnostic

Table 7 reports the numerical values used for Figure 3. For each action-space sampler, we use its native inference setting: 10 solver steps for Act-Flow and 100 DDIM steps for Act-Diff. For each task, we fix the initial observation, sample 4096 base noises, select 100 cross-mode valid pairs, and evaluate 51 interpolation points per pair.

Let $G_{\theta,s} : u \mapsto a$ denote the deterministic sampling map from base noise to the decoded trajectory used in synthetic rollout evaluation. For trajectories $a, a' \in \mathbb{R}^{H \times 2}$, we use the RMS trajectory distance

$$d_{\text{traj}}(a, a') = \left(\frac{1}{H} \sum_{t=0}^{H-1} \|a_t - a'_t\|_2^2 \right)^{1/2}.$$

For each selected pair (u_1, u_2) , we decode $u_\lambda = (1 - \lambda)u_1 + \lambda u_2$. We define λ_- as the last grid point assigned to the first mode and λ_+ as the first later grid point assigned to the second mode, and set

$$w := \|u_{\lambda_+} - u_{\lambda_-}\|.$$

Table 6: Conditional aggregate-matching ablation for Sinkhorn-CWAE on PushT Image. Posterior L1 evaluates chunks decoded from $Z \sim q_\phi(\cdot | A, S)$; prior-sample L1 evaluates chunks decoded from $Z \sim p_\psi(\cdot | S)$, as at deployment. We report $\Delta_{L1} = L1_{\text{prior}} - L1_{\text{post}}$.

OT variant	Final IoU $\uparrow$	Post. L1 $\downarrow$	Prior L1 $\downarrow$	$\Delta_{L1} \downarrow$
Fixed Gaussian	0.0004	1.9829	38.8889	36.9060
Learned prior	0.4385	2.0476	16.8767	14.8290
Conditional learned prior	0.7517	2.0422	20.1505	18.1084

Table 7: Action-space bridge-sensitivity diagnostic on synthetic tasks. We report valid base-sample rate, interior bridge fraction, transition width w , segment sensitivity S_{seg} , and the ratio $S_{\text{seg}}/(\Delta_{ij}/w)$.

Method	Task	Steps	K	Valid base	Bridge	w	S_{seg}	Ratio
Act-Flow	Circle	10	2	1.000	0.000	0.313	1.810	1.21
Act-Flow	Sequential	10	4	0.992	0.016	1.958	0.393	1.65
Act-Flow	Corridor	10	16	0.435	0.549	12.559	0.013	4.89
Act-Flow	Radial	10	16	0.477	0.469	10.633	0.028	1.34
Act-Diff	Circle	100	2	1.000	0.000	0.310	1.775	1.18
Act-Diff	Sequential	100	4	0.999	0.000	2.098	0.558	1.75
Act-Diff	Corridor	100	16	0.483	0.526	11.653	0.014	4.94
Act-Diff	Radial	100	16	0.451	0.486	10.740	0.029	1.32

The transition-segment sensitivity is

$$S_{\text{seg}} = \frac{d_{\text{traj}}(G_{\theta,s}(u_{\lambda_+}), G_{\theta,s}(u_{\lambda_-}))}{w}.$$

Let a_i^*, a_j^* be the noise-free synthetic mode templates for the two modes, generated from the known task geometry. We estimate their separation as

$$\Delta_{ij} = \max\{0, d_{\text{traj}}(a_i^*, a_j^*) - 2\varepsilon_{\text{tol}}\}, \quad \varepsilon_{\text{tol}} = 0.05.$$

The ratio column reports

$$\frac{S_{\text{seg}}}{\Delta_{ij}/w}$$

over paths for which the transition is found and $\Delta_{ij} > 0$. All reported ratios are above one, consistent with the pathwise separation-sensitivity implication of the action-space analysis.

D.6 Quantifying Multimodality of Simulation Benchmarks

The simulation benchmarks differ in how much action ambiguity remains after conditioning on the state representation available to the policy. We therefore measure *state-conditioned action ambiguity* directly from the datasets. Formally, it estimates the local conditional variance of future action chunks,

$$\text{Var}(A^{(\text{Hdiag})} | s' \approx s),$$

and normalizes it by the global marginal action spread, $\text{Var}(A^{(\text{Hdiag})})$. Thus it asks whether nearby states in the demonstration data are followed by nearly identical future action chunks or by different ones.

We use the same state and action variables as in the state-policy experiments. For Kitchen, we do not include the task-goal vector because it is not provided to the state-policy encoder.

For each dataset and diagnostic horizon $H_{\text{diag}} \in \{1, 10, 32\}$, let

$$a_i^{(\text{Hdiag})} := (a_i, a_{i+1}, \dots, a_{i+H_{\text{diag}}-1}) \in \mathbb{R}^{H_{\text{diag}} \times d_a}$$

be the future action chunk starting at index i . We only use indices for which the full chunk lies inside the same episode; denote this valid set by $\mathcal{I}_{H_{\text{diag}}}$.

States are standardized componentwise,

$$\tilde{s}_{i,d} = \frac{s_{i,d} - \mu_d}{\sigma_d},$$

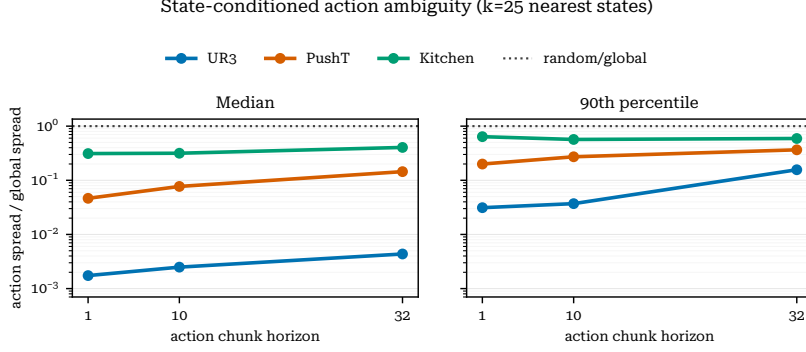


Figure 9: **State-conditioned action ambiguity in simulation datasets.** For each query state, we find the $k = 25$ nearest states in standardized state space, excluding states from the same episode, and measure the variance of their future action chunks relative to the global action-chunk variance. Lower values indicate that the dataset is closer to conditionally unimodal under the state representation available to the policy. The dotted reference denotes the random-neighbor baseline.

and nearest neighbors are computed in this standardized state space.

We uniformly sample 10,000 query indices $i \in \mathcal{I}_{\text{Hdiag}}$. Each query index defines both a current state s_i and its corresponding future action chunk $a_i^{(\text{Hdiag})}$. For each query, we find the $k = 25$ nearest valid indices in standardized state space,

$$\mathcal{N}_k(i) = \text{kNN}_{j \in \mathcal{I}_{\text{Hdiag}}: e_j \neq e_i}(\tilde{s}_i, \tilde{s}_j),$$

where e_i denotes the episode containing index i . Excluding all neighbors from the same episode prevents the diagnostic from simply measuring temporal smoothness along a single trajectory. Let

$$\bar{a}_{\mathcal{N}_k(i)}^{(\text{Hdiag})} = \frac{1}{k} \sum_{j \in \mathcal{N}_k(i)} a_j^{(\text{Hdiag})}$$

be the mean future chunk among the nearest-neighbor states. The local state-conditioned action spread is

$$L_i^{(\text{Hdiag})} = \frac{1}{k} \sum_{j \in \mathcal{N}_k(i)} \left\| a_j^{(\text{Hdiag})} - \bar{a}_{\mathcal{N}_k(i)}^{(\text{Hdiag})} \right\|_2^2.$$

This is an empirical local variance of future action chunks around state s_i . We normalize it by the global action-chunk spread

$$G^{(\text{Hdiag})} = \frac{1}{|\mathcal{I}_{\text{Hdiag}}|} \sum_{i \in \mathcal{I}_{\text{Hdiag}}} \left\| a_i^{(\text{Hdiag})} - \bar{a}^{(\text{Hdiag})} \right\|_2^2, \quad \bar{a}^{(\text{Hdiag})} = \frac{1}{|\mathcal{I}_{\text{Hdiag}}|} \sum_{i \in \mathcal{I}_{\text{Hdiag}}} a_i^{(\text{Hdiag})}.$$

The reported ambiguity ratio is

$$R_i^{(\text{Hdiag})} = \frac{L_i^{(\text{Hdiag})}}{G^{(\text{Hdiag})}}.$$

Values near zero indicate that nearby states are followed by nearly identical future chunks, so the dataset is close to conditionally unimodal under the given state representation. Values near one indicate that nearby states are almost as action-diverse as random states, so conditioning on the state removes little action variability. As a sanity check, we also compute a random-neighbor baseline by replacing $\mathcal{N}_k(i)$ with k random valid indices from different episodes. This baseline is close to 0.95 across datasets and horizons, confirming that the global normalization behaves as expected.

Figure 9 and Table 8 show three regimes. UR3 BlockPush is almost conditionally unimodal: even for $\text{Hdiag} = 32$, the median local spread is 0.0044, less than 0.5% of the global action-chunk spread. Thus, under the UR3 state representation, nearby states almost always imply the same future action chunk. This explains why the deterministic BCAT baseline performs strongly on UR3 BlockPush in Table 1: there is little conditional ambiguity for a generative latent or action-space policy to resolve.

Table 8: State-conditioned action ambiguity ratios for $k = 25$. Values are local nearest-neighbor action-chunk spread divided by global action-chunk spread. Lower values indicate less conditional ambiguity.

Dataset	Horizon H_{diag}	Median (multimodal $\uparrow$)	90th percentile (multimodal $\uparrow$)	Random median
UR3 BlockPush	1	0.0017	0.0312	0.9419
UR3 BlockPush	10	0.0025	0.0370	0.9536
UR3 BlockPush	32	0.0044	0.1566	0.9560
PushT	1	0.0465	0.1995	0.9525
PushT	10	0.0770	0.2718	0.9510
PushT	32	0.1444	0.3653	0.9541
Kitchen	1	0.3115	0.6392	0.9603
Kitchen	10	0.3160	0.5677	0.9574
Kitchen	32	0.4044	0.5914	0.9606

PushT has intermediate conditional ambiguity. Its median ratio increases from 0.0465 at $H_{\text{diag}} = 1$ to 0.1444 at $H_{\text{diag}} = 32$, indicating that longer-horizon futures are less determined by the current state alone. Kitchen has the largest conditional ambiguity under the available state representation: the median ratio is already 0.3115 for one-step actions and reaches 0.4044 for 32-step chunks. This means that nearby Kitchen states retain roughly 30–40% of the global action-chunk variation.

This diagnostic is representation-dependent: it measures whether the state variables available to the policy make future chunks locally predictable in the dataset. Because fixed- k neighborhoods may have different radii across state spaces, we additionally report a radius-controlled check below.

Radius-controlled check. The fixed- k diagnostic compares the same number of neighbors across datasets, but the corresponding state-space radius may differ across state representations. We therefore also run a radius-controlled version. After standardizing each state dimension, we define the dimension-normalized distance

$$d_{\text{state}}(i, j) = \frac{\|\tilde{s}_i - \tilde{s}_j\|_2}{\sqrt{d_s}},$$

where d_s is the state dimension. For a radius ε , the neighbor set is

$$\mathcal{N}_\varepsilon(i) = \{j \in \mathcal{I}_{H_{\text{diag}}} : e_j \neq e_i, d_{\text{state}}(i, j) \leq \varepsilon\}.$$

We only evaluate query states with at least $n_{\text{min}} = 5$ neighbors inside the radius. For each radius, we report both the coverage

$$C_\varepsilon = \Pr_i(|\mathcal{N}_\varepsilon(i)| \geq n_{\text{min}})$$

and the same normalized action-spread ratio as above, with $\mathcal{N}_k(i)$ replaced by $\mathcal{N}_\varepsilon(i)$. This check separates two effects: conditional action variation and local state-space support density. At small radius $\varepsilon = 0.1$, UR3 has almost full coverage for $H_{\text{diag}} = 32$, PushT has limited coverage, and Kitchen has no query states with enough neighbors. Thus, fixed- k neighborhoods for Kitchen are necessarily less local. However, at larger radii where coverage is non-negligible for all datasets, the ordering remains the same: UR3 has the smallest conditional action spread, PushT is intermediate, and Kitchen has the largest spread.

The radius-controlled diagnostic refines the interpretation of Figure 9. UR3 is not only low-spread under fixed- k neighbors; it also has dense local support and low conditional spread at small standardized radius. Kitchen, by contrast, has sparse local support at small radius, but when the radius is large enough to obtain valid neighborhoods, its future chunks remain much more diverse than UR3. Therefore, the practical conclusion is unchanged: under the state representations available to the policies, UR3 is nearly conditionally deterministic, PushT is intermediate, and Kitchen retains substantial conditional action variation.

D.7 Simulation Inference Throughput

Table 10 reports policy-query throughput, measured as the inverse wall-clock time required to generate one action chunk. All methods are evaluated with the same hardware, batch size, and native inference setting used in the simulation experiments. The numbers therefore quantify the deployment cost of the different output parameterizations rather than environment stepping or rendering overhead.

Table 9: Radius-controlled conditional ambiguity for $H_{\text{diag}} = 32$. Distance is computed in standardized state space and normalized by $\sqrt{d_s}$. Coverage is the fraction of query states with at least five cross-episode neighbors inside radius ε . Spread is normalized by global action-chunk spread.

Dataset	Radius ε	Coverage	Median spread (multimodal $\uparrow$)	90th percentile
UR3 BlockPush	0.1	0.992	0.0179	–
PushT	0.1	0.169	0.0509	–
Kitchen	0.1	0.000	–	–
UR3 BlockPush	0.3	1.000	0.0880	0.278
PushT	0.3	0.803	0.1990	0.396
Kitchen	0.3	0.267	0.3470	0.459
UR3 BlockPush	0.5	1.000	0.0947	0.294
PushT	0.5	0.974	0.3170	0.522
Kitchen	0.5	0.927	0.4750	0.636

Table 10: Inference throughput in policy queries per second. Higher is better. Throughput is measured as the inverse wall-clock time required to generate one action chunk under the native inference setting of each method. KL-fixed corresponds to KL-CVAE, KL-learned to KL-CVAE-LP, Cond-MMD to the state-conditioned MMD-CWAE-LP, and Cond-OT to the relaxed state-conditioned Sinkhorn-CWAE-LP of the main table.

Method	PushT Img.	PushT State	Kitchen Img.	Kitchen State	UR3 BlockPush	Avg.
Act-Flow	6.24	6.59	4.61	5.79	6.24	5.89
LAT-Flow	13.78	20.58	8.79	12.66	15.19	14.20
KL-fixed	30.63	69.02	17.50	21.62	19.73	31.70
KL-learned	31.97	58.94	12.11	14.75	30.18	29.59
Cond-MMD	29.89	59.10	13.31	27.05	15.72	29.02
Cond-OT	27.06	33.76	12.69	14.24	29.72	23.49
BCAT	43.86	63.72	18.95	16.86	25.57	33.79

E Experiment Hyperparameters

We report the hyperparameters used across synthetic and simulation experiments. A dash denotes a setting that is not applicable or not run. Unless stated otherwise, all models use AdamW with learning rate 5×10^{-4} , weight decay 0.02, observation horizon $T_{\text{obs}} = 1$, and action horizon $H = 10$ for simulation tasks. Synthetic tasks use $H = 60$. Image encoders are fine-tuned jointly with the policy. All transformer layers use ReLU as activation function.

Latent and generative objectives. For KL-CVAE, the pointwise KL weight is $\beta_{\text{KL}} = 0.01$. Learned-prior KL variants use a conditional Gaussian prior with fixed unit variance. For VQ-VAE, the commitment weight is $\beta_{\text{vq}} = 0.25$ and the number of residual quantization layers is $L_{\text{vq}} = 2$.

For aggregate-matched latent models, posterior geometry regularization uses decoder-side latent jitter $\sigma_{\text{dec}} = 0.075$, mean penalty weight $\beta_{\text{mean}} = 0.01$, standard-deviation penalty weight $\beta_{\text{std}} = 0.05$, covariance penalty weight $\beta_{\text{cov}} = 0.01$, target standard deviation $\sigma_* = 1$, and maximum standard deviation $\sigma_{\text{max}} = 2$. Learned latent priors are matched to posterior means.

For MMD-CWAE and its conditional variant, the latent aggregate matching weight is $\beta = 1.0$. We use the inverse multiquadratic kernel [29]

$$k_{\text{IMQ}}(z, z') = \sum_{C \in \mathcal{C}_z} \frac{C}{C + \|z - z'\|_2^2}.$$

For synthetic experiments, $\mathcal{C}_z = \{0.5d_z, d_z, 2d_z, 4d_z\}$. For simulation experiments, $\mathcal{C}_z = \{d_z, 2d_z, 4d_z, 8d_z\}$.

For Sinkhorn-CWAE and its conditional variant, the latent aggregate matching weight is $\beta = 0.01$, the blur parameter is $\varepsilon_{\text{Sink}} = 0.1$, and the transport cost is squared Euclidean distance.

For both conditional aggregate matching models (Appendix C.1) used in the simulation experiments, the state-conditioning weight is $\lambda_s = 1.0$.

For LAT-Flow, the latent flow-prior loss weight is $\beta_{\text{flow}} = 0.01$. LAT-Flow and Act-Flow both use an Euler solver with 10 inference steps and sample training times from $\text{Beta}(1.5, 1)$.

For Act-Diff, we use a DDIM scheduler with 100 training timesteps and 100 inference steps, the squared-cosine capped noise schedule, sample prediction, sample clipping enabled, $\alpha_0 = 1$, and step offset 0.

Dropout. Synthetic action decoders use dropout 0.2 and attention dropout 0.05. Simulation action decoders use dropout 0.1 and attention dropout 0.01. Posterior encoders use dropout 0.2 and attention dropout 0.05. Learned-prior encoders use dropout 0.1 and attention dropout 0.01.

Data augmentation and normalization. We normalize observations and actions to $[-1, 1]$ using min-max scaling. For image-based simulation experiments, we apply data augmentation with Albumentations [4]. The photometric augmentation pipeline contains ColorJitter with brightness 0.3, contrast 0.4, saturation 0.5, hue 0.1, and probability 0.5; RandomSunFlare with flare region $(0, 0, 1, 0.5)$, white source color, and probability 0.6; RandomBrightnessContrast with brightness and contrast limits 0.4 and probability 0.6; RandomGamma with gamma range $(80, 120)$ and probability 0.3; CLAHE with clip limit 4.0 and probability 0.3; RandomShadow with probability 0.4; and JPEG ImageCompression with quality range $[50, 100]$ and probability 0.2. The spatial and occlusion augmentation pipeline contains GaussianBlur with blur limit $(3, 7)$ and probability 0.5, CoarseDropout with at most 8 holes of size 8×8 and probability 0.3, and ShiftScaleRotate with shift limit 0.0625, scale limit $[-0.5, 0.6]$, zero rotation, and probability 0.5.

Table 11: Common benchmark-level training settings.

Setting	Synthetic	PushT-S	PushT-I	Kitchen-S	Kitchen-I	UR3-S
Observation Dimension	3x64x64	24	3x96x96	30	3x112x112	6
Observation horizon	1	1	1	1	1	1
Action horizon H	60	10	10	10	10	10
Batch size	256	256	64	256	64	256
Validation Ratio	0.05	0.05	0.05	0.05	0.05	0.05
Epochs	600(Circle)/ 1000	1000	1000	1000	1000	1000
Rollout every	100	100	100	100	100	100
Optimizer	AdamW	AdamW	AdamW	AdamW	AdamW	AdamW
Policy LR	5×10^{-4}	5×10^{-4}	5×10^{-4}	5×10^{-4}	5×10^{-4}	5×10^{-4}
Weight decay	0.02	0.02	0.02	0.02	0.02	0.02
Image-encoder LR	10^{-5}	–	10^{-5}	–	10^{-5}	–
Image-encoder WD	0.001	–	0.001	–	0.001	–
EMA	–	true	true	true	true	true

Table 12: Model sizes used in the experiments. L denotes transformer layers, d hidden width, h attention heads, and FF the feedforward width. All transformers use ReLU as activation function.

Module / family	Synthetic	Simulation
Image encoder	MobileNetV4 Conv Small 0.50	EfficientNet-B0
State encoder	–	Linear projection (state_dim, embedding_dim)
BCAT decoder	$L = 8, d = 256, h = 8, \text{FF} = 512$	$L = 8, d = 256, h = 8, \text{FF} = 1024$
Latent decoder	$L = 8, d = 256, h = 8, \text{FF} = 512$	$L = 8, d = 256, h = 8, \text{FF} = 1024$
MMDiT decoder	$L = 8, d = 256, h = 8, \text{FF} = 512, \text{timestep_emb}=32$	$L = 8, d = 256, h = 8, \text{FF} = 1024, \text{timestep_emb}=128$
Posterior encoder	$L = 8, d = 256, h = 8, \text{FF} = 512$	$L = 8, d = 256, h = 8, \text{FF} = 1024$
Learned Gaussian prior	–	$L = 4, d = 256, h = 8, \text{FF} = 1024$
Conditional aggregate prior	–	$L = 8, d = 256, h = 8, \text{FF} = 1024$
Latent flow prior	$L = 8, d = 256, h = 8, \text{FF} = 512$	$L = 8, d = 256, h = 8, \text{FF} = 1024$

Table 13: Latent dimensions and codebook sizes.

Benchmark / task	Modes K	Latent dim. d_z	VQ codebook size C
Circle	2	1	2
Sequential	4	2	4
Radial	16	4	16
Corridor	16	4	16
Simulation benchmarks	–	16	–