

Symmetries Here and There, Combined Everywhere: Cross-space Symmetry Compositions in Robotics

Loizos Hadjiloizou, Rodrigo Pérez-Dattari, and Noémie Jaquier

Abstract—Robots exhibit a rich variety of symmetries arising from their mechanical structure and the properties of their tasks. Although many robotics problems exhibit several symmetries simultaneously, existing approaches typically treat them in isolation, failing to exploit their combined potential. This paper introduces cross-space symmetry compositions, a framework for learning robot policies that are jointly equivariant to multiple symmetries across configuration and task spaces. Leveraging the differential-geometric structure of the forward kinematics map, we both descend symmetries from configuration to task space and lift symmetries from task to configuration space, enabling their composition within a unified representation space. We validate our framework on simulated and real-world experiments on a dual-arm robot, demonstrating that jointly leveraging multiple symmetries yields improved generalization.

I. INTRODUCTION

Incorporating inductive bias is a key avenue to improve sample efficiency and generalization in robot policy learning. Among possible biases, those arising from *symmetries* are particularly powerful as they enable a policy to generalize from each training sample to an entire class of equivalent observations and actions [1]. In robot policy learning, a symmetry describes a transformation of the observation inducing an associated transformation of the action, leading to consistent behavior across symmetric situations. Symmetries may arise from physical laws and mechanical structures [2] or may be identified directly from data as invariance and equivalence relations that a policy should respect [3].

Robots exhibit a rich variety of symmetries rooted both in their mechanical structure and in the properties of their tasks. These symmetries have been largely exploited by the robot control and learning communities. In configuration space, the Lagrangian of floating-based robots are invariant to translations and reorientations of their base [2]. By factoring out these transformations from the equations of motion, dynamic controllers and policies can be formulated or learned on lower-dimensional spaces [4], [5], [6], [7]. Morphological symmetries [8] arise from the interchangeability of replicated kinematic chains such as the arms of a humanoid robot or the legs of a quadruped. They were exploited for state estimation [8] and policy learning [9], yielding enhanced sample efficiency and stronger generalization compared to symmetry-unaware algorithms. Symmetries in configuration space were also shown to improve consistency and reduce sample complexity of motion planning algorithms [10]. In task space, symmetries typically capture equivalences in

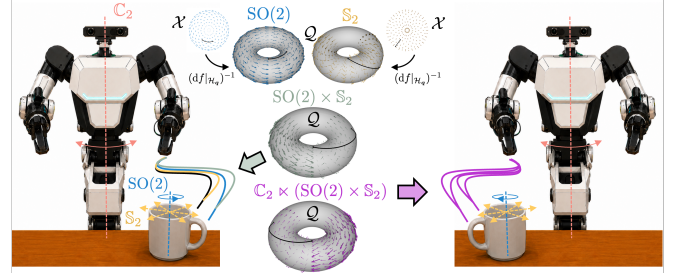


Fig. 1: Example of manipulation task with several symmetries. We lift the rotation and scaling symmetries from the task space $\mathcal{X}$ to the configuration space $\mathcal{Q}$, where we systematically compose them with the morphological symmetry. The learned equivariant policy allows the robot to pick the mug (—) while handling symmetric transformations via scaling (—), rotation (—), scaling and rotation (—), and their compositions with morphological reflection (—).

the specification of the tasks. Euclidean isometries, such as translations and rotations, have been widely exploited to learn equivariant grasping and manipulation policies that generalize across unseen object poses and workspace configurations [11], [12], [13], [14], [15]. Many robotics tasks also exhibit task-induced symmetries [16], where all states or actions achieving the same objective are considered equivalent.

In many manipulation tasks, robots exhibit several of the aforementioned symmetries simultaneously, as illustrated in Fig. 1. Yet, the aforementioned works consider them in isolation, thereby overlooking relevant inductive bias. For instance, a dual-arm policy encoding only rotational symmetry generalizes across rotated scenes but cannot execute the task upon a reflection of the workspace. Conversely, a policy encoding only morphological symmetries can exploit the interchangeability of limbs, but fails under rotations of the scene. Robust generalization across both variations therefore requires jointly encoding both symmetries. Compositions of symmetries have been explored by the machine learning community. Kim *et al.* [17] proposed to weakly enforce multiple symmetries through multiple regularizers in the objective function. In a similar line, Li *et al.* [18] proposed to learn dynamic models via latent flows that preserve several symmetries simultaneously. However, in both cases, the considered symmetries arise in a single space. In contrast, robotics symmetries naturally emerge in different spaces: Floating-base and morphological symmetries are defined in the robot configuration space, while task isometries and task-induced symmetries are expressed in task space. Therefore, these symmetries cannot be composed directly and must first be transferred in a common space.

In this paper, we propose *cross-space symmetry compositions*, a framework for learning robot policies that are

All authors are with the Department of Robotics, Perception and Learning, KTH Royal Institute of Technology. Emails: loizosh@kth.se, rpd@kth.se, jaquier@kth.se. This work was supported by the Wallenberg Artificial Intelligence, Autonomous Systems, and Software Program (WASP) funded by the Knut and Alice Wallenberg Foundation.

jointly equivariant to multiple symmetries arising across configuration and task spaces (see Section III for a review). Our approach builds on two key components: (1) The transfer of symmetries into either the configuration or the task space (Section IV); and (2) Their composition within that space (Section V). Taking a vector-field view on symmetries and leveraging the differential-geometric structure of forward kinematics, we propose a unified framework to both *descend* symmetries from configuration to task space and *lift* symmetries from task to configuration space. Specifically, we show that descending a configuration-space symmetry reduces to verifying the equivariance of the forward kinematics map, and lift task-space symmetries by identifying the aforementioned map as a *Riemannian submersion* [19]. Then, we characterize the conditions under which the transferred symmetries can then be systematically composed within a common space through direct or semi-direct products. We validate our approach via simulated and real-world experiments on a dual-arm manipulator, showing that jointly leveraging multiple symmetries leads to improved generalizability.

In summary, we contribute: (1) A unified review of the principal families of symmetries arising in robotics, spanning both configuration and task spaces; (2) A cross-space symmetry transfer framework to descend and lift symmetries between configuration and task spaces, together with feasibility conditions; (3) A framework for composing multiple symmetries within a common space, including a characterization of the necessary compatibility conditions.

II. PRELIMINARIES

This section reviews the background on differential geometry, groups theory, and Riemannian geometry necessary for cross-space symmetry transfer and composition.

A. Differential Geometry

Intuitively, a smooth manifold $\mathcal{M}$ of dimension n is a topological space that locally resembles the Euclidean space $\mathbb{R}^n$. Formally, there exists a neighborhood homeomorphic to an open subset of $\mathbb{R}^n$ around each point $\mathbf{p} \in \mathcal{M}$. The tangent space $\mathcal{T}_{\mathbf{p}}\mathcal{M}$ at every point $\mathbf{p} \in \mathcal{M}$ is an n -dimensional vector space composed of the first-order derivatives of curves on the manifold passing through $\mathbf{p}$. The Euclidean structure of tangent spaces enables the use of tools from calculus, including differentiation, integration, and vector fields. The tangent bundle $\mathcal{TM}$ is the disjoint union of all tangent spaces.

B. Groups, Actions, and Equivariance

Symmetries are naturally represented through the mathematical structure of *groups* and their associated *group actions*. A group $\mathbb{G}$ is a set equipped with an associative binary operation $\circ: \mathbb{G} \times \mathbb{G} \rightarrow \mathbb{G}$, an identity element $e \in \mathbb{G}$, and an inverse $g^{-1} \in \mathbb{G}$ for each element $g \in \mathbb{G}$ [20]. A group acts on a manifold $\mathcal{M}$ via its action Φ , which defines transformations parametrized by the group elements. We focus on the *left action*, which is an associative map $\Phi^{\mathcal{M}}: \mathbb{G} \times \mathcal{M} \rightarrow \mathcal{M}$ that respects the identity transformation $\Phi^{\mathcal{M}}(e, \mathbf{p}) = \mathbf{p}$, $\forall \mathbf{p} \in \mathcal{M}$. Intuitively, a map $h: \mathcal{M} \rightarrow \mathcal{N}$ across

two manifolds $\mathcal{M}, \mathcal{N}$ is $\mathbb{G}$ -equivariant when transforming the input before applying the map is equivalent to first applying the map and subsequently transforming the output. Mathematically, h is $\mathbb{G}$ -equivariant if

$$h(\Phi^{\mathcal{M}}(g, \mathbf{p})) = \Phi^{\mathcal{N}}(g, h(\mathbf{p})) \quad \forall g \in \mathbb{G} \mathbf{p} \in \mathcal{M}. \quad (1)$$

The *equivariance condition* (1) underpins equivariant learning models, where it is used to perform data augmentation [21], penalize symmetry violations via regularization [22], or enforce a symmetry directly in the network architecture [23].

Finite and Lie Groups. Robotic systems exhibit both *discrete* and *continuous* symmetries. Discrete symmetries such as morphological symmetries are described by *finite groups*, i.e., groups containing finitely-many elements. Continuous symmetries, such as translational and rotational symmetries, are described by *Lie groups*. A Lie group $\mathbb{G}$ is simultaneously a group and a smooth manifold such that the group operations are smooth. Its tangent space at the identity $\mathfrak{g} = \mathcal{T}_e\mathbb{G}$, known as the *Lie algebra*, provides an infinitesimal description of $\mathbb{G}$. The Lie group and its Lie algebra are related through the exponential map $\exp: \mathfrak{g} \rightarrow \mathbb{G}$. A Lie group action on $\mathcal{M}$ induces actions on its tangent spaces, transforming velocities via its differential $d\Phi_g^{\mathcal{M}}|_{\mathbf{p}}: \mathcal{T}_{\mathbf{p}}\mathcal{M} \rightarrow \mathcal{T}_{\Phi(g, \mathbf{p})}\mathcal{M}$ with $g \in \mathbb{G}$, $\mathbf{p} \in \mathcal{M}$. For instance, the special orthogonal group $\text{SO}(2)$ acting on Euclidean space rotates both positions and the associated velocities.

Infinitesimal description of group actions. Continuous symmetries can also be characterized from an infinitesimal perspective via vector fields on $\mathcal{M}$. In particular, each Lie algebra element $\xi \in \mathfrak{g}$ induces a vector field $X_{\xi}^{\mathcal{M}}: \mathcal{M} \rightarrow \mathcal{TM}$, known as its *infinitesimal generator*, given at $\mathbf{p} \in \mathcal{M}$ as

$$X_{\xi}^{\mathcal{M}}(\mathbf{p}) = \left. \frac{d}{dt} \right|_{t=0} \Phi^{\mathcal{M}}(\exp(t\xi), \mathbf{p}). \quad (2)$$

The flow generated by $X_{\xi}^{\mathcal{M}}$ correspond to applying the actions $\Phi^{\mathcal{M}}(\exp(t\xi), \mathbf{p})$. For instance, the action of the special orthogonal group $\text{SO}(2)$ on $\mathbb{R}^2$ induces rotational vector fields tangent to circles around the origin.

Lie bracket. Two smooth vector fields $X^{\mathcal{M}}, Y^{\mathcal{M}}$ on a manifold $\mathcal{M}$ can be combined into another vector field via their *Lie bracket*. In local coordinates, the Lie bracket is

$$[X^{\mathcal{M}}, Y^{\mathcal{M}}](\mathbf{p}) = dX^{\mathcal{M}}|_{\mathbf{p}}Y^{\mathcal{M}}(\mathbf{p}) - dY^{\mathcal{M}}|_{\mathbf{p}}X^{\mathcal{M}}(\mathbf{p}), \quad (3)$$

for $\mathbf{p} \in \mathcal{M}$. It measures the non-commutativity of the flows generated by the vector fields, i.e., they commute if and only if $[X^{\mathcal{M}}, Y^{\mathcal{M}}](\mathbf{p}) = 0, \forall \mathbf{p} \in \mathcal{M}$.

C. Riemannian Manifolds and Maps

A Riemannian manifold $(\mathcal{M}, m)$ is a smooth manifold $\mathcal{M}$ equipped with a smoothly-varying inner product called a Riemannian metric m and expressed in coordinates as $\langle \dot{\mathbf{p}}_1, \dot{\mathbf{p}}_2 \rangle_{\mathcal{M}} = \dot{\mathbf{p}}_1^{\top} \mathbf{M}(\mathbf{p}) \dot{\mathbf{p}}_2$ for $\dot{\mathbf{p}}_1, \dot{\mathbf{p}}_2 \in \mathcal{T}_{\mathbf{p}}\mathcal{M}$. A smooth map $h: \mathcal{M} \rightarrow \mathcal{N}$ between two Riemannian manifolds is a *smooth submersion* at $\mathbf{p} \in \mathcal{M}$ if its differential $dh|_{\mathbf{p}}: \mathcal{T}_{\mathbf{p}}\mathcal{M} \rightarrow \mathcal{T}_{h(\mathbf{p})}\mathcal{N}$ is surjective. A *Riemannian submersion* decomposes each tangent space into vertical and horizontal subspaces as

$\mathcal{T}_p\mathcal{M} = \mathcal{V}_p + \mathcal{H}_p$ [24]. The vertical subspace is the kernel $\mathcal{V}_p = \text{Ker}(\text{d}h)|_p = \{v \in \mathcal{T}_p\mathcal{M} : \text{d}h|_p(v) = 0\}$. The horizontal subspace $\mathcal{H}_p = \mathcal{V}_p^\perp$ is its orthogonal complement with respect to the metric m . The differential $\text{d}h|_p$ of a Riemannian submersion h restricts to a linear isometry from $\mathcal{H}_p$ onto $\mathcal{T}_{h(p)}\mathcal{N}$ for each $p \in \mathcal{M}$.

The robot configuration space $(\mathcal{Q}, m_{\mathcal{Q}})$ and task space $(\mathcal{X}, m_{\mathcal{X}})$ are Riemannian manifolds whose elements represent the joint configurations and end-effector poses, respectively. They are related through the forward kinematics map $f: \mathcal{Q} \rightarrow \mathcal{X}$. In coordinates, its differential $\text{d}f|_q: \mathcal{T}_q\mathcal{Q} \rightarrow \mathcal{T}_{f(q)}\mathcal{X}$ corresponds to the robot Jacobian $J(q)$. In this paper, we utilize that, under some conditions, the forward kinematics map of redundant robots is a Riemannian submersion [19] to lift symmetries from $\mathcal{X}$ to $\mathcal{Q}$.

III. A CATALOG OF ROBOTIC SYMMETRIES

We review three principal families of symmetries commonly encountered in robotics: morphological, rotational, and task-induced symmetries. We describe their associated group action acting on either the configuration or task space.

A. Morphological and Floating-based Symmetries

Morphological symmetries [8] capture the interchangeability of replicated kinematic chains with symmetric mass distributions, such as the arms of a humanoid robot or the legs of a quadruped. These symmetries arise from the robot's mechanical structure and induce equivariances in both the state space and dynamics equations. Morphological symmetries naturally act on the robot joints, i.e., on its configuration space $\mathcal{Q}$. Morphological symmetries of a rigid-bodied robot with fixed morphology (i.e., with finitely-many interchangeable kinematic chains) are characterized as a finite group $\mathbb{G}_M$ acting on $\mathcal{Q}$ through the group action

$$\Phi_M^{\mathcal{Q}}: \mathbb{G}_M \times \mathcal{Q} \rightarrow \mathcal{Q}, \quad \Phi_M^{\mathcal{Q}}(g_M, q) = \rho_{\mathcal{Q}}(g_M)q, \quad (4)$$

where the matrix $\rho_{\mathcal{Q}}(g_M)$ is built from correspondences between interchangeable kinematic chains and defines a non-trivial transformation of the joint coordinates. For robots whose symmetric chains are composed of 1-dimensional revolute and prismatic joints, $\rho_{\mathcal{Q}}$ is a signed permutation matrix. It exchanges each joint coordinate with its morphologically-symmetric counterpart, applying a sign inversion whenever paired joints have opposite coordinate conventions. For example, it swaps the joint coordinates of the two arms of a humanoid robot to mimic a reflection across the sagittal plane.

For floating-based robots, morphological symmetries are typically paired with floating-based symmetries [2], leading to the composed group action

$$\Phi_M^{\mathcal{Q}}(g_M, q) = \begin{pmatrix} X_{g_F} X X_{g_F}^{-1} \\ \rho_{\mathcal{Q}}(g_M)q \end{pmatrix}, \quad (5)$$

where $X \in \text{SE}(3)$ is the base pose represented as an element of the special Euclidean group $\text{SE}(3)$ and $X_{g_F} \in \text{SE}(3)$ represents the rigid-body transformation associated with the floating-base symmetry. The action (5) therefore jointly transforms the base pose through conjugation in $\text{SE}(3)$ while simultaneously permuting the joint coordinates according to the robot morphological symmetry.

B. Rotational Symmetries

Many robotic manipulation tasks exhibit *Euclidean isometries*, i.e., are equivariant under rigid-body transformations such as translations and rotations in task space. While translational equivariance is generally easier to implement, for instance through standard convolutional architectures [11], rotational equivariance is typically more challenging to enforce. Consequently, much of the literature [11], [13], [15] focuses specifically on rotational equivariance through the actions of the *special orthogonal group* $\mathbb{G}_R = \text{SO}(n)$, $n \in \{2, 3\}$ on the robot task space $\mathcal{X}$. For a task space $\mathcal{X} \subseteq \mathbb{R}^n$, the corresponding group action is

$$\Phi_R^{\mathcal{X}}: \mathbb{G}_R \times \mathcal{X} \rightarrow \mathcal{X}, \quad \Phi_R^{\mathcal{X}}(g_R, x) = R(g_R)x, \quad (6)$$

where $R(g_R) \in \text{SO}(n)$ is the rotation matrix associated with the element $g_R \in \mathbb{G}_R$. Since $\text{SO}(n)$ is a Lie group, its action admits an infinitesimal form through its Lie algebra $\mathfrak{so}(n) = \{\Omega \in \mathbb{R}^{n \times n} | \Omega^T = -\Omega\}$, whose elements represent infinitesimal rotations. For every $\Omega \in \mathfrak{so}(n)$, the associated infinitesimal generator is the vector field $X_{\Omega}^{\mathcal{X}}(x) = \Omega x$.

C. Task-induced Symmetries

Task-induced symmetries [16] describe transformations of $x \in \mathcal{X}$ that preserve a given cost function $c: \mathcal{X} \rightarrow \mathbb{R}$. Two task-space states $x_1, x_2 \in \mathcal{X}$ are considered symmetric if $c(x_1) = c(x_2)$. Therefore, task-induced symmetries describe transformations within equivalence classes of states that leave the task cost c unchanged.

Unlike morphological and rotational symmetries, task-induced symmetries are not specified a priori through the action of a known group. Instead, they emerge implicitly from the structure of the task itself through the invariance of c . Following [16], we focus on continuous task-induced symmetries. Such symmetries are characterized locally by the infinitesimal directions in $\mathcal{T}_x\mathcal{X}$ along which c remains constant. These directions form the basis of the space of motions in $\mathcal{X}$ along which c is invariant. Each basis component corresponds to a smooth vector field $X^{\mathcal{X}}: \mathcal{X} \rightarrow \mathcal{T}\mathcal{X}$ whose flow preserves c . If the vector fields are complete (i.e., their flow exists for all times) and closed under the Lie bracket, they define the infinitesimal generators $X_{\xi}^{\mathcal{X}}$ of a Lie group $\mathbb{G}_T$. Their flows then define the actions of $\mathbb{G}_T$ on $\mathcal{X}$. Specifically, the group action $\Phi_T^{\mathcal{X}}: \mathbb{G}_T \times \mathcal{X} \rightarrow \mathcal{X}$ is constructed by integrating along $X_{\xi}^{\mathcal{X}}$ as

$$\begin{aligned} \Phi_T^{\mathcal{X}}(g_T, x) &= \Phi_T^{\mathcal{X}}(\exp(t\xi), x) = \gamma(t, x), \\ \text{with } \frac{d\gamma}{dt} &= X_{\xi}^{\mathcal{X}}(\gamma(t, x)), \quad \gamma(0, x) = x. \end{aligned} \quad (7)$$

By construction, the action (7) preserves the cost c , i.e., $c(\Phi_T^{\mathcal{X}}(g_T, x)) = c(x)$, $\forall g \in \mathbb{G}_T, x \in \mathcal{X}$.

IV. CROSS-SPACE SYMMETRY TRANSFER

The families of symmetries introduced in Section III emerge jointly in various manipulation tasks, see, e.g., Fig. 1. However, they act on different spaces with different group actions. In this section, we propose to transfer symmetries across configuration and task spaces in order to express

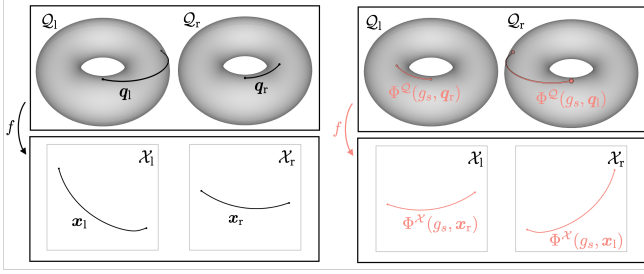


Fig. 2: Descended symmetry. A symmetry in configuration space (top-left to top-right) induces a corresponding symmetry in task space (bottom-left to bottom-right) via the forward kinematics map.

them within a unified representation space, where they can subsequently be composed. Transferring a symmetry requires preserving the effect of its action on the original space onto the target one. Next, we describe the transfer of symmetries from $\mathcal{Q}$ to $\mathcal{X}$ and vice versa via the forward kinematics map $f: \mathcal{Q} \rightarrow \mathcal{X}$ for redundant robots, i.e., $\dim(\mathcal{Q}) > \dim(\mathcal{X})$.

A. Descending Symmetries

We consider the action $\Phi^\mathcal{Q}: \mathbb{G} \times \mathcal{Q} \rightarrow \mathcal{Q}$ of a group $\mathbb{G}$ on the configuration space $\mathcal{Q}$. This action relates each configuration $q \in \mathcal{Q}$ to its symmetric counterparts $q' = \Phi^\mathcal{Q}(g, q)$, $\forall g \in \mathbb{G}$. Here, we study the condition under which this symmetry induces a corresponding symmetry in task space, i.e., an equivalent relation between the associated task-space states $x = f(q)$ and $x' = f(\Phi^\mathcal{Q}(g, q))$, $\forall g \in \mathbb{G}$. When such a relation exists, we say that the symmetry *descends* from configuration to task space, as illustrated in Fig. 2.

Formally, descending a symmetry requires constructing a group action $\Phi^\mathcal{X}: \mathbb{G} \times \mathcal{X} \rightarrow \mathcal{X}$ such that

$$x' = f(q') = f(\Phi^\mathcal{Q}(g, q)) = \Phi^\mathcal{X}(g, f(q)). \quad (8)$$

holds $\forall q \in \mathcal{Q}$, $g \in \mathbb{G}$. In other words, a configuration-space symmetry descends to the task space if the forward kinematics map is $\mathbb{G}$ -equivariant, i.e., fullfills the equivariance condition (1). Consequently, the task-space action $\Phi^\mathcal{X}$ is uniquely determined by $\Phi^\mathcal{Q}$ and f through (8) as

$$\Phi^\mathcal{X}(g, x) = f(\Phi^\mathcal{Q}(g, q)). \quad (9)$$

For example, the forward kinematics map f is known to be $\mathbb{G}_M$ -equivariant, with $\mathbb{G}_M$ denoting the morphological symmetry group [8]. Therefore, morphological symmetries descend naturally and the descended group action is

$$\Phi_M^\mathcal{X}: \mathbb{G}_M \times \mathcal{X} \rightarrow \mathcal{X}, \quad \Phi_M^\mathcal{X}(g_M, x) = \rho_\mathcal{X}(g_M)x, \quad (10)$$

where $\rho_\mathcal{X}(g_M)$ is the permutation of the end-effector poses.

Example IV.1. We consider the dual-arm humanoid robot RB-YI [25] (see Fig. 1) and its configuration space defined as $\mathcal{Q} = \mathcal{Q}_l \times \mathcal{Q}_r$, where $\mathcal{Q}_l, \mathcal{Q}_r$ are the joint spaces of the 7-DoF left and right arm, respectively. Due to the bilateral symmetry of its two arms, the robot admits the morphological symmetry described by the cyclic group $\mathbb{G}_M = \mathbb{C}_2 = \{e, g_s\}$. The action of the non-trivial element

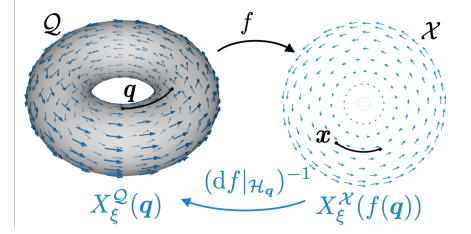


Fig. 3: Lifted symmetry. The infinitesimal generators of $\mathbb{G}$ in task space are horizontally lifted to configuration space, leading to horizontally-lifted group actions in $\mathcal{Q}$.

g_s on $\mathcal{Q}$ permutes the joints $q_l \in \mathcal{Q}_l$ and $q_r \in \mathcal{Q}_r$ as

$$\Phi_M^\mathcal{Q}(g_s, q) = \begin{pmatrix} \mathbf{0} & \mathbf{P} \\ \mathbf{P} & \mathbf{0} \end{pmatrix} \begin{pmatrix} q_l \\ q_r \end{pmatrix} = \begin{pmatrix} \mathbf{P}q_r \\ \mathbf{P}q_l \end{pmatrix}, \quad (11)$$

where $\mathbf{P} = \text{diag}(1, -1, -1, 1, -1, 1, -1)$ accounts for differences in the coordinate conventions of symmetric joints. We descend this symmetry to the task space $\mathcal{X} = \mathbb{R}^3 \times \mathbb{R}^3$ composed of the two end-effector positions. The descended group action induced through the forward kinematics is

$$\Phi_M^\mathcal{X}(g_s, x) = \begin{pmatrix} \mathbf{0} & \mathbf{P}_\mathcal{X} \\ \mathbf{P}_\mathcal{X} & \mathbf{0} \end{pmatrix} \begin{pmatrix} x_l \\ x_r \end{pmatrix} = \begin{pmatrix} \mathbf{P}_\mathcal{X}x_r \\ \mathbf{P}_\mathcal{X}x_l \end{pmatrix}, \quad (12)$$

with $\mathbf{P}_\mathcal{X} = \text{diag}(1, -1, 1)$ such that $f(\mathbf{P}q_{l,r}) = \mathbf{P}_\mathcal{X}x_{l,r}$. Intuitively, the descended action reflects the positions of two end-effectors across the robot sagittal plane, so that the task-space symmetry mirrors the bilateral symmetry originally defined in configuration space.

B. Lifting Symmetries

After characterizing descending symmetries, we proceed to study their *lifting*, i.e., the transfer of task-space symmetries to $\mathcal{Q}$. We consider a continuous symmetry described by the action $\Phi^\mathcal{X}: \mathbb{G} \times \mathcal{X} \rightarrow \mathcal{X}$ of a Lie group $\mathbb{G}$ on the task space $\mathcal{X}$. This action relates each task-space state $x \in \mathcal{X}$ to its symmetric counterparts $x' = \Phi^\mathcal{X}(g, x)$, $\forall g \in \mathbb{G}$. Following the same reasoning as in Section IV-A, lifting a symmetry would require constructing a group action $\Phi^\mathcal{Q}: \mathbb{G} \times \mathcal{Q} \rightarrow \mathcal{Q}$ such that the inverse of the forward kinematics map is $\mathbb{G}$ -equivariant. However, for redundant robots, this problem is generally ill-posed due to the non-injectivity of the forward kinematics map, leading to the non-uniqueness of its inverse. As multiple joint configurations correspond to the same task-space state, a task-space symmetry does not uniquely determine a corresponding transformation in configuration space. Hence, directly constructing the lifted group action $\Phi^\mathcal{Q}$ through inverse kinematics becomes an under-determined problem. Next, we resolve this ambiguity by exploiting the additional geometric structure of the forward kinematics map.

Forward kinematics and Riemannian submersion. In the following, we assume that: **(A1)** Our robots are composed of open kinematic chains of 1-DoF joints, implying that the configuration space $\mathcal{Q}$ is an Abelian group; **(A2)** The configuration space is endowed with the kinetic-energy metric and the resulting manifold is flat, i.e., there exists an isometry $\varphi: (\mathcal{Q}, M(q)) \rightarrow (\tilde{\mathcal{Q}}, I)$; **(A3)** The task space is (a subset of) $\text{SE}(3)$ endowed with the double geodesic metric,

i.e., the product of the bi-invariant metric of $SO(3)$ and the Euclidean metric of $\mathbb{R}^3$; **(A4)** The robot operates away from kinematic singularities, i.e., $\mathbf{J}(\mathbf{q})$ has full row rank. Note these assumptions hold for a broad range of rigid-bodied robots and commonly-used task-space representations. Under **(A1)**-**(A4)**, the forward kinematics map f is a *Riemannian submersion* [19, Prop. II.1]. As explained next, this geometric structure provides a canonical way to lift task-space tangent vectors to configuration-space tangent vectors, which we subsequently leverage to lift symmetries.

Horizontal lift. As a Riemannian submersion, the forward kinematics map decomposes each tangent space $\mathcal{T}_q\mathcal{Q}$ into vertical and horizontal subspaces (see Section II-C). The vertical subspace $\mathcal{V}_q = \{\dot{\mathbf{q}} | \dot{\mathbf{x}} = \mathbf{J}(\mathbf{q})\dot{\mathbf{q}} = \mathbf{0}\}$ coincides with the nullspace of the Jacobian and contains the joint velocities that leave the end-effector state unchanged. The horizontal subspace is $\mathcal{H}_q = (\mathcal{V}_q)^\perp$. Since f is a Riemannian submersion, the restricted differential

$$df|_{\mathcal{H}_q} : \mathcal{H}_q \rightarrow \mathcal{T}_{f(q)}\mathcal{X}, \quad (13)$$

is a linear isometry, i.e., for horizontal vectors $\dot{\mathbf{q}}_1, \dot{\mathbf{q}}_2 \in \mathcal{H}_q$,

$$\langle \dot{\mathbf{q}}_1, \dot{\mathbf{q}}_2 \rangle_{\mathcal{Q}} = \langle df|_{\mathcal{H}_q}(\dot{\mathbf{q}}_1), df|_{\mathcal{H}_q}(\dot{\mathbf{q}}_2) \rangle_{\mathcal{X}}. \quad (14)$$

Therefore, for each $\dot{\mathbf{x}} \in \mathcal{T}_{f(q)}\mathcal{X}$, there is a unique $\dot{\mathbf{q}}_{\mathcal{H}_q} \in \mathcal{H}_q$, called the *horizontal lift* of $\dot{\mathbf{x}}$ at $\mathbf{q}$, satisfying

$$df|_{\mathcal{H}_q}(\dot{\mathbf{q}}_{\mathcal{H}_q}) = \dot{\mathbf{x}}. \quad (15)$$

In coordinates, the horizontal lift is given by [19, Thm. III.2]

$$\dot{\mathbf{q}}_{\mathcal{H}_q} = \mathbf{J}(\mathbf{q})^\dagger \dot{\mathbf{x}}, \quad (16)$$

where $\mathbf{J}(\mathbf{q})^\dagger$ is the Moore-Penrose pseudoinverse of the Jacobian. Geometrically, the horizontal lift is the unique minimum-norm joint-space velocity, under the chosen Riemannian metric, that realizes the task-space velocity $\dot{\mathbf{x}}$.

Lifting the vector fields. We propose to take a vector-field perspective on task-space symmetries to lift them horizontally onto the configuration space. As explained in Section II-B, the group actions of continuous symmetries can be characterized via their infinitesimal generators $X_\xi^\mathcal{X}(\mathbf{x})$ (2). At a configuration $\mathbf{q}$, the generator specifies a tangent vector $X_\xi^\mathcal{X}(f(\mathbf{q})) \in \mathcal{T}_{f(q)}\mathcal{X}$ describing the infinitesimal direction of the symmetric action. Using (15)-(16), we obtain the unique horizontally-lifted infinitesimal generator

$$X_\xi^\mathcal{Q}(\mathbf{q}) = (df|_{\mathcal{H}_q})^{-1}(X_\xi^\mathcal{X}(f(\mathbf{q}))) \in \mathcal{H}_q, \quad (17)$$

given, in coordinates, by

$$X_\xi^\mathcal{Q}(\mathbf{q}) = \mathbf{J}(\mathbf{q})^\dagger X_\xi^\mathcal{X}(f(\mathbf{q})). \quad (18)$$

Importantly, we recover the task-space infinitesimal generator from the horizontally-lifted ones by construction, i.e.,

$$df(X_\xi^\mathcal{Q}(\mathbf{q})) = X_\xi^\mathcal{X}(f(\mathbf{q})). \quad (19)$$

so that $X_\xi^\mathcal{Q}$ and $X_\xi^\mathcal{X}$ are called *f*-related vector fields [24, Chap. 8]. Fig. 3 illustrates the lifting of a vector field.

Lifting the group actions. Next, we aim to construct the lifted group action $\Phi^\mathcal{Q}$ from $X_\xi^\mathcal{Q}$. While the horizontal

lift defines a configuration-space vector field, it does not guarantee the existence of a corresponding global group action. To obtain a valid lifted symmetry, we must ensure that moving along the flow of $X_\xi^\mathcal{Q}$ yields the same task-space motion as flowing along $X_\xi^\mathcal{X}$. This requires the flows (1) to be complete, i.e., exist for all time, and (2) to preserve the equivariance (19) of their generating vector fields. The former is always satisfied for smooth vector fields on compact manifolds such as the n -dimensional torus configuration space of unconstrained robot chains. For the latter, we denote the flows generated by $X_\xi^\mathcal{X}$ and $X_\xi^\mathcal{Q}$ for each $\xi \in \mathfrak{g}$ as

$$\frac{d}{dt}\gamma_\xi^\mathcal{X}(t, \mathbf{x}) = X_\xi^\mathcal{X}(\gamma_\xi^\mathcal{X}(t, \mathbf{x})), \quad \gamma_\xi^\mathcal{X}(0, \mathbf{x}) = \mathbf{x}, \quad (20)$$

$$\frac{d}{dt}\gamma_\xi^\mathcal{Q}(t, \mathbf{q}) = X_\xi^\mathcal{Q}(\gamma_\xi^\mathcal{Q}(t, \mathbf{q})), \quad \gamma_\xi^\mathcal{Q}(0, \mathbf{q}) = \mathbf{q}, \quad (21)$$

respectively. By the naturality of flows [24, Prop. 9.13], the equivariance of *f*-related vector fields extends to their flows,

$$f(\gamma_\xi^\mathcal{Q}(t, \mathbf{q})) = \gamma_\xi^\mathcal{X}(t, f(\mathbf{q})), \quad (22)$$

and thus to their group actions $\Phi_\xi^\mathcal{Q}$ and $\Phi_\xi^\mathcal{X}$. This allows us to define the group action $\Phi^\mathcal{Q}(g, \mathbf{q}) = \gamma_\xi^\mathcal{Q}(t, \mathbf{q})$ as the unique horizontally-lifted group action of $\mathbb{G}$ on $\mathcal{Q}$.

Example IV.2. We consider a n -DoF planar robot whose task space $\mathcal{X} = \mathbb{R}^2$ represents the end-effector position (see Fig. 4) and a rotational symmetry described by the group action $\Phi_R^\mathcal{X}(g_R, \mathbf{x}) = \mathbf{R}(g_R)\mathbf{x}$ of $\mathbb{G}_R = SO(2)$ on $\mathcal{X}$. From Section III-B, the infinitesimal generators of $SO(2)$ are

$$X_\Omega^\mathcal{X}(\mathbf{x}) = \Omega\mathbf{x} = \begin{pmatrix} -x_2 \\ x_1 \end{pmatrix}. \quad (23)$$

We obtain the configuration-space infinitesimal generator $X_\Omega^\mathcal{Q}(\mathbf{q})$ from (18) as

$$X_\Omega^\mathcal{Q}(\mathbf{q}) = \mathbf{J}^\dagger(\mathbf{q})X_\Omega^\mathcal{X}(f(\mathbf{q})). \quad (24)$$

V. SYMMETRY COMPOSITION

In this section, we consider robot manipulation tasks exhibiting several symmetries, originating either in the configuration space $\mathcal{Q}$ or the task space $\mathcal{X}$. All symmetries are assumed to have been transferred to $\mathcal{Q}$ or $\mathcal{X}$ using the transfer framework from Section IV. Our goal is to learn a jointly-equivariant policy with respect to all symmetries at hand. Formally, the policy must satisfy the equivariance condition (1) simultaneously for a set of group actions $[\Phi_1, \dots, \Phi_M]$. Next, we study the compatibility conditions under which symmetries can be composed, and characterize the resulting compositions based on their actions.

A. Direct Product

Two groups $\mathbb{G}_1, \mathbb{G}_2$ can be composed into a product group $\mathbb{G} = \mathbb{G}_1 \times \mathbb{G}_2 = \{g = (g_1, g_2) | g_1 \in \mathbb{G}_1, g_2 \in \mathbb{G}_2\}$ via the direct product $\times$ if their actions Φ_1, Φ_2 commute, i.e.,

$$\Phi_1(g_1, \Phi_2(g_2, \mathbf{q})) = \Phi_2(g_2, \Phi_1(g_1, \mathbf{q})), \quad (25)$$

$\forall g_1 \in \mathbb{G}_1, g_2 \in \mathbb{G}_2, \mathbf{q} \in \mathcal{M}$. Intuitively, the resulting transformation does not depend on the order in which the

two symmetry actions are applied. For Lie groups, commutativity can be equivalently tested using their infinitesimal generators, i.e., the actions commute if

$$[X_{\xi}^{\mathcal{M}}, X_{\zeta}^{\mathcal{M}}] = 0, \quad \forall \xi \in \mathfrak{g}_1, \zeta \in \mathfrak{g}_2. \quad (26)$$

The composed group action Φ is given as

$$\Phi(g, x) = \Phi_1(g_1, \Phi_2(g_2, x)) = \Phi_2(g_2, \Phi_1(g_1, x)). \quad (27)$$

Example V.1. We consider the groups of planar rotations $\mathbb{G}_1 = SO(2)$ and uniform scaling $\mathbb{G}_2 = \mathbb{S}(2)$. Their group actions are $\Phi_1^{\mathcal{X}} = \mathbf{R}(g_1)x$ and $\Phi_2^{\mathcal{X}} = \lambda \mathbf{I}x$ where λ is a scaling factor. The corresponding infinitesimal generators are

$$X_1^{\mathcal{X}}(x) = \begin{pmatrix} -x_2 \\ x_1 \end{pmatrix}, \quad \text{and} \quad X_2^{\mathcal{X}}(x) = \begin{pmatrix} x_1 \\ x_2 \end{pmatrix}. \quad (28)$$

The first generator induces infinitesimal rotations around the origin, while the second generates radial scaling motions. Their compatibility can be verified by computing their Lie bracket,

$$\begin{aligned} [X_1^{\mathcal{X}}, X_2^{\mathcal{X}}](x) &= dX_1^{\mathcal{X}}|_x X_2^{\mathcal{X}}(x) - dX_2^{\mathcal{X}}|_x X_1^{\mathcal{X}}(x) \\ &= \begin{pmatrix} -x_2 \\ x_1 \end{pmatrix} - \begin{pmatrix} -x_2 \\ x_1 \end{pmatrix} = 0. \end{aligned} \quad (29)$$

Since the infinitesimal generators commute, the group actions commute. Therefore, we can compose the two groups through the direct product $\mathbb{G} = SO(2) \times \mathbb{S}(2)$ with combined group action

$$\Phi^{\mathcal{X}}(g, x) = \mathbf{R}(g_1)(\lambda \mathbf{I}x) = (\lambda \mathbf{I})\mathbf{R}(g_1)x. \quad (30)$$

B. Semi-Direct Product

When two group actions do not commute, applying one action and then the other leads to a different transformation than applying them in the opposite order. In this case, the two groups can still be combined if the group $\mathbb{G}_1$ acts on $\mathbb{G}_2$ via automorphisms. This action is described by a homomorphism

$$\rho : \mathbb{G}_1 \rightarrow \text{Aut}(\mathbb{G}_2), \quad (31)$$

where $\text{Aut}(\mathbb{G}_2)$ is the automorphism group of $\mathbb{G}_2$, i.e., the group of bijections from $\mathbb{G}_2$ to itself that preserve the group operation. This implies that each element $g_1 \in \mathbb{G}_1$ defines a structure-preserving transformation of $\mathbb{G}_2$. Intuitively, applying an action from $\mathbb{G}_1$ modifies the action from $\mathbb{G}_2$.

Under this compatibility structure, the groups $\mathbb{G}_1, \mathbb{G}_2$ can be composed via the semi-direct product $\mathbb{G} = \mathbb{G}_1 \ltimes \mathbb{G}_2$ [20], yielding the composed action

$$\Phi(g, q) = \Phi_1(g_1, \Phi_2(\rho(g_1)(g_2), q)). \quad (32)$$

Unlike the direct-product case, the second action is explicitly transformed by the first through ρ , reflecting the non-commutativity of the two actions.

Example V.2. We consider the reflectional $\mathbb{G}_1 = \mathbb{C}_2$ and rotational $\mathbb{G}_2 = SO(2)$ symmetries acting on $\mathcal{X} = \mathbb{R}^2$ via

$$\begin{aligned} \Phi_M^{\mathcal{X}}(g_1, x) &= \rho(g_1)x = \begin{pmatrix} 1 & 0 \\ 0 & -1 \end{pmatrix} \begin{pmatrix} x_1 \\ x_2 \end{pmatrix}, \\ \Phi_R^{\mathcal{X}}(g_2, x) &= \mathbf{R}(g_2)x = \begin{pmatrix} \cos g_2 & -\sin g_2 \\ \sin g_2 & \cos g_2 \end{pmatrix} \begin{pmatrix} x_1 \\ x_2 \end{pmatrix}. \end{aligned} \quad (33)$$

The non-trivial element of $\mathbb{C}_2$ acts on the orthogonal group through the automorphism

$$\varphi_{g_s}(\mathbf{R}(g_2)) = \rho(g_s)\mathbf{R}(g_2)\rho(g_s)^{-1} = \mathbf{R}(-g_2). \quad (34)$$

Geometrically, the reflection reverses the sense of rotation: A counterclockwise rotation in the original frame becomes a clockwise rotation in the reflected frame, and conversely. The two symmetry groups are composed via the semi-direct product as $\mathbb{G} = \mathbb{C}_2 \ltimes SO(2)$, which corresponds to the orthogonal group $O(2)$. The composed action is

$$\Phi^{\mathcal{X}}((g_1, g_2), x) = \rho(g_1)\mathbf{R}(g_2)x. \quad (35)$$

VI. EXPERIMENTS

We experimentally validate the proposed cross-symmetry compositions on a letter-writing task with a simulated dual-arm planar robot, and on two real-world experiments on the dual-arm humanoid robot RB-Y1.

A. Letter-drawing Task with a Simulated Planar Robot

We consider a planar dual-arm robot with two 4-DoF arms with configuration space $\mathcal{Q} = \mathcal{Q}_l \times \mathcal{Q}_r = \mathbb{T}^4 \times \mathbb{T}^4$ and task space $\mathcal{X} = \mathcal{X}_l \times \mathcal{X}_r = \mathbb{R}^2 \times \mathbb{R}^2$. The robot is tasked to simultaneously trace the letters C and N with its left and right end-effectors. Our objective is to learn a policy capable of drawing these letters and symmetric variations thereof. We consider three symmetries: (1) The bilateral morphological symmetry of the arms, i.e., the cyclic-two group $\mathbb{G}_M^{\mathcal{Q}} = \mathbb{C}_2$ acting on $\mathcal{Q}$; (2) A rotational symmetry of $\mathbb{G}_R^{\mathcal{X}} = SO(2)$ acting on the letters in $\mathcal{X}$; and (3) A task-induced scaling symmetry $\mathbb{G}_S^{\mathcal{X}} = \mathbb{S}_2$ acting on the letters in $\mathcal{X}$.

We train a policy $\pi : \mathcal{Q} \times \mathcal{S} \rightarrow \mathcal{T}\mathcal{Q}$ that returns joint-space velocities $\dot{q} \in \mathcal{T}_q\mathcal{Q}$ based on the configuration $q \in \mathcal{Q}$. We condition the network on a variable $s \in \mathcal{S}$ that specifies the symmetric variant of the task to execute. Each $s = (\theta, \lambda, \sigma)$ is composed of a rotation angle $\theta \in [-\pi, \pi]$, a scaling factor $\lambda \in \mathbb{R}_{>0}$, and reflection index $\sigma \in \{1, -1\}$. The network is trained via imitation learning as in [26] using 5 demonstrations.

We incorporate the symmetries into the policy through data augmentation. The joint configurations and joint velocities of each demonstration are transformed via an action $\Phi^{\mathcal{Q}}(g, q)$ and its differential $d\Phi_g^{\mathcal{Q}}|_q$, respectively. Following Sections IV and V, all symmetries are transferred to and composed in $\mathcal{Q}$. We generate the augmented dataset using combinations of a finite subset of group elements per symmetry. For the rotational symmetry, we discretize $SO(2)$ using rotations $\mathbf{R}(\theta)$ with angular increment $\Delta\theta$, such that $\theta = k\Delta\theta \in [-\pi, \pi]$ with $k \in \mathbb{Z}$. Similarly, for $\mathbb{S}_2$, we use a predefined finite set of scaling factors $\lambda \in \mathbb{R}_{>0}$. We use both elements $\{e, g_s\} \in \mathbb{C}_2$ of the morphological symmetry group.

Evaluation. We evaluate the symmetry composition by considering four policies: (1) π , a base policy without symmetry augmentation; (2) $\pi_{\mathbb{G}_R}$, encoding only rotational symmetry; (3) $\pi_{\mathbb{G}_{RT}}$, encoding rotational and task-induced symmetries; and (4) $\pi_{\mathbb{G}_{MRT}}$, encoding the full composition of morphological, rotational, and scaling symmetries.

TABLE I: RMSE of trained policies on test datasets augmented with an increasing number of different symmetric transformations.

Policy	Test datasets			
	Original	$\mathbb{G}_R$	$\mathbb{G}_{RT}$	$\mathbb{G}_{MRT}$
π	0.203 ± 0.046	3.841 ± 5.397	3.008 ± 4.778	2.804 ± 4.562
$\pi_{\mathbb{G}_R}$	0.116 ± 0.006	0.134 ± 0.011	3.563 ± 9.660	3.978 ± 10.921
$\pi_{\mathbb{G}_{RT}}$	0.127 ± 0.012	0.137 ± 0.013	0.094 ± 0.016	3.635 ± 15.729
$\pi_{\mathbb{G}_{MRT}}$	0.184 ± 0.034	0.172 ± 0.041	0.11 ± 0.020	0.112 ± 0.018

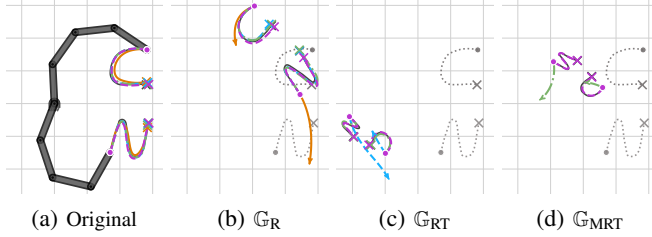


Fig. 4: Policies π (—), $\pi_{\mathbb{G}_R}$ (—), $\pi_{\mathbb{G}_{RT}}$ (—), $\pi_{\mathbb{G}_{MRT}}$ (—) evaluated on test trajectories (—) obtained as symmetric transformations of the demonstrations (—). Trajectories start and end are depicted as $\cdot$ and $\times$. Diverging trajectories are truncated and indicated by $\rightarrow$ and are excluded from the visualization of the next composition.

Fig. 4 depicts trajectories generated by the learned policies under different symmetric transformations. As expected, π only reproduces the original demonstrations and fails to generalize to symmetric variations. The rotationally-equivariant policy π_R generalizes to rotated letters, but fails under scaling and morphological reflections. Incorporating the task-induced symmetry in π_{RT} enables generalization to (jointly) rotated and scaled trajectories. Finally, the fully-symmetric policy π_{MRT} generalizes consistently across all considered transformations, demonstrating the benefit of jointly encoding multiple symmetries. Table I reports the RMSE between the predicted and nominal trajectories starting from identical initial conditions, where nominal trajectories refer to both the original demonstrations and their symmetric transformations. We observe that incorporating the relevant symmetries consistently improves performance across all settings. In particular, whenever a policy lacks a symmetry present in the evaluation data, its prediction error increases significantly. The policy $\pi_{\mathbb{G}_{MRT}}$ performs well across all datasets, highlighting the effectiveness of cross-space symmetry compositions.

Impact of data augmentation. Next, we study the effect of augmentation resolution on policy generalization. We train several policies $\pi_{\mathbb{G}_R}$ in $\mathcal{Q}$ using different discretization steps for the $SO(2)$ group actions in $\mathcal{X}$. Fig. 5 reports the task-space RMSE between predicted and nominal trajectories as a function of the angle θ . As expected, denser augmentation consistently improves performance across all rotations. In contrast, policies trained with coarser augmentation also exhibit larger performance variations, with errors increasing as the queried rotation moves farther away from the nearest augmented training sample. Fig. 6 shows that, even under relatively coarse augmentation in $\mathcal{X}$, the learned policies still produce trajectories in $\mathcal{Q}$ that mostly preserve the intended letter shapes across the whole range of rotations.

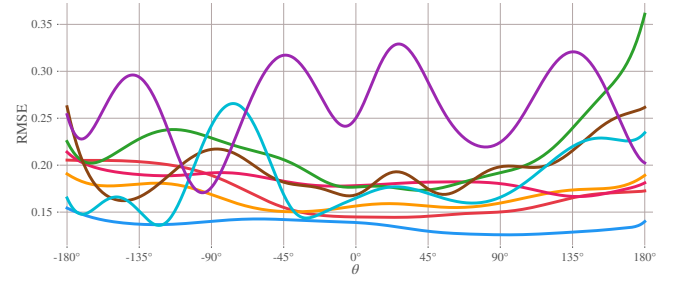


Fig. 5: RMSE of policies $\pi_{\mathbb{G}_R}$ trained with varying augmentation intervals (5° (—), 10° (—), 15° (—), 30° (—), 45° (—), 60° (—), 75° (—), 90° (—)) and evaluated on θ -rotated letters.

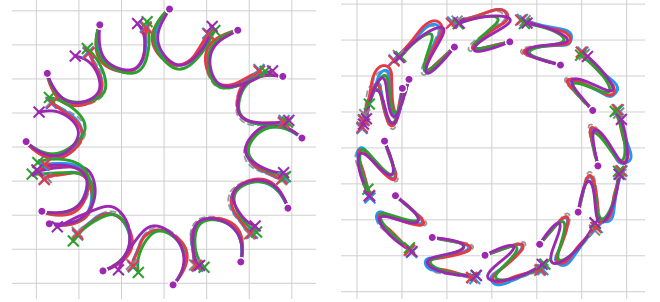


Fig. 6: Policies $\pi_{\mathbb{G}_R}$ trained with augmentation intervals of 5° (—), 10° (—), 45° (—), 90° (—) evaluated on test trajectories (—) at 30° intervals. Trajectories start and end are depicted as $\cdot$ and $\times$.

B. Real-Robot Experiments

Next, we further validate the proposed cross-space symmetry compositions through two real-robot experiments using the dual-arm humanoid robot RB-Y1. Similar to the simulated experiments, we train joint-space symmetry-conditioned policies $\pi: \mathcal{Q} \times \mathcal{S} \rightarrow \mathcal{T}\mathcal{Q}$.

Letter-drawing task. The first experiment extends the dual-arm letter-drawing task to the real robot. In this setting, the policy is trained on demonstrations augmented with the full composed symmetry group $\mathbb{G}_{MRT}$, enabling simultaneous rotational, scaling, and morphological equivariance across the two 7-DoF arms of the RB-Y1. Fig. 7 shows executions of the learned policy generated under different symmetry-conditioning values s . We observe that the learned policy successfully generalizes across all considered symmetry transformations, allowing the robot to trace rotated and scaled letters using either arm.

Pan-grasping task. The second experiment considers a pan-grasping task, where the robot must grasp the handle of a rotated pan using either its left or its right arm. We collected 2 demonstrations with the right arm at a nominal pan orientation ($\theta = 0$). To enable generalization across pan rotations and arms interchangeability, the dataset is augmented using rotational symmetries represented via the group $\mathbb{G}_R^x = SO(2)$ acting on $\mathcal{X}$ and the bilateral morphological symmetries using the group $\mathbb{G}_M^o = \mathbb{C}_2$ acting on $\mathcal{Q}$. As illustrated in Fig. 8, the resulting equivariant policy successfully generalizes to multiple unseen pan orientations and executes grasping motions with both arms.

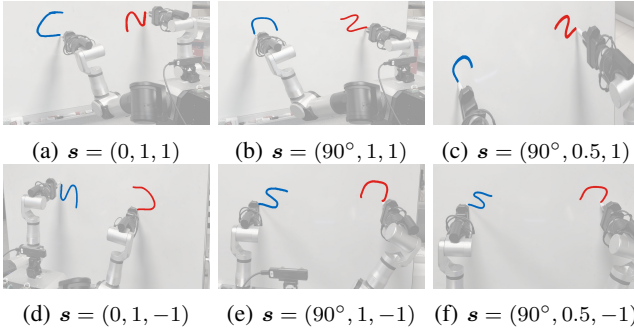


Fig. 7: Real-world letter-drawing experiment. The robot draws rotated and scaled letters using its left (—) and right (—) arms.

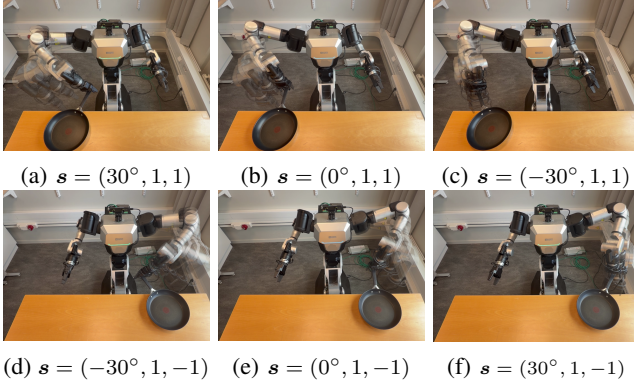


Fig. 8: Real-world pan-grasping experiment. The robot grasps the rotated pan with either its left (bottom) or right (top) arm.

VII. CONCLUSION

This paper introduces *cross-space symmetry compositions*, a framework for learning robot policies that are jointly equivariant to multiple symmetries arising across configuration and task spaces. Building on the differential-geometric structure of the forward kinematics map, we transfer symmetries across spaces by *descending* configuration-space symmetries to task space and *lifting* task-space symmetries to configuration space. Moreover, we characterize the compatibility conditions under which transferred symmetries can be systematically composed through direct and semi-direct products. Our framework unifies several important symmetry families commonly encountered in robotics, including morphological, rotational, and task-induced symmetries, within a common mathematical formalism. Through simulated and real-world experiments on dual-arm manipulation tasks, we demonstrated that jointly leveraging multiple symmetries substantially improves policy generalization across task variations.

Future work will investigate the integration of the proposed cross-space symmetry compositions into equivariant neural architectures, to be enforce equivariance at the architectural level rather than weakly through data augmentation.

REFERENCES

[1] S. E. Otto, N. Zolman, J. N. Kutz, and S. L. Brunton, “A Unified Framework to Enforce, Discover, and Promote Symmetry in Machine Learning,” *Journal of Machine Learning Research*, vol. 26, no. 248, pp. 1–83, 2025.

[2] J. E. Marsden and T. S. Ratiu, *Introduction to Mechanics and Symmetry*. Springer, 1999, vol. 2.

[3] K. Desai, B. Nachman, and J. Thaler, “Symmetry Discovery with Deep Learning,” *Physical Review D*, vol. 105, no. 9, p. 096031, 2022.

[4] J. Ostrowski, “Computing reduced equations for robotic systems with constraints and symmetries,” *IEEE Transactions on Robotics and Automation*, vol. 15, no. 1, pp. 111–123, 1999.

[5] T. Ohsawa, “Symmetry reduction of optimal control systems and principal connections,” *SIAM Journal on Control and Optimization*, vol. 51, no. 1, pp. 96–120, 2013.

[6] H. Mishra, G. Garofalo, A. M. Giordano, M. De Stefano, C. Ott, and A. Kugi, “Reduced Euler-Lagrange Equations of Floating-Base Robots: Computation, Properties, & Applications,” *IEEE Trans. on Robotics*, vol. 39, no. 2, pp. 1439–1457, 2023.

[7] J. Welde, N. Rao, P. Kunapuli, D. Jayaraman, and V. Kumar, “Leveraging symmetry to accelerate learning of trajectory tracking controllers for free-flying robotic systems,” in *IEEE Intl. Conf. on Robotics and Automation (ICRA)*, 2025, pp. 15 121–15 127.

[8] D. O. Apraez, G. Turrissi, V. Kostic, M. Martin, A. Agudo, F. Moreno-Noguer, M. Pontil, C. Semini, and C. Mastalli, “Morphological Symmetries in Robotics,” *Intl. Journal of Robotics Research*, vol. 44, no. 10–11, pp. 1743–1766, 2025.

[9] Z. Li, Y. Jin, D. O. Apraez, C. Semini, P. Liu, and G. Chalvatzaki, “Morphologically symmetric reinforcement learning for ambidextrous bimanual manipulation,” in *Conference on Robot Learning (CoRL)*, 2025.

[10] T. Cohn and R. Tedrake, “Sampling-based motion planning with discrete configuration-space symmetries,” in *IEEE/RSJ Intl. Conf. on Intelligent Robots and Systems (IROS)*, 2025, pp. 13 119–13 126.

[11] A. Zeng, P. Florence, J. Tompson, S. Welker, J. Chien, M. Attarian, T. Armstrong, I. Krasin, D. Duong, V. Sindhvani *et al.*, “Transporter Networks: Rearranging the Visual World for Robotic Manipulation,” in *Conference on Robot Learning (CoRL)*, 2021.

[12] X. Zhu, D. Wang, O. Biza, G. Su, R. Walters, and R. Platt, “Sample efficient grasp learning using equivariant models,” in *Robotics: Science and Systems (R:SS)*, 2022.

[13] D. Wang, R. Walters, and R. Platt, “SO(2)-equivariant reinforcement learning,” in *Intl. Conf. on Learning Representations (ICLR)*, 2022.

[14] R. Hyunwoo, L. Hong-in, L. Jeong-Hoon, and C. Jongeun, “Equivariant Descriptor Fields: SE(3)-Equivariant Energy-Based Models for End-to-End Visual Robotic Manipulation Learning,” in *Intl. Conf. on Learning Representations (ICLR)*, 2023.

[15] H. Huang, D. Wang, A. Tangri, R. Walters, and R. Platt, “Leveraging Symmetries in Pick and Place,” *Intl. Journal of Robotics Research*, vol. 43, no. 4, pp. 550–571, 2024.

[16] V. Kallem, D. E. Chang, and N. J. Cowan, “Task-Induced Symmetry and Reduction with Application to Needle Steering,” *IEEE Transactions on Automatic Control*, vol. 55, no. 3, pp. 664–673, 2010.

[17] H. Kim, H. Lee, H. Yang, and J. Lee, “Regularizing Towards Soft Equivariance Under Mixed Symmetries,” in *Intl. Conf. on Machine Learning (ICML)*, 2023.

[18] H. Li, C. Xiao, M. Guo, and Y. Weng, “Latent Mixture of Symmetries for Sample-Efficient Dynamic Learning,” in *Neural Information Processing Systems (NeurIPS)*, 2025.

[19] C. Altafini, “Redundant Robotic Chains on Riemannian Submersions,” *IEEE Transactions on Robotics and Automation*, vol. 20, no. 2, pp. 335–340, 2004.

[20] B. C. Hall, *Lie Groups, Lie Algebras, and Representations*, 2nd ed. Springer, 2015, vol. 2.

[21] J. Luo, D. Chen, and Q. Zhang, “Reinforcement Learning with Euclidean Data Augmentation for State-Based Continuous Control,” in *Neural Information Processing Systems (NeurIPS)*, 2024.

[22] R. Wang, R. Walters, and R. Yu, “Approximately Equivariant Networks for Imperfectly Symmetric Dynamics,” in *Intl. Conf. on Machine Learning (ICML)*, 2022.

[23] M. Finzi, M. Welling, and A. G. Wilson, “A practical method for constructing equivariant multilayer perceptrons for arbitrary matrix groups,” in *Intl. Conf. on Machine Learning (ICML)*, 2021.

[24] J. M. Lee, *Introduction to Smooth Manifolds*. Springer, 2012, vol. 218.

[25] Rainbow Robotics, “Rainbow Robotics,” <https://www.rainbow-robotics.com/>, 2026.

[26] R. Pérez-Dattari and J. Kober, “Stable Motion Primitives via Imitation and Contrastive Learning,” *IEEE Transactions on Robotics*, vol. 39, no. 5, pp. 3909–3928, 2023.