

A Generalized Nash Equilibrium-Seeking Scheme for Trauma Resuscitation

Promise Ekpo* Angelique Taylor* Lekan Molu**

* Cornell University, NY. {poe6, amt298}@cornell.edu.

** Bala Cynwyd, PA. lekanmolu@scriptedonachip.com

Abstract: Trauma resuscitation is a clinical process for treating life-threatening physiological disorders in safety-critical environments, driven by the experience of healthcare workers (HCWs). Designing and optimizing quantifiable metrics that accurately capture HCW decisions may augment current resuscitation procedures with the potential to improve patient outcomes. This motivates our socio-technical formulation of trauma resuscitation as a distributed generalized Nash equilibrium (GNE)-seeking game with coupled inequality constraints. This method is optimized over a time-varying communication graph. We introduce novel insights from clinical experience to model HCWs behavior. This work facilitates the best possible resuscitation outcome given HCWs' workloads, schedules, competencies, and limited resources.

Keywords: Cyber-physical and human systems (CPHS); Social computing; Game theory.

1. INTRODUCTION

Trauma resuscitation (TR) is a collaborative, often conflicting, coordination effort among a team of healthcare workers (HCWs). It is often characterized by significant differential in (i) skillset; (ii) mental and physical alacrity; and (iii) intra-team communication skills. These factors are shaped by HCWs' workplace experience and can degrade over time. The degradation may spur burnout and fatigue — undermining productivity; miscommunication informs duplicated execution of tasks — engendering redundancy. Across medical organizational hierarchies, through verbal and aural cues (Sarcevic et al., 2012; Ogun-dare et al., 2025) HCWs can improve decision quality if a systematic and quantifiable algorithmic framework is integrated into workflows to track performance. Previous efforts have integrated autonomous systems to support team dynamics (Taylor et al., 2024; Tanjim et al., 2025), deliver supplies (Salinas-Avila et al., 2022), or sanitize surgical rooms (Sun and Yeung, 2007).

A well-executed TR procedure involves a deliberative process where skill-informed task delegation by clinic leaders and responsibilities hand-off among peers are well-executed in spite of time constraints. We set forth to design socio-technical process that (i) supports clinical decision-making through automated task allocation among HCWs; (ii) maximizes HCW skill levels while counterbalancing other HCWs' skill levels; and (iii) enhances communication efficacy whilst reducing duplicate information exchange. This work studies quantifiable algorithms in high-stakes socio-technical medical settings to enhance patient outcomes. We take the view of a game-theoretic, collaborative TR setting, informed by our observations in a representative medical simulation training environment for HCWs at

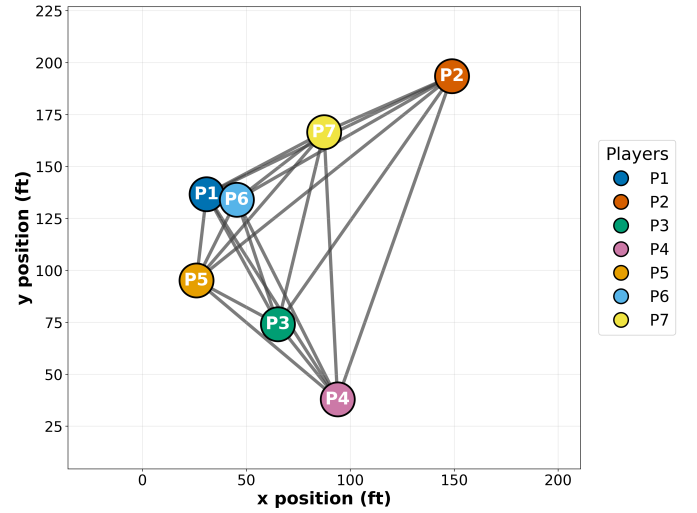


Fig. 1. Communication graph at $k = 0$. Nodes are $n = 7$ healthcare workers; edges link pairs within radius $r = 200$ ft. Player positions yield a time-varying neighbor structure.

Weill Cornell Emergency Medicine in New York City¹. We provide a mathematical characterization between observed skill levels and task models in the algorithmic framework we present.

The role of shared mental models and decentralized communication workflows has been described in high-duress trauma resuscitation contexts (Sarcevic et al., 2012; Batra et al., 2026). Co-design studies have proposed cognitive aids and augmented-reality systems to improve information flow and situational awareness for distributed clinical teams (Taylor et al., 2024). MATEC (Cho et al., 2025)

¹ The BASE Camp event for interprofessional pediatric emergency medicine team training in the emergency care of critically ill and injured children was employed (Weill Cornell Medicine, 2025).

and TraumaFlow (Neumann et al., 2024) demonstrate that software agents can align team actions with clinical protocols with centralized controllers. Distributed optimization in games over networks may be characterized with generalized Nash equilibrium (GNE)-seeking algorithms that better enhance multi-agent socio-technical systems with coupling constraints (Dave et al., 2022). Models incorporating agent dynamics, constraints, and communication topology align well with real-world healthcare teams. In these environments, agents exhibit rationality under partial observability.

The rest of this paper is structured as follows: §2 describes the notations and games background. Our hypothesis is presented in §3 and it is evaluated on numerical test environments in §4. We conclude the paper in §5.

2. BACKGROUND AND PRELIMINARIES

2.1 General Notations

The set of real (non-negative) numbers is denoted, $\mathbb{R} (\mathbb{R}_+)$, the m -dimensional vector space is $\mathbb{R}^m$, and the $n \times n$ dimensional real matrix is denoted $\mathbb{R}^{n \times n}$. A time-varying variable, x is denoted $x(t)$. For a function f that depends on $x(t)$, we write $f(x; t)$. The absolute value of scalar x is $|x|$. The Euclidean norm of the vector $x \in \mathbb{R}^n$ is $\|x\| := \sqrt{x^\top x}$. The n -dimensional vector of ones (zeroes) is $\mathbf{1}_n (\mathbf{0}_n)$. For a differentiable function $J(x)$, the first-order derivative of $J(x)$ is denoted $\nabla_x J(x)$. For a set Ω and variable x , the Euclidean projection of x onto Ω is $\mathcal{P}_\Omega(x) = \operatorname{argmin}_{x' \in \Omega} \|x - x'\|_2$. The set $\mathcal{S} \subset \mathbb{R}^m$ is a convex set if for $\alpha > 0$ and for every $x, y \in \mathcal{S}$, $\alpha x + (1 - \alpha)y \in \mathcal{S}$. The cardinality of a $\mathcal{S}$ is denoted $|\mathcal{S}|$. Suppose that $\mathcal{S}$ is a closed convex set, and $\mathcal{P}_\mathcal{S}(x)$ is a projection of x onto the set $\mathcal{S}$, then there is a unique element $\mathcal{P}_\mathcal{S}(x) \in \mathcal{S}$ such that $\|x - \mathcal{P}_\mathcal{S}(x)\| = \inf_{y \in \mathcal{S}} \|x - y\|$. Similarly, the Euclidean projection of x onto the set Ω is denoted $\mathcal{P}_\Omega(x) = \operatorname{argmin}_{y \in \Omega} \|x - y\|$.

2.2 Games Taxonomy

Let a game be denoted as $\Gamma(\mathcal{V}, \Omega, J)$, where $\mathcal{V}$ are the players $\{1, \dots, n\}$, each with action x_i belonging in a constraint set $\Omega_i \in \mathbb{R}^m$ and a local cost profile $J_i : \Omega_i \rightarrow \mathbb{R}$ so that $J = \{J_1, \dots, J_n\}$. The action profile of the game is $\Omega := \Omega_1 \times \dots \times \Omega_n$. The vector formed by all players' actions is $x := (x_i, x_{-i}) \triangleq \{x_i\}_{i=1}^n$, where the vector formed by all the players' actions except those of player i is $x_{-i} = \{x_{i'}\}_{i'=1, i' \neq i}^n \in \mathbb{R}^{n-i}$ where $n_{-i} := n - n_i$.

Define $K_i^p := \{x_i \in \Omega_i | h_i(x_i) \leq 0\}$ as the set of each individual player's constraint set, and $K^s := \{x \in \Omega | g(x) \geq 0_m\}$ as the set of shared constraints, where $g(x) = c^\top x - d$, for $c = [c_1^\top, \dots, c_n^\top]^\top$, $c_i \in \mathbb{R}^m$ and $d \in \mathbb{R}$. It follows that player i 's action is constrained along two directions: constraints that depend on the action of other players i.e. $g(x) \geq 0$, and individual constraints that depend on player i 's action i.e. $x_i \in K_i$. Contrary to popular formulations in GNE-seeking literature, we have chosen $g(x) \geq 0$ since the skills, time indices, and other parameters we are optimizing for cannot be negative.

2.3 Games Machinery

Let us set a few definitions and preliminary results in motion. Denote the feasible set of player i ' action by $K_i(x_{-i}) := \{x_i | (x_i, x_{-i}) \in K\}$, where $K := K^s \cap (K_1 \times \dots \times K_n)$. Suppose we define the generalized Nash equilibrium problem (GNEP) as $\Gamma(\mathcal{V}, \Omega, J, K)$, then the individual players in the game "freeze" other players' actions x_{-i} as exogenous variables, to solve

$$\begin{aligned} & \min_{x_i \in \Omega_i} J_i(x_i, x_{-i}), \quad \forall i \in \mathcal{V} \\ & \text{subject to } x_i \in K_i(x_{-i}). \end{aligned} \quad (\text{GNEP})$$

Definition 1. (Neighbors of a Player). We define the neighbors $\mathcal{N}_i(t)$ of player i at time t as the set of all agents that lie within a predefined radius, r_i . $\mathcal{N}_i(t) = \{j | (j, i) \in \mathcal{E}\}$.

Definition 2. (Generalized Nash Equilibrium). In problem (GNEP), the action profile $x^* := (x_i^*, x_{-i}^*)$ is a GNE if $J_i(x_i^*, x_{-i}^*) \leq J_i(x_i, x_{-i}^*), \forall x_i \in \Omega_i, \forall i \in \mathcal{V}$.

Assumptions are made for feasibility of the solution (GNEP).

Assumption 1. (Interconnectivity). The game occurs over a time-varying *connected*² and undirected³ weighted communication graph $\mathcal{G}(\mathcal{A})(t) : \{\mathcal{V}, \mathcal{E}\}$ where $t > 0$ with edges $\mathcal{E} \subset \mathcal{V} \times \mathcal{V}$ and adjacency matrix $\mathcal{A} := [a_{ij}] \in \mathbb{R}^{n \times n}$. Player i is connected to (can receive information from) player j if $(i, j) \in \mathcal{E}$ and vice versa. Let $a_{ij} > 0$ if $(i, j) \in \mathcal{E}$ and $a_{ij} = 0$ otherwise. For a $D = \operatorname{diag}(d_{11}, \dots, d_{nn}) \in \mathbb{R}^{n \times n}$, where $d_{ii} = \sum_{j=1}^n a_{ij}$ for all $i \in \mathcal{V}$, we have $\mathcal{G}(\mathcal{A})$'s Laplacian as $\mathcal{L} := D - \mathcal{A} \in \mathbb{R}^{n \times n}$.

Assumption 2. (Cost Function). For $i \in \mathcal{V}$, $\Omega_i \in \mathbb{R}^m$ is a nonempty, convex, and closed set; and the cost $J_i(x_i, x_{-i})$ is continuously differentiable on Ω and convex in x_i for every fixed x_{-i} . Define $\nabla J(x) = [\nabla_{x_1} J_1^\top(x), \dots, \nabla_{x_n} J_n^\top(x)]^\top$ as the *single-value* game mapping.

Assumption 3. (Monotonicity and Game-mapping). The single-valued mapping $\mathcal{M} : \mathbb{R}^m \rightarrow \mathbb{R}^m$ is strongly monotone on the action constraint set $\Omega \in \mathbb{R}^m$ if there exists a constant $\mu > 0$ for any $x, x' \in \Omega$, where $x \neq x'$ such that $(\nabla J - \nabla J')^\top(x - x') \geq \mu \|x - x'\|^2$ for any $\nabla J \in \mathcal{M}(x), \nabla J' \in \mathcal{M}(x')$.

Assumption 4. (Constraint Function). The inequality constraint function $g(x) \geq 0$ is continuously differentiable and convex in x . Also, the feasible action set K is nonempty, convex, and closed — satisfying the Slater's condition i.e., $x^* \in \operatorname{int}(\Omega)$ ⁴ such that $g(x^*) \leq 0_m$.

Lemma 1. (Existence of a GNEP). Let the GNEP of Def. 2 be given and suppose that (i) $\Omega_i \in \mathbb{R}^m$ be a nonempty, convex, and compact such that for $i \in \mathcal{V}$, $K_i(x_{-i})$ is nonempty, convex, closed, and K_i is both upper and lower semi-continuous; and (ii) the local cost $J_i(x_i, x_{-i})$ is quasi-convex on $K_i(x_{-i})$ for every $i \in \mathcal{V}$. Then, a GNE exists.

Proof. (Existence of GNEP) Follows directly from Thm. 4.1 in (Facchinei and Kanzow, 2010).

² That is, any two nodes in $\mathcal{V}$ are connected by a path.

³ That is, $(i, j) \in \mathcal{E} \Leftrightarrow (j, i) \in \mathcal{E}$.

⁴ The relative interior of the set Ω is denoted $\operatorname{int}(\Omega)$.

Table 1. Representative HCW skill attributes (ALS protocol).

Taxonomy	Meaning
CPR	Cardiopulmonary resuscitation
SHOCK	Deliver defibrillation shock
RHYTHM_CHECK	Evaluate rhythm every 2 min
AIRWAY_MGMT	Airway interventions
EPI	Epinephrine administration
TEAM_COMM	Team communication

Remark 1. When assumptions 2, 3, and 4 are fulfilled, then the GNEP $\Gamma(\mathcal{V}, \Omega, J, K)$ satisfies the existence condition x^* in Lemma 1.

Lemma 2. (Optimality of the GNE). Suppose that there exists a multiplier $\lambda_i^* \in \mathbb{R}^m$, $\forall i \in \mathcal{V}$. The optimality condition for each player can be found via the KKT conditions

$$\begin{aligned} \nabla_{x_i} J_i(x_i^*, x_{-i}^*) + \langle \lambda_i^*, \nabla_{x_i} g(x^*) \rangle &= 0_n, \quad \forall i \in \mathcal{V}, \lambda_i^* \in \mathcal{V}, \\ 0_m &\leq \lambda_i^* \perp g(x_i^*, x_{-i}^*) \geq 0_m \end{aligned} \quad (1)$$

under the assumption of continuous differentiability. This follows from Thm. 4.6 in Facchinei and Kanzow (2010).

As a system of equations, (1) can be written as

$$\begin{aligned} J(x^*, \lambda^*) &= 0, \\ 0 &\leq \lambda^* \perp g(x^*) \geq 0, \end{aligned} \quad (2)$$

for $g(x^*) = [g^\top(x_1^*), \dots, g^\top(x_n^*)]^\top$, $\lambda = [\lambda_1^{*\top}, \dots, \lambda_n^{*\top}]^\top$, and $J(x^*, \lambda^*) = [\nabla_{x_1} J_1^\top(x_1^*), \dots, \nabla_{x_n} J_n^\top(x_n^*)]^\top$.

With the constraint qualification, the x portion of (2) is a first-order necessary condition for the GNEP; and under appropriate convexity assumptions, the x part solves the GNEP so that (2) is sufficient condition for the GNEP.

Remark 2. Lemma 2 is the so-called variational inequality problem $VI(X, \nabla J(x))$ whose solution set is a special class of GNEs with all Lagrange multipliers equal. That is, the solution x^* to the $VI(X, \nabla J(x))$ under the KKT conditions (1) satisfies the GNE x^* if $\lambda_1^* = \dots = \lambda_n^* = \lambda^*$.

3. A GNEP TRAUMA RESUSCITATION SCHEME

In this section, we present our formalism of clinical TR workflows into an games and optimization problem.

3.1 Clinical model

Each healthcare worker is a player $i \in \mathcal{V}$ with objective J_i (e.g., start CPR), individual constraints K_i^P (e.g., hemorrhage control), and shared constraints K_i^S (e.g., breathing or pulse checks) in a game $\Gamma(\mathcal{V}, \Omega, \{J_i\}, K)$ where $K_i = K_i^S \cap K_i^P$. Table 1 itemizes typical HCW skill attributes inspired by the ALS code card for adult cardiac arrest (American Red Cross, 2025). The inequality constraint $h_i(x_i) \leq 0$ represents each player’s clinical role assignment.

The state x_i of each player is

$$x_i(t) := [s_i, a_i(t), f_i(t), v_i(t)]^\top \quad (3)$$

with skill proficiency index s_i and time-dependent decision variables: alacrity index $a_i(t)$, fairness index $f_i(t)$, and communication efficiency $v_i(t)$. Here s_i is a fixed parameter characterizing player i ’s competence, while

$[a_i(t), f_i(t), v_i(t)]$ constitutes player i ’s action and the state of the dynamical system that converges to the Nash equilibrium. The action profile lies in $\Omega = K_1 \times \dots \times K_n \subset \mathbb{R}^{3n}$.

The skill proficiency index $s_i \in [0, 1]$ is a fixed scalar averaging player i ’s competence over past assignments and training (nursing, clinical certifications, physician training), calibrated by the institution. Performance degradation due to fatigue is captured indirectly through the time-varying alacrity index $a_i(t)$.

Players’ transient step response is described as a second-order system (Nise, 2019)

$$\sigma_i(t) = 1 - \frac{1}{\sqrt{1 - \zeta^2}} \exp(-\zeta \omega_n t) \cos(\omega_n \sqrt{1 - \zeta^2} t - \phi) \quad (4)$$

where $\phi = \arctan(\zeta / (\sqrt{1 - \zeta^2}))$ for damping ratio ζ and natural frequency ω_n . We use an underdamped model ($\zeta < 1$) since human physiological responses to stress overshoot before settling (Rosenblum et al., 2025). We adopt $\omega_n^i := 2\pi b_i / 60$ where b_i is player i ’s resting heart rate (bpm), a proxy for the engagement transient time.⁵

Alacrity measure: The alacrity index a_i encodes a player’s readiness to execute tasks within their skillset. We model a_i via the rise time t_r of (4), which is the time for $\sigma(t)$ to go from 10% to 90% of its final value. Fixing $\zeta = k < 1$ and using $\omega_n^i t$ as the normalized time variable, $a_i(t)$ is found as

$$a_i(t) = \Delta \sigma(t) / \omega_n^i, \quad t \geq 0. \quad (5)$$

Fairness in workload distribution should be encouraged when players share resources (Ekpo et al., 2025b,a). If one worker bears workload beyond their capacity, the uneven throughput becomes untenable for efficient resuscitation. We adopt the Jain fairness index (Jain et al., 1984), a convex, scale-invariant metric, bounded in $[1/n, 1]$:

$$f_i(w; t) = \frac{(\sum_{j=1}^n w_j(t))^2}{n \sum_{j=1}^n w_j(t)^2}, \quad w(t), t \geq 0 \quad (6)$$

which measures the equity of work w allocated to player i . Each player maintains a local team-level estimate $\hat{f}_i(t)$ obtained by running dynamic averaging consensus on $\sum_j w_j$ and $\sum_j w_j^2$. The per-task weights $\delta_\tau \in [0, 1]$ that define the workload $w_i(t) = \sum_{\tau \in \mathcal{T}_i(t)} \delta_\tau$ are specified in Section 4.

Communication efficiency. We define the communication efficacy as a function of (i) settling time; (ii) engagement level; and (iii) response time. The **settling time** t_s^i is the time for $\sigma_i(t)$ ’s damped oscillations to reach and stay within $\pm 2\%$ of steady state, approximated as

$$t_s^i = -\ln(\epsilon \sqrt{1 - \zeta^2}) / \zeta \omega_n \quad (7)$$

with $\epsilon = 0.02$. The **response time** is the difference between reaching steady state and being within 10% of $\sigma_i(t)$ ’s final value upon a task handover. The timely response is $\bar{t}_i = k \Delta t_{ij}$ where Δt_{ij} is the inter-call time between players i and j for all $j \in x_{-i}$. The **engagement**

⁵ In practice, sensor noise in b_i would be handled by standard filtering (e.g., multisensor fusion, low-pass smoothing).

level for player i is a running mean of visit counts from neighbors $\mathcal{N}_i$ up to discretized time $\mathcal{K}$:

$$e_i(t) = \frac{1}{Tn_{-i}} \int_{t_0}^T \left(\sum_{k=1}^{\mathcal{K}} \nu_{ij}(t) \right) dt, \quad \forall j \in x_{-i}.$$

A “visit” is a discrete communication event (verbal hand-off, task delegation, closed-loop confirmation) recorded at each timestep k . The **communication efficiency index** is

$$v_i(t) = \alpha(t_s^i + \bar{t}_i) + (1 - \alpha)e_i(t), \quad \alpha \in (0, 1). \quad (8)$$

3.2 Local costs and dynamics

Problem 1. We want a distributed algorithm for a GNEP $\Gamma(\mathcal{V}, \Omega, \nabla J(x), K)$ for the socio-technical game with coupled constraints, K .

The local cost for player i is the quadratic objective between player i and its neighbors $\mathcal{N}_i$:

$$J_i(x_i, x_{-i}; t) := J_i(x_i; t) + \langle J_i(x_{-i}; t) \rangle_{r_i} \quad (9)$$

where

$$J_i(x_i; t) = \|s_i\|^2 + \|a_i(t)\|^2 + \|f_i(w; t)\|^2 + \|v_i(t)\|^2$$

and

$$\langle J_i(x_{-i}; t) \rangle_{r_i} = \frac{1}{1 + n_i(t)} \left(J_i(x_i; t) + \sum_{j \in \mathcal{N}_i(t)} J_i(x_{-i}; t) \right) \quad (10)$$

denotes the cost of neighboring players within radius $r_i > 0$ of player i . The resuscitation coordination is modeled as a dynamic game whose actions evolve under the distributed dynamics in (11), converging to a variational generalized Nash equilibrium (v-GNE) $x^* = (x_1^*, \dots, x_n^*)$:

$$\dot{x}_i = P_{\Omega_i} \left(x_i - \alpha \nabla_{x_i} J_i(x) + \frac{\alpha\gamma}{n} \nabla_{x_i} g_i(x_i)^\top \lambda_i \right) - x_i \quad (11a)$$

$$\dot{\lambda}_i = P_{\mathbb{R}_+^p} \left[\kappa \sum_{j \in \mathcal{N}_i} \text{sgn}(\lambda_j - \lambda_i) - g_i(x_i) \right] \quad (11b)$$

$$\dot{\zeta}_i = \rho \sum_{j \in \mathcal{N}_i} \text{sgn}(\eta_j - \eta_i), \quad \dot{\eta}_i = \zeta_i + J_i(x_{-i}) \quad (11c)$$

where $\alpha > 0$ is the primal step size; $\gamma > 0$ scales the constraint coupling, normalized by n ; and $\kappa, \rho > 0$ are the consensus gains for the dual and aggregation channels. The Lagrange multiplier $\lambda_i \in \mathbb{R}_+^p$ carries one component per inequality constraint in $g_i(x_i)$; ζ_i and η_i are auxiliary scalars implementing finite-time dynamic averaging consensus on $J_i(x_{-i})$. Initial conditions are $x_i(0) \in \Omega_i$, $\lambda_i(0) \in \mathbb{R}_+^p$, and $\zeta_i(0) = 0$. Solutions are interpreted similarly to Filippov (Cortés, 2008). Algorithm (11) extends Liang et al. (2017) to inequality constraints $g(x) \geq 0$. The constants are chosen as $\kappa > (n-1)h_1$ and $\rho > \gamma(n-1)h_2$, where

$$h_1 = \sup_{i \in \mathcal{V}} \left(\sup_{x_i \in \Omega_i} \|\nabla_{x_i} J_i(\cdot, x_{-i})\| \sup_{y, y' \in \Omega} \|y - y'\| \right),$$

$$h_2 = \sup_{i \in \mathcal{V}} \left(\sup_{x_i \in \Omega_i} \|g_i(x_i)\| \right),$$

computed distributively as in (Liang et al., 2017).

4. NUMERICAL RESULTS

Setup. We validate the distributed GNEP algorithm on a trauma resuscitation scenario with 7 healthcare workers executing the Advanced Life Support (ALS) cardiac arrest protocol (American Red Cross, 2025). The synthetic dataset models a 20-minute episode with clinically accurate CPR cycles, rhythm checks, shock delivery, drug administration, airway management, and Return of Spontaneous Circulation (ROSC) assessment. Each timestamp assigns one atomic action per agent (e.g., `Start_CPR`, `Deliver_Shock`, `Administer_Epinephrine`), following the ideal ALS flowchart.

Initial conditions and constraints. Workers are initialized with heterogeneous state components: alacrity in $[0.5, 1.0]$, fairness in $[0.8, 0.95]$, communication efficiency v_i in $[0.9, 1.0]$, and fixed skill proficiencies in $[0.6, 0.9]$. A spatial communication radius $r = 200$ ft induces time-varying neighbor sets $\mathcal{N}_i(t)$. The shared constraint $g(x) \geq 0$ enforces minimum operational thresholds $a_i, f_i, v_i \geq 0.2$, preventing excessive fatigue or coordination degradation. All states are normalized to $[0, 1]$.

Task weighting. Each task τ is assigned a weight $\delta_\tau \in [0, 1]$, with negative penalties applied when a player’s assignment falls below the protocol-prescribed threshold: -1.0 for suboptimal role assignment, -0.5 for low alacrity, and -0.5 for low energy. The negative values discount the workload contribution of substandard assignments so that the resulting workload $w_i(t) = \sum_{\tau \in \mathcal{T}_i(t)} \delta_\tau$ enters the Jain fairness index in (6) with the right sign.

Convergence. Figure 2 shows the simulation results. Fixed-point residuals decay below the 10^{-3} tolerance within roughly six iterations (panel a), confirming that all players reach a stable joint decision under the time-varying graph. Dual norms remain bounded throughout (panel b), indicating that the constraints remain appropriately enforced without divergence. Individual objectives reach heterogeneous steady values consistent with the KKT conditions of a v-GNE (panel c); the spread across players reflects each player’s fixed skill s_i , since each one optimizes its own cost rather than a shared team cost.

Communication topology. Figure 1 shows the communication graph at $k = 0$, with seven healthcare workers within a 200-ft radius. Edges connect player pairs whose Euclidean distance falls below the radius. Since player positions drift after each iteration, the neighbor sets $\mathcal{N}_i(k)$ change over time, and the graph in subsequent iterations differs from the initial snapshot. The dynamics in (11) operate on the graph $\mathcal{G}(\mathcal{A})(k)$ at each iteration.

Scalability. Figure 3 shows how the algorithm scales with team size n . The number of iterations to reach the 10^{-3} convergence threshold depends on how well-connected the communication graph is. As long as the graph stays well-connected as n grows, the iteration count grows only mildly. Empirically, this count grows mildly with n , from ~ 124 at $n = 5$ to ~ 147 at $n = 50$. Wall-clock time per iteration is dominated by the neighbor sums and scales as $O(n + |\mathcal{E}|)$, well below the $O(n^2)$ worst-case reference.

Chattering analysis. The signum function in (11) is discontinuous, which can cause small oscillations in numerical

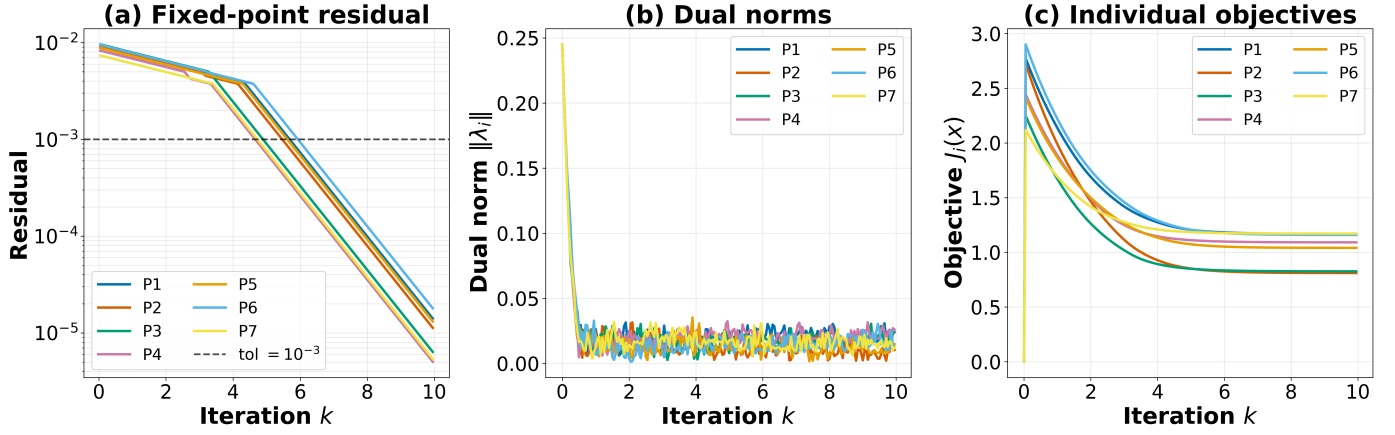


Fig. 2. Distributed GNEP simulation for 7 players. (a) Fixed-point residual. (b) Dual variable norms. (c) Individual objectives.

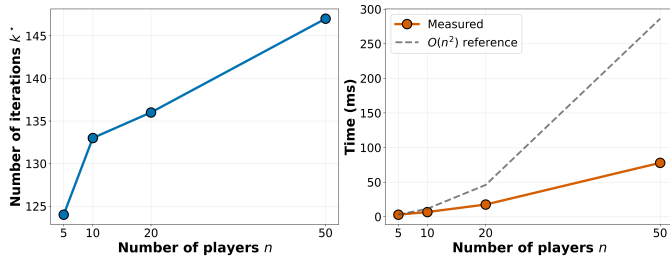


Fig. 3. Scalability of the distributed GNEP algorithm. (a) Iteration count to reach the convergence threshold 10^{-3} versus n . (b) Wall-clock time versus n , with $O(n^2)$ worst case reference (dashed).

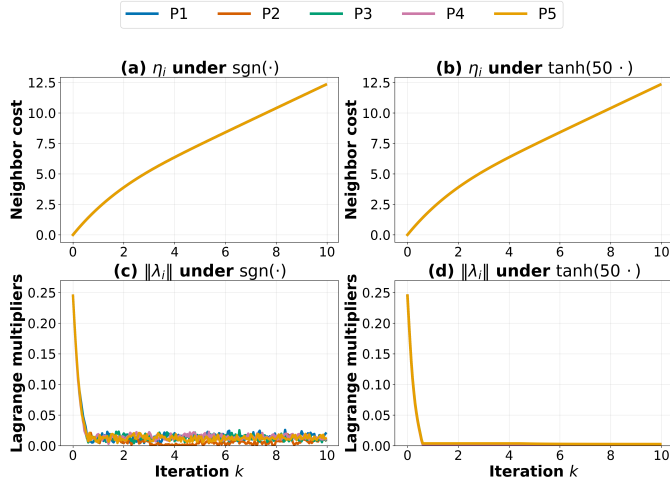


Fig. 4. Discontinuous vs. smoothed signum, $n = 5$ players. (a, b) Neighbor cost under $\text{sgn}(\cdot)$ and $\tanh(50 \cdot)$. (c, d) Lagrange multipliers under each.

simulation. To mitigate these oscillations, we smooth the signum with a “smooth-abs” function

$$\text{sgn}_\alpha(x) := \sqrt{x^2 + \alpha^2} - \alpha, \quad \alpha > 0, \quad (12)$$

following Tassa et al. (2012). The original discontinuous dynamics are interpreted in the standard Filippov framework of Cortés (2008). Figure 4 compares the two. Smoothing preserves convergence to the v-GNE and eliminates the oscillations.

5. CONCLUSION

This paper formulated trauma resuscitation as a distributed generalized Nash equilibrium problem in which healthcare worker skill, alacrity, fairness, and communication efficiency enter as coupled decision variables. A primal–dual seeking algorithm with inequality constraints was proposed and analyzed. Simulations on a seven-player Advanced Life Support scenario demonstrated convergence with bounded dual variables, and a sweep over up to 50 players characterized the dependence of iteration count on team size. This is a feasibility study on a synthetic clinical workflow that does not capture protocol deviations or stress-induced behavior in the decision-making process.

REFERENCES

- American Red Cross (2025). Adult Cardiac Arrest. URL <https://tinyurl.com/2jypcw6d>.
- Batra, Y., Pioldi, G., Ekpo, P., Sayatqzy, A., Maruur, P., Otieno, S., Ching, K., and Taylor, A. (2026). Rfm-hri: A multimodal dataset of medical robot failure, user reaction and recovery preferences for item retrieval tasks. doi:10.48550/arXiv.2603.05641. URL <http://arxiv.org/abs/2603.05641>. ArXiv:2603.05641 [cs].
- Cho, A., Woo, J.M., Shi, B., Udeshi, A., and Woo, J.S.H. (2025). The application of matec (multi-ai agent team care) framework in sepsis care.
- Cortés, J. (2008). Discontinuous dynamical systems: A tutorial on solutions, nonsmooth analysis, and stability. *IEEE Control Systems Magazine*, 28(3), 36–73. doi: 10.1109/MCS.2008.919306.
- Dave, A., Chremos, I.V., and Malikopoulos, A.A. (2022). Social media and misleading information in a democracy: A mechanism design approach. *IEEE Transactions on Automatic Control*, 67(5), 2633–2639.
- Ekpo, P., Agarwal, S., Grimm, F., and Taylor, A. (2025a). Adafair-marl: Enforcing adaptive fairness constraints in multi-agent reinforcement learning. doi:10.48550/ARXIV.2511.14135. URL <https://arxiv.org/abs/2511.14135>.
- Ekpo, P.O., La, B., Wiener, T., Agarwal, S., Agrawal, A., Gonzalez-Pumariiega, G., and Taylor, A. (2025b). Skill-aligned fairness in multi-agent learning for collaboration

- in healthcare. doi:10.48550/arXiv.2508.18708. URL <http://arxiv.org/abs/2508.18708>.
- Facchinei, F. and Kanzow, C. (2010). Generalized nash equilibrium problems. *Annals of Operations Research*, 175(1), 177–211.
- Jain, R., Chiu, D.M.W., and Hawe, W.R. (1984). A quantitative measure of fairness and discrimination for resource allocation in shared computer systems.
- Liang, S., Yi, P., and Hong, Y. (2017). Distributed nash equilibrium seeking for aggregative games with coupled constraints. *Automatica*, 85, 179–185.
- Neumann, J., Vogel, C., Kießling, L., Hempel, G., Kleber, C., Osterhoff, G., and Neumuth, T. (2024). Traumaflow—development of a workflow-based clinical decision support system for the management of severe trauma cases. *International Journal of Computer Assisted Radiology and Surgery*, 19(12), 2399–2409. Publisher: Springer.
- Nise, N.S. (2019). *Control Systems Engineering, Seventh Edition*. John Wiley & Sons.
- Ogundare, O., Owadokun, T., Ogundare, T., Ekpo, P., Nguyen, H.L., and Bello, S. (2025). Integrated artificial intelligence in healthcare and the patient’s experience of care. *Scientific Reports*, 15(1), 21879. doi:10.1038/s41598-025-07581-7. URL <https://www.nature.com/articles/s41598-025-07581-7>.
- Rosenblum, S., Rab, S.L., and Admon, R. (2025). Dynamics in physiological acute stress response trajectories: uncovering latent variability. *BMC Psychiatry*, 25(1), 361. doi:10.1186/s12888-025-06807-2.
- Salinas-Avila, J.E., Gonzalez-Hernandez, H.G., Martinez-Chan, N., Bielma-Avendano, C.M., Salinas-Molar, X.A., and Garcia-Garcia, M.O. (2022). Assistant delivery robot for nursing home using ros: Robotic prototype for medicine delivery and vital signs registration. In *Proceedings of the 2022 5th International Conference on Electronics, Communications and Control Engineering*, 141–148.
- Sarcevic, A., Marsic, I., and Burd, R.S. (2012). Teamwork errors in trauma resuscitation. *ACM Transactions on Computer-Human Interaction (TOCHI)*, 19(2), 1–30.
- Sun, L.W. and Yeung, C.K. (2007). Port placement and pose selection of the da vinci surgical system for collision-free intervention based on performance optimization. In *2007 IEEE/RSJ International Conference on Intelligent Robots and Systems*, 1951–1956. IEEE.
- Tanjim, T., Ekpo, P., Cao, H., George, J.S., Ching, K., Lee, H.R., and Taylor, A. (2025). Human-robot teaming field deployments: A comparison between verbal and non-verbal communication. In *2025 34th IEEE International Conference on Robot and Human Interactive Communication (RO-MAN)*, 1699–1704. IEEE. doi:10.1109/ro-man63969.2025.11217867. URL <http://dx.doi.org/10.1109/RO-MAN63969.2025.11217867>.
- Tassa, Y., Erez, T., and Todorov, E. (2012). Synthesis and stabilization of complex behaviors through online trajectory optimization. In *IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, 4906–4913. doi:10.1109/IROS.2012.6386025.
- Taylor, A., Tanjim, T., Cao, H., and Lee, H.R. (2024). Towards collaborative crash cart robots that support clinical teamwork. In *Proceedings of the 2024 ACM/IEEE International Conference on Human-Robot Interaction*, HRI ’24, 715–724. Association for Computing Machinery, New York, NY, USA.
- Weill Cornell Medicine (2025). Base Camp. URL <https://tinyurl.com/2t9musvp>.