

When Efficiency Becomes Fragility: Exploiting Dynamic Routing Vulnerabilities in Adaptive UAV Tracking

Shaofeng Liang

shawnliao0420@gmail.com
The Hong Kong University of Science
and Technology (Guangzhou)
Guangzhou, China

Runwei Guan

The Hong Kong University of Science
and Technology (Guangzhou)
Guangzhou, China

Wenshuo Chen

The Hong Kong University of Science
and Technology (Guangzhou)
Guangzhou, China

Jiemin Wu

The Hong Kong University of Science
and Technology (Guangzhou)
Guangzhou, China

Bowen Tian

The Hong Kong University of Science
and Technology (Guangzhou)
Guangzhou, China

Haozhe Jia

The Hong Kong University of Science
and Technology (Guangzhou)
Guangzhou, China

Kaishen Yuan

The Hong Kong University of Science
and Technology (Guangzhou)
Guangzhou, China

Songning Lai

The Hong Kong University of Science
and Technology (Guangzhou)
Guangzhou, China

Daizong Liu

Wuhan University
Wuhan, China

Yutao Yue*

The Hong Kong University of Science
and Technology (Guangzhou)
Guangzhou, China
Institute of Deep Perception
Technology (JITRI)
Wuxi, China

Abstract

Resource constraints on UAV platforms have driven a paradigm shift in aerial tracking, from pursuing performance toward balancing accuracy with efficiency. Adaptive Transformer Trackers, which leverage an input-dependent dynamic routing architecture, have emerged as a representative solution to this challenge. However, we reveal that behind this computation-on-demand flexibility hides a critical structural flaw: the Lipschitz singularity of computational path decisions, which has an unbounded local Lipschitz constant at discrete layer-skipping decision boundaries. This mathematical discontinuity renders adaptive tracking networks inherently unstable: tiny input perturbations can be amplified at the gating modules, causing dramatic changes in the inference topology. We formally characterize this singularity in the context of adaptive tracking architectures and, for the first time, identify it as a directly exploitable new attack surface. This insight reveals a previously overlooked and highly vulnerable topological path space attack surface. Unlike traditional adversarial attacks that target the output

space, this new attack surface allows for the simultaneous manipulation of both the model's semantic representation and its inference topology. Based on this, we propose the Adversarial Path-Inversion (API) framework. API generates imperceptible perturbations to precisely manipulate the gating decisions, forcing the inference onto altered computational paths. The severe inconsistency between the original and the inverted paths dismantles the representation capability of the model. Extensive experiments on state-of-the-art adaptive trackers demonstrate that API achieves superior perturbation stealthiness, more effective attack, and faster inference speeds. This work opens a new dimension for the security analysis of dynamic tracking networks and provides a theoretical warning for constructing robust adaptive tracking architectures in the future.

CCS Concepts

• **Computing methodologies** → **Tracking**; • **Security and privacy** → **Domain-specific security and privacy architectures**; • **Theory of computation** → **Adversarial learning**.

Keywords

Object tracking, Feature Deception, Dynamic Neural Networks, Adversarial Attack, Efficient Visual Tracking

1 Introduction

Unmanned Aerial Vehicles (UAVs) have been widely deployed in visual surveillance [4], autonomous navigation [34], and aerial media production [37], where robust and real-time visual tracking plays an



This work is licensed under a Creative Commons Attribution-NonCommercial-NoDerivatives 4.0 International License.

MM '26, Rio de Janeiro, Brazil

© 2026 Copyright held by the owner/author(s).

ACM ISBN 979-8-4007-2213-4/2026/11

<https://doi.org/10.1145/3767308.3832549>

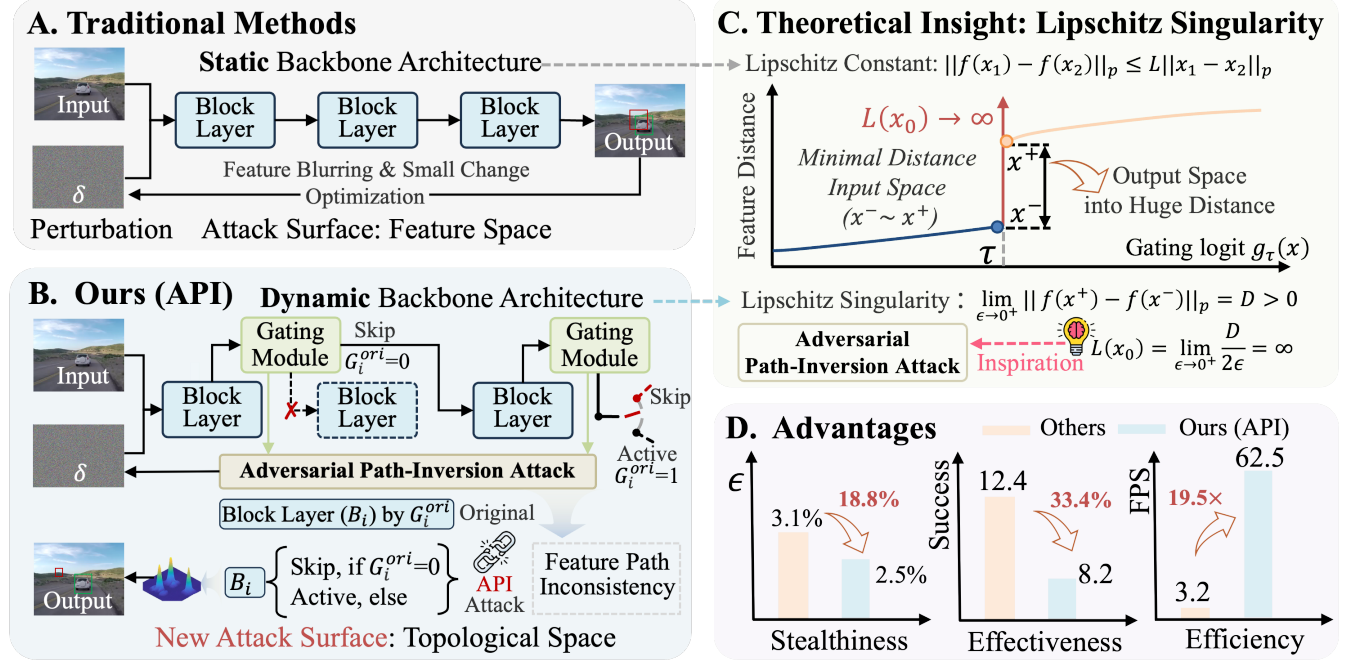


Figure 1: Core motivation and theoretical foundation of the Adversarial Path-Inversion (API) framework. Unlike traditional attacks targeting the output space (subfig. A), API discovers attack surfaces in new topological spaces (subfig. B) and forces path changes by flipping gating decisions, leading to feature collapse. API theoretically proves the inherent instability of dynamic routing architectures (subfig. C). Compared to existing paradigms, API demonstrates superior perturbation stealthiness, more effective attack, and faster attack inference speeds (subfig. D).

indispensable role. In recent years, Vision Transformers (ViTs) have driven the performance of visual tracking [5, 6, 28, 45, 48] to new heights. However, the heavy computational [9] burden inherent in standard ViT architectures strictly limits the deployment of these models on resource-constrained platforms of UAVs. Consequently, the paradigm of UAV visual tracking is undergoing a critical shift from being purely performance-first to seeking a delicate balance between performance and efficiency. To address this issue, pioneering works have introduced Adaptive Vision Transformers [33, 46], represented by a prominent class of frameworks that includes AV-Track [38], SGLATrack [43], LGTrack [49], and DyTrack [51]. By employing input-dependent layer-skipping mechanisms, such as dynamic activation modules, these computation-on-demand architectures can selectively activate transformer blocks. This dynamic routing allows the models to achieve real-time inference speeds while maintaining state-of-the-art tracking accuracy.

While these adaptive tracking models have achieved a remarkable balance between performance and efficiency, their adversarial robustness remains a conspicuously under-explored frontier. For unmanned aerial vehicles (UAVs) operating in dynamic environments, this can seriously hinder their reliable physical deployment and even physical collisions in high-speed flight scenarios. Existing adversarial attacks [16, 23, 26, 41] in visual tracking predominantly target static neural network architectures. These attacks typically focus on perturbing to corrupt semantic representations or bounding box predictions within a fixed computational graph, as shown

in Fig. 1-A. However, adaptive models introduce a fundamentally different computational paradigm, where the computational path itself depends on the input (Fig. 1-B). This raises a natural question: **Does such dynamic routing introduce new vulnerabilities beyond those from static tracking networks?**

To investigate this, we analyze that layer-skipping decisions in adaptive trackers are inherently discrete. Specifically, each gating module produces a binary output that either activates or bypasses a Transformer block. This discrete switching behavior implies that the output of the network may exhibit discontinuities in the vicinity of the gating boundaries. To formalize this intuition, we evaluate the Lipschitz continuity (*i.e.*, the sensitivity of the outputs to inputs) of the gating decisions, and derive the local Lipschitz singularity at these discrete decision boundaries (see Fig. 1-C). This analysis reveals that the resulting singularity indirectly constitutes a directly exploitable attack surface in adaptive tracking, leading to a concrete security consequence: the discrete nature of layer-skipping decisions means that even infinitesimal input perturbations can trigger abrupt transitions in the inference topology, forcing the computational graph to deviate from its intended execution path. This finding exposes a previously overlooked threat category that we term the Topology-Path-Based Attack. Traditional adversarial attacks [16, 36, 39] operate within a fixed computational path and can only degrade the semantic representation along that path. In contrast, the attack surface identified here enables an adversary to simultaneously alter both the dynamic inference topology and

the feature representation, resulting in a far more severe and irreversible collapse of tracking performance.

To systematically exploit this vulnerability, we propose the Adversarial Path-Inversion (API) framework. By optimizing perturbations specifically tailored for the gating modules of adaptive trackers, the proposed framework precisely manipulates the discrete routing decisions to force the inversion of computational paths. It dismantles the representation capability of the tracker by exploiting the severe feature inconsistency between the original optimal path and the maliciously altered computational paths. Remarkably, we discover that directly targeting the inference topology inflicts a significantly more severe degradation on tracking precision compared to traditional attacks. This finding strongly validates the effectiveness and novelty of the discovered topology-path-based attack surface. Comprehensive evaluations across state-of-the-art adaptive trackers substantiate that the API framework achieves superior perturbation stealthiness, heightened attack efficacy, and accelerated inference speeds (Fig. 1-D). Furthermore, it exhibits remarkable generalizability, consistently achieving high attack efficacy across a broad class of adaptive architectures. This work unveils a novel dimension for the security assessment of dynamic tracking models and establishes a critical theoretical imperative for the development of robust adaptive architectures in the future.

In summary, this work makes the following contributions:

- (1) We analyze the inherent instability of dynamic routing in adaptive tracking architectures from a Lipschitz perspective, showing that discontinuous gating decisions can lead to vulnerabilities around routing boundaries.
- (2) We expose a previously overlooked attack surface rooted in the computational path and propose the Adversarial Path-Inversion framework, which disrupts dynamic trackers by maliciously inverting their routing decisions.
- (3) Extensive experiments across multiple adaptive trackers and UAV benchmarks demonstrate that the proposed framework significantly outperforms traditional output-oriented attacks in degrading tracking precision.

2 Related Work

2.1 Visual Object Tracking

Visual object tracking is a fundamental task in computer vision, aiming to continuously estimate the state and location of a target across subsequent frames given its initial state. While early methods based on discriminative correlation filters [2, 10, 11, 19] and Siamese networks [8, 18, 42] established crucial baselines, their reliance on local operations limits the capability to capture global context. Recently, Vision Transformer (ViT)-based trackers [6, 48], such as MixFormer [9] and OSTRack [45], have significantly enhanced feature discriminability by enabling global interactive modeling between the template and the search region. However, their heavy computational burden poses a severe deployment challenge on resource-constrained hardware platforms, such as Unmanned Aerial Vehicles. To overcome this, the research community has shifted attention towards efficient visual tracking frameworks based on dynamic Transformers [24, 33, 46]. The core idea of these dynamic architectures is to allocate computational resources on demand based on the complexity of the input instance. These models [38, 51] insert multiple decision makers into the intermediate layers of the

ViT to evaluate the reliability of the current feature representation. Similarly, SGLATrack [43] employs a selection module acting as a decision maker, which outputs the selection probability of subsequent layers and retains only the optimal representative layer from deep stages. Despite their remarkable efficiency, we reveal that these decision-based routing mechanisms inadvertently expose a fatal structural vulnerability [20, 31], creating massive hidden dangers regarding adversarial robustness, a previously unexplored blind spot that our work directly targets.

2.2 Adversarial Attacks in Visual Tracking

With the widespread application of tracking algorithms in safety-critical domains such as autonomous driving and surveillance systems, evaluating their robustness against malicious attacks has become increasingly urgent. Adversarial attacks [3, 12, 13, 25] trick deep neural networks into making incorrect predictions by injecting imperceptible perturbations into input images. Existing adversarial perturbation methods in visual tracking can be broadly categorized into online iterative optimization methods [7, 22, 23, 32] and offline generator-based paradigms [21, 44, 50]. Online methods, such as RTAA [22], generate strong adversarial examples by utilizing pseudo-labels to progressively align the correct classification and regression labels of the tracker. While online optimization brings significant improvements in attack performance, its time-consuming nature heavily compromises stealthiness, especially in high-speed tracking scenarios. In contrast, offline methods [39] train an adversarial generator from massive data, requiring only a single forward pass to generate perturbations during the attack phase, thereby achieving an optimal balance between time and performance. For instance, the Only Once Attack framework [50] effectively fools the tracker by generating perturbations solely for the initial template. Furthermore, IoU Attack [23] introduces a decision-based black-box approach that sequentially generates perturbations based on predicted IoU scores. Ad2Attack [16] reveals a neglected vulnerability from the perspective of image preprocessing, targeting the image resampling process. More recently, with the rise of multi-modal tracking, researchers have proposed sophisticated cross-modal attacks. For example, FA3T [36] disrupts cross-modal alignment through feature-aware perturbations; ACAttack [41] achieves adaptive cross attacks via multi-modal response decoupling; and methods like ICAttack [39] and Cross-Modal Stealth [40] progressively dismantle fusion mechanisms via intra-modal excavation and coarse-to-fine latent space strategies.

However, all the aforementioned attacks predominantly focus on adding perturbations at the semantic feature or input pixel level to strictly corrupt the final output. Unlike these feature-level attacks, our method pioneers the manipulation of dynamic routing decisions, revealing that attacking the inference topology is far more devastating. Some related studies [20, 31] have also explored adversarial attacks targeting dynamic network routing mechanisms in image classification. These attacks focus on inference efficiency in image classification, rather than the visual tracking task, without considering the crucial temporal dynamics, template search relevance, and online state estimation inherent in visual tracking, thus serving a fundamentally different attack objective and task domain.

3 Method

3.1 Problem Formulation

Visual object tracking aims to continuously estimate the state of a target in a search region sequence $S = \{s_1, s_2, \dots, s_T\}$, given an initial template z . A typical tracker can be formulated as a mapping function $\mathcal{F}$, which predicts the bounding box b_t at frame t via $b_t = \mathcal{F}(z, s_t; \Theta)$, where Θ represents the model parameters. Referring to standard adversarial attack paradigms in visual tracking [22, 36, 50], the goal of an adversary is to craft an imperceptible perturbation δ , added to the input images to induce tracking failure. Formally, the traditional objective is to maximize the deviation between the predicted bounding box of the adversarial sample and the ground truth, formulated as:

$$\max_{\delta} \mathcal{L}_{task}(\mathcal{F}(z, s_t + \delta; \Theta), y_t), \quad \text{s.t.} \quad |\delta| \leq \epsilon \quad (1)$$

where y_t is the ground truth label, $\mathcal{L}_{task}$ is the tracking loss, and ϵ is the maximum perturbation magnitude constrained to ensure visual stealthiness.

3.2 Theoretical Analysis: The Lipschitz Singularity in Dynamic Routing

Adaptive tracking architectures achieve high efficiency by introducing intermediate decision modules, such as dynamic gating mechanisms, to selectively skip redundant transformer blocks. To formally characterize the resulting system, let $x \in \mathbb{R}^n$ denote the intermediate feature representation prior to a routing module. The decision function $\pi(\cdot)$ can be abstracted as a discrete step function:

$$\pi(x) = \mathbb{I}(g(x) > \tau) \quad (2)$$

where $g(\cdot)$ represents a scoring network (e.g., the activation module in AVTrack [38] or the selection module in SGLATrack [43] and LGTrack [49]), τ is a predefined confidence threshold, and $\mathbb{I}(\cdot)$ is the indicator function.

Depending on the binary value of $\pi(x) \in \{0, 1\}$, the network activates divergent computational sub-graphs, denoted as f_{act} and f_{skip} . The resulting output feature mapping can be formulated as a piecewise discontinuous function:

$$f(x) = \pi(x)f_{act}(x) + (1 - \pi(x))f_{skip}(x) \quad (3)$$

While this mechanism provides remarkable flexibility for computation-on-demand, we reveal that it induces severe structural instability. This vulnerability can be formalised by analyzing the Lipschitz continuity of the underlying mapping. A mapping is defined as L -Lipschitz continuous if, for any inputs x_1, x_2 , the following condition holds:

$$\|f(x_1) - f(x_2)\|_p \leq L\|x_1 - x_2\|_p \quad (4)$$

where L is the Lipschitz constant, $\|\cdot\|_p$ represents the L_p distance.

The discrete nature of the gating mechanism induces a structural singularity at the decision boundary. To formalize this, consider an input x_0 residing on the decision boundary manifold $\mathcal{D}_b$. We define a vanishingly small directional perturbation δ and two neighboring points x^+ and x^- on opposite sides of the manifold:

$$\begin{aligned} \mathcal{D}_b &= \{x \in \mathbb{R}^n : g(x) = \tau\} \\ x^\pm &= x_0 \pm \delta = x_0 \pm \epsilon \cdot \vec{u} \quad \text{s.t.} \quad g(x^+) > \tau, g(x^-) \leq \tau \end{aligned} \quad (5)$$

where $\vec{u}$ is a unit vector transversal to the boundary and $\epsilon \rightarrow 0^+$ is an infinitesimal scalar. Although the distance between these points in the input space vanishes as ϵ approaches zero, the discrepancy between the corresponding outputs remains finite and non-zero:

$$\lim_{\epsilon \rightarrow 0^+} \|f(x^+) - f(x^-)\|_p = \|f_{act}(x_0) - f_{skip}(x_0)\|_p = D > 0 \quad (6)$$

The local Lipschitz constant $L(x_0)$ is defined as the supremum of the ratio between the output change and the input perturbation. By evaluating this ratio across the boundary, we obtain:

$$L(x_0) = \lim_{\epsilon \rightarrow 0^+} \frac{\|f(x^+) - f(x^-)\|_p}{\|x^+ - x^-\|_p} \geq \lim_{\epsilon \rightarrow 0^+} \frac{D}{2\epsilon} = \infty \quad (7)$$

where $L(x_0)$ becomes unbounded and approaches infinity.

The above analysis reveals that the discrete gating mechanism introduces local discontinuities, making routing decisions highly sensitive to tiny perturbations and easy to invert. In adaptive tracking architectures, different routing paths correspond to distinct sub-networks, leading to semantically inconsistent feature representations. This inconsistency is particularly harmful for visual tracking, where accurate localization relies on the precise alignment between template and search features across consecutive frames. Once disrupted, the resulting misalignment quickly accumulates, causing irreversible tracking drift.

3.3 Adversarial Path-Inversion Framework

Motivated by the theoretical discovery of the above, we propose the Adversarial Path-Inversion (API) framework to systematically exploit this vulnerability and manipulate the dynamic routing decisions of adaptive trackers, as illustrated in Fig. 2.

The inputs $z \in \mathbb{R}^{H_z \times W_z \times 3}$ denote the initial template image, which provides the reference appearance, and let $s_t \in \mathbb{R}^{H_s \times W_s \times 3}$ represent the search region at frame t . The tracking task can be formulated as learning a mapping function $\mathcal{F}(\cdot)$ to predict the bounding box B_t of the target, where the global mapping is essentially a composition of L Transformer blocks $\mathcal{B}_l$, each conditionally executed based on a discrete gate $g_l \in \{0, 1\}$:

$$\begin{aligned} B_t &= \mathcal{F}(z, s_t) = \mathcal{H}\left(\Phi_L(\Phi_{L-1}(\dots \Phi_1(\mathcal{T}_0)))\right), \\ \Phi_l(x) &= g_l \mathcal{B}_l(x) + (1 - g_l)x \end{aligned} \quad (8)$$

where $\mathcal{H}(\cdot)$ denotes the tracking head, and $\mathcal{T}_0$ represents the initially embedded joint tokens.

The API framework employs an encoder-decoder perturbation generator G_p to synthesize a localized adversarial noise δ_t . This perturbation is strictly applied to the search region prior to the patch embedding (PE) stage:

$$\tilde{x}_t = x_t + \delta_t = x_t + G_p(x_t), \quad \text{s.t.} \quad \delta_t \leq \epsilon \quad (9)$$

where ϵ denotes the maximum magnitude of the perturbation. The clean template z and the perturbed search input $\tilde{x}_t$ are subsequently processed by the patch embedding module of the victim tracker to obtain the initial joint tokens $\mathcal{T}_0^{adv}$:

$$\mathcal{T}_0^{adv} = [\text{PE}(z); \text{PE}(\tilde{x}_t)] + \mathcal{P}_{pos} \quad (10)$$

where $[\cdot]$ denotes the concatenation operation, and $\mathcal{P}_{pos}$ represents the position embeddings. The ultimate goal is to force the current routing decisions $\{r_t^1, \dots, r_t^L\}$ to deviate from the clean computational path, thereby dismantling the feature consistency and the

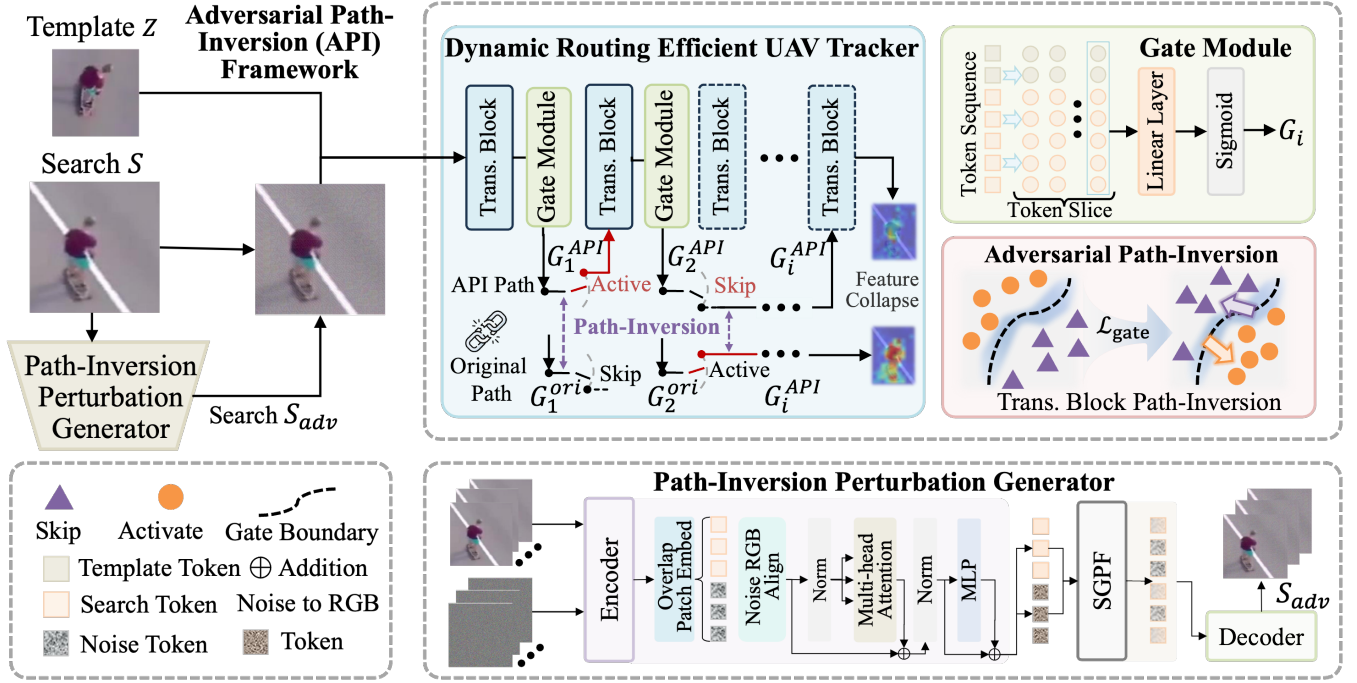


Figure 2: Overview of the Adversarial Path-Inversion (API) framework. The perturbation generator (bottom) synthesizes adversarial noise from the search region and a learnable noise prior, which is injected before patch embedding to invert the gating decisions of the victim tracker (top), dismantling feature consistency across computational paths.

overall tracking precision. During training, the parameters of the victim tracker remain frozen, and only the generator is optimized.

Path-Inversion Perturbation Generator. To systematically exploit the structural vulnerabilities inherent in adaptive trackers, we design a gate-aware adversarial perturbation generator. Drawing inspiration from the intra-modal excavation paradigm [39], the framework processes the search region s_t and the noise prior n through two independently parameterized branches. These branches utilize a hierarchical encoding architecture to progressively extract features, yielding the scene tokens $\mathcal{T}_s$ and noise tokens $\mathcal{T}_n$:

$$\mathcal{T}_s = \mathcal{E}^{(s)}(s_t), \quad \mathcal{T}_n = \mathcal{E}^{(n)}(n), \quad \mathcal{T}_s, \mathcal{T}_n \in \mathbb{R}^{N \times C}, \quad (11)$$

where $\mathcal{E}^{(s)}$ and $\mathcal{E}^{(n)}$ denote the scene and noise encoders.

Subsequently, to achieve precise spatial targeting and ensure visual stealthiness, we incorporate an Saliency-Guided Perturbation Focusing (SGPF) module and an adversarial perturbation decoder $\mathcal{D}(\cdot)$. The SGPF module identifies decision-critical tokens to concentrate adversarial energy, while the decoder translates these latent representations into a localized pixel-level perturbation δ_t . This process is summarized by the following joint mapping:

$$\mathcal{T}^{\text{tc}} = \text{SGPF}(\mathcal{T}_s + \mathcal{T}_n), \quad \delta_t = \mathcal{D}(\mathcal{T}^{\text{tc}}, \mathcal{T}_s), \quad (12)$$

where $\mathcal{T}^{\text{tc}}$ represents the token-centric adversarial features. Through this mechanism, abstract topological threats are materialized into scene-adaptive noise, the specific implementations of which are detailed in the following sections.

As the cornerstone of our framework, we formulate the Path-Inversion Objective ($\mathcal{L}_{\text{path}}$). Let $l_{t,k}^{\text{adv}}$ and $l_{t,k}^{\text{clean}}$ denote the pre-sigmoid logits of the k -th gating module at frame t for the adversarial and

clean inputs, respectively. We define a polarity indicator $\eta_{t,k} = \text{sgn}(l_{t,k}^{\text{clean}})$, where $\eta_{t,k} = 1$ for active layers and $\eta_{t,k} = -1$ for skipped layers. The objective is:

$$\mathcal{L}_{\text{path}} = \frac{1}{T \cdot K} \sum_{t=1}^T \sum_{k=1}^K \eta_{t,k} \cdot l_{t,k}^{\text{adv}}. \quad (13)$$

where $T = 9$ is the number of frames in each training segment. Minimizing $\mathcal{L}_{\text{path}}$ drives $l_{t,k}^{\text{adv}}$ toward the opposite sign of its clean counterpart: originally active layers are forced to skip, and originally skipped layers are forced to activate, thereby systematically inverting the computational path.

To complement the topological disruption, we introduce a Synergistic Feature Disruption objective ($\mathcal{L}_{\text{feat}}$) that minimizes the cosine similarity between clean and adversarial token embeddings:

$$\mathcal{L}_{\text{feat}} = \frac{1}{T} \sum_{t=1}^T \frac{1}{N_s} \sum_{i=1}^{N_s} \text{sim}_{\cos}(f_{t,i}^{\text{adv}}, f_{t,i}^{\text{clean}}), \quad (14)$$

where N_s denotes the number of search tokens. This objective drives the semantic representation away from its clean counterpart, amplifying the destructive impact of path inversion.

Saliency-Guided Perturbation Focusing. To concentrate adversarial energy on decision-critical spatial regions, inspired by [36, 39, 45], we introduce the Saliency-Guided Perturbation Focusing (SGPF) module. After the final encoder stage, the scene and noise tokens are fused into a unified representation $\mathcal{T}' = \mathcal{T}_s + \mathcal{T}_n$. We compute the self-attention map over $\mathcal{T}'$ and average to obtain a per-token relevance score. The top- K tokens with the highest scores form a binary saliency mask $W \in \{0, 1\}^N$. The adversarial

representation is then modulated as:

$$\mathcal{T}^{\text{tc}} = W \odot (\mathcal{T}') + \gamma(1 - W) \odot \mathcal{T}_n, \quad \gamma = 0.5. \quad (15)$$

For salient tokens ($W_i = 1$), the full adversarial signal augmented with the noise prior is preserved, directing maximum perturbation energy toward the regions that dominate the gating decisions of the tracker. For non-salient tokens ($W_i = 0$), only a scaled noise component is retained ($\gamma = 0.5$), which suppresses perturbation magnitude in background regions and improves visual imperceptibility.

Adversarial Perturbation Decoder. The decoder translates the adversarial token representation $\mathcal{T}^{\text{tc}}$ into a pixel-level perturbation while preserving multi-scale spatial coherence through encoder skip connections. It progressively upsamples through $S = 3$ stages, where each stage j doubles the spatial resolution via transposed convolution, fuses the result with the corresponding encoder feature, and refines it through a Transformer block:

$$F_{\text{dec}}^j = \mathcal{B}_j^{(d)} \left(\text{Up}_j(F_{\text{dec}}^{j-1}) + F_{S-j}^E \right), \quad j = 1, 2, 3 \quad (16)$$

where $F_{\text{dec}}^0 = \mathcal{T}^{\text{tc}}$, Up_j denotes transposed convolution with bilinear interpolation, F_{S-j}^E is the skip feature from the encoder, and $\mathcal{B}_j^{(d)}$ is a Transformer block. A final upsampling followed by a 1×1 convolution and a tanh activation yields the perturbation:

$$\delta_t = \epsilon \cdot \tanh(\text{Conv}_{1 \times 1}(\text{Up}_4(F_{\text{dec}}^3))) \quad (17)$$

This formulation inherently enforces $\|\delta_t\|_{\infty} \leq \epsilon$ without external clipping. The final adversarial search frame is constructed as $s_t^{\text{adv}} = \text{clamp}(s_t + \delta_t, 0, 1)$.

Finally, to dismantle tracking precision at the output level, we incorporate a Response Center Suppression objective ($\mathcal{L}_{\text{resp}}$). Inspired by [39, 41], we aggregate multi-frame segments during training to capture the temporal dynamics of tracking. Specifically, within a temporal window from t to $t + T$, we suppress the response map toward a uniform distribution and simultaneously apply a Visual Reconstruction Constraint ($\mathcal{L}_{\text{recon}}$) to preserve visual stealthiness:

$$\mathcal{L}_{\text{resp}} = \frac{1}{T} \sum_{i=t}^{t+T-1} \|R_i^{\text{adv}} - \hat{R}_i\|_1, \quad \mathcal{L}_{\text{recon}} = \frac{1}{T} \sum_{i=t}^{t+T-1} \|\hat{x}_i - x_i\|_1, \quad (18)$$

where R_i^{adv} is the adversarial response map at frame i and T is the temporal segment length. This multi-frame formulation ensures persistent attack efficacy across consecutive frames while satisfying strict stealthiness constraints.

Path-Inversion Centric Composite Optimization. The generator is optimized with a composite objective that jointly drives topological inversion, semantic disruption, and visual fidelity:

$$\mathcal{L}_{\text{total}} = \lambda_{\text{path}} \mathcal{L}_{\text{path}} + \lambda_{\text{resp}} \mathcal{L}_{\text{resp}} + \lambda_{\text{feat}} \mathcal{L}_{\text{feat}} + \lambda_{\text{recon}} \mathcal{L}_{\text{recon}}, \quad (19)$$

where λ denotes the designated scaling coefficients to balance the optimization landscape.

4 Experiments

4.1 Experimental Settings

Implementation Details. In our experiments, we employ state-of-the-art adaptive trackers AVTrack [38], SGLATrack [43], and LGTrack [49] as the primary baseline victim model. The entire training process is conducted on the training split of the LaSOT [14] dataset. We utilize a computing cluster equipped with 4 NVIDIA

RTX 4090 GPUs to train 50 epochs. During the training phase, the parameters of the baseline tracking model are strictly frozen, and the optimization process is exclusively directed toward the proposed Path-Inversion Perturbation Generator and the learnable noise seed. To ensure the visual imperceptibility of the attack, the maximum magnitude of the adversarial perturbation is strictly bounded to 0.025 in the normalized continuous pixel space. Furthermore, the composite loss hyperparameters are empirically configured as follows: the path-inversion loss weight $\lambda_{\text{path}} = 2.0$, the response suppression weight $\lambda_{\text{resp}} = 1 \times 10^4$, the feature disruption weight $\lambda_{\text{feat}} = 1.0$, and the reconstruction constraint weight $\lambda_{\text{recon}} = 1.0$.

Benchmarks and Metrics. To evaluate the API framework, we conduct extensive experiments on six representative UAV tracking benchmarks: DTB70 [27], UAV123 [1] (including the 10fps subset), UAVDT [47], VisDrone2018 [52], and UAVtrack112 [15]. These datasets collectively encompass a diverse array of aerial challenges, such as intense camera motion, viewpoint variations, and severe occlusions. Performance is quantified using two standard metrics [16, 45]: the Precision Rate (Prec.) and the Success Rate (Succ.). A significant degradation in both indicators relative to the clean baseline signifies a successful adversarial attack.

4.2 Quantitative Comparison

To rigorously evaluate the destructive capability of the Adversarial Path-Inversion (API) framework, we conduct a comprehensive comparison against several state-of-the-art adversarial tracking methods. As presented in Table 1, the API framework consistently achieves the most significant degradation in both precision and success rates across all evaluated benchmarks, achieving a remarkable average precision degradation of over 80% and a success rate drop exceeding 85%. This uniformity in performance degradation strongly validates the fundamental vulnerability of the dynamic inference topology. For a fair comparison, all baseline attack methods were retrained and evaluated on the AVTrack [38] model, adhering strictly to the configurations in their respective original settings.

A critical strength of the proposed framework is its ability to balance attack potency with inference efficiency, as detailed in Table 2. Unlike existing adversarial paradigms that typically suffer from an inherent trade-off between performance and speed, the API framework achieves superior results in both dimensions. Specifically, while optimization-based methods such as RTAA [22] can induce high performance degradation, they are constrained by prohibitive computational overhead, operating at only 4.6 FPS. In contrast, the API framework maintains a high inference speed of 62.5 FPS while delivering an 87.3% drop in success rate, effectively demonstrating that high-potency attacks do not necessitate a compromise in execution efficiency.

The generalization capability of the path-based attack is further validated through extensive experiments on three representative adaptive gating dynamic routing trackers: AVTrack [38], SGLATrack [43], and LGTrack [49]. As shown in Table 3, the API framework consistently induces substantial performance drops across these diverse architectures, confirming the universal vulnerability of dynamic inference topologies. The weaker degradation on LGTrack is attributable to both a stronger victim baseline and

Table 1: Quantitative comparison of adversarial attack methods on AVTrack across UAV tracking benchmarks. The top 5 best attacking results in each metric are highlighted with decreasing color depths. UAV123* denotes the UAV123@10fps subset.

Method	DTB70		UAV123		UAVDT		VisDrone		UAV123*		UAVtrack 112	
	Prec.	Succ.	Prec.	Succ.	Prec.	Succ.	Prec.	Succ.	Prec.	Succ.	Prec.	Succ.
AVTrack [38]	84.3	65.0	84.8	66.8	82.1	58.7	86.0	65.0	83.2	65.8	80.3	65.4
Random	82.3	61.8	82.7	64.6	76.3	52.9	83.2	62.6	81.7	64.0	79.2	63.9
FGSM [17]	53.3	34.7	60.8	43.5	56.3	41.5	50.0	26.3	56.0	38.3	57.0	39.5
UAP [29]	48.2	35.8	54.3	41.5	31.0	20.3	43.0	32.1	57.4	43.7	50.0	37.6
CSA [44]	71.2	47.6	74.0	49.8	62.8	35.5	72.5	52.5	69.9	48.2	68.5	46.2
TTAttack [30]	54.0	35.9	67.2	46.8	45.6	23.6	65.8	43.0	65.9	46.8	54.8	37.9
DFA [35]	72.3	55.1	72.8	57.2	71.9	49.0	78.6	58.8	73.1	57.6	71.4	56.5
Ad2attack [16]	71.9	48.4	78.5	57.6	67.2	41.8	76.7	54.7	75.6	56.1	73.3	54.4
RTAA [22]	19.0	12.4	27.3	20.4	25.3	16.8	33.0	24.2	34.2	25.0	21.2	16.0
ICAttack [39]	38.0	30.3	38.9	31.7	20.8	15.1	24.8	19.0	41.3	33.5	34.2	27.2
API Attack	16.1	8.2	11.6	7.5	18.2	8.5	16.4	7.0	16.1	10.2	16.8	10.4


Table 2: Comparison of performance and efficiency degradation rates on the DTB70 dataset.

Method	$\epsilon(\%)$	Performance Drop		Efficiency	
		Prec.	Succ.	FPS	Drop (%)
Victim [38]	-	-	-	79.5	-
DFA [35]	3.1	14.3	15.2	13.7	82.8
Ad2attack [16]	3.1	14.7	25.6	49.7	37.5
CSA [44]	3.1	15.6	26.9	17.0	78.6
TTAttack [30]	3.1	35.9	44.8	29.7	62.6
Fgsm [17]	3.1	36.7	46.6	11.2	85.9
UAP [29]	3.1	42.9	44.9	11.4	85.7
ICAttack [39]	2.5	54.9	53.3	22.8	71.3
RTAA [22]	3.1	77.5	81.0	4.6	94.2
API Attack	2.5	80.9	87.3	62.5	21.4

Table 3: Generalization Analysis of the API Framework.

Tracker	DTB70		UAV123		UAVDT		VisDrone		UAV123 @10fps		Uavtrack 112	
	Prec.	Succ.	Prec.	Succ.	Prec.	Succ.	Prec.	Succ.	Prec.	Succ.	Prec.	Succ.
AVTrack [38]	84.3	65.0	84.8	66.8	82.1	58.7	86.0	65.0	83.2	65.8	80.3	65.4
API Attack	16.1	8.2	11.6	7.5	18.2	8.5	16.4	7.0	16.1	10.2	16.8	10.4
SGLATrack [43]	84.4	65.1	84.9	66.9	81.9	59.9	81.2	62.1	82.6	65.5	82.8	67.5
API Attack	11.1	8.9	17.7	14.3	15.3	11.0	19.9	15.8	21.2	16.9	22.8	19.1
LGTrack [49]	84.0	65.1	83.9	65.7	80.5	58.8	87.1	65.0	82.6	64.8	80.7	65.2
API Attack	47.7	37.6	48.2	38.9	32.5	23.3	44.0	34.5	49.8	39.7	41.9	34.1

only applies dynamic routing to 3 blocks (30% of AVTrack’s attackable branch space). Consequently, more features are fixed by early blocks, reducing the global impact of route-flip perturbations.

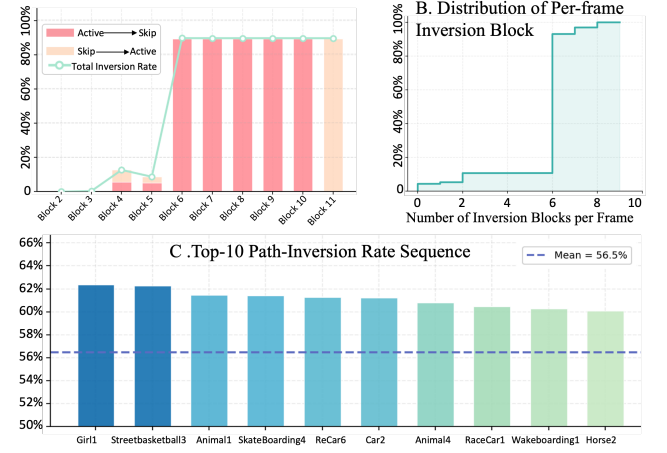**Figure 3: Empirical validation of the path-inversion effect across different complementary dimensions.**

4.3 Exploration Experiments

To provide a fine-grained understanding of how the Adversarial Path-Inversion (API) framework operates the dynamic routing topology on AVTrack [38], we conduct a systematic exploration of the gate inversion behavior across dimensions, as shown in Fig. 3.

Block-level Analysis. The observed disparity in path-inversion rates validates the inherent instability of adaptive tracking (see Fig. 3-A). The sharp phase transition at Block 6 results from the synergy between error propagation and semantic abstraction. In the initial stages (Blocks 2–5), inversion rates remain below 12.7% as infinitesimal input perturbations have not yet been sufficiently amplified to exceed the decision thresholds of the shallow gating modules. However, through mathematically proven amplification, the cumulative error surpasses the critical threshold of the Lipschitz singularity by the time it reaches the mid-to-deep blocks (Blocks 6–11). This transition is further driven by the high-level semantic

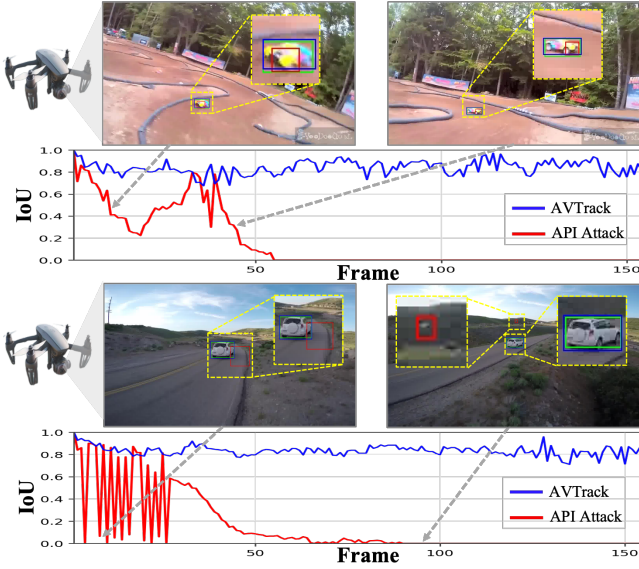


Figure 4: Qualitative Visualization of the API Attack on a UAV Tracking Platform.

representations in deeper layers, which are significantly more susceptible to adversarial feature blurring than the textural features in shallow blocks. Consequently, the inversion rate surges to 89.3% from Block 6 onward, where original paths are forcibly reversed.

Frame-level Effect. The frame-level distribution in Figure 3-B proves this structural interpretation. The distribution exhibits a highly concentrated and near-step transition at 6 inverted blocks, with more than 90% of frames experiencing simultaneous inversion of 6 or more transformer blocks. This near-deterministic behavior confirms that the path-inversion effect is a structurally induced discrete transition: once the perturbation crosses the decision boundary, the routing of multiple deep blocks collapses in unison.

Sequence-level Generalizability. To further assess the stability of the path-inversion effect across diverse aerial tracking scenarios, Figure 3-C reports the per-sequence gate inversion rate on DTB70, ranked in descending order. The mean inversion rate across the entire benchmark reaches 56.5%, with the top-performing sequences consistently exceeding 60%.

4.4 Qualitative Comparison

As shown in Fig. 4, the corresponding *IoU* (Intersection over Union) curves below each scenario quantify the tracking precision. Upon the introduction of the adversarial perturbation to the search patch, the adaptive tracker experiences a catastrophic failure, as evidenced by the rapid collapse of the red *IoU* curve and the resultant irreversible drift of the red bounding box from the actual target.

Compared to other adversarial methods, the API framework induces a significantly earlier onset of drift (Fig. 5). For instance, in the middle and bottom rows (at frame #2), while the baseline adversarial trackers still manage to localize the target, the API attack has already forced the tracker to deviate from the ground truth. Furthermore, the magnitude of the drift generated by the proposed framework is substantially larger than that of the existing methods. As the sequences progress (e.g., frame #255 and #272),

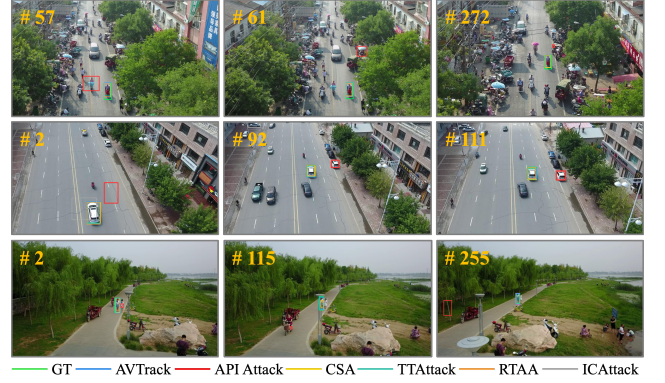


Figure 5: Qualitative tracking results of the representative attack methods on the Visdrone2018 [52] dataset.

the *IoU* ratio of the API-attacked tracker collapses more rapidly and remains consistently lower, eventually approaching zero. This immediate and severe subversion of the tracking logic demonstrates the superior potency of the path-inversion mechanism.

The trajectory visualization jointly explains the attack effectiveness from both temporal and spatial dimensions, as illustrated in Fig. 6. In the temporal dimension, the attack trajectory does not manifest as isolated frame-by-frame noise, but first deviates from the baseline path in the early stage, and then remains continuously unstable in subsequent frames. This pattern indicates the existence of an error accumulation process, where the state update gradually deviates from the true motion manifold and cannot recover. In the spatial dimension, the attack trajectory is repeatedly attracted by background regions and shows frequent local oscillations. Therefore, the proposed attack degrades the instantaneous localization quality and destroys the long-term motion consistency.

4.5 Ablation Study

We conduct comprehensive ablation studies on the DTB70 and UAVDT datasets to dissect the individual contributions of the core components within the Adversarial Path-Inversion framework, as reported in Table 4. First, we investigate the impact of the path-inversion objective. Removing this component leads to the most significant degradation in attack effectiveness, with the precision score on the DTB70 dataset increasing from 16.1 to 52.7. This severe drop validates the theoretical insight of this paper: without explicitly targeting the Lipschitz singularity to force topological hijacking, relying solely on semantic feature corruption is insufficient to induce catastrophic failure of the tracker. Second, we analyze the Saliency-Guided Perturbation Focusing module. Disabling this module causes the precision score to recover to 27.9. Without the focusing mechanism, the adversarial energy is uniformly diluted across the background, which reduces the probability of crossing the gating decision boundaries. Furthermore, we evaluate the roles of the learnable noise prior and the noise-to-RGB alignment module. Removing the learnable noise token or the alignment mechanism substantially weakens the attack effectiveness. These results demonstrate that an adaptive noise representation is crucial for bridging the abstract topological manipulation in the latent space to the concrete pixel-level perturbation in the input space. The synergy

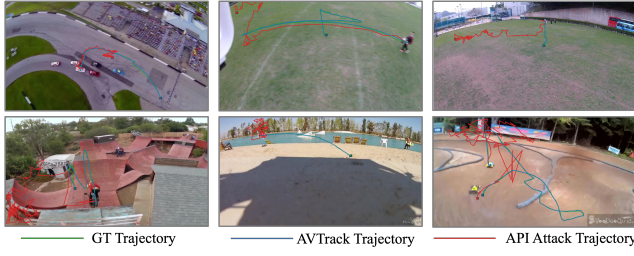


Figure 6: Spatio-temporal trajectory comparison. The attack trajectory deviates early from the baseline path and is repeatedly attracted toward background regions.

Table 4: Ablation study of core components on DTB70 and UAVDT datasets.

Variant	DTB70		UAVDT	
	Succ.	Prec.	Succ.	Prec.
Full Model (API)	8.2	16.1	8.5	18.2
w/o SGPF	19.8	27.9	13.5	20.1
w/o Noise2RGB	21.9	30.5	17.5	26.0
w/o Path-Inversion	35.9	52.7	31.5	46.9
w/o Learn Noise	27.9	43.2	24.5	37.7

of these components ensures that the structural bias is effectively injected into the search region to dismantle both the localization capability and the motion consistency of the model. More ablation results, additional experimental analysis, and promising defense strategies can be found in the **supplementary materials**.

5 Conclusion

In this work, we first identify a structural vulnerability in the computation-on-demand mechanism of adaptive tracking architectures. We demonstrate that the discrete gating boundaries of dynamic routing decisions exhibit a Lipschitz singularity. This inherent discontinuity ensures that even infinitesimal input perturbations near the decision boundary can trigger abrupt transitions in the inference topology. To systematically exploit this property, we propose the Adversarial Path-Inversion (API) framework. Different from traditional attack paradigms that target semantic representations within a fixed computational path, our framework operates on a topology-path-based attack surface. By precisely manipulating the gating modules to invert the computational paths, the framework completely dismantles the localization capability and the temporal consistency of the tracker. Extensive evaluations across multiple benchmarks confirm that the proposed method achieves superior attack efficacy and high inference efficiency under strict perturbation constraints. Beyond the attack perspective, this work also motivates the investigation of potential defense strategies, such as randomization of gating decisions, soft relaxation of routing boundaries, and adversarial training with topology-aware regularization. We hope this study provides useful insights for both the security analysis and the robust design of dynamic tracking architectures.

References

- [1] U Benchmark. 2016. A benchmark and simulator for uav tracking. In *European conference on computer vision*, Vol. 7.
- [2] Goutam Bhat, Martin Danelljan, Luc Van Gool, and Radu Timofte. 2019. Learning discriminative model prediction for tracking. In *Proceedings of the IEEE/CVF international conference on computer vision*. 6182–6191.
- [3] Anirban Chakraborty, Manar Alam, Vishal Dey, Anupam Chattopadhyay, and Debdeep Mukhopadhyay. 2021. A survey on adversarial attacks and defences. *CAAI Transactions on Intelligence Technology* 6, 1 (2021), 25–45.
- [4] Chenglizhao Chen, Shaofeng Liang, Runwei Guan, Xiaolou Sun, Haocheng Zhao, Haiyun Jiang, Tao Huang, Henghui Ding, and Qing-Long Han. 2026. Aerialmind: Towards referring multi-object tracking in UAV scenarios. In *Proceedings of the AAAI Conference on Artificial Intelligence*, Vol. 40. 2805–2813.
- [5] Chenglizhao Chen, Shaofeng Liang, Luming Li, Mengke Song, Xu Yu, and Shanchen Pang. 2026. Adapting Visual Trackers to Dynamic View Transitions with Shift-view Prompt Tuning. *IEEE Transactions on Circuits and Systems for Video Technology* (2026).
- [6] Xin Chen, Bin Yan, Jiawen Zhu, Dong Wang, Xiaoyun Yang, and Huchuan Lu. 2021. Transformer tracking. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*. 8126–8135.
- [7] Xuesong Chen, Xiyu Yan, Feng Zheng, Yong Jiang, Shu-Tao Xia, Yong Zhao, and Rongrong Ji. 2020. One-shot adversarial attacks on visual tracking with dual attention. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*. 10176–10185.
- [8] Zedu Chen, Bineng Zhong, Guorong Li, Shengping Zhang, and Rongrong Ji. 2020. Siamese box adaptive network for visual tracking. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*. 6668–6677.
- [9] Yutao Cui, Cheng Jiang, Limin Wang, and Gangshan Wu. 2022. Mixformer: End-to-end tracking with iterative mixed attention. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*. 13608–13618.
- [10] Martin Danelljan, Goutam Bhat, Fahad Shahbaz Khan, and Michael Felsberg. 2019. Atom: Accurate tracking by overlap maximization. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*. 4660–4669.
- [11] Martin Danelljan, Gustav Hager, Fahad Shahbaz Khan, and Michael Felsberg. 2015. Learning spatially regularized correlation filters for visual tracking. In *Proceedings of the IEEE international conference on computer vision*. 4310–4318.
- [12] Wenbiao Du, Jingfeng Xue, Xiuqi Yang, Wenjie Guo, Dujuan Gu, and Weijie Han. 2025. TransfocFormer: A novel Transformer-based framework to generate evasive malicious traffic. *Knowledge-Based Systems* 319 (2025), 113546.
- [13] Wenbiao Du, Tengfei Yang, Zhihan Sun, Xiuqi Yang, Zeyang Liu, and Jingfeng Xue. 2025. A Comprehensive Survey on White-Box Security Threats for Large Language Models. In *International Conference on Knowledge Science, Engineering and Management*. Springer, 74–86.
- [14] Heng Fan, Hexin Bai, Liting Lin, Fan Yang, Peng Chu, Ge Deng, Sijia Yu, Harshit, Mingzhen Huang, Juehuan Liu, et al. 2021. Lasot: A high-quality large-scale single object tracking benchmark. *International Journal of Computer Vision* 129, 2 (2021), 439–461.
- [15] Changhong Fu, Ziang Cao, Yiming Li, Junjie Ye, and Chen Feng. 2021. Onboard real-time aerial tracking with efficient Siamese anchor proposal network. *IEEE Transactions on Geoscience and Remote Sensing* 60 (2021), 1–13.
- [16] Changhong Fu, Sihang Li, Xinnan Yuan, Junjie Ye, Ziang Cao, and Fangqiang Ding. 2022. Ad 2 attack: Adaptive adversarial attack on real-time uav tracking. In *2022 International conference on robotics and automation (ICRA)*. IEEE, 5893–5899.
- [17] Ian J Goodfellow, Jonathon Shlens, and Christian Szegedy. 2014. Explaining and harnessing adversarial examples. *arXiv preprint arXiv:1412.6572* (2014).
- [18] Dongyan Guo, Jun Wang, Ying Cui, Zhenhua Wang, and Shengyong Chen. 2020. SiamCAR: Siamese fully convolutional classification and regression for visual tracking. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*. 6269–6277.
- [19] João F Henriques, Rui Caseiro, Pedro Martins, and Jorge Batista. 2014. High-speed tracking with kernelized correlation filters. *IEEE transactions on pattern analysis and machine intelligence* 37, 3 (2014), 583–596.
- [20] Sanghyun Hong, Yiğitcan Kaya, Ionuț-Vlad Modoranu, and Tudor Dumitras. 2020. A panda? no, it's a sloth: Slowdown attacks on adaptive multi-exit neural network inference. *arXiv preprint arXiv:2010.02432* (2020).
- [21] Xingsen Huang, Deshui Miao, Hongpeng Wang, Yaowei Wang, and Xin Li. 2024. Context-guided black-box attack for visual tracking. *IEEE Transactions on Multimedia* 26 (2024), 8824–8835.
- [22] Shuai Jia, Chao Ma, Yibing Song, Xiaokang Yang, and Ming-Hsuan Yang. 2025. Robust deep object tracking against adversarial attacks. *International Journal of Computer Vision* 133, 3 (2025), 1238–1257.
- [23] Shuai Jia, Yibing Song, Chao Ma, and Xiaokang Yang. 2021. Iou attack: Towards temporally coherent black-box adversarial attack for visual object tracking. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*. 6709–6718.
- [24] Ben Kang, Xin Chen, Dong Wang, Houwen Peng, and Huchuan Lu. 2023. Exploring lightweight hierarchical vision transformers for efficient visual tracking. In

- Proceedings of the IEEE/CVF international conference on computer vision*. 9612–9621.
- [25] Songning Lai, Yu Huang, Jiayu Yang, Gaoxiang Huang, Wenshuo Chen, and Yutao Yue. 2024. Guarding the gate: Conceptguard battles concept-level backdoors in concept bottleneck models. *arXiv preprint arXiv:2411.16512* (2024).
 - [26] Songning Lai, Jiayu Yang, Yu Huang, Lijie Hu, Tianlang Xue, Zhangyi Hu, Jiaxu Li, Haicheng Liao, and Yutao Yue. 2024. Cat: Concept-level backdoor attacks for concept bottleneck models. *arXiv preprint arXiv:2410.04823* (2024).
 - [27] Siyi Li and Dit-Yan Yeung. 2017. Visual object tracking for unmanned aerial vehicles: A benchmark and new motion models. In *Proceedings of the AAAI conference on artificial intelligence*, Vol. 31.
 - [28] Shaofeng Liang, Runwei Guan, Wangwang Lian, Daizong Liu, Xiaolou Sun, Dongming Wu, Yutao Yue, Weiping Ding, and Hui Xiong. 2025. Cognitive Disentanglement for Referring Multi-Object Tracking. *INFFUS* (2025), 103349.
 - [29] Seyed-Mohsen Moosavi-Dezfooli, Alhussein Fawzi, Omar Fawzi, and Pascal Frossard. 2017. Universal adversarial perturbations. In *Proceedings of the IEEE conference on computer vision and pattern recognition*. 1765–1773.
 - [30] Krishna Kanth Nakka and Mathieu Salzmann. 2022. Universal, transferable adversarial perturbations for visual object trackers. In *European Conference on Computer Vision*. Springer, 413–429.
 - [31] KL Navaneet, Soroush Abbasi Koohpayegani, Essam Sleiman, and Hamed Pirsiavash. 2024. Slowformer: Adversarial attack on compute and energy consumption of efficient vision transformers. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 24786–24797.
 - [32] Fatemeh Nourilenjan Nokabadi, Yann Batiste Pequignot, Jean-François Lalonde, and Christian Gagné. 2024. TrackPGD: Efficient Adversarial Attack using Object Binary Masks against Robust Transformer Trackers. In *The 3rd New Frontiers in Adversarial Machine Learning (AdvML Frontiers@ NeurIPS2024)*.
 - [33] Yongming Rao, Wenliang Zhao, Benlin Liu, Jiwen Lu, Jie Zhou, and Cho-Jui Hsieh. 2021. Dynamicvit: Efficient vision transformers with dynamic token sparsification. *Advances in neural information processing systems* 34 (2021), 13937–13949.
 - [34] Xiaolou Sun, Wufei Si, Wenhui Ni, Yuntian Li, Dongming Wu, Fei Xie, Runwei Guan, He-Yang Xu, Henghui Ding, Yuan Wu, et al. 2026. AutoFly: Vision-Language-Action Model for UAV Autonomous Navigation in the Wild. *arXiv preprint arXiv:2602.09657* (2026).
 - [35] Wattanapong Suttapak, Jianfu Zhang, and Liqing Zhang. 2022. Diminishing-feature attack: The adversarial infiltration on visual tracking. *Neurocomputing* 509 (2022), 21–33.
 - [36] Jiahao Wang, Fang Liu, Licheng Jiao, Hao Wang, Shuo Li, Lingling Li, Puhua Chen, Xu Liu, and Xinyi Wang. 2025. FA3T: Feature-Aware Adversarial Attacks for Multi-modal Tracking. In *Proceedings of the 33rd ACM International Conference on Multimedia*. 1376–1385.
 - [37] Tingyu Wang, Yujiao Shi, Fabian Deuser, Shaofei Huang, Guosheng Hu, Si Liu, Zhedong Zheng, and Roger Zimmermann. 2025. The 3rd workshop on uavs in multimedia: Capturing the world from a new perspective. In *Proceedings of the 3rd International Workshop on UAVs in Multimedia: Capturing the World from a New Perspective*. 1–3.
 - [38] You Wu, Yongxin Li, Mengyuan Liu, Xucheng Wang, Xiangyang Yang, Hengzhou Ye, Dan Zeng, Qijun Zhao, and Shuiwang Li. 2025. Learning an adaptive and view-invariant vision transformer for real-time UAV tracking. *IEEE Transactions on Circuits and Systems for Video Technology* (2025).
 - [39] Xinyu Xiang, Xuying Wu, Shengxiang Li, Qinglong Yan, Tong Zou, Hao Zhang, and Jiayi Ma. 2026. Adversarial perturbation for RGB-T tracking via intra-modal excavation and cross-modal collusion. *Information Fusion* (2026), 104183.
 - [40] Xinyu Xiang, Qinglong Yan, Hao Zhang, Jianfeng Ding, Han Xu, Zhongyuan Wang, and Jiayi Ma. 2025. Cross-modal stealth: A coarse-to-fine attack framework for rgb-t tracker. In *Proceedings of the AAAI Conference on Artificial Intelligence*, Vol. 39. 8620–8627.
 - [41] Xinyu Xiang, Qinglong Yan, Hao Zhang, and Jiayi Ma. 2025. Aattack: Adaptive cross attacking rgb-t tracker via multi-modal response decoupling. In *Proceedings of the Computer Vision and Pattern Recognition Conference*. 22099–22108.
 - [42] Yinda Xu, Zeyu Wang, Zuoxin Li, Ye Yuan, and Gang Yu. 2020. SiamFC++: Towards robust and accurate visual tracking with target estimation guidelines. In *Proceedings of the AAAI conference on artificial intelligence*, Vol. 34. 12549–12556.
 - [43] Chaocan Xue, Bineng Zhong, Qihua Liang, Yaozong Zheng, Ning Li, Yuanliang Xue, and Shuxiang Song. 2025. Similarity-guided layer-adaptive vision transformer for UAV tracking. In *Proceedings of the Computer Vision and Pattern Recognition Conference*. 6730–6740.
 - [44] Bin Yan, Dong Wang, Huchuan Lu, and Xiaoyun Yang. 2020. Cooling-shrinking attack: Blinding the tracker with imperceptible noises. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*. 990–999.
 - [45] Botao Ye, Hong Chang, Bingpeng Ma, Shiguang Shan, and Xilin Chen. 2022. Joint feature learning and relation modeling for tracking: A one-stream framework. In *European conference on computer vision*. Springer, 341–357.
 - [46] Hongxu Yin, Arash Vahdat, Jose M Alvarez, Arun Mallya, Jan Kautz, and Pavlo Molchanov. 2022. A-vit: Adaptive tokens for efficient vision transformer. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*. 10809–10818.
 - [47] Hongyang Yu, Guorong Li, Weigang Zhang, Qingming Huang, Dawei Du, Qi Tian, and Nicu Sebe. 2020. The unmanned aerial vehicle benchmark: Object detection, tracking and baseline. *International Journal of Computer Vision* 128, 5 (2020), 1141–1159.
 - [48] Yuhui Zheng, Yan Zhang, and Bin Xiao. 2023. Target-aware transformer tracking. *IEEE Transactions on Circuits and Systems for Video Technology* 33, 9 (2023), 4542–4551.
 - [49] Yang Zhou, Derui Ding, Ran Sun, Ying Sun, and Haohua Zhang. 2026. Layer-Guided UAV Tracking: Enhancing Efficiency and Occlusion Robustness. *arXiv preprint arXiv:2602.13636* (2026).
 - [50] Ze Zhou, Yinghui Sun, Quansen Sun, Chaobo Li, and Zhenwen Ren. 2023. Only once attack: Fooling the tracker with adversarial template. *IEEE Transactions on Circuits and Systems for Video Technology* 33, 7 (2023), 3173–3184.
 - [51] Jiawen Zhu, Xin Chen, Haiwen Diao, Shuai Li, Jun-Yan He, Chenyang Li, Bin Luo, Dong Wang, and Huchuan Lu. 2025. Exploring dynamic transformer for efficient object tracking. *IEEE Transactions on Neural Networks and Learning Systems* (2025).
 - [52] Pengfei Zhu, Longyin Wen, Dawei Du, Xiao Bian, Haibin Ling, Qinghua Hu, Qinqin Nie, Hao Cheng, Chenfeng Liu, Xiaoyu Liu, et al. 2018. Visdrone-det2018: The vision meets drone object detection in image challenge results. In *Proceedings of the European conference on computer vision (ECCV) workshops*. 0–0.