

Muon Meets Mamba: Spectral Optimization for State Space Models

Arslan Battalov
HSE University
Moscow, Russia

Karim Kramin
HSE University
Moscow, Russia

Alexander Markotenko
HSE University
Moscow, Russia

Sofia Sinitsina
HSE University
Moscow, Russia

Abstract—Muon is a recent optimizer that orthogonalizes the update to each weight matrix with a Newton–Schulz iteration, which performs steepest descent under the spectral norm. Almost all the evidence for it comes from Transformer models, and its behavior on state-space models is largely unreported. We compare Muon with AdamW on Mamba-2 130M under a controlled protocol that varies only which weight groups are trained with Muon. The benefit is localized. Muon on the output projection alone beats Muon on the input projection or on both. The advantage is mainly one of token efficiency. It holds on two corpora and two token budgets, and persists when training continues well past the compute-optimal point. Conditioning does not explain the gain. Muon lowers the condition number of whichever projection it trains, but the better-conditioned input projection is not the one that helps.

Index Terms—Muon optimizer, steepest descent, spectral norm, state space models, Mamba, Mamba-2, learning-rate sensitivity, optimization stability

I. Project Description

We compare how Mamba-2 trains under Muon versus AdamW in a controlled setup. The model is Mamba-2 130M, trained on two datasets, OpenWebText (OWT) and FineWebEdu, at token budgets of 10^9 , 2.6×10^9 , and 5×10^{10} . The baseline trains every parameter with AdamW. Separate runs, from the same initialization seeds, instead assign Muon to $\mathcal{G}_{\text{in}}$, to $\mathcal{G}_{\text{out}}$, and to $\mathcal{G}_{\text{in}} \cup \mathcal{G}_{\text{out}}$, and leave the rest on AdamW. Section III describes the model and the two optimizers, Section IV defines these assignments formally, and Figure 1 shows them inside the Mamba-2 block.

The central research question is whether Muon, applied to $\mathcal{G}_{\text{in}}$, to $\mathcal{G}_{\text{out}}$, or to $\mathcal{G}_{\text{in}} \cup \mathcal{G}_{\text{out}}$, improves on the pure AdamW baseline on Mamba-2, in final validation loss or in token efficiency, and whether any such improvement is localized to a specific projection group.

All runs use the official Mamba implementation [1] and the public Muon reference implementation [2], [3]. The contribution is empirical: we report final loss, convergence, and robustness under one fixed protocol, together with the matrix spectral diagnostics used to interpret where the Muon assignment helps.

II. Literature Review

Mamba-2 as the target architecture: Structured state space models such as S4 [4] showed that recurrent sequence

models with structured transition matrices can be competitive on long-range sequence tasks. Mamba [5] made this family effective for language modeling by introducing input-dependent selective SSM parameters. Mamba-2 [6] reformulates the sequence-mixing computation through structured state space duality, which connects SSMs to structured matrices and linear attention, and improves hardware utilization relative to Mamba. Empirical studies show that Mamba-family models behave differently from Transformers in architecture-specific ways: Waleffe et al. [7] compare pure SSM and hybrid models up to 8B parameters, Park et al. [8] analyze controlled in-context learning tasks, and Lieber et al. [9] train Jamba, a 52B-parameter hybrid Transformer–Mamba model. This architecture-specific behavior is why optimizer conclusions from Transformers cannot be assumed to transfer, and why we treat Mamba-2 as a separate optimization target.

AdamW as the baseline optimizer: AdamW [10] decouples weight decay from the adaptive gradient update and is the baseline optimizer here; all parameters not assigned to Muon remain on AdamW. Recent work explains why Adam-type methods are strong baselines for language modeling. Zhang et al. [11] identify blockwise Hessian heterogeneity as one reason a single global learning rate can make SGD underperform Adam on Transformers. Kunstner et al. [12] show that heavy-tailed token imbalance slows gradient descent on low-frequency classes, while Adam and sign-based methods are less sensitive. Zhao et al. [13] provide the optimizer-comparison template used here: fixed token budgets, explicit learning-rate selection, and a strong baseline. We therefore compare Muon against a carefully calibrated AdamW baseline under a fixed protocol.

Matrix-aware optimization and Muon: Shampoo [14], [15] is the main precedent here. It preconditions whole weight matrices with Kronecker factors rather than adapting each coordinate independently, but requires inverse matrix-root computations and substantial optimizer-state engineering. Muon is lighter, as it applies a fixed-iteration Newton–Schulz orthogonalization directly to matrix-valued momentum updates. Jordan [2] defines Muon for two-dimensional hidden-layer matrices, while embeddings, output matrices, scalars, and vectors remain under AdamW. Liu et al. [16] report that, with weight decay and shape-dependent update scaling, Muon matches AdamW quality at approximately 52% of the training FLOPs in Transformer-based scaling-law experiments.

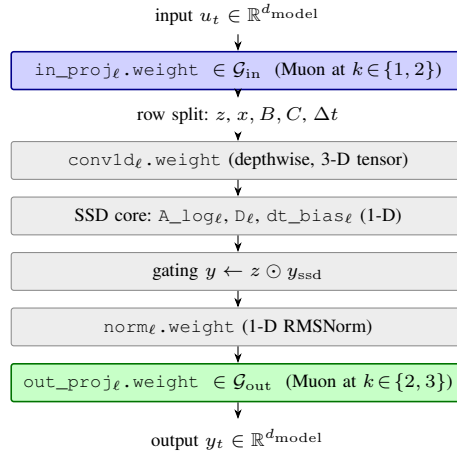


Fig. 1. Mamba-2 block (single layer ℓ) with the two-dimensional, Muon-eligible projection matrices highlighted. Muon is assigned to blue $\mathcal{G}_{\text{in}}$ at $k = 1$ and $k = 2$, and to green $\mathcal{G}_{\text{out}}$ at $k = 2$ (jointly with $\mathcal{G}_{\text{in}}$) and at $k = 3$ (alone). Gray cells are parameters always trained with AdamW: one-dimensional SSD and normalization parameters, three-dimensional depthwise convolution filters, embeddings, the language-modeling head, and biases.

Bernstein and Newhouse [17], [18] connect orthogonalized matrix updates to steepest descent under the spectral norm and argue that the appropriate update geometry depends on layer role. The role of Mamba-2’s projection matrices differs from that of Transformer attention or MLP projections, so Muon’s behavior on them is not predetermined by the Transformer evidence.

Adjacent formulations: Two kinds of alternatives sit next to Muon. Per-group AdamW learning rates and plain momentum methods probe learning-rate allocation and momentum, but not Muon’s spectral update geometry. Shampoo and related preconditioners do reach that geometry through explicit preconditioning, but at the cost of larger optimizer state and more implementation work [14], [15]. We therefore use Muon, the lightweight option, and vary only its assignment to the predefined Mamba-2 projection groups.

Spectral diagnostics: Muon orthogonalizes matrix-valued update directions, so its effect may appear in the spectra of the trained matrices to which it is assigned. Saxe, McClelland, and Ganguli [19] show in deep linear networks that learning dynamics decompose along singular modes and that ill-conditioned matrices can slow learning by separating the evolution of different modes. Martin and Mahoney [20] find that trained deep-network weight matrices can exhibit structured spectral regimes, including spiked and heavy-tailed spectra, rather than uniform singular-value distributions. Together these results make the spectral effect of Muon on Mamba-2 projection matrices hard to predict. A more uniform update geometry may help if AdamW leaves the projection matrices poorly conditioned, but it could equally be neutral or harmful if the AdamW-trained spectra already carry useful task-specific structure. We therefore report three diagnostics (effective rank [21], condition number, and spectral norm) to test whether optimizer-dependent validation differences come with systematic spectral changes in the Mamba-2 projection groups.

Research gap: No controlled evidence exists for how Muon should be assigned inside Mamba-2 blocks. Existing work supports Muon as a spectral-geometry update for Transformer hidden matrices, but says nothing about which Mamba-2 projection matrices should receive it. We close that gap by comparing AdamW and Muon under a shared protocol, varying only which predefined Mamba-2 projection groups receive Muon.

III. Preliminaries

This section fixes the model and the two optimizers, and identifies which Mamba-2 parameters are matrix-valued and therefore eligible for Muon.

Model and SSD core: Let Θ be the trainable parameters of the Mamba-2 130M model (Section V) and L the number of Mamba-2 blocks. Following Dao and Gu [6], a discrete SSM has the form

$$h_t = A_t h_{t-1} + B_t x_t, \quad y_t = C_t^\top h_t.$$

In the default Mamba-2 multi-input-head pattern, and suppressing the batch axis, the SSD layer operates on

$$A \in \mathbb{R}^{T \times H}, \quad X \in \mathbb{R}^{T \times H \times P}, \quad B, C \in \mathbb{R}^{T \times 1 \times N},$$

where T is the sequence length, H the number of heads, P the head dimension, and N the state dimension.

The SSD layer maps A, X, B, C to Y , but those quantities come from trainable block projections and nonlinearities; they are not themselves the matrices Muon acts on.

Eligible matrices in a Mamba-2 block: For the reference state-spaces/mamba implementation [1] of a single Mamba-2 block, indexed by layer $\ell \in \{1, \dots, L\}$, the trainable parameters comprise:

- $\text{in_proj}_\ell.\text{weight} \in \mathbb{R}^{(2d_{\text{inner}} + 2n_{\text{groups}}d_{\text{state}} + n_{\text{heads}}) \times d_{\text{model}}}$, the merged input projection that produces the gating channel z , the

data channel x , the SSD observations B, C , and the time-step Δt ;

- `conv1d $_{\ell}$ .weight` and its bias `conv1d $_{\ell}$ .bias`, a depthwise 1D convolution over the (x, B, C) channels (a 3-dimensional tensor, not a matrix in the linear-algebra sense);
- `dt_bias $_{\ell}$` , `A_log $_{\ell}$` , `D $_{\ell}$` $\in \mathbb{R}^{n_{\text{heads}}}$, one-dimensional SSD parameters;
- the block input norm `norm $_{\ell}$ .weight` $\in \mathbb{R}^{d_{\text{model}}}$ and the gated norm mixer `norm $_{\ell}$ .weight` $\in \mathbb{R}^{d_{\text{inner}}}$, both RMSNorm weights;
- `out_proj $_{\ell}$ .weight` $\in \mathbb{R}^{d_{\text{model}} \times d_{\text{inner}}}$, the output projection.

The two-dimensional matrix-valued trainable parameters in this block are therefore `in_proj $_{\ell}$ .weight` and `out_proj $_{\ell}$ .weight`. Token embeddings, the language-modeling head, biases, normalization parameters, one-dimensional SSD parameters, and the depthwise convolution filter are excluded from Muon assignment by the eligibility rules of [2], [16] and remain on AdamW throughout this study. We accordingly define

$$\mathcal{G}_{\text{in}} = \{\text{in_proj}_{\ell}.\text{weight} : \ell = 1, \dots, L\},$$

$$\mathcal{G}_{\text{out}} = \{\text{out_proj}_{\ell}.\text{weight} : \ell = 1, \dots, L\}.$$

For the Mamba-2 architecture used in the main study, the Muon-eligible matrix set inside the blocks is

$$\mathcal{G}_{\text{elig}} = \mathcal{G}_{\text{in}} \cup \mathcal{G}_{\text{out}}.$$

All parameters in $\Theta \setminus \mathcal{G}_{\text{elig}}$ are always trained with AdamW.

Optimizer update rules: For the minibatch training loss $\mathcal{L}(\theta_n)$ at update step n , let

$$g_n = \nabla_{\theta} \mathcal{L}(\theta_n)$$

denote the full parameter gradient. We write $g_{n,w}$ and $g_{n,W}$ for the components of g_n at a parameter w and at a matrix-valued parameter W , respectively.

AdamW uses the decoupled weight decay of Loshchilov and Hutter [10]. For a parameter w on AdamW, it maintains elementwise moment estimates

$$m_{n,w} = \beta_1 m_{n-1,w} + (1 - \beta_1) g_{n,w},$$

$$v_{n,w} = \beta_2 v_{n-1,w} + (1 - \beta_2) (g_{n,w} \odot g_{n,w}),$$

with bias-corrected moments

$$\hat{m}_{n,w} = \frac{m_{n,w}}{1 - \beta_1^n}, \quad \hat{v}_{n,w} = \frac{v_{n,w}}{1 - \beta_2^n}.$$

The AdamW update is

$$w_{n+1} = w_n - \alpha \frac{\hat{m}_{n,w}}{\sqrt{\hat{v}_{n,w} + \varepsilon}} - \alpha \lambda w_n.$$

We use betas $(\beta_1, \beta_2) = (0.9, 0.95)$, $\varepsilon = 10^{-8}$, and decoupled weight decay $\lambda = 0.1$. Following the configuration used by Dao and Gu [6] for Mamba-2 130M, the AdamW *reference* learning rate is

$$\alpha_0 = 3 \times 10^{-3}.$$

On Muon-updated parameters, for each matrix-valued parameter $W \in \mathcal{G}_{\text{elig}}$, the optimizer forms a matrix-valued momentum buffer

$$M_{n,W} = \mu M_{n-1,W} + (1 - \mu) g_{n,W}, \quad \mu = 0.95,$$

an exponential moving average of the gradient. Following the public Muon reference implementation [2], [3], the buffer is combined with the current gradient in a Nesterov step,

$$U_{n,W} = (1 - \mu) g_{n,W} + \mu M_{n,W},$$

and it is $U_{n,W}$, rather than $M_{n,W}$ itself, that is approximately orthogonalized by the Newton–Schulz polynomial of [2], [16]. Letting

$$\tilde{U}_{n,W} = \frac{U_{n,W}}{\|U_{n,W}\|_F}$$

be the Frobenius-normalized update direction, the iteration is initialized at $X_0 = \tilde{U}_{n,W}$ and applies, for $j = 0, 1, \dots, N_{\text{NS}} - 1$,

$$X_{j+1} = a X_j + b X_j X_j^{\top} X_j + c X_j X_j^{\top} X_j X_j^{\top} X_j,$$

with the quintic coefficients

$$(a, b, c) = (3.4445, -4.7750, 2.0315),$$

reported by [2] and used as the default in the public Muon reference implementation [3]. The orthogonalized matrix is then rescaled by $\gamma_W = \max(1, d_W^{\text{row}}/d_W^{\text{col}})^{1/2}$, where $d_W^{\text{row}} \times d_W^{\text{col}}$ is the shape of W , a shape-dependent factor that keeps the update magnitude comparable to AdamW’s across matrices of different aspect ratios. This default scaling is distinct from the RMS-matched rescaling evaluated as an ablation in Appendix B, which is not used in the main protocol. With learning rate η , the Muon update is

$$W_{n+1} = W_n - \eta \gamma_W X_{N_{\text{NS}}}.$$

The polynomial $p(\sigma) = a\sigma + b\sigma^3 + c\sigma^5$ pushes the singular values of $\tilde{U}_{n,W}$ toward 1, so $X_{N_{\text{NS}}}$ approximates the orthogonal polar factor of $U_{n,W}$ and has approximately unit spectral norm; the resulting step is spectral rather than elementwise, and is therefore not commensurate with AdamW’s adaptive update. We use $N_{\text{NS}} = 5$ iterations, following [2], [16]. The Muon *reference* learning rate is

$$\eta_0 = 1 \times 10^{-2},$$

within the range $[5 \times 10^{-3}, 2 \times 10^{-2}]$ used in [2], [16].

The reference rates α_0 and η_0 only fix the search neighborhood: the learning rates actually used in all runs are selected by the pilot calibration of Section A.

IV. Problem Statement

Autoregressive language modeling: We consider autoregressive language modeling over a finite vocabulary $\mathcal{V}$. For a token sequence $x = (x_1, \dots, x_T) \in \mathcal{V}^T$ and model parameters θ , the model defines the conditional distribution

$$p_{\theta}(x) = \prod_{t=1}^T p_{\theta}(x_t \mid x_{<t}), \quad x_{<1} = \emptyset.$$

Training minimizes the average negative log-likelihood on $\mathcal{D}_{\text{train}}$, and model quality is evaluated on a held-out validation set $\mathcal{D}_{\text{val}}$ by

$$\mathcal{L}_{\text{val}}(\theta) = -\frac{1}{N_{\text{val}}} \sum_{x \in \mathcal{D}_{\text{val}}} \sum_{t=1}^{|x|} \log p_{\theta}(x_t | x_{<t}),$$

$$N_{\text{val}} = \sum_{x \in \mathcal{D}_{\text{val}}} |x|.$$

The corresponding validation perplexity is

$$\text{PPL}_{\text{val}}(\theta) = \exp(\mathcal{L}_{\text{val}}(\theta)).$$

Muon assignment regimes: The Muon-eligible matrix groups $\mathcal{G}_{\text{in}}$, $\mathcal{G}_{\text{out}}$, and the eligible set $\mathcal{G}_{\text{elig}} = \mathcal{G}_{\text{in}} \cup \mathcal{G}_{\text{out}}$ are defined in Section III. With two eligible groups, Muon can be assigned to neither, to one of them, or to both, which enumerates four regimes

$$\begin{aligned}\mathcal{M}^{(0)} &= \emptyset, \\ \mathcal{M}^{(1)} &= \mathcal{G}_{\text{in}}, \\ \mathcal{M}^{(2)} &= \mathcal{G}_{\text{in}} \cup \mathcal{G}_{\text{out}}, \\ \mathcal{M}^{(3)} &= \mathcal{G}_{\text{out}}.\end{aligned}$$

For each $k \in \{0, 1, 2, 3\}$, the parameters in $\mathcal{M}^{(k)}$ are trained with Muon and the rest, $\Theta \setminus \mathcal{M}^{(k)}$, with AdamW. Thus $k = 0$ is the pure AdamW baseline, $k = 1$ puts Muon on the merged input projections, $k = 3$ on the output projections, and $k = 2$ on both. Here $\mathcal{M}^{(2)} = \mathcal{G}_{\text{elig}}$ means Muon on all eligible matrix-valued parameters inside the Mamba-2 blocks, not on every trainable parameter of the model. Each regime is trained from scratch from the same shared seed initialization; no run is warm-started from an AdamW checkpoint.

We select each optimizer’s learning rate separately and then hold it fixed across regimes; the controlled experimental factor is the Muon assignment to the fixed sets $\mathcal{M}^{(k)}$.

Research question: We ask three questions, with the assignment regime k as the only controlled factor. We answer them mainly with the validation loss $\mathcal{L}_{\text{val}}$ and perplexity PPL_{val} defined above, and also report token efficiency and spectral diagnostics:

- 1) does assigning Muon to the input projections ($k = 1$), the output projections ($k = 3$), or both ($k = 2$) reduce the final validation loss relative to the pure AdamW baseline ($k = 0$) on Mamba-2;
- 2) is any improvement *localized* to a particular projection group, rather than shared equally between $\mathcal{G}_{\text{in}}$ and $\mathcal{G}_{\text{out}}$;
- 3) is the observed effect stable across the training corpus and the token budget.

V. Experimental Protocol and Evaluation Metrics

We train Mamba-2 130M under the regimes of Section IV on two datasets, OpenWebText (OWT) [22] and FineWeb-Edu (FW) [23], at token budgets 10^9 and the Chinchilla-optimal 2.6×10^9 [24]. All non-optimizer parts of the protocol (tokenizer, data splits, checkpoint grid, seeds, and reporting rules) are fixed before the runs.

TABLE I
EXPERIMENTAL PROTOCOL.

Parameter	Value
Model configuration	Mamba-2 130M
Datasets	OpenWebText (OWT) [22]; FineWeb-Edu (FW) [23]
Token budgets	10^9 ; 2.6×10^9 ; 5×10^{10}
Batch / seq. len. / grad. accum.	8 / 2048 / 32 (524,288 tokens per step)
Main seeds	2 shared seeds {42, 1337} for the AdamW baseline and each regime k
Pilot	per-optimizer LR sweeps, 2×10^8 tokens, seeds {42, 1337}
Assignment regimes	$k \in \{0, 1, 2, 3\}$ ($\mathcal{M}^{(k)}$)

Checkpoint grid and reporting indices: For a training-token budget T_{max} we define the evaluation checkpoint grid as the $N_{\text{ck}} + 1 = 11$ evenly spaced points

$$\mathcal{T}_{\text{ck}} = \left\{ \frac{i}{N_{\text{ck}}} T_{\text{max}} : i = 0, 1, \dots, N_{\text{ck}} \right\}, \quad N_{\text{ck}} = 10,$$

so that $\mathcal{T}_{\text{ck}}$ explicitly contains 0, $T_{\text{max}}/2$, and T_{max} ; the extended-budget runs use the same grid rescaled to $T_{\text{max}} = 2.6 \times 10^9$. For regime k , seed r , and evaluation point $t \in \mathcal{T}_{\text{ck}}$, let $\theta_t^{(k,r)}$ denote the parameters after processing t training tokens; the metrics computed from these checkpoints are defined below.

Evaluation metrics:

- Pilot hyperparameter selection uses the AdamW and Muon learning-rate sweeps. Their outputs serve only to select stable optimizer-specific hyperparameters before the primary paired comparison. Pilot runs are archived for reproducibility but are not included in the final comparison tables.
- Validation quality and convergence are reported through validation loss and validation perplexity at $t \in \mathcal{T}_{\text{ck}}$, including the final values

$$\mathcal{L}_{\text{val}}(\theta_{T_{\text{max}}}^{(k,r)}) \quad \text{and} \quad \text{PPL}_{\text{val}}(\theta_{T_{\text{max}}}^{(k,r)}).$$

For each regime, these quantities are reported as mean $\pm$ std across the available seeds.

- Paired seed-wise differences use the same seed identifiers in the AdamW baseline and at each Muon regime. We report paired differences in final validation loss relative to the $k = 0$ baseline:

$$\Delta_r^{\mathcal{L},k} = \mathcal{L}_{\text{val}}(\theta_{T_{\text{max}}}^{(k,r)}) - \mathcal{L}_{\text{val}}(\theta_{T_{\text{max}}}^{(0,r)}).$$

An analogous paired difference may also be reported for final validation perplexity when useful for interpretation. For each $k = 1, 2$, the primary paired comparison reports mean $\pm$ std for $\Delta_r^{\mathcal{L},k}$ across the shared seeds. Because the number of seeds is small, paired seed-wise differences with mean/std are treated as descriptive summaries rather than formal significance tests. For reporting purposes,

Muon is considered to improve over AdamW at regime k if

$$\frac{1}{R} \sum_{r=1}^R \Delta_r^{\mathcal{L},k} < 0$$

over the R completed stable shared seeds. A positive mean paired difference is reported as worse than AdamW, while a near-zero mean is reported as a null result under the fixed protocol.

- Token efficiency is quantified by *validation-equivalent tokens*: for each AdamW checkpoint with mean validation loss ℓ , we report the number of tokens each Muon regime needs to first reach ℓ , obtained by linear interpolation of its validation-loss curve over $\mathcal{T}_{\text{ck}}$. A value below the AdamW reference (the diagonal) means Muon attains that loss in fewer tokens; this is reported on OpenWebText at $T_{\text{max}} = 10^9$ (Section VI). The cross-budget narrowing of the baseline-to- $k = 3$ gap (Section VI) is a complementary view of the same effect.
- Ablation reporting follows a fixed suite of optimizer-modification slices, each anchored at the primary configuration selected after the primary paired comparison (the regime with the lowest mean final validation loss) and fixed before any ablation runs. The slices are RMS-style rescaling of the Muon update, explicit Muon-side weight decay, and per-slice assignment of Muon within the merged input projection (Appendix B). They are reported separately from the primary paired comparison and do not enter the seed-paired $\Delta_r^{\mathcal{L},k}$ summaries.
- Secondary matrix diagnostics are computed on the representative seed (seed 42, the first of the two shared main seeds) and tracked over training, which yields the trajectories in Section VII. The layer-averaged summary is reported at T_{max} and the per-layer profiles at the subset

$$\mathcal{T}_{\text{spec}} = \{T_{\text{max}}/2, T_{\text{max}}\} \subseteq \mathcal{T}_{\text{ck}}.$$

These diagnostics are used only to interpret whether optimizer-dependent differences are associated with changes in matrix spectra; they are not treated as primary success metrics or as formal mechanistic proof.

Following Roy and Vetterli [21], for a nonzero matrix $W \in \mathbb{R}^{d_1 \times d_2}$, let $m = \min\{d_1, d_2\}$ and let $\sigma_1 \geq \dots \geq \sigma_m \geq 0$ denote its singular values. We define

$$\bar{\sigma}_i = \frac{\sigma_i}{\sum_{j=1}^m \sigma_j},$$

$$H(W) = - \sum_{i=1}^m \bar{\sigma}_i \log \bar{\sigma}_i, \quad \text{erank}(W) = \exp(H(W)),$$

and

$$\kappa(W) = \frac{\sigma_1}{\sigma_m}, \quad \sigma_m > 0.$$

We use the standard entropy convention $0 \log 0 = 0$. If $\sigma_m = 0$ or is numerically zero, the matrix is reported as singular or ill-conditioned rather than assigned an arbitrary finite condition number. Per-layer profiles

TABLE II
FINAL VALIDATION LOSS AND PERPLEXITY AT $T_{\text{max}} = 10^9$ TOKENS ON OPENWEBTEXT. MEAN AND STANDARD DEVIATION ARE COMPUTED OVER SEEDS $\{42, 1337\}$. $\Delta\mathcal{L}$ IS RELATIVE TO $k = 0$.

k	Muon groups	η_{Muon}^*	$\mathcal{L}_{\text{val}}$	PPL	$\Delta\mathcal{L}$
0	AdamW	—	3.4178 ± 0.0103	30.50	—
1	$\mathcal{G}_{\text{in}}$	10^{-2}	3.3869 ± 0.0020	29.58	-0.031
2	$\mathcal{G}_{\text{in}} \cup \mathcal{G}_{\text{out}}$	2×10^{-2}	3.3472 ± 0.0012	28.42	-0.071
3	$\mathcal{G}_{\text{out}}$	1.5×10^{-2}	3.3019 ± 0.0025	27.17	-0.116

and layer-averaged summaries of spectral norm, Frobenius norm, effective rank, and condition number are reported whenever the corresponding decomposition is numerically well-defined. Zero matrices are skipped for effective-rank reporting.

VI. Full-budget training results

A. Setup

Using the learning rates of Table VI, we trained all four regimes $k \in \{0, 1, 2, 3\}$ over the two corpora (OWT, FW) and the two token budgets (10^9 and 2.6×10^9 , abbreviated 1B and 2.6B) of the protocol, with all non-optimizer hyperparameters held identical across regimes, corpora, and budgets (Section V). Section VI-B covers the primary paired comparison (OWT at 1B), and Section VI-C reports robustness across corpus and budget.

B. Final validation loss and perplexity on OpenWebText

Table II reports the final validation loss and perplexity at $T_{\text{max}} = 10^9$ tokens on OpenWebText. All three Muon regimes reduce final validation loss relative to the AdamW baseline. Of the two intermediate regimes, $k = 2$ ($\mathcal{G}_{\text{in}} \cup \mathcal{G}_{\text{out}}$) yields the larger reduction ($\Delta\mathcal{L} = -0.071$, PPL 28.42, a $\approx 6.8\%$ reduction in perplexity) and $k = 1$ ($\mathcal{G}_{\text{in}}$) the smaller ($\Delta\mathcal{L} = -0.031$, PPL 29.58, $\approx 3.0\%$). Seed-wise variance is lower under Muon than under AdamW (± 0.001 – 0.002 versus ± 0.010). The $k = 3$ regime ($\mathcal{G}_{\text{out}}$ only) achieves the lowest final loss of the four regimes ($\Delta\mathcal{L} = -0.116$, PPL 27.17); this result is discussed in Section X.

Figures 2 and 3 trace the validation and training loss of this run. The ranking $k = 3 < k = 2 < k = 1 < k = 0$ emerges by $T = 2 \times 10^8$ tokens, and the curves never cross through T_{max} . The late-phase training loss (Figure 4) shows that the gaps persist under learning-rate decay, so they are not merely an early-training transient.

Beyond the final loss, Muon is more token-efficient at matched loss: for every AdamW checkpoint, each Muon regime reaches the same validation loss in fewer tokens, so all three curves lie below the AdamW reference diagonal (Figure 5). The effect is largest for $k = 3$, which matches AdamW’s final 10^9 -token validation loss in only $\approx 5.8 \times 10^8$ tokens.

C. Robustness across corpus and training budget

To test whether the OpenWebText ranking reflects the optimizer rather than a single corpus or budget, we repeated the

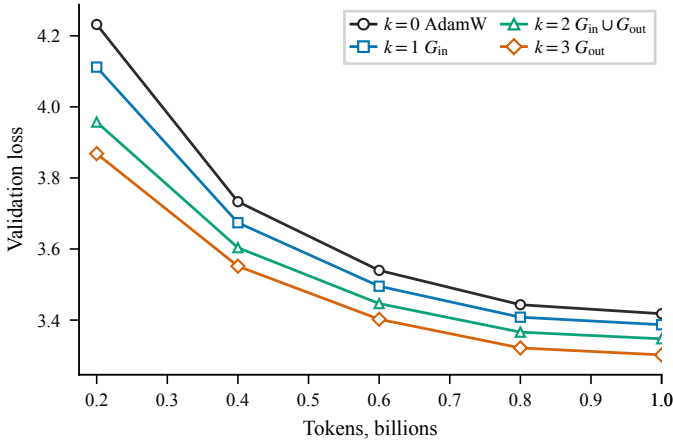


Fig. 2. Validation loss at checkpoints $\mathcal{T}_{ck}$, averaged over seeds $\{42, 1337\}$ (OpenWebText, $T_{\max} = 10^9$).

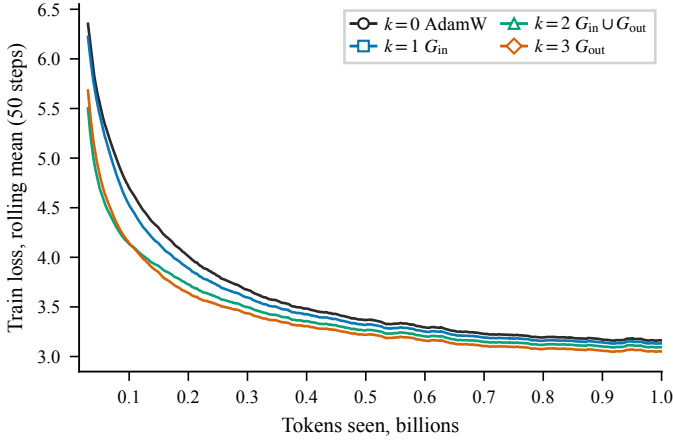


Fig. 3. Smoothed training loss (rolling mean over 50 steps), averaged over seeds $\{42, 1337\}$ (OpenWebText, $T_{\max} = 10^9$). Curves begin at 0.03×10^9 tokens.

four-regime comparison on FineWeb-Edu and at the extended 2.6×10^9 -token budget on both corpora. Table III reports the final validation loss in all four corpus–budget cells.

Two findings hold in every cell. First, the endpoints of the ranking are stable: $k = 3$ ($\mathcal{G}_{\text{out}}$ only) has the lowest validation loss and AdamW the highest, on both corpora and at both budgets. Second, the advantage is mostly a token-efficiency effect. The baseline-to- $k = 3$ gap shrinks as the budget grows (from 0.116 to 0.063 on OpenWebText, and from 0.083 to 0.043 on FineWeb-Edu), so AdamW partially closes the gap with more tokens but does not overtake $k = 3$ within the budgets tested. The intermediate ordering of $k = 1$ and $k = 2$ is not stable at 2.6×10^9 tokens: on OpenWebText the two coincide within noise (3.1539 versus 3.1528), and on FineWeb-Edu $k = 1$ overtakes $k = 2$. This matches the pilot observation that assigning both projection groups to Muon ($k = 2$) does not compound the single-group gains.

The loss curves show the same pattern in every remaining cell (Figures 6–8): the $k = 0$ and $k = 3$ curves separate early and never cross, and only the intermediate $k = 1$ and $k = 2$

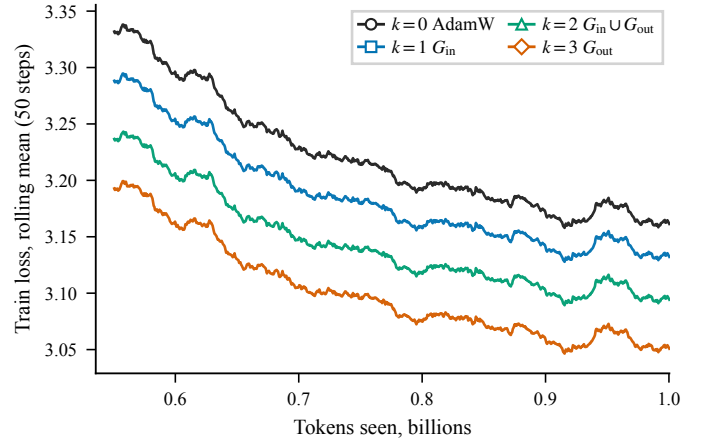


Fig. 4. Smoothed training loss over the late training phase ($T \in [0.55, 1.0] \times 10^9$ tokens, OpenWebText).

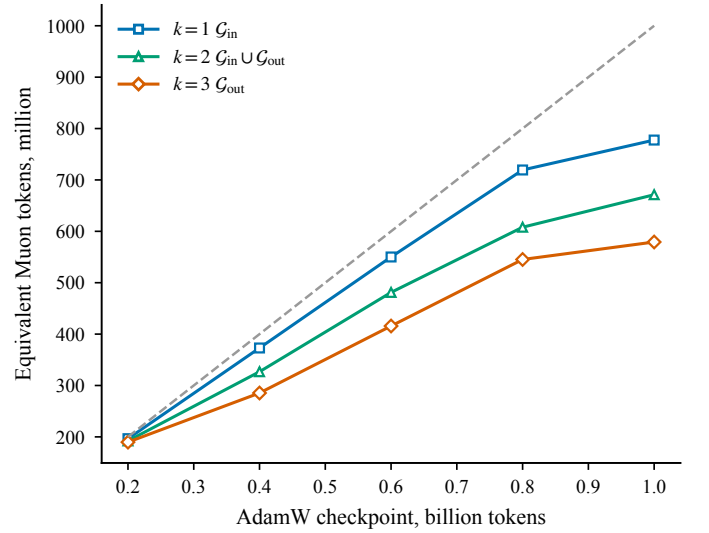


Fig. 5. Validation-equivalent Muon tokens for matched AdamW loss (OpenWebText, seeds $\{42, 1337\}$). For each AdamW checkpoint (horizontal axis), the vertical axis is the number of tokens each Muon regime needs to reach the same validation loss; the dashed diagonal is the AdamW reference. All regimes lie below it throughout training.

curves draw together at the extended budget.

VII. Spectral diagnostics

Spectral diagnostics were computed on seed 42 and tracked over training. Table IV reports layer-averaged values at $T_{\max}$; Figures 9 and 10 show how these quantities evolve over training. Per-layer profiles at $T_{\max}$ and the replication across corpus–budget cells are deferred to Appendix C. These analyses are interpretive, not primary success metrics.

The spectral effect of Muon is confined to the group to which it is assigned. For $\mathcal{G}_{\text{in}}$, the $k = 1$ regime reduces κ from 20.56 to 4.73 and increases effective rank from 646.7 to 732.9, while the $\mathcal{G}_{\text{out}}$ condition number in the same regime remains at 19.33, nearly unchanged from the AdamW baseline. Conversely, $k = 3$ achieves $\kappa = 8.95$ and $\text{erank} = 697.9$ on

TABLE III

MEAN FINAL VALIDATION LOSS ACROSS CORPUS AND TRAINING BUDGET, OVER SEEDS {42, 1337}. THE BOTTOM ROW IS THE GAP BETWEEN THE ADAMW BASELINE AND THE BEST REGIME, $k = 3$.

k	Muon groups	OWT 1B	OWT 2.6B	FW 1B	FW 2.6B
0	AdamW	3.4178	3.1813	3.3589	3.1508
1	$\mathcal{G}_{\text{in}}$	3.3869	3.1539	3.3409	3.1397
2	$\mathcal{G}_{\text{in}} \cup \mathcal{G}_{\text{out}}$	3.3472	3.1528	3.3246	3.1457
3	$\mathcal{G}_{\text{out}}$	3.3019	3.1184	3.2761	3.1080
$\Delta\mathcal{L} (k=0 - k=3)$		+0.116	+0.063	+0.083	+0.043

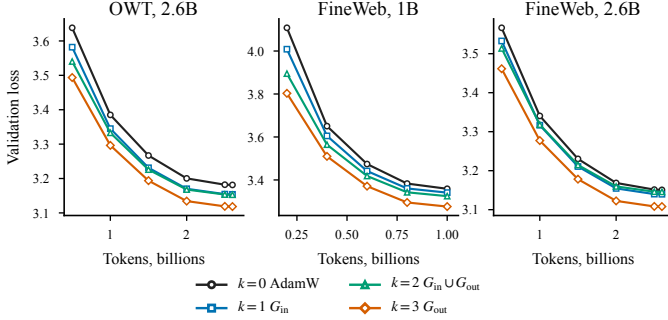


Fig. 6. Validation loss at checkpoints $\mathcal{T}_{\text{ck}}$ for the three remaining corpus-budget cells, averaged over seeds {42, 1337} (the primary OpenWebText 10^9 -token run is Figure 2).

$\mathcal{G}_{\text{out}}$, while the $\mathcal{G}_{\text{in}}$ condition number under $k = 3$ remains at 15.47. The joint assignment $k = 2$ improves both groups moderately but reaches neither the $\mathcal{G}_{\text{in}}$ conditioning of $k = 1$ nor the $\mathcal{G}_{\text{out}}$ conditioning of $k = 3$.

The spectral separation between regimes emerges by $T = 2 \times 10^8$ tokens and changes little thereafter (Figures 9, 10). For $\mathcal{G}_{\text{in}}$, the condition number under $k = 1$ rises to ≈ 4 by 0.2×10^9 tokens and plateaus, while the AdamW baseline reaches ≈ 20 and stabilizes there. For $\mathcal{G}_{\text{out}}$, the effective rank under $k = 0$ and $k = 1$ drops sharply at 0.2×10^9 tokens before partially recovering; $k = 3$ avoids this drop and maintains the highest effective rank throughout training. The per-layer profiles confirm that this structure is consistent across all 24 layers with no systematic depth dependence (Appendix C). Taken together, the spectral evidence supports the reading that well-conditioned output projections are the main source of Muon’s empirical advantage here.

VIII. Does the advantage survive at scale?

Within the budgets of Section VI-C the baseline-to- $k = 3$ gap shrinks monotonically with tokens, raising the question of whether the $\mathcal{G}_{\text{out}}$ advantage is only an early-training effect. To test this we trained the two endpoint regimes, $k = 0$ (AdamW) and $k = 3$ (Muon on $\mathcal{G}_{\text{out}}$), far past the compute-optimal point: Mamba-2 130M on FineWeb-Edu to 5×10^{10} tokens ($\approx 19\times$ the Chinchilla-optimal budget, deeply overtrained), single seed, all non-optimizer hyperparameters held fixed.

The $k = 3$ advantage persists. The Muon- $\mathcal{G}_{\text{out}}$ curve stays below the AdamW baseline on both train and validation at every evaluation checkpoint, ending at a final validation loss of 2.8853 versus 2.9027 (a gap of 0.017; Figure 11). The gap

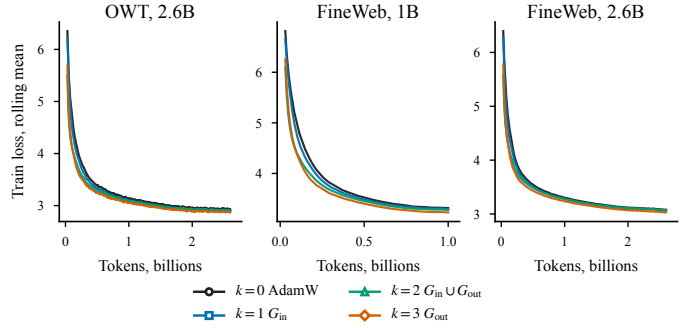


Fig. 7. Smoothed training loss (rolling mean over 50 steps) for the three remaining corpus-budget cells, averaged over seeds {42, 1337}.

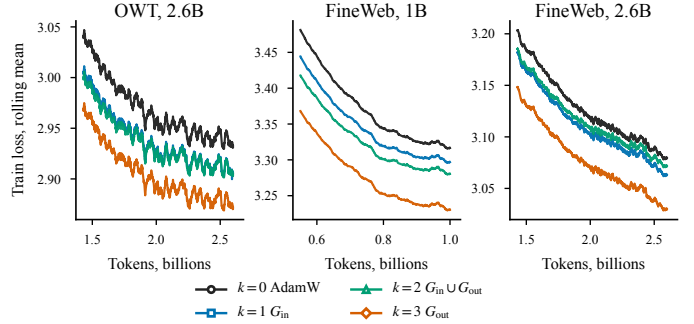


Fig. 8. Smoothed training loss over the late training phase (final $\sim 45\%$ of each budget) for the three remaining corpus-budget cells, averaged over seeds {42, 1337}.

continues to narrow with budget, consistent with the token-efficiency reading of Section VI-B, but AdamW does not overtake $k = 3$ even at $19\times$ Chinchilla. The output-projection assignment is therefore a durable advantage in pre-training loss, not an artifact of under-budgeted runs.

IX. Downstream evaluation

A lower pre-training loss is only useful if it transfers to downstream tasks. We evaluated the two 50B checkpoints of Section VIII with lm-evaluation-harness in the zero-shot setting, following the evaluation protocol of Mamba and Mamba-2 [5], [6] on seven standard tasks (Table V).

The 0.017 validation-loss gap does *not* translate into a downstream advantage. Neither regime is consistently better: Muon wins four of the seven tasks and AdamW three, and the mean accuracy differs by only 0.3 points (41.7 vs. 42.0). The per-task gaps are small and mostly within noise; the clearest exception is LAMBADA, where AdamW leads on both accuracy and perplexity. At 130M, pre-training loss and zero-shot accuracy decouple. We read this not as a weakness of the output-projection assignment but as a reminder that small-model loss gaps need not carry to task accuracy, consistent with the near-chance behavior of models of this size on several of these tasks in prior work [5], [6].

TABLE IV
LAYER-AVERAGED SPECTRAL DIAGNOSTICS AT $T_{\max}$, SEED 42. EFFECTIVE RANK AND CONDITION NUMBER κ ARE DEFINED IN SECTION V.

Regime	Group	σ_1	erank	κ
$k = 0$ AdamW	$\mathcal{G}_{\text{in}}$	23.29	646.7	20.56
$k = 1$ $\mathcal{G}_{\text{in}}$	$\mathcal{G}_{\text{in}}$	5.53	732.9	4.73
$k = 2$ $\mathcal{G}_{\text{in}} \cup \mathcal{G}_{\text{out}}$	$\mathcal{G}_{\text{in}}$	11.49	730.2	5.42
$k = 3$ $\mathcal{G}_{\text{out}}$	$\mathcal{G}_{\text{in}}$	21.01	691.8	15.47
$k = 0$ AdamW	$\mathcal{G}_{\text{out}}$	11.56	656.1	20.18
$k = 1$ $\mathcal{G}_{\text{in}}$	$\mathcal{G}_{\text{out}}$	12.98	661.3	19.33
$k = 2$ $\mathcal{G}_{\text{in}} \cup \mathcal{G}_{\text{out}}$	$\mathcal{G}_{\text{out}}$	6.29	689.6	10.66
$k = 3$ $\mathcal{G}_{\text{out}}$	$\mathcal{G}_{\text{out}}$	4.40	697.9	8.95

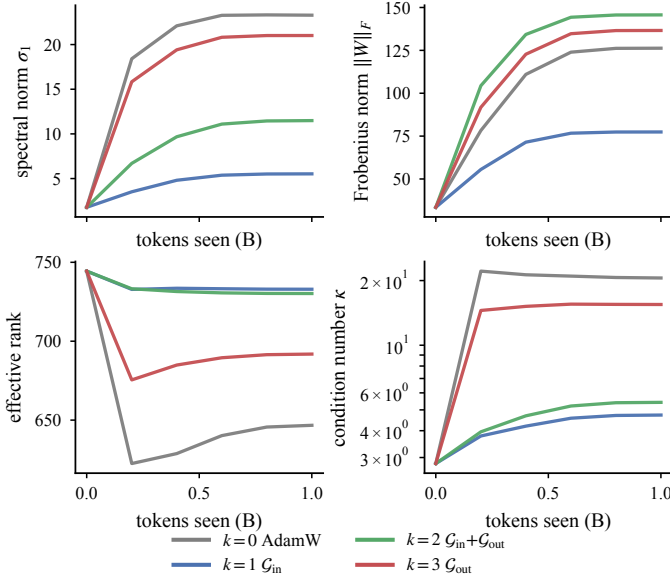


Fig. 9. Layer-averaged spectral metrics for $\mathcal{G}_{\text{in}}$ over training, seed 42. The four panels show spectral norm σ_1 , Frobenius norm, effective rank, and condition number κ .

X. Discussion

Across our four assignment regimes, Muon on `out_proj` alone ($k = 3$) consistently outperforms the joint assignment ($k = 2$) and the `in_proj`-only assignment ($k = 1$). The ordering stabilizes by roughly 2×10^8 tokens, and seed-wise variation is an order of magnitude smaller than the inter-regime gaps. One interpretation, consistent with the architecture of Mamba-2, is that `out_proj` is a uniform dense projection, whereas `in_proj` is a row-concatenation of five functionally distinct sub-projections ($z, x, B, C, \Delta t$). Muon’s Newton–Schulz iteration orthogonalizes the update spectrum across the full matrix, a global operation that may be ill-matched to a stacked projection whose sub-blocks need different update geometries.

The gain is concentrated in early-to-mid training rather than in a lower loss floor. The baseline-to- $k = 3$ gap shrinks monotonically with the budget (from 0.116 to 0.063 on OpenWebText and from 0.083 to 0.043 on FineWeb-Edu between 10^9 and 2.6×10^9 tokens), and $k = 3$ reaches AdamW’s 10^9 -token loss in roughly 5.8×10^8 tokens. We read this as a token-efficiency effect: Muon on $\mathcal{G}_{\text{out}}$ buys a given loss in fewer

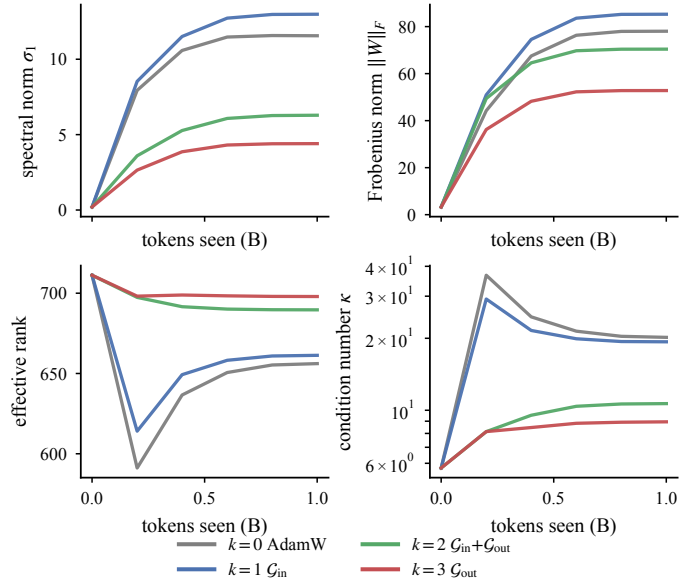


Fig. 10. Layer-averaged spectral metrics for $\mathcal{G}_{\text{out}}$ over training, seed 42. Panels as in Figure 9.

TABLE V
ZERO-SHOT ACCURACY (%) AT 5×10^{10} TOKENS (LM-EVALUATION-HARNESS, 0-SHOT; MAMBA-2 130M, FINEWEB-EDU, SEED 42). PER-TASK WINNER UNDERLINED; $\pm$ STANDARD ERROR. acc_n DENOTES NORMALIZED ACCURACY. BOTTOM ROWS: MEAN ACCURACY AND LAMBADA PERPLEXITY.

Task	Metric	AdamW ($k=0$)	Muon $\mathcal{G}_{\text{out}}$ ($k=3$)
LAMBADA	acc	<u>27.6</u> ± 0.6	25.5 ± 0.6
HellaSwag	acc _n	35.7 ± 0.5	<u>36.6</u> ± 0.5
PIQA	acc	<u>66.2</u> ± 1.1	64.1 ± 1.1
ARC-Easy	acc	56.2 ± 1.0	<u>58.5</u> ± 1.0
ARC-Challenge	acc _n	<u>26.1</u> ± 1.3	25.5 ± 1.3
WinoGrande	acc	49.3 ± 1.4	<u>51.6</u> ± 1.4
OpenBookQA	acc _n	30.6 ± 2.1	<u>31.8</u> ± 2.1
Average	acc	41.7	<u>42.0</u>
LAMBADA	ppl $\downarrow$	<u>63.3</u>	68.5

tokens rather than a different asymptote, so its practical value is largest in compute-constrained, near-single-epoch training and should fade as training approaches convergence.

The spectral diagnostics in Section VII provide an independent line of evidence consistent with this reading. Muon’s spectral effect is assignment-local: the condition number of each projection group changes only when Muon is assigned to that group. The $\mathcal{G}_{\text{out}}$ condition number decreases monotonically with the strength of Muon’s involvement (AdamW 20.18 $\rightarrow k = 1$ 19.33 $\rightarrow k = 2$ 10.66 $\rightarrow k = 3$ 8.95), and the regime that achieves the cleanest $\mathcal{G}_{\text{out}}$ spectrum ($k = 3$) is also the one with the lowest validation loss. Conversely, the largest improvement in $\mathcal{G}_{\text{in}}$ conditioning at $k = 1$, where κ drops from 20.56 to 4.73, is not matched by a comparable gain in validation loss; a better-conditioned `in_proj` is not on its own sufficient. We do not treat this as causal evidence, since the spectral diagnostics use a single seed, but the loss ranking and the spectral conditioning point to the same projection group.

Two follow-up analyses sharpen this reading rather than

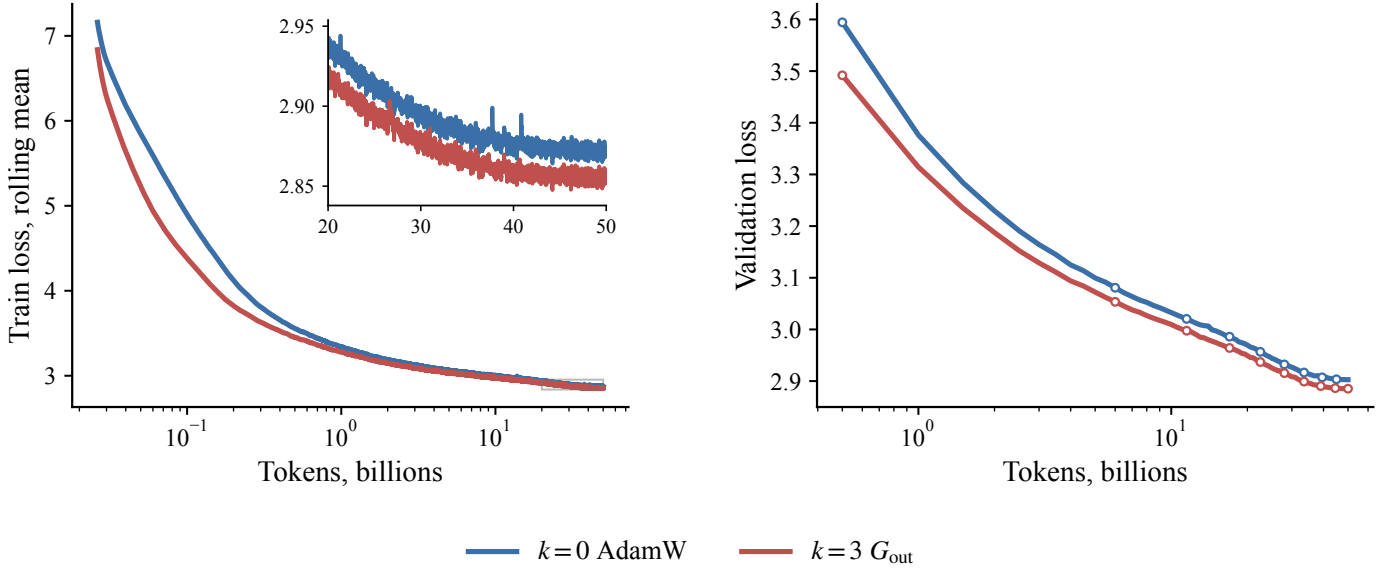


Fig. 11. Training (left) and validation (right) loss for $k = 0$ and $k = 3$, Mamba-2 130M on FineWeb-Edu to 5×10^{10} tokens ($\approx 19 \times$ Chinchilla), single seed. $k = 3$ stays below the AdamW baseline throughout; final validation loss 2.8853 vs. 2.9027.

just restating it. Resolving `in_proj` into its five row-slices (Appendix C) shows that Muon conditions the ill-posed slices (the gating channel z and the data channel x , whose AdamW condition numbers are $\kappa \approx 25\text{--}40$) while leaving the already-isotropic B , C , and Δt essentially unchanged. Yet assigning Muon to those slices on top of $k = 3$ (Appendix B-C) does not lower the loss: the gating channel z is the single most harmful slice, and the data channels x, B, C help only at the 2×10^8 -token pilot, reversing at 2.6×10^9 tokens. Conditioning of `in_proj`, whole or per-slice, is therefore *decoupled* from loss, and the benefit is specific to the homogeneous output projection rather than to conditioning the input projection at all.

Two caveats temper the mechanism. The Muon learning rates come from a discrete two-seed grid, so we cannot fully exclude that $k = 2$'s under-performance reflects a single scalar rate serving heterogeneous sub-blocks; and the spectra use a single seed. Our data also do not cleanly separate `out_proj`'s role as the residual-stream writer from `in_proj`'s heterogeneity per se. Even so, three independent signals (the loss ranking, the group-level spectra, and the per-slice analysis) point to the same conclusion: among Mamba-2's weight groups, Muon helps where the matrix is homogeneous and writes to the residual stream.

Appendix A Learning-rate calibration

A. AdamW learning-rate calibration

The AdamW baseline learning rate was calibrated under the fixed pilot protocol described in Section V. Each run used Mamba-2 130M on OpenWebText with micro-batch size 8, sequence length 2048, gradient accumulation 32, and pilot

budget $T = 2 \times 10^8$ training tokens, so each optimizer step processed

$$8 \times 2048 \times 32 = 524,288 \text{ tokens.}$$

The only varied hyperparameter was the AdamW learning rate α .

Figure 12 shows the sweep over

$$\alpha \in \{1.2, 1.8, 2.4, 3.0, 3.6, 4.5, 6.0, 8.0\} \times 10^{-3},$$

evaluated on the shared pilot seeds $\{42, 1337\}$. Colored markers show per-seed results; open markers with error bars show the two-seed mean and standard deviation; the filled marker indicates the selected value. The minimum two-seed mean validation loss was attained at $\alpha_{\text{AdamW}}^* = 3.6 \times 10^{-3}$, with per-seed values 4.4243 and 4.4493, giving $\mathcal{L}_{\text{val}} = 4.4368 \pm 0.0177$. This value was frozen for all subsequent runs.

B. Muon learning-rate calibration

After fixing the AdamW learning rate, the Muon learning rate was calibrated separately for each regime $k \in \{1, 2, 3\}$. In all Muon pilot runs the AdamW learning rate for non-Muon parameters was held at $\alpha_{\text{AdamW}}^* = 3.6 \times 10^{-3}$; all other training constants were identical to the AdamW pilot protocol.

The Muon learning-rate grid was

$$\eta \in \{10^{-4}, 10^{-3}, 2.5 \times 10^{-3}, 5 \times 10^{-3}, 7.5 \times 10^{-3}, 10^{-2}, 1.25 \times 10^{-2}, 1.5 \times 10^{-2}, 2 \times 10^{-2}, 2.5 \times 10^{-2}\},$$

evaluated on seeds $\{42, 1337\}$ for each regime. Figure 13 reports the resulting validation losses. For each regime the selected learning rate minimized the two-seed mean validation loss, subject to the requirement that both seeds complete the pilot budget without divergence or non-finite loss values. The one exception is $k = 1$, where the sweep exhibited a broad

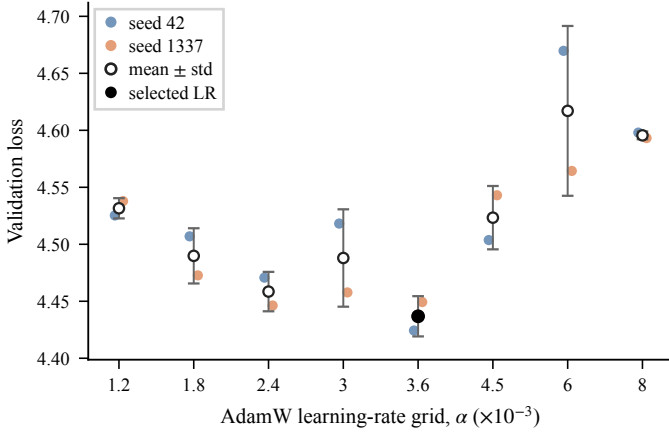


Fig. 12. AdamW learning-rate sweep at the pilot budget $T = 2 \times 10^8$ training tokens. Colored markers show individual seeds {42, 1337}; open markers with error bars show mean $\pm$ standard deviation. The filled marker indicates the selected learning rate, $\alpha_{\text{AdamW}}^* = 3.6 \times 10^{-3}$.

plateau whose raw minimum is statistically indistinguishable from neighboring values; there a more stable point within the plateau was adopted, as detailed below.

The selected values and corresponding pilot validation losses are

$$\begin{aligned} \eta_{k=1}^* &= 1.0 \times 10^{-2}, & \mathcal{L}_{\text{val}} &= 4.3214 \pm 0.0192, \\ \eta_{k=2}^* &= 2.0 \times 10^{-2}, & \mathcal{L}_{\text{val}} &= 4.0433 \pm 0.0026, \\ \eta_{k=3}^* &= 1.5 \times 10^{-2}, & \mathcal{L}_{\text{val}} &= 3.9971 \pm 0.0003. \end{aligned}$$

For $k = 1$, the sweep revealed a broad plateau over $\eta \in [1.0, 2.5] \times 10^{-2}$, within which mean validation loss varied by less than 0.015. At the plateau minimum ($\eta = 1.5 \times 10^{-2}$) the seed-wise standard deviation was 0.028, comparable to the improvement over $\eta = 1.0 \times 10^{-2}$ ($\Delta\mathcal{L} = 0.013$); the two values are therefore statistically indistinguishable at the pilot sample size. Since $\eta = 1.0 \times 10^{-2}$ lies within the reference range $[5 \times 10^{-3}, 2 \times 10^{-2}]$ of Jordan [2] and Liu et al. [16], it was adopted as the full-run setting for $k = 1$. For $k = 2$, the sweep decreased with low seed-wise variance to an unambiguous minimum at $\eta = 2.0 \times 10^{-2}$.

The $k = 3$ regime (Muon on $\mathcal{G}_{\text{out}}$ only, defined in Section IV) was calibrated in the same way. At $\eta_{k=3}^* = 1.5 \times 10^{-2}$ its pilot loss was the lowest across all regimes ($\mathcal{L}_{\text{val}} = 3.9971 \pm 0.0003$).

All three selected learning rates were frozen before any full-budget run was inspected.

C. Learning-rate transfer check

Rather than repeating the full grid search on FineWeb-Edu [23], we ran a reduced one-seed three-point check at the 2×10^8 -token pilot budget to verify that the OWT-calibrated learning rates transfer to the second corpus. For the AdamW baseline ($k = 0$) we swept $\alpha \in \{2.4, 3.6, 4.5\} \times 10^{-3}$, covering the neighborhood of the OWT optimum; the minimum was again attained at $\alpha^* = 3.6 \times 10^{-3}$. For the $k = 3$ regime we swept $\eta \in \{1.0, 1.5, 2.2\} \times 10^{-2}$; the minimum was again at

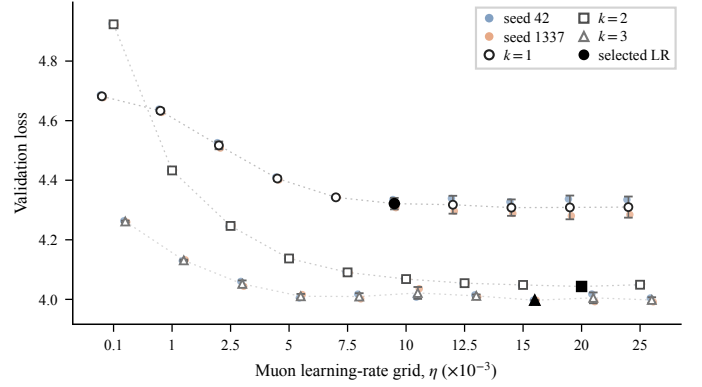


Fig. 13. Muon learning-rate sweep at the pilot budget $T = 2 \times 10^8$ training tokens, with AdamW learning rate fixed to $\alpha_{\text{AdamW}}^* = 3.6 \times 10^{-3}$ for all non-Muon parameters. Colored markers show individual seeds {42, 1337}; open markers with error bars show mean $\pm$ standard deviation. Filled markers indicate the selected Muon learning rate for each assignment regime.

TABLE VI
LEARNING RATES USED IN ALL FULL-BUDGET RUNS. THE ADAMW RATE $\alpha_{\text{AdamW}}^* = 3.6 \times 10^{-3}$ IS SHARED ACROSS ALL REGIMES AND BOTH CORPORA. THE MUON RATES FOR $k = 1$ AND $k = 2$ ON FINEWEB-EDU WERE NOT INDEPENDENTLY SWEEPED; THEY WERE TRANSFERRED FROM THE OWT CALIBRATION AFTER THE $k = 0$ AND $k = 3$ CHECKS ABOVE CONFIRMED TRANSFER.

k	Muon groups	α_{AdamW}^*	η_{Muon}^*
0	— (AdamW only)	3.6×10^{-3}	—
1	$\mathcal{G}_{\text{in}}$	3.6×10^{-3}	1.0×10^{-2}
2	$\mathcal{G}_{\text{in}} \cup \mathcal{G}_{\text{out}}$	3.6×10^{-3}	2.0×10^{-2}
3	$\mathcal{G}_{\text{out}}$	3.6×10^{-3}	1.5×10^{-2}

$\eta^* = 1.5 \times 10^{-2}$. Since both optima coincided with the OWT selections, we transferred the full set of OWT learning rates to FineWeb-Edu without modification. Table VI summarizes the per-regime learning rates used in all full-budget runs.

Appendix B Additional analyses

This appendix collects analyses that support but did not feed into the primary comparison: two ablations run after the learning-rate calibration (RMS scaling and Muon weight decay) and an ablation that resolves `in_proj` into its individual sub-blocks. None of them were used to select the primary regimes in Table II.

A. RMS scaling

We tested whether RMS-style rescaling of the Muon update improves over the calibrated non-RMS setting. Short pilot runs were repeated with RMS scaling enabled for each $k \in \{1, 2, 3\}$, with AdamW learning rate fixed at $\alpha_{\text{AdamW}}^* = 3.6 \times 10^{-3}$, Muon weight decay set to zero, and the grid

$$\eta \in \{2.4 \times 10^{-3}, 3.6 \times 10^{-3}, 6.0 \times 10^{-3}\}$$

evaluated on seeds {42, 1337}. The best RMS-scaled pilot losses were

$$\begin{aligned} k = 1 : & \quad 4.3146 \pm 0.0440 \quad \text{at } \eta = 2.4 \times 10^{-3}, \\ k = 2 : & \quad 4.0550 \pm 0.0049 \quad \text{at } \eta = 2.4 \times 10^{-3}, \\ k = 3 : & \quad 4.0009 \pm 0.0042 \quad \text{at } \eta = 3.6 \times 10^{-3}. \end{aligned}$$

For $k = 2$ and $k = 3$ these are strictly worse than the corresponding non-RMS minima (4.0433 ± 0.0026 and 3.9971 ± 0.0003 from Section A). For $k = 1$ the RMS point improves the two-seed mean by 0.007, but the seed-wise standard deviation at that point is 0.044, so the difference is not reliable. RMS scaling is therefore disabled in the main protocol.

B. Weight decay for Muon

We tested explicit Muon-side weight decay for $k = 2$ and $k = 3$, using the Muon learning rates selected in Section A ($\eta_{k=2}^* = 2 \times 10^{-2}$, $\eta_{k=3}^* = 1.5 \times 10^{-2}$) and sweeping

$$\lambda_{\text{Muon}} \in \{0.01, 0.03, 0.10\}$$

on seeds {42, 1337}.

For $k = 2$ all three values lie within 0.002 of the no-WD pilot loss (4.0433 ± 0.0026):

$$\begin{aligned} \lambda = 0.01 : & \quad 4.0418 \pm 0.0004, \\ \lambda = 0.03 : & \quad 4.0423 \pm 0.0017, \\ \lambda = 0.10 : & \quad 4.0418 \pm 0.0000. \end{aligned}$$

For $k = 3$ the best result was obtained at $\lambda = 0.03$:

$$\begin{aligned} \lambda = 0.01 : & \quad 4.0060 \pm 0.0017, \\ \lambda = 0.03 : & \quad 3.9926 \pm 0.0098, \\ \lambda = 0.10 : & \quad 4.0063 \pm 0.0030. \end{aligned}$$

This suggests a marginal benefit of moderate weight decay for the $k = 3$ regime, but the observation is based on the pilot budget and was made after the primary full-budget runs were fixed; it is treated as a follow-up hypothesis.

C. Input-projection sub-blocks

The merged `in_proj` weight is a row-concatenation of five functionally distinct sub-blocks: the gating channel z , the data channel x , the SSD observation projections B, C , and the time-step Δt . A natural hypothesis (Section X) is that this heterogeneity is why Muon on $\mathcal{G}_{\text{in}}$ does not help, i.e. why $k = 2$ trails $k = 3$. We probe which sub-blocks help or hurt by assigning Muon to individual row-slices *on top of* $k = 3$ (so $\mathcal{G}_{\text{out}}$ is always under Muon), sweeping the Muon learning rate per variant on the 2×10^8 -token OWT pilot (Table VII; Figure 14, left). Only the data channels x, B, C edge below the $k = 3$ baseline ($\Delta\mathcal{L} = -0.0076$); the gating channel z and the full `in_proj` ($= k=2$) are clearly worse. The five curves stay cleanly ordered through the late phase and the same way on validation and training loss (Figures 14 and 15), so this is a stable ranking rather than an end-point fluctuation. What matters is which slices are added, not how many: the gating channel z is the single most harmful slice and the full `in_proj` ($k=2$) the worst overall, which is what the heterogeneity hypothesis predicts.

This pilot advantage does not survive at scale. Re-running the best candidate ($+x, B, C$) at the Chinchilla budget (2.6×10^9 tokens) on FineWeb-Edu (four seeds, the hardest corpus-budget cell) inverts the sign: $k = 3$ reaches 3.1080 while

TABLE VII
INPUT-PROJECTION SUB-BLOCK ABLATION, WITH MUON ADDED ON TOP OF $k = 3$. PILOT: OWT AT 2×10^8 TOKENS, BEST MUON RATE PER VARIANT, MEAN OVER SEEDS {42, 1337}. VALIDATION: FINEWEB-EDU AT 2.6×10^9 TOKENS, FOUR SEEDS. $\Delta\mathcal{L}$ IS RELATIVE TO $k = 3$.

Muon target	$\mathcal{L}_{\text{val}}$	$\Delta\mathcal{L}$ vs $k = 3$
<i>Pilot: OpenWebText @ 2×10^8 tokens</i>		
$k = 3$ ($\mathcal{G}_{\text{out}}$)	3.9971	—
$+x, B, C$	3.9895	-0.0076
$+\Delta t$	3.9995	+0.0024
$+z$	4.0202	+0.0231
$+ \text{all in_proj}$ ($= k=2$)	4.0435	+0.0464
<i>Validation: FineWeb-Edu @ 2.6×10^9 tokens</i>		
$k = 3$ ($\mathcal{G}_{\text{out}}$)	3.1080	—
$+x, B, C$	3.1145	+0.0065

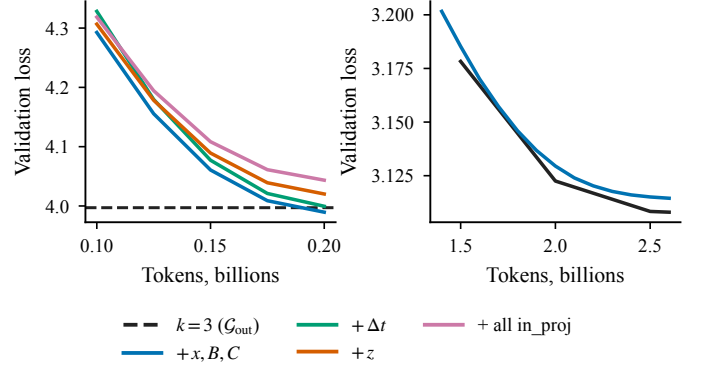


Fig. 14. Validation loss for Muon on `in_proj` sub-blocks added on top of $k = 3$ (late-phase zoom). *Left*: OWT pilot (2×10^8 tokens); only x, B, C falls below the $k = 3$ reference (dashed). *Right*: FineWeb-Edu at 2.6×10^9 tokens; the ordering inverts and $+x, B, C$ ends above $k = 3$.

$+x, B, C$ reaches 3.1145 ($\Delta\mathcal{L} = +0.0065$, $\approx 10\sigma$; Figure 14, right). The 200M signal was therefore a pilot-scale artifact, and $k = 3$ (Muon on $\mathcal{G}_{\text{out}}$ alone) remains the best configuration on every axis tested. The smoothed training loss shows the same ordering in both regimes (Figure 15), and the $k = 3$ margin over $+x, B, C$ widens with the budget rather than shrinking. In spectral terms this mirrors Section VII: $k = 1$ sharply improves the conditioning of $\mathcal{G}_{\text{in}}$ yet does not lower the loss, so conditioning the input projections (whole or sliced) is not what drives Muon’s gain; the output projection $\mathcal{G}_{\text{out}}$ is.

In summary, none of these auxiliary modifications improves on the calibrated plain $k = 3$ configuration. RMS scaling does not improve over the non-RMS settings. Muon weight decay has negligible effect on $k = 2$, with only a marginal $k = 3$ benefit at moderate λ_{Muon} that warrants a dedicated full-budget run. Assigning Muon to individual `in_proj` sub-blocks helps only at the pilot scale, not at 2.6×10^9 tokens.

Appendix C Detailed spectral diagnostics

This appendix collects the spectral diagnostics deferred from Section VII: the per-layer profiles at T_{max} , the replication of the conditioning result across the remaining corpus-budget cells, and the per-slice conditioning of `in_proj`.

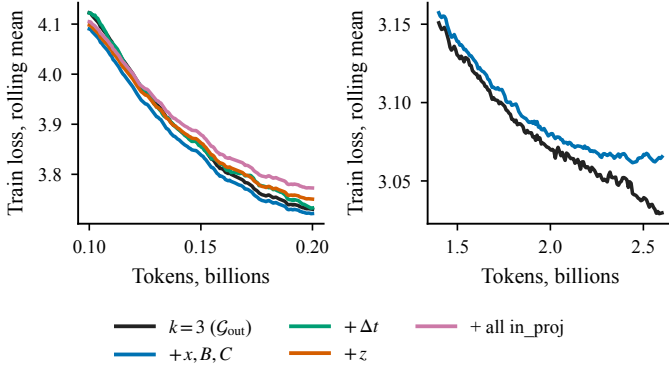


Fig. 15. Smoothed training loss (rolling mean over 50 steps) for the sub-block ablation, late-phase zoom. *Left*: OWT pilot (2×10^8 tokens). *Right*: FineWeb-Edu at 2.6×10^9 tokens. The ordering matches the validation loss: x, B, C edges below $k = 3$ on the pilot but ends above it at scale.

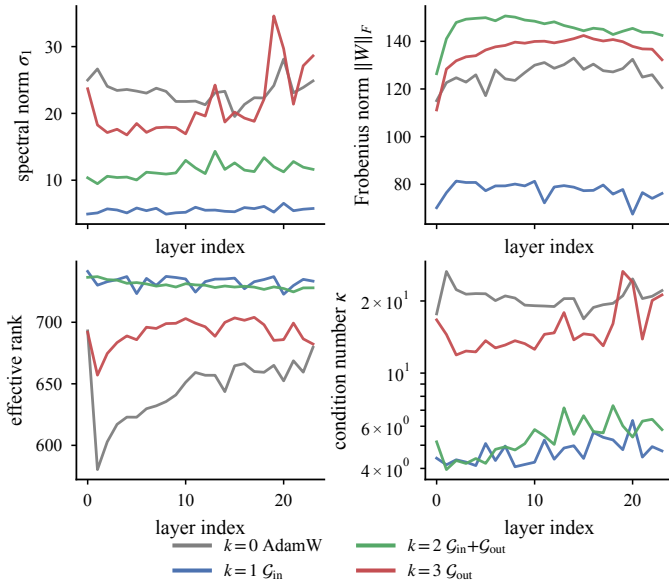


Fig. 16. Per-layer spectral profile for $\mathcal{G}_{in}$ at T_{max} , seed 42.

Per-layer profiles.: The per-layer profiles are consistent across all 24 layers with no systematic depth dependence, and the half-budget profiles are visually indistinguishable from the final ones; the spectral structure thus stabilizes from mid-training onward (Figures 16, 17). Under $k = 1$, the $\mathcal{G}_{in}$ spectral norm is uniformly low (≈ 5 – 6) across layers, compared with ≈ 22 – 28 under AdamW. Under $k = 3$, the $\mathcal{G}_{out}$ spectral norm is uniformly low (≈ 4 – 5), compared with ≈ 10 – 21 under AdamW, with a notable spike at layer 14 in the AdamW and $k = 1$ baselines that is absent under $k = 2$ and $k = 3$.

Robustness of the conditioning result.: We recomputed the same $\mathcal{G}_{out}$ diagnostics (seed 42) for the three remaining corpus-budget cells of Section VI, in the same format as the OpenWebText figures of Section VII (Figures 18–23); as before, only the output projection is reported. The conditioning result reproduces in every cell: $k = 3$ reaches the lowest condition number on $\mathcal{G}_{out}$. At 10^9 tokens FineWeb-Edu ($\kappa = 8.84$)

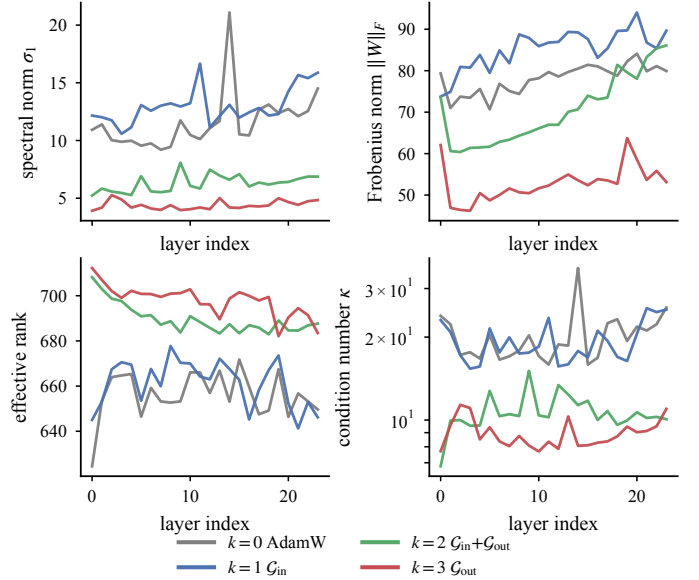


Fig. 17. Per-layer spectral profile for $\mathcal{G}_{out}$ at T_{max} , seed 42.

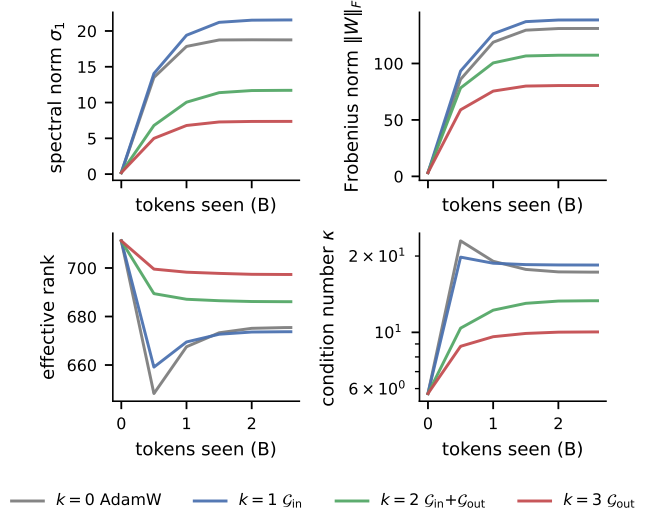


Fig. 18. Layer-averaged $\mathcal{G}_{out}$ spectral metrics over training, OpenWebText at 2.6×10^9 tokens, seed 42.

essentially matches OpenWebText ($\kappa = 8.95$, Table IV), and at 2.6×10^9 tokens $\kappa \approx 10$ on both corpora. In these cells $k = 1$ (Muon on $\mathcal{G}_{in}$ only) leaves $\mathcal{G}_{out}$ slightly worse-conditioned than the AdamW baseline, and $k = 2$ falls in between, mirroring the loss ordering $k = 3 < k = 2 < k = 1 < k = 0$. The $k = 3$ conditioning advantage thus holds on both corpora and at both budgets.

Per-slice conditioning of in_proj.: Resolving in_proj into its five row-slices makes the heterogeneity behind Section B-C explicit (Figure 24). Under AdamW ($k = 0$) the slices span an order of magnitude in conditioning: the gating channel z and the data channel x are poorly conditioned ($\kappa \approx 25$ – 40), while B, C , and Δt are near-

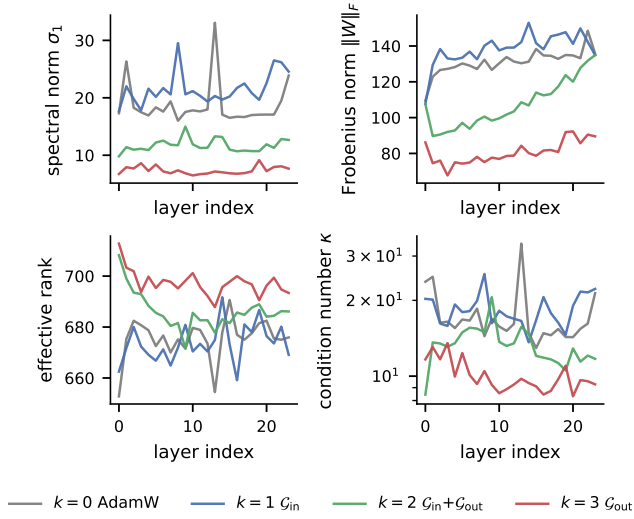


Fig. 19. Per-layer $\mathcal{G}_{\text{out}}$ spectral profile at the final checkpoint, OpenWebText at 2.6×10^9 tokens, seed 42.

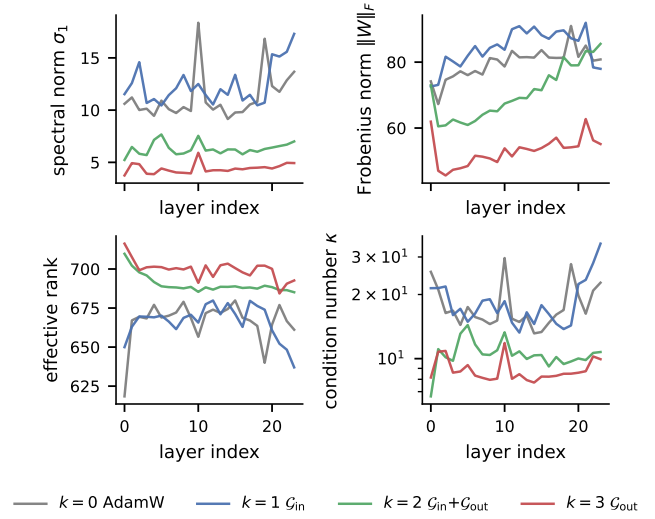


Fig. 21. Per-layer $\mathcal{G}_{\text{out}}$ spectral profile at the final checkpoint, FineWeb-Edu at 10^9 tokens, seed 42.

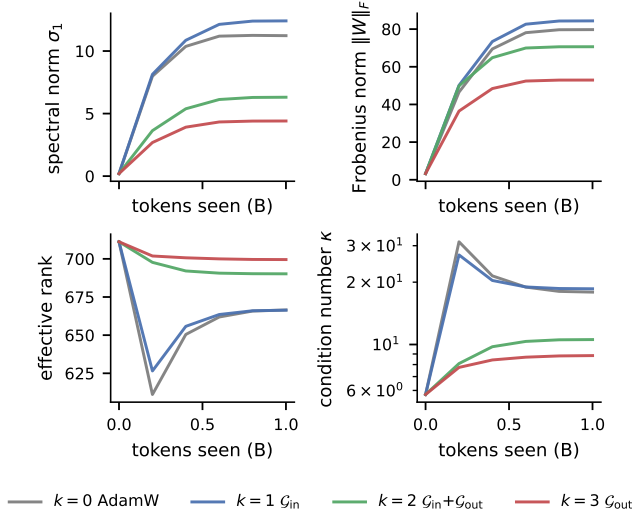


Fig. 20. Layer-averaged $\mathcal{G}_{\text{out}}$ spectral metrics over training, FineWeb-Edu at 10^9 tokens, seed 42.

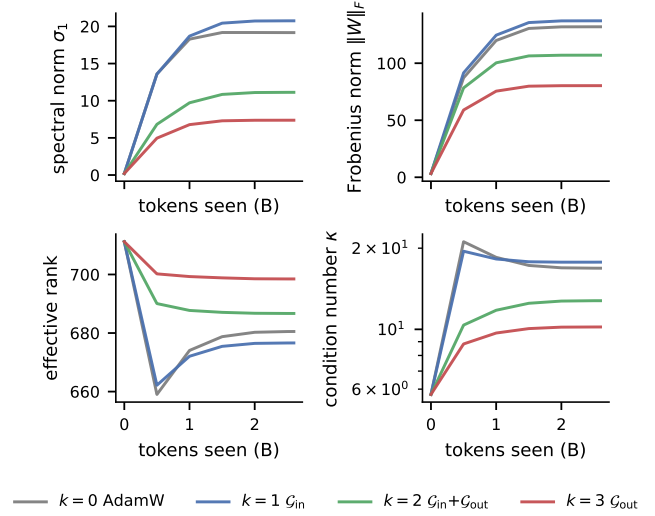


Fig. 22. Layer-averaged $\mathcal{G}_{\text{out}}$ spectral metrics over training, FineWeb-Edu at 2.6×10^9 tokens, seed 42.

isotropic ($\kappa \approx 6$ –9). Placing in_proj under Muon ($k = 1$, $k = 2$) sharply conditions the ill-posed slices: z and x fall to $\kappa \approx 9$ –15, while the already-good slices stay essentially unchanged. But this does not lower the loss ($k = 1$, $k = 2$ trail $k = 3$), and the slice Muon conditions most aggressively, the gating channel z , is also the one whose orthogonalization is most harmful in the sub-block ablation (Section B-C). For in_proj , conditioning and loss are therefore decoupled: Muon’s benefit comes from the homogeneous output projection $\mathcal{G}_{\text{out}}$, not from conditioning the heterogeneous input slices.

Appendix D Localizing the input-projection effect

The input projection in_proj ($\mathcal{G}_{\text{in}}$) is a single 3352×768 matrix that row-stacks five functionally distinct sub-matrices $W_z, W_x, W_B, W_C, W_{\Delta t}$. To find which slice carries the (small) $k = 1$ effect, we replace the global Newton–Schulz pass on the merged matrix with a *split* variant in which each slice runs its own Newton–Schulz iteration, then run a leave-one-out (LOO) ablation: starting from the split all-Muon assignment, one slice at a time is moved back to AdamW while the other four stay on Muon (OWT, 10^9 tokens, single seed).

Splitting helps.: Per-slice orthogonalization beats one global pass: the split all-Muon assignment reaches a final validation loss 0.024 below the merged whole-matrix $k = 1$

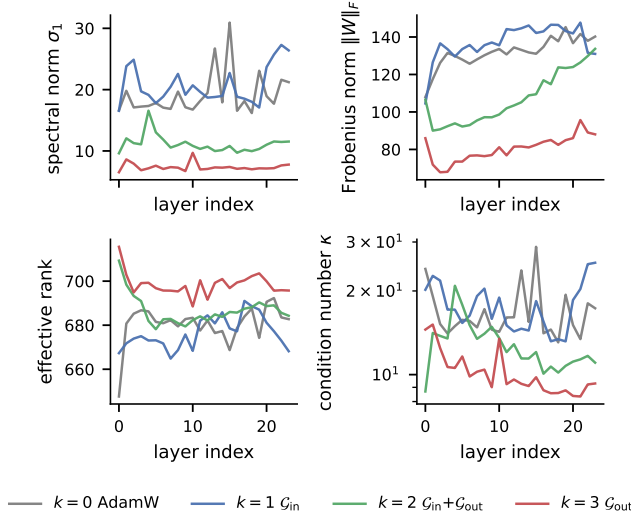


Fig. 23. Per-layer $\mathcal{G}_{\text{out}}$ spectral profile at the final checkpoint, FineWeb-Edu at 2.6×10^9 tokens, seed 42.

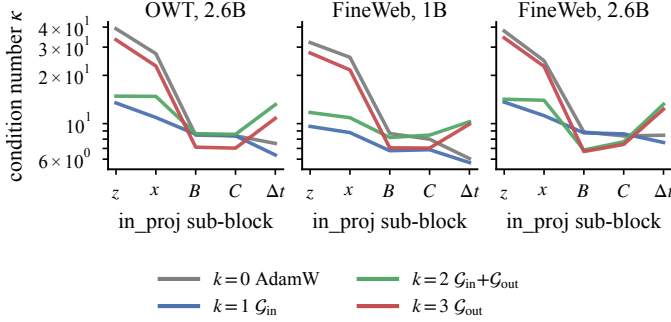


Fig. 24. Layer-averaged condition number κ of the five in_proj row-slices (z , x , B , C , Δt) at the final checkpoint, by regime and corpus-budget cell (seed 42). Muon on in_proj ($k=1$, $k=2$) conditions the ill-posed z and x slices but not the already-isotropic B , C , Δt .

run, so the merged Newton–Schulz under-conditions the heterogeneous slices.

The data channel carries the effect.: Table VIII reports the increase in final validation loss when each slice is removed from the split assignment. Removing the data channel W_x is by far the most damaging (+0.040, larger than the gap between split and the merged $k=1$ run itself), whereas removing the gating channel W_z is essentially free (+0.001); W_B , W_C , $W_{\Delta t}$ sit in between. The $\mathcal{G}_{\text{in}}$ benefit is thus localized almost entirely to the x slice.

Ill-conditioned $\neq$ useful.: The per-slice spectra make this clear (Figure 25). Under split-Muon the gate W_z and the data channel W_x are the two worst-conditioned slices, at a similar $\kappa \approx 10$ –12 and similar effective rank, yet their contributions are opposite: removing W_z is free, while removing W_x is the most costly of the five. The better-conditioned slices W_B , W_C , and $W_{\Delta t}$ contribute little. A slice’s conditioning thus does not predict its contribution, echoing the matrix-level finding of Section VII: Muon’s gain comes from the matrices (and

TABLE VIII
LEAVE-ONE-OUT LOCALIZATION WITHIN IN_PROJ : INCREASE IN FINAL VALIDATION LOSS WHEN ONE SLICE IS MOVED BACK TO ADAMW, RELATIVE TO THE SPLIT ALL-MUON ASSIGNMENT (OWT, 10^9 TOKENS, SINGLE SEED). THE MERGED WHOLE-MATRIX $k=1$ RUN IS SHOWN FOR REFERENCE.

Slice moved back to AdamW	$\Delta \mathcal{L}_{\text{val}}$
$-W_z$ (gate)	+0.001
$-W_B$	+0.008
$-W_C$	+0.008
$-W_{\Delta t}$	+0.017
$-W_x$ (data channel)	+0.040
merged $k=1$ (reference)	+0.024

slices) the model actually *uses*, not from those it conditions most.

The output projection remains the driver.: Localizing the $\mathcal{G}_{\text{in}}$ effect does not make it competitive with $\mathcal{G}_{\text{out}}$. Stacking the best $\mathcal{G}_{\text{in}}$ recipe on top of the output projection (split $\mathcal{G}_{\text{in}}$ and Muon on $\mathcal{G}_{\text{out}}$) does not beat $k=3$ alone: on OWT at 2.6×10^9 tokens the two tie on validation, with $\mathcal{G}_{\text{out}}$ -only marginally ahead (3.118 vs. 3.128; hyperparameter-matched runs, validation only). The split analysis tells us *where* the $\mathcal{G}_{\text{in}}$ effect lives, but it is a mechanistic refinement, not a better model: $\mathcal{G}_{\text{out}}$ stays the single best target.

References

- [1] state-spaces, “state-spaces/mamba,” <https://github.com/state-spaces/mamba>, 2024, official Mamba implementation repository, accessed 2026-04-24.
- [2] K. Jordan, “Muon: An optimizer for hidden layers in neural networks,” <https://kellerjordan.github.io/posts/muon/>, Dec. 2024, blog post. Accessed: 2026-04-23.
- [3] —, “Kellerjordan/Muon,” <https://github.com/KellerJordan/Muon>, 2024, public Muon implementation repository, accessed 2026-04-24.
- [4] A. Gu, K. Goel, and C. Ré, “Efficiently modeling long sequences with structured state spaces,” *arXiv preprint arXiv:2111.00396*, 2021.
- [5] A. Gu and T. Dao, “Mamba: Linear-time sequence modeling with selective state spaces,” *arXiv preprint arXiv:2312.00752*, 2023.
- [6] T. Dao and A. Gu, “Transformers are SSMs: Generalized models and efficient algorithms through structured state space duality,” in *Proceedings of the 41st International Conference on Machine Learning*, ser. Proceedings of Machine Learning Research, vol. 235. PMLR, 2024, pp. 10 041–10 071. [Online]. Available: <https://proceedings.mlr.press/v235/dao24a.html>
- [7] R. Waleffe, W. Byeon, D. Riach, B. Norick, V. Korthikanti, T. Dao, A. Gu, A. Hatamizadeh, S. Singh, D. Narayanan *et al.*, “An empirical study of mamba-based language models,” *arXiv preprint arXiv:2406.07887*, 2024.
- [8] J. Park, J. Park, Z. Xiong, N. Lee, J. Cho, S. Oymak, K. Lee, and D. Papailiopoulos, “Can mamba learn how to learn? a comparative study on in-context learning tasks,” *arXiv preprint arXiv:2402.04248*, 2024.
- [9] O. Lieber, B. Lenz, H. Bata, G. Cohen, J. Osin, I. Dalmedigos, E. Safahi, S. Meirom, Y. Belinkov, S. Shalev-Shwartz *et al.*, “Jamba: A hybrid transformer-mamba language model,” *arXiv preprint arXiv:2403.19887*, 2024.
- [10] I. Loshchilov and F. Hutter, “Decoupled weight decay regularization,” in *International Conference on Learning Representations*, 2019. [Online]. Available: <https://openreview.net/forum?id=Bkg6RiCqY7>
- [11] Y. Zhang, C. Chen, T. Ding, Z. Li, R. Sun, and Z.-Q. Luo, “Why transformers need adam: A hessian perspective,” *Advances in neural information processing systems*, vol. 37, pp. 131 786–131 823, 2024.
- [12] F. Kunstner, A. Milligan, R. Yadav, M. Schmidt, and A. Bietti, “Heavy-tailed class imbalance and why adam outperforms gradient descent on language models,” *Advances in Neural Information Processing Systems*, vol. 37, pp. 30 106–30 148, 2024.

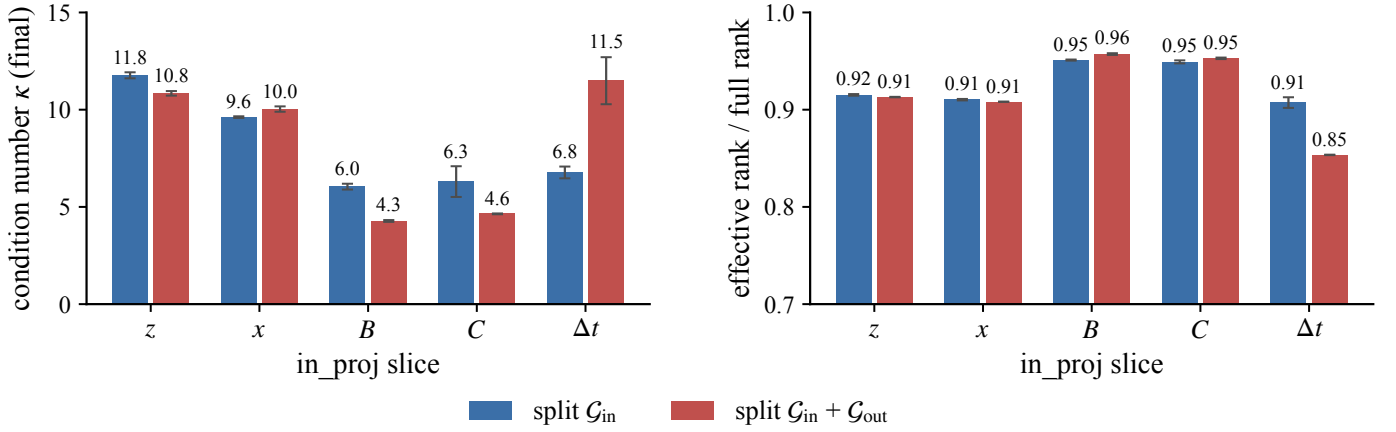


Fig. 25. Per-slice condition number κ (left) and effective-rank fraction (right) of the five `in_proj` slices under split-Muon (OWT, 2.6×10^9 tokens, mean over seeds). The gate W_z and the data channel W_x are the two worst-conditioned slices yet have opposite usefulness (removing W_z is free, removing W_x most costly), so conditioning does not predict which slice matters.

- [13] R. Zhao, D. Morwani, D. Brandfonbrener, N. Vyas, and S. Kakade, “Deconstructing what makes a good optimizer for language models,” *arXiv preprint arXiv:2407.07972*, 2024.
- [14] R. Anil, V. Gupta, T. Koren, K. Regan, and Y. Singer, “Scalable second order optimization for deep learning,” *arXiv preprint arXiv:2002.09018*, 2020.
- [15] H.-J. M. Shi, T.-H. Lee, S. Iwasaki, J. Gallego-Posada, Z. Li, K. Rangadurai, D. Mudigere, and M. Rabbat, “A distributed data-parallel pytorch implementation of the distributed shampoo optimizer for training neural networks at-scale,” *arXiv preprint arXiv:2309.06497*, 2023.
- [16] J. Liu, J. Su, X. Yao, Z. Jiang, G. Lai, Y. Du, Y. Qin, W. Xu, E. Lu, J. Yan *et al.*, “Muon is scalable for llm training,” *arXiv preprint arXiv:2502.16982*, 2025.
- [17] J. Bernstein and L. Newhouse, “Old optimizer, new norm: An anthology,” *arXiv preprint arXiv:2409.20325*, 2024.
- [18] —, “Modular duality in deep learning,” *arXiv preprint arXiv:2410.21265*, 2024.
- [19] A. M. Saxe, J. L. McClelland, and S. Ganguli, “Exact solutions to the nonlinear dynamics of learning in deep linear neural networks,” *arXiv preprint arXiv:1312.6120*, 2013.
- [20] C. H. Martin and M. W. Mahoney, “Implicit self-regularization in deep neural networks: Evidence from random matrix theory and implications for learning,” *Journal of Machine Learning Research*, vol. 22, no. 165, pp. 1–73, 2021.
- [21] O. Roy and M. Vetterli, “The effective rank: A measure of effective dimensionality,” in *2007 15th European signal processing conference*. IEEE, 2007, pp. 606–610.
- [22] A. Gokaslan, V. Cohen, E. Pavlick, and S. Tellex, “OpenWebText corpus,” <https://skylion007.github.io/OpenWebTextCorpus/>, 2019, dataset release.
- [23] G. Penedo, H. Kydliček, A. Lozhkov, M. Mitchell, C. Raffel, L. v. Werra, and T. Wolf, “The FineWeb datasets: Decanting the web for the finest text data at scale,” *arXiv preprint arXiv:2406.17557*, 2024.
- [24] J. Hoffmann, S. Borgeaud, A. Mensch, E. Buchatskaya, T. Cai, E. Rutherford, D. de Las Casas, L. A. Hendricks, J. Welbl, A. Clark *et al.*, “Training compute-optimal large language models,” *arXiv preprint arXiv:2203.15556*, 2022.