



ReflectRL: Learning from Golden Negative Trajectories via Reflective-to-Direct Reasoning

Jinhe Bi^{1,2,6,9}, Chennan Zhou³, Zengjie Jin², Aniri^{2,9}, Shuo Lu⁸, Wenke Huang⁴, Hu Cao⁷, Xun Xiao⁶, Zhihong Zhu⁵, Volker Tresp², Fei Shen¹, Yunpu Ma^{2,9}, Tat-Seng Chua¹

¹National University of Singapore, ²Ludwig Maximilian University of Munich, ³Technical University of Munich, ⁴Nanyang Technological University, ⁵Peking University, ⁶Huawei Heisenberg Research Center, ⁷Southeast University, ⁸Institute of Automation, Chinese Academy of Sciences, ⁹Munich Center for Machine Learning

GitHub Dataset Model

On-policy training has emerged as a powerful post-training paradigm for improving the reasoning capabilities of large language models, and is often enhanced by golden trajectories from stronger expert models. However, when the expert fails on harder problems, existing trajectory-guided methods lose their main source of supervision, and these failed trajectories are typically discarded as negative samples. We argue that such failures, which we call Golden Negative Trajectories, can still provide valuable reasoning signals when treated not as demonstrations to imitate, but as flawed trajectories to reflect upon. We identify a Reflection Advantage: for hard problems, reflecting on a flawed trajectory can be easier and more effective than solving the problem directly from scratch. Motivated by this, we propose ReflectRL, a lightweight plug-and-play framework that learns from Golden Negative Trajectories during on-policy training. ReflectRL first uses these trajectories to elicit Reflective Reasoning, then applies Reflective-to-Direct Policy Transition to transfer the acquired reasoning behavior back to Direct Reasoning. Experiments across 9 benchmarks, 4 LLM backbones, and 4 on-policy training methods show that ReflectRL consistently improves reasoning performance with minimal overhead.

Date: August 2026

Correspondence: bijinhe@outlook.com

1 Introduction

On-policy training has become a central recipe for improving the reasoning capabilities of large language models [1, 2, 3, 4, 5, 6]. In this paradigm, a model samples reasoning rollouts on training problems and updates its policy using feedback from verifiers, reward models, or distributional objectives. Recent methods such as Reinforcement Learning with Verifiable Rewards (RLVR) and On-Policy Distillation (OPD) show that this training paradigm can substantially improve reasoning performance when the sampled rollouts provide informative learning signals [7, 1]. This dependence on rollout quality becomes more critical on hard problems, where direct sampling often produces sparse positive rewards and weak policy updates [8].

A common strategy for improving on-policy training is to incorporate golden reasoning trajectories from stronger expert models, such as DeepSeek-R1 [1]. In RLVR, correct experts' golden trajectories can guide rollout generation toward more promising reasoning paths [9, 10]. In OPD, golden trajectories from expert models can serve as privileged information for shaping the learning signal [11]. These trajectories are most useful when the expert model solves the problem and provides a correct reasoning trajectory. When the expert model fails on harder problems, existing trajectory-guided methods lose their main source of positive supervision. The failed expert trajectories are then typically filtered out as negative samples, leaving a large amount of structured reasoning from strong models unused. This deficiency in the prior art brings up an open question:

Is it possible to leverage these discarded but still informative negative trajectories to continuously improve the reasoning capability?

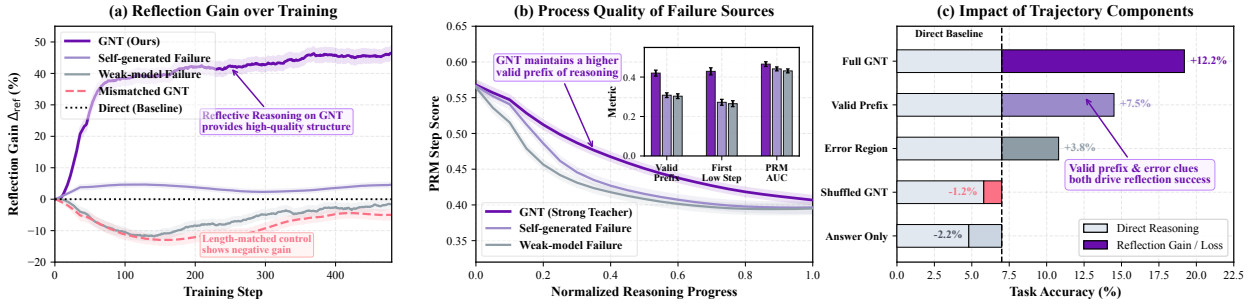


Figure 1 Understanding the **Reflection Advantage** through behavioral, descriptive, and intervention evidence on Qwen2.5-Math-7B. (a) **Behavioral Evidence**: Reflection Gain $\Delta_{ref} = \mathbb{E}_{o \sim \pi}[r(q, o) | q, o^-] - \mathbb{E}_{o \sim \pi}[r(q, o) | q]$ over training steps. Reflecting on a GNT yields the largest gain, which steadily grows during training, whereas self-failures offer limited benefits, and weak-model failures or mismatched GNT (in case length bias) leads to negative gain. (b) **Descriptive Evidence**: Qwen2.5-Math-PRM-7B score profiles of failure sources and process metrics (inset). GNT maintains a higher valid prefix of reasoning compared to other failure sources before dropping at localized error points. (c) **Intervention Evidence**: Ablation of GNT trajectory components. Both the valid prefix and the error region causally drive the reflection gain, whereas removing these components (Shuffled GNT, Answer Only) reduces accuracy below the direct baseline.

The Present Work: ReflectRL addresses this question by exploiting these valuable negative trajectories, which are typically discarded under existing training paradigms [10, 9]. However, incorporating negative samples into the current on-policy training paradigm is fundamentally challenging. Specifically, trajectory-guided RLVR variants rely on correct expert trajectories to yield positive rewards, establishing a relative advantage over self-generated negative rollouts. Because negative trajectories from expert models fail to produce positive rewards, these methods cannot exploit them. Consequently, standard advantage estimation cannot distinguish the structured, high-quality expert failures from the model’s own low-quality self-failures, preventing these negative trajectories from being leveraged to drive policy updates. Alternatively, when external trajectories are used as privileged information in OPD paradigms, they are typically designed as positive demonstrations to be imitated, which directly contradicts the flawed nature of negative trajectories.

To address this gap, we first conduct an empirical analysis to locate where usable learning signals reside in expert-generated negative trajectories and investigate how the target model can leverage them. As shown in Figure 1(a), we identify a distinct behavioral pattern: compared to direct reasoning on hard questions without any external context—the default mode in on-policy training, the model achieves a substantial reasoning accuracy improvement (which we term *Reflection Gain*) when it is hinted with a negative trajectory and forced to reflect on the errors. We define this pattern as the *Reflection Advantage*. Importantly, we find that negative trajectories generated by expert models (which we refer to as *Golden Negative Trajectories*-GNTs) yield a far more pronounced Reflection Advantage than failure trajectories from the target model itself or a weaker model as shown in Figure 1(a). To understand why GNTs are uniquely beneficial, we utilize a Process Reward Model (PRM) [12] to profile the step-level quality of different negative trajectory sources. As shown in Figure 1(b), GNTs maintain higher process rewards and longer valid reasoning prefixes before encountering localized errors. To isolate this signal, we perform causal interventions on GNT components (Figure 1(c)), demonstrating that both the valid prefix and the localized error region jointly drive the Reflection Advantage. This suggests that the model not only benefits from continuing reasoning along a high-quality prefix but also learns to actively reflect on and recover from specific errors.

Leveraging this Reflection Advantage, as shown in Figure 2, we propose **ReflectRL**, a lightweight framework for learning from GNTs during on-policy training. ReflectRL keeps the base training objective unchanged and only modifies how training rollouts are constructed. For RLVR, ReflectRL samples both Reflective Reasoning rollouts and Direct Reasoning rollouts, evaluates them with the same verifier, and applies the standard policy update. For OPD, ReflectRL incorporates GNTs as privileged context on the teacher-side, while keeping the student aligned with Direct Reasoning. This unified design allows ReflectRL to be easily integrated into various on-policy training paradigms.

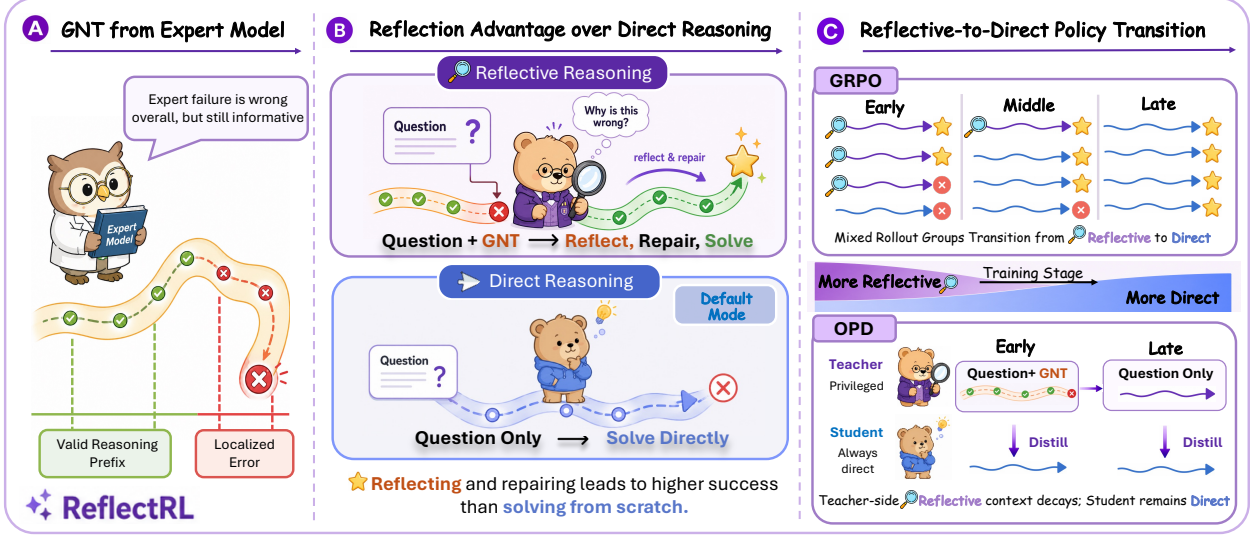


Figure 2 Overview of **ReflectRL**. A failed expert trajectory is used as a **Golden Negative Trajectory** to elicit **Reflective Reasoning**. ReflectRL combines Reflective Reasoning with **Direct Reasoning** during on-policy training and applies **Reflective-to-Direct Policy Transition** to transfer the acquired reasoning behavior back to the original problem setting.

Reflective Reasoning enables the model to learn from GNTs during training, while Direct Reasoning remains the desired behavior at inference time. ReflectRL connects these two reasoning modes through **Reflective-to-Direct Policy Transition**. During training, the rollout distribution is gradually shifted from Reflective Reasoning toward Direct Reasoning. This transition encourages the model to preserve the reasoning behavior learned from GNTs while reducing its dependence on expert models.

We evaluate ReflectRL in representative on-policy training settings covering 9 benchmarks, 4 LLM backbones, and 4 training methods, including both RLVR and OPD. The results show that ReflectRL consistently improves reasoning performance with minimal overhead. Further analysis supports the Reflection Advantage and shows that Reflective-to-Direct Policy Transition helps transfer the benefit of Golden Negative Trajectories back to Direct Reasoning.

Our contributions are summarized as follows:

- We introduce **Golden Negative Trajectories** as a useful source of reasoning signal for on-policy training, and release **OpenR1-GNT-69k**, a dataset consisting of 69k expert failure trajectories.
- We identify the **Reflection Advantage**, showing that hard problems can be easier and more effective to solve through Reflective Reasoning than through Direct Reasoning.
- We propose **ReflectRL**, a lightweight framework that integrates Golden Negative Trajectories into on-policy training through **Reflective-to-Direct Policy Transition**.
- We demonstrate consistent improvements across representative on-policy training settings covering RLVR and OPD, with minimal additional overhead.

2 Preliminaries

This section establishes the notation used throughout the paper and briefly reviews the GRPO and OPD objectives. We also introduce a concise definition of Reflection Advantage, which is used to motivate our method and analysis.

Notation Let q be an input query, and $\mathcal{D}$ represent a dataset of prompt-answer pairs (q, a) , where a is the ground-truth answer. The likelihood of generating a response rollout $o = (o_1, \dots, o_{|o|})$ given q under policy π_θ

is factorized autoregressively as:

$$\pi_{\theta}(o \mid q) = \prod_{s=1}^{|o|} \pi_{\theta}(o_s \mid q, o_{<s}), \quad (1)$$

where π_{θ} is the trainable policy parameterized by θ , $o_{<s} \stackrel{\text{def}}{=} (o_1, \dots, o_{s-1})$ denotes the history prefix, and $|o|$ denotes the response length.

Group Relative Policy Optimization (GRPO) Group Relative Policy Optimization (GRPO) is widely used as a representative method for RLVR [1]. For a given prompt (q, a) , the algorithm samples a group of N outputs $\{o^{(i)}\}_{i=1}^N$ from the frozen rollout policy $\pi_{\theta_{\text{old}}}$. Each rollout $o^{(i)}$ is evaluated to obtain a verifiable reward r_i . Rather than employing a separate critic network, GRPO calculates the relative advantage for each rollout by normalizing the rewards within the sampled group:

$$\hat{A}_i = \frac{r_i - \mu_r(q)}{\sigma_r(q)}, \quad (2)$$

where $\mu_r(q) \stackrel{\text{def}}{=} \text{mean}(\{r_j\}_{j=1}^N)$ and $\sigma_r(q) \stackrel{\text{def}}{=} \text{std}(\{r_j\}_{j=1}^N)$ are the mean and standard deviation of rewards within the group for query q , and the advantage $\hat{A}_i$ is broadcast to each token position s in rollout $o^{(i)}$. **On-Policy Distillation (OPD)** On-policy distillation [7] transfers knowledge from a fixed teacher policy π_{teacher} to a trainable student policy π_{θ} on student-generated trajectories. Given a query q , the student samples a rollout $o \sim \pi_{\theta}(\cdot \mid q)$. At each token position s , OPD minimizes the reverse Kullback–Leibler (KL) divergence from the student’s predictive distribution to the teacher’s predictive distribution:

$$\mathcal{L}_{\text{OPD}}(\theta) = \mathbb{E}_{q \sim \mathcal{D}, o \sim \pi_{\theta}(\cdot \mid q)} \left[\sum_{s=1}^{|o|} \mathbb{D}_{\text{KL}}(\pi_{\theta}(\cdot \mid q, o_{<s}) \parallel \pi_{\text{teacher}}(\cdot \mid q, o_{<s})) \right]. \quad (3)$$

By training on student-generated states rather than offline expert demonstrations, OPD alleviates the exposure bias and distribution shift issues common in offline imitation learning.

3 ReflectRL

This section presents ReflectRL, a lightweight framework designed to leverage Golden Negative Trajectories (GNTs) during on-policy training, as overviewed in Figure 2. Crucially, ReflectRL introduces no auxiliary loss terms, requires no changes to the outcome reward or inference-time interfaces, and preserves the original RLVR/OPD objectives.

3.1 Direct & Reflective Reasoning Interfaces

To enable the policy to learn from expert failures, we define two reasoning interfaces based on distinct prompt templates. Specifically, Chat_Temp_D and Chat_Temp_R denote the prompt templates designed to activate Direct Reasoning and Reflective Reasoning, respectively.

Direct Reasoning The direct reasoning interface applies the direct prompt template Chat_Temp_D to the query q :

$$x^D(q) = \text{Chat_Temp}_D(q). \quad (4)$$

This interface provides only the original query and prompts the policy to solve the problem directly, without access to any external trajectory. It corresponds to the default reasoning mode in standard on-policy training.

Reflective Reasoning The reflective reasoning interface applies the reflective prompt template Chat_Temp_R to the query q and a pre-generated Golden Negative Trajectory o^- :

$$x^R(q, o^-) = \text{Chat_Temp}_R(q, o^-). \quad (5)$$

This template presents the GNT as contextual information and prompts the policy to identify its errors, repair the reasoning process, and derive a corrected solution. The detailed formats of `Chat_TempD` and `Chat_TempR` are provided in Appendix A.

Reflection Advantage Using these interfaces, we formalize the Reflection Advantage that motivates our framework. Let $r(q, o) \in \{0, 1\}$ represent the binary outcome reward indicating the correctness of rollout o for query q . We define the *Reflection Gain* Δ_{ref} of a policy π_θ given query q and GNT o^- as the expected correctness difference between reflective and direct reasoning:

$$\Delta_{\text{ref}}(\theta; q, o^-) = \mathbb{E}_{o \sim \pi_\theta(\cdot | x^R(q, o^-))} [r(q, o)] - \mathbb{E}_{o \sim \pi_\theta(\cdot | x^D(q))} [r(q, o)]. \quad (6)$$

The *Reflection Advantage* describes the empirical behavior where the policy achieves a positive Reflection Gain ($\Delta_{\text{ref}} > 0$). Under this condition, identifying and correcting errors in a structured expert failure is easier than generating a correct path from scratch.

3.2 Reflective-to-Direct Policy Transition

To internalize the reflective reasoning capabilities (elicited by GNTs) into the model’s direct reasoning pathway for actual inference, we design a Reflective-to-Direct Policy Transition mechanism. Without this transition, a model trained exclusively on reflective inputs would suffer from exposure bias, becoming dependent on external expert failure trajectories that are unavailable during inference. Conversely, a smooth transition encourages the model to compile the error-correction and reasoning behaviors learned from GNTs into its own parameters, effectively transferring the reflection advantage back to the direct interface.

Specifically, at training step t , we define a transition kernel $g(t)$ to govern the target proportion of Reflective Reasoning. We default to cosine decay:

$$g(t) = p_l + \frac{p_h - p_l}{2} [1 + \cos(\pi\tau(t))], \quad (7)$$

where p_h and p_l are the initial and terminal proportions, and $\tau(t) \in [0, 1]$ is the normalized transition progress after warm-up; Appendix C provides the exact schedule. The number of reflective rollouts is $K_t = \text{round}(Ng(t))$, with the remaining $N - K_t$ rollouts using Direct Reasoning. In our RLVR setting, the terminal allocation rounds to zero, yielding fully direct rollout groups.

3.3 ReflectRL in RLVR

We instantiate ReflectRL in the RLVR paradigm by optimizing a joint group-relative objective. For each training query, we generate a mixed group of N rollouts $o^{(i)} \sim \pi_{\theta_{\text{old}}}(\cdot | x_t^{(i)})$, where the prompt context $x_t^{(i)}$ is determined by the transition schedule K_t :

$$x_t^{(i)} = \begin{cases} \text{Chat_Temp}_R(q, o^-), & i \leq K_t, \\ \text{Chat_Temp}_D(q), & i > K_t. \end{cases} \quad (8)$$

Rather than separating the direct and reflective reasoning modes, we jointly optimize the policy by maximizing the objective $\mathcal{L}_{\text{ReflectRL}}(\theta)$:

$$\begin{aligned} \mathbb{E} \Big[& \frac{1}{N} \sum_{i=1}^{K_t} \sum_{s=1}^{|o^{(i)}|} \min \left(w_{i,s}(\theta) \hat{A}_i, \text{clip}(w_{i,s}(\theta)) \hat{A}_i \right) \\ & + \frac{1}{N} \sum_{i=K_t+1}^N \sum_{s=1}^{|o^{(i)}|} \min \left(w_{i,s}(\theta) \hat{A}_i, \text{clip}(w_{i,s}(\theta)) \hat{A}_i \right) \Big]. \end{aligned} \quad (9)$$

Here, the advantage $\hat{A}_i$ is computed jointly over the mixed group according to Equation 2, with rewards evaluated by $r(q, o^{(i)}) = \text{MathVerify}(a, o^{(i)})$. The likelihood ratio $w_{i,s}(\theta)$ is defined as:

$$w_{i,s}(\theta) = \frac{\pi_\theta \left(o_s^{(i)} | x_t^{(i)}, o_{<s}^{(i)} \right)}{\pi_{\theta_{\text{old}}} \left(o_s^{(i)} | x_t^{(i)}, o_{<s}^{(i)} \right)}. \quad (10)$$

Model / Method	In-Distribution Performance							Out-of-Distribution Performance			
	AIME24	AIME25	AMC	MATH-500	Minerva	Olympiad	Avg.	ARC-c	GPQA*	MMLU-Pro	Avg.
Qwen2.5-Math-7B	11.4	4.9	31.3	43.6	7.4	15.6	19.0	18.2	11.1	16.9	15.4
Qwen2.5-Math-7B-Instruct	12.9	10.2	48.5	80.4	32.7	41.0	37.6	70.3	24.7	34.1	43.0
<i>Previous Zero RLVR Methods</i>											
PRIME-Zero [TMLR'25]	17.0	12.8	54.0	81.4	39.0	40.3	40.7	73.3	18.2	32.7	41.4
SimpleRL-Zero [CoLM'25]	27.0	6.8	54.9	76.0	25.0	34.7	37.4	30.2	23.2	34.5	29.3
OpenReasoner [NeurIPS'25]	16.5	15.0	52.1	82.4	33.1	47.1	41.0	66.2	29.8	58.7	51.6
<i>Supervised Learning Methods</i>											
SFT	17.2	15.1	49.8	72.1	31.2	33.2	36.4	35.1	16.9	29.5	27.2
SFT-KL	11.4	11.2	36.1	52.9	21.4	27.5	26.8	30.1	15.2	21.1	22.1
<i>RLVR with ReflectRL</i>											
GRPO [Nature'25]	22.2	10.5	54.3	77.2	19.1	38.5	37.0	22.5	15.2	25.0	20.9
↪ + EchoRL [ICML'26]	23.4	11.1	55.2	77.1	24.6	39.8	38.5	33.8	15.8	27.9	25.8
↪ + ReflectRL	25.5	12.8	58.7	77.2	37.5	43.0	42.4 ^(+5.4)	65.4	17.7	36.7	40.0 ^(+19.1)
DAPO [NeurIPS'25]	22.9	11.8	56.5	76.4	22.4	40.2	38.4	30.8	16.2	28.8	25.3
↪ + EchoRL [ICML'26]	25.3	11.8	57.3	77.6	26.2	40.4	39.8	37.2	15.9	31.3	28.1
↪ + ReflectRL	31.0	12.1	59.8	80.6	36.8	41.3	43.5 ^(+5.1)	57.4	14.7	39.1	37.0 ^(+11.7)
<i>On-Policy Distillation with ReflectRL (Student: Qwen2.5-3B-Instruct)</i>											
OPD	6.2	2.8	34.0	62.8	24.8	29.8	26.7	22.5	0.8	41.6	21.6
↪ + ReflectRL	8.1	4.5	36.5	64.6	27.9	30.5	29.0 ^(+2.3)	77.6	1.5	38.1	39.1 ^(+17.5)

Table 1 Overall in-distribution (ID) and out-of-distribution (OOD) performance comparison on Qwen2.5-Math-7B. ReflectRL consistently boosts existing on-policy post-training baselines (GRPO, DAPO, and OPD) in both ID and OOD scenarios, achieving competitive performance compared to previous zero-RL paradigms under a lightweight training recipe.

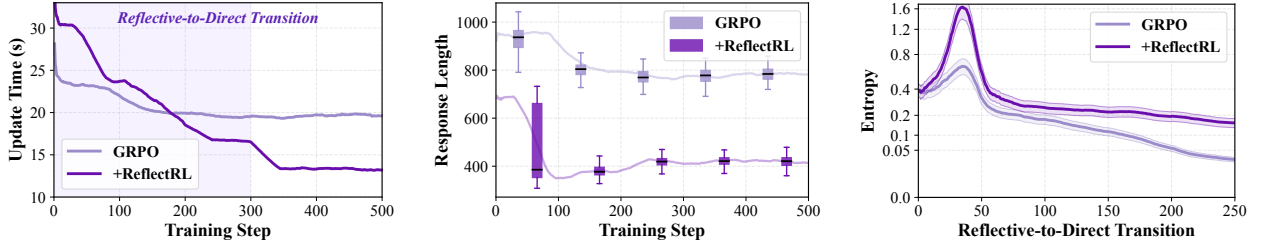


Figure 3 Training dynamics comparison on Qwen2.5-Math-7B. (a) ReflectRL shifts computation from expensive search to cheap context processing, achieving higher update efficiency than GRPO. (b) ReflectRL achieves higher performance with more concise reasoning lengths. (c) Compared to GRPO, ReflectRL maintains active policy exploration and prevents premature entropy collapse.

This joint formulation compares direct and reflective rollouts within the same group. With binary rewards, group normalization changes only advantage magnitude: in every non-degenerate group, correct rollouts retain positive advantages and incorrect rollouts retain negative advantages regardless of interface, so Direct Reasoning is not systematically disadvantaged.

3.4 ReflectRL in OPD

In On-Policy Distillation (OPD), ReflectRL utilizes the GNT as teacher-side privileged information to guide student training. OPD generates one rollout per query, so we apply $g(t)$ across a batch of B queries and set $K_t^{\text{batch}} = \text{round}(Bg(t))$. For sample b , the student generates $o^{(b)} \sim \pi_\theta(\cdot | x^D(q^{(b)}))$. The teacher context $\tilde{x}_t^{(b)}$ is reflective for K_t^{batch} samples and direct otherwise. Let $p_{b,s}^{\text{student}} = \pi_\theta(\cdot | x^D(q^{(b)}), o_{<s}^{(b)})$ and $p_{b,s}^{\text{teacher}} = \pi_{\text{teacher}}(\cdot | \tilde{x}_t^{(b)}, o_{<s}^{(b)})$. Then

$$\mathcal{L}_{\text{OPD}}^{\text{ReflectRL}}(\theta) = \mathbb{E} \left[\frac{1}{B} \sum_{b=1}^B \sum_{s=1}^{|o^{(b)}|} \mathbb{D}_{\text{KL}}(p_{b,s}^{\text{student}} \| p_{b,s}^{\text{teacher}}) \right], \quad (11)$$

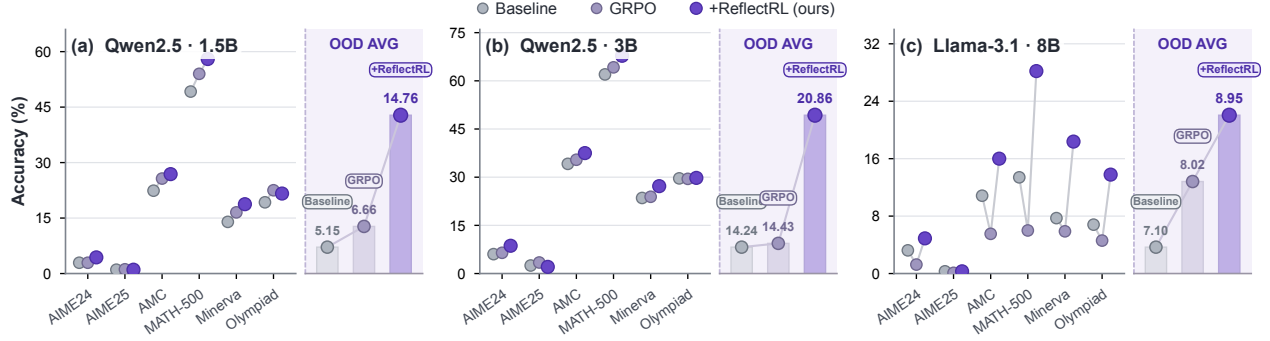


Figure 4 Performance comparison of Baseline, GRPO, and ReflectRL (+ReflectRL) across Llama-3.1-8B-Instruct, Qwen2.5-1.5B-Instruct, and Qwen2.5-3B-Instruct on 9 ID and OOD benchmarks. ReflectRL consistently outperforms standard GRPO across various model sizes and families, showing strong generalization capabilities.

where the reflective context is $x^R(q^{(b)}, o^{-(b)})$ and the direct context is $x^D(q^{(b)})$. The GNT $o^{-(b)}$ is provided strictly as teacher-side privileged context. This formulation ensures that the student model never observes the GNT, retaining the direct reasoning interface $x^D(q)$ throughout training. The teacher policy π_{teacher} , guided by the GNT, provides a higher-quality target distribution $p_{b,s}^{\text{teacher}}$ by actively reflecting on the error prefix. By matching this distribution, the student distills the underlying error-avoidance and correction capabilities into its direct reasoning pathway, eliminating any GNT dependence during inference.

3.5 Computational Overhead

ReflectRL is highly computationally efficient because Golden Negative Trajectories are pre-generated offline, requiring no online expert queries. It retains the original rollout and verifier budgets, maintaining the same policy update rate as baseline training. The only extra overhead is prefilling GNT tokens in the reflective prompt, which accounts for a negligible fraction of training time and decreases to zero as $g(t)$ decays.

4 Experiments

In this section, we conduct extensive experiments to address the following research questions: **(RQ1: Overall Effectiveness)** How does ReflectRL perform when integrated into existing on-policy post-training methods? **(RQ2: Computational Efficiency)** Does ReflectRL introduce significant computational overhead? **(RQ3: Mechanistic Validity)** How sensitive is ReflectRL to the proposed reflective mechanism and the choice of policy transition schedule?

4.1 Experiment Setup

Datasets and Benchmarks We construct OpenR1-GNT-69k from a subset of OpenR1-Math-220k. The prompts are drawn from NuminaMath 1.5, and the candidate trajectories are generated by DeepSeek-R1. We retain trajectories that are verified as incorrect by Math-Verify, yielding 69k Golden Negative Trajectories for training. To evaluate both in-domain learning and transfer, we use 9 widely used reasoning benchmarks. Six benchmarks are in-distribution mathematical reasoning tasks: AIME 2024/2025, AMC, MATH-500 [13], Minerva [14], and OlympiadBench [15]. Three benchmarks evaluate out-of-distribution generalization: ARC-c [16], GPQA-Diamond [17], and MMLU-Pro [18]. For AIME 2024, AIME 2025, and AMC, we report avg@32 because the test sets are small; for the remaining benchmarks, we report pass@1.

Baselines We evaluate ReflectRL by integrating it into four representative on-policy training methods: GRPO [1], DAPO [2], EchoRL [8], and OPD [7]. EchoRL recovers learning signals from advantage-degenerated rollout groups by extracting entropy-selected clips from verified-success rollouts and feeding them back as auxiliary supervision. We also report results from prior work, including: (1) SFT on an equivalent amount of verified correct trajectories extracted from OpenR1 for fair comparison; (2) SFT with a KL-divergence constraint incorporated into the objective (SFT-KL); and three RL baselines: (3) SimpleRL-Zero [19], which

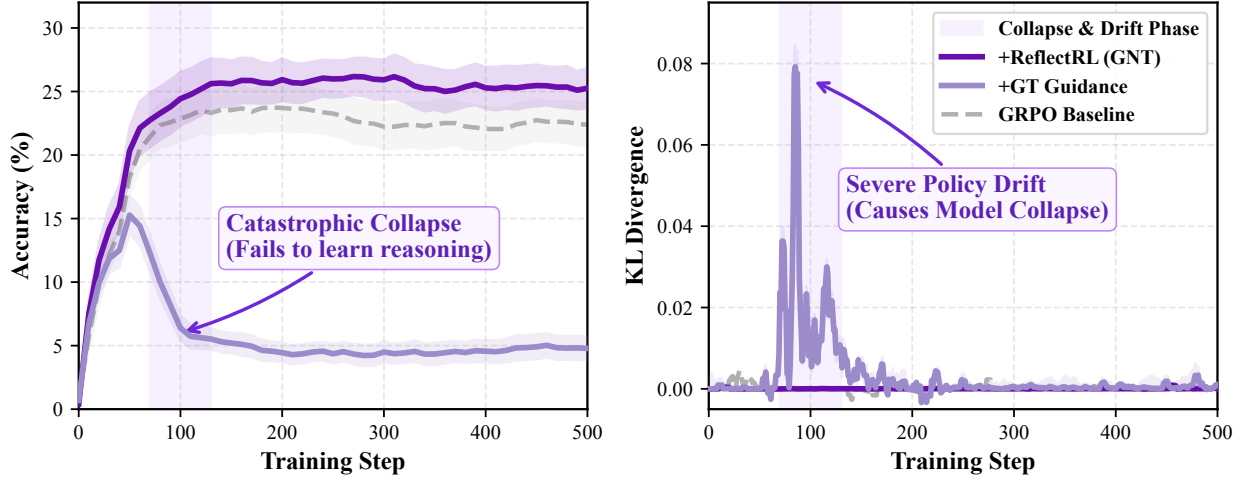


Figure 5 Ablation analysis on Qwen2.5-Math-7B. (a) Accuracy dynamics under different guidance source. (b) Policy drift measured by KL divergence. Highlighted region (steps 70–130) demonstrates the clear causal link between severe policy drift and catastrophic collapse under +GT Guidance, whereas ReflectRL (GNT) stabilizes policy updates.

applies GRPO to approximately 24k mathematical samples from GSM8K and MATH; (4) OpenReasoner-Zero [20], a PPO-based method trained on 129k multi-source samples, including AIME; and (5) PRIME-Zero [21], which performs policy rollouts on 150k NuminaMath queries using implicit process rewards and outcome labels.

Models We consider 4 representative LLMs ranging from 1.5B to 8B parameters from the Qwen2.5 [22] and LLaMA-3.1 [23] families, and train them on OpenR1-GNT-69k. For OPD, we use Qwen2.5-3B-Instruct as the student model and Qwen2.5-7B-Instruct as the expert model.

Parameter Configurations We implement ReflectRL in verl¹. We use a rollout batch size of 128 and an update batch size of 64. During rollout generation, we sample 8 responses for each on-policy question. We shuffle multiple-choice options to reduce contamination risk. For evaluation, we set the temperature to 0.6. For OPD, we use reverse KL and a rollout batch size of 1024. All experiments are run on 16 H200 GPUs. Additional training and evaluation details are provided in Appendix E.

4.2 RQ1: Overall Effectiveness

We integrate ReflectRL into various on-policy baselines to evaluate its impact on reasoning performance and generalization across different model scales and domains.

Takeaway 1: ReflectRL delivers consistent improvements over various baselines across diverse architectures and domains. Table 1 and Figure 4 show that ReflectRL consistently improves GRPO, DAPO, and OPD across Qwen and LLaMA models from 1.5B to 8B parameters. OpenR1-GNT-69k and ARC-c have no data overlap [24, 25]. The substantial ARC-c gain therefore reflects transfer beyond the mathematical training distribution: its causal and logical consistency checks and distractor rejection align with the reflect–repair–solve process induced by GNTs, indicating that ReflectRL acquires domain-general reasoning capabilities.

Takeaway 2: ReflectRL elicits more concise reasoning through Reflective-to-Direct Policy Transition. Reasoning length can serve as a behavioral indicator of reasoning efficiency, where shorter successful trajectories often reflect more direct and selective problem solving [26, 27]. As shown in Figure 3(b), GRPO produces responses exceeding 800 tokens by step 500, whereas ReflectRL remains near 420 tokens while achieving higher accuracy. This suggests that Reflective-to-Direct Policy Transition effectively elicits a more concise reasoning behavior, allowing the model to reach correct solutions with substantially fewer tokens.

¹<https://github.com/volcengine/verl>

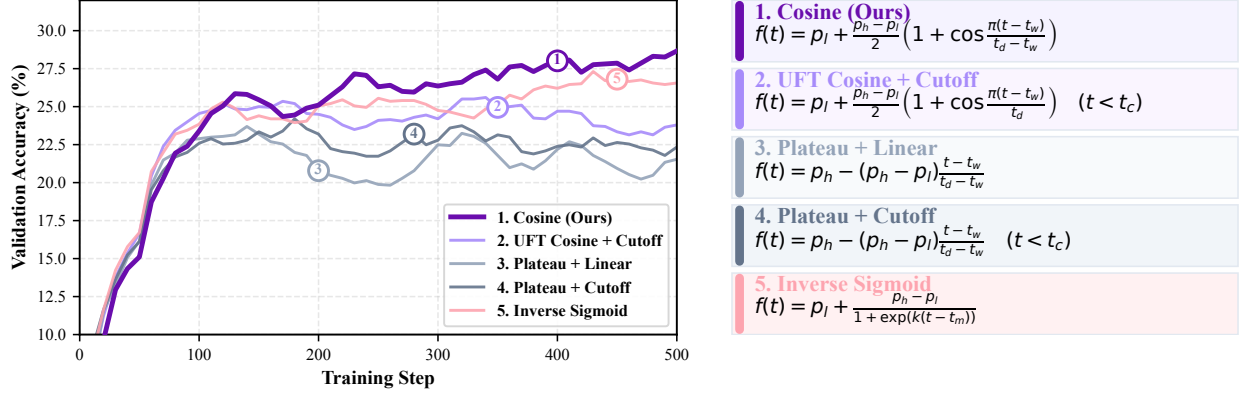


Figure 6 Comparison of different policy transition kernels on Qwen2.5-Math-7B. (Left) Validation accuracy over training steps with smoothed curves. (Right) Corresponding generalized mathematical equations color-coded to match the curves (specific parameters are detailed in Appendix C).

Takeaway 3: ReflectRL effectively mitigates entropy collapse and sustains continuous learning. Policy entropy provides a useful view of whether training remains exploratory or collapses to a narrow response mode. In Figure 3(c), GRPO entropy falls from 0.97 to below 0.03 by step 250. ReflectRL remains around 0.15 at the same step, roughly five times higher than GRPO. This sustained entropy correlates strongly with continuous performance growth, indicating that ReflectRL effectively internalizes this reflective reasoning capability into the model parameters, enabling sustained exploration throughout training.

4.3 RQ2: Computational Efficiency

To evaluate the efficiency of ReflectRL, we analyze its training dynamics and computational profile in Figure 3.

Takeaway 4: ReflectRL reduces training time through shorter rollout generation. Figure 3(a) shows that the update time of ReflectRL decreases throughout the Reflective-to-Direct Policy Transition, eventually stabilizing at approximately 13 seconds per step, compared with around 20 seconds for GRPO. Although reflective rollouts introduce additional GNT tokens during prefilling, this cost is offset by the substantially shorter continuations shown in Figure 3(b), which reduce the more expensive autoregressive decoding workload. Since the GNTs are generated offline and the rollout and verifier budgets remain unchanged, ReflectRL ultimately achieves higher reasoning performance with lower per-step training cost. ReflectRL introduces no auxiliary model, trainable parameters, gradients, or optimizer states, and therefore adds no persistent memory overhead. Its only additional cost is the temporary KV cache for reflective context; as training proceeds, the savings from substantially shorter rollout generation increasingly outweigh this cost, while the Reflective-to-Direct Policy Transition gradually reduces the extra KV-cache usage to zero.

4.4 RQ3: Mechanistic Validity

Source of Reflection We progressively isolate the source of effective reflection from three perspectives: trajectory provenance, trajectory components, and training stability. First, Figure 1(a) shows that not all failures are equally useful. GNTs produce a large and steadily increasing Reflection Gain, whereas self-generated failures provide only limited benefits, and weak-model failures or length-matched mismatched GNTs yield negative gains. This rules out the possibility that reflection simply benefits from additional context or arbitrary incorrect reasoning; the failure must be both high-quality and aligned with the target problem. Second, Figure 1(c) further localizes the useful signal within a GNT. The valid prefix provides a strong reasoning scaffold, while the localized error region supplies a concrete target for correction; combining both yields the largest gain. In contrast, shuffling the trajectory or retaining only the final answer reduces performance below Direct Reasoning, showing that coherent reasoning structure is essential. Finally, Figure 5 shows that correct expert trajectories(GT) are not necessarily better guidance. Although GT guidance brings an early improvement, it induces severe policy drift and eventually collapses, whereas GNT guidance remains

stable throughout training. Together, these results identify GNTs as a particularly effective source of reflection: they are more informative than low-quality failures, yet still require the policy to diagnose and repair reasoning rather than directly imitate an expert solution.

Influence of Policy Transition Kernels Figure 6 shows that smooth transition kernels consistently yield stronger and more stable performance than abrupt or overly rapid schedules. The cosine kernel achieves the best final accuracy, while the inverse-sigmoid variant follows a similar trend, suggesting that the exact functional form is less important than maintaining a gradual shift from Reflective Reasoning to Direct Reasoning. In contrast, sharper transitions weaken performance by removing reflective guidance before the policy has fully internalized the learned behavior.

5 Conclusion

We introduce ReflectRL, a lightweight framework that learns from GNTs through reflection rather than imitation. Reflective-to-Direct Policy Transition transfers this behavior to direct reasoning while preserving the original on-policy training pipeline. Experiments across RLVR and OPD show consistent gains in accuracy, efficiency, and training stability.

References

- [1] DeepSeek-AI, Daya Guo, Dejian Yang, Haowei Zhang, Jun-Mei Song, Ruoyu Zhang, Runxin Xu, Qihao Zhu, Shirong Ma, Peiyi Wang, Xiaoling Bi, Xiaokang Zhang, Xingkai Yu, Yu Wu, Z. F. Wu, Zhibin Gou, Zhihong Shao, Zhuoshu Li, Ziyi Gao, Aixin Liu, Bing Xue, Bing-Li Wang, Bochao Wu, Bei Feng, Chengda Lu, Chenggang Zhao, Chengqi Deng, Chenyu Zhang, Chong Ruan, Damai Dai, Deli Chen, Dong-Li Ji, Erhang Li, Fangyun Lin, Fucong Dai, Fuli Luo, Guangbo Hao, Guanting Chen, Guowei Li, H. Zhang, Han Bao, Hanwei Xu, Haocheng Wang, Honghui Ding, Huajian Xin, Huazuo Gao, Hui Qu, Hui Li, Jianzhong Guo, Jiashi Li, Jiawei Wang, JingChang Chen, Jingyang Yuan, Junjie Qiu, Junlong Li, J. L. Cai, Jiaqi Ni, Jian Liang, Jin Chen, Kai Dong, Kai Hu, Kaige Gao, Kang Guan, Kexin Huang, Kuai Yu, Lean Wang, Lecong Zhang, Liang Zhao, Litong Wang, Liyue Zhang, Lei Xu, Leyi Xia, Mingchuan Zhang, Minghua Zhang, M. Tang, Meng Li, Miaojun Wang, Mingming Li, Ning Tian, Panpan Huang, Peng Zhang, Qiancheng Wang, Qinyu Chen, Qiushi Du, Ruiqi Ge, Ruisong Zhang, Ruizhe Pan, Runji Wang, R. J. Chen, Rui-Qi Jin, Ruyi Chen, Shanghao Lu, Shangyan Zhou, Shanhuang Chen, Shengfeng Ye, Shiyu Wang, Shuiping Yu, Shunfeng Zhou, Shuting Pan, S. S. Li, Shuang Zhou, Shao-Kang Wu, Tao Yun, Tian Pei, T. Sun, T. Wang, Wangding Zeng, Wanbiao Zhao, Wen Liu, Wenfeng Liang, Wenjun Gao, Wen-Xia Yu, Wentao Zhang, Wangding Xiao, Wei An, Xiaodong Liu, Xiaohan Wang, Xiaokang Chen, Xiaotao Nie, Xin Cheng, Xin Liu, Xin Xie, Xingchao Liu, Xinyu Yang, Xinyuan Li, Xuecheng Su, Xuheng Lin, X. Q. Li, Xiangyu Jin, Xi-Cheng Shen, Xiaosha Chen, Xiaowen Sun, Xiaoxiang Wang, Xinnan Song, Xinyi Zhou, Xianzu Wang, Xinxia Shan, Y. K. Li, Y. Q. Wang, Y. X. Wei, Yang Zhang, Yanhong Xu, Yao Li, Yao Zhao, Yaofeng Sun, Yaohui Wang, Yi Yu, Yichao Zhang, Yifan Shi, Yi Xiong, Ying He, Yishi Piao, Yisong Wang, Yixuan Tan, Yiyang Ma, Yiyuan Liu, Yongqiang Guo, Yuan Ou, Yuduan Wang, Yue Gong, Yu-Jing Zou, Yujia He, Yunfan Xiong, Yu-Wei Luo, Yu mei You, Yuxuan Liu, Yuyang Zhou, Y. X. Zhu, Yanping Huang, Yao Li, Yi Zheng, Yuchen Zhu, Yunxiang Ma, Ying Tang, Yukun Zha, Yuting Yan, Zehui Ren, Zehui Ren, Zhangli Sha, Zhe Fu, Zhean Xu, Zhenda Xie, Zhen guo Zhang, Zhewen Hao, Zhicheng Ma, Zhigang Yan, Zhiyu Wu, Zihui Gu, Zijia Zhu, Zijun Liu, Zi-Long Li, Ziwei Xie, Ziyang Song, Zizheng Pan, Zhen Huang, Zhipeng Xu, Zhongyu Zhang, and Zhen Zhang. Deepseek-r1 incentivizes reasoning in llms through reinforcement learning. *Nature*, 645:633 – 638, 2025. URL <https://api.semanticscholar.org/CorpusID:275789950>.
- [2] Qiyang Yu, Zheng Zhang, Ruofei Zhu, Yufeng Yuan, Xiaochen Zuo, YuYue, Weinan Dai, Tiantian Fan, Gaohong Liu, Juncai Liu, LingJun Liu, Xin Liu, Haibin Lin, Zhiqi Lin, Bole Ma, Guangming Sheng, Yuxuan Tong, Chi Zhang, Mofan Zhang, Ru Zhang, Wang Zhang, Hang Zhu, Jinhua Zhu, Jiaze Chen, Jiangjie Chen, Chengyi Wang, Hongli Yu, Yuxuan Song, Xiangpeng Wei, Hao Zhou, Jingjing Liu, Wei-Ying Ma, Ya-Qin Zhang, Lin Yan, Yonghui Wu, and Mingxuan Wang. DAPO: An open-source LLM reinforcement learning system at scale. In *The Thirty-ninth Annual Conference on Neural Information Processing Systems*, 2025. URL <https://openreview.net/forum?id=2a36EMSSTp>.
- [3] Jinhe Bi, Danqi Yan, Yifan Wang, Wenke Huang, Haokun Chen, Guancheng Wan, Mang Ye, Xun Xiao, Hinrich Schuetze, Volker Tresp, and Yunpu Ma. Cot-kinetics: A theoretical modeling assessing lrm reasoning process. *ArXiv*, abs/2505.13408, 2025. URL <https://api.semanticscholar.org/CorpusID:278769227>.
- [4] Xingyue Huang, Rishabh, Gregor Franke, Ziyi Yang, Jiamu Bai, Weijie Bai, Jinhe Bi, Zifeng Ding, Yiqun Duan, Chengyu Fan, Wendong Fan, Xin Gao, Ruohao Guo, Yuan He, Zhuangzhuang He, Xianglong Hu, Neil Johnson, Bowen Li, Fangru Lin, Siyu Lin, Tong Liu, Yunpu Ma, Hao Shen, Hao Sun, Beibei Wang, Fangyijie Wang, Hao Wang, Haoran Wang, Yang Wang, Yifeng Wang, Zhaowei Wang, Ziyang Wang, Yifan Wu, Zikai Xiao, Chengxing Xie, Fan Yang, Junxiao Yang, Qianshuo Ye, Ziyu Ye, Guangtao Zeng, Yuwen Ebony Zhang, Zeyu Zhang, Zihao Zhu, Bernard Ghanem, Philip Torr, and Guohao Li. Loong: Synthesize long chain-of-thoughts at scale through verifiers, 2025. URL <https://arxiv.org/abs/2509.03059>.
- [5] Yijun Tian, Shaoyu Chen, Zhichao Xu, Yawei Wang, Jinhe Bi, Peng Han, and Wei Wang. Reinforcement mid-training, 2025. URL <https://arxiv.org/abs/2509.24375>.
- [6] Xiaowen Ma, Yunpu Ma, Chenyang Lin, Sikuan Yan, Jinhe Bi, Zixuan Cao, Yijun Tian, Volker Tresp, and Hinrich Schuetze. Self-evolving multi-agent systems via textual backpropagation. In Maria Liakata, Viviane P. Moreira, Jiajun Zhang, and David Jurgens, editors, *Findings of the Association for*

- Computational Linguistics: ACL 2026*, pages 9918–9951, San Diego, California, United States, July 2026. Association for Computational Linguistics. ISBN 979-8-89176-395-1. doi: 10.18653/v1/2026.findings-acl.483. URL <https://aclanthology.org/2026.findings-acl.483/>.
- [7] Kevin Lu and Thinking Machines Lab. On-policy distillation. *Thinking Machines Lab: Connectionism*, 2025. doi: 10.64434/tml.20251026. <https://thinkingmachines.ai/blog/on-policy-distillation>.
 - [8] Jinhe Bi, Aniri, Minglai Yang, Xingcheng Zhou, Wenke Huang, Sikuan Yan, Yujun Wang, Zixuan Cao, Michael Färber, Xun Xiao, Volker Tresp, and Yunpu Ma. EchoRL: Reinforcement learning via rollout echoing. In *Forty-third International Conference on Machine Learning*, 2026. URL <https://openreview.net/forum?id=A6az59SGtF>.
 - [9] Jianhao Yan, Yafu Li, Zican Hu, Zhi Wang, Ganqu Cui, Xiaoye Qu, Yu Cheng, and Yue Zhang. Learning to reason under off-policy guidance. In D. Belgrave, C. Zhang, H. Lin, R. Pascanu, P. Koniusz, M. Ghassemi, and N. Chen, editors, *Advances in Neural Information Processing Systems*, volume 38, pages 117157–117186. Curran Associates, Inc., 2025. URL https://proceedings.neurips.cc/paper_files/paper/2025/file/a9d5c33e38442450f9781bd7bad3c81e-Paper-Conference.pdf.
 - [10] Mingyang Liu, Gabriele Farina, and Asuman E. Ozdaglar. UFT: Unifying supervised and reinforcement fine-tuning. In *The Thirty-ninth Annual Conference on Neural Information Processing Systems*, 2025. URL <https://openreview.net/forum?id=usOkGv1S7M>.
 - [11] Siyan Zhao, Zhihui Xie, Mengchen Liu, Jing Huang, Guan Pang, Feiyu Chen, and Aditya Grover. Self-distilled reasoner: On-policy self-distillation for large language models, 2026. URL <https://arxiv.org/abs/2601.18734>.
 - [12] Zhenru Zhang, Chujie Zheng, Yang Wu, Beichen Zhang, Runji Lin, Bowen Yu, Dayiheng Liu, Jingren Zhou, and Junyang Lin. The lessons of developing process reward models in mathematical reasoning. *ArXiv*, abs/2501.07301, 2025. URL <https://api.semanticscholar.org/CorpusID:275470671>.
 - [13] Dan Hendrycks, Collin Burns, Saurav Kadavath, Akul Arora, Steven Basart, Eric Tang, Dawn Song, and Jacob Steinhardt. Measuring mathematical problem solving with the MATH dataset. In *Thirty-fifth Conference on Neural Information Processing Systems Datasets and Benchmarks Track (Round 2)*, 2021. URL <https://openreview.net/forum?id=7Bywt2mQsCe>.
 - [14] Aitor Lewkowycz, Anders Johan Andreassen, David Dohan, Ethan Dyer, Henryk Michalewski, Vinay Venkatesh Ramasesh, Ambrose Slone, Cem Anil, Imanol Schlag, Theo Gutman-Solo, Yuhuai Wu, Behnam Neyshabur, Guy Gur-Ari, and Vedant Misra. Solving quantitative reasoning problems with language models. In Alice H. Oh, Alekh Agarwal, Danielle Belgrave, and Kyunghyun Cho, editors, *Advances in Neural Information Processing Systems*, 2022. URL <https://openreview.net/forum?id=IFXTZERXdm7>.
 - [15] Chaoqun He, Renjie Luo, Yuzhuo Bai, Shengding Hu, Zhen Thai, Junhao Shen, Jinyi Hu, Xu Han, Yujie Huang, Yuxiang Zhang, Jie Liu, Lei Qi, Zhiyuan Liu, and Maosong Sun. OlympiadBench: A challenging benchmark for promoting AGI with olympiad-level bilingual multimodal scientific problems. In Lun-Wei Ku, Andre Martins, and Vivek Srikumar, editors, *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 3828–3850, Bangkok, Thailand, August 2024. Association for Computational Linguistics. doi: 10.18653/v1/2024.acl-long.211. URL <https://aclanthology.org/2024.acl-long.211/>.
 - [16] Peter Clark, Isaac Cowhey, Oren Etzioni, Tushar Khot, Ashish Sabharwal, Carissa Schoenick, and Oyvind Tafjord. Think you have solved question answering? try arc, the ai2 reasoning challenge, 2018. URL <https://arxiv.org/abs/1803.05457>.
 - [17] David Rein, Betty Li Hou, Asa Cooper Stickland, Jackson Petty, Richard Yuanzhe Pang, Julien Dirani, Julian Michael, and Samuel R. Bowman. GPQA: A graduate-level google-proof q&a benchmark. In *First Conference on Language Modeling*, 2024. URL <https://openreview.net/forum?id=Ti67584b98>.
 - [18] Yubo Wang, Xueguang Ma, Ge Zhang, Yuansheng Ni, Abhranil Chandra, Shiguang Guo, Weiming Ren, Aaran Arulraj, Xuan He, Ziyang Jiang, Tianle Li, Max Ku, Kai Wang, Alex Zhuang, Rongqi Fan, Xiang Yue, and Wenhui Chen. MMLU-pro: A more robust and challenging multi-task language understanding

- benchmark. In *The Thirty-eight Conference on Neural Information Processing Systems Datasets and Benchmarks Track*, 2024. URL <https://openreview.net/forum?id=y10DM6R2r3>.
- [19] Weihao Zeng, Yuzhen Huang, Qian Liu, Wei Liu, Keqing He, Zejun MA, and Junxian He. SimpleRL-zoo: Investigating and taming zero reinforcement learning for open base models in the wild. In *Second Conference on Language Modeling*, 2025. URL <https://openreview.net/forum?id=vSMCBUgrQj>.
- [20] Jingcheng Hu, Yinmin Zhang, Qi Han, Daxin Jiang, Xiangyu Zhang, and Heung-Yeung Shum. Open-reasoner-zero: An open source approach to scaling up reinforcement learning on the base model. In *The Thirty-ninth Annual Conference on Neural Information Processing Systems*, 2025. URL <https://openreview.net/forum?id=NFM8F5cVOV>.
- [21] Ganqu Cui, Lifan Yuan, Zefan Wang, Hanbin Wang, Yuchen Zhang, Jiacheng Chen, Wendi Li, Bingxiang He, Yuchen Fan, Tianyu Yu, Qixin Xu, Weize Chen, Jiarui Yuan, Huayu Chen, Kaiyan Zhang, Xingtai Lv, Shuo Wang, Yuan Yao, Xu Han, Hao Peng, Yu Cheng, Zhiyuan Liu, Maosong Sun, Bowen Zhou, and Ning Ding. Process reinforcement through implicit rewards. *Transactions on Machine Learning Research*, 2026. ISSN 2835-8856. URL <https://openreview.net/forum?id=9SkkifLopZ>.
- [22] Qwen, :, An Yang, Baosong Yang, Beichen Zhang, Binyuan Hui, Bo Zheng, Bowen Yu, Chengyuan Li, Dayiheng Liu, Fei Huang, Haoran Wei, Huan Lin, Jian Yang, Jianhong Tu, Jianwei Zhang, Jianxin Yang, Jiaxi Yang, Jingren Zhou, Junyang Lin, Kai Dang, Keming Lu, Keqin Bao, Kexin Yang, Le Yu, Mei Li, Mingfeng Xue, Pei Zhang, Qin Zhu, Rui Men, Runji Lin, Tianhao Li, Tianyi Tang, Tingyu Xia, Xingzhang Ren, Xuancheng Ren, Yang Fan, Yang Su, Yichang Zhang, Yu Wan, Yuqiong Liu, Zeyu Cui, Zhenru Zhang, and Zihan Qiu. Qwen2.5 technical report, 2025. URL <https://arxiv.org/abs/2412.15115>.
- [23] Llama 3 Team. The llama 3 herd of models, 2024. URL <https://arxiv.org/abs/2407.21783>.
- [24] Hsiu-Yuan Huang, Chenming Tang, Weijie Liu, Clive Bai, Saiyong Yang, and Yunfang Wu. Think outside the policy: In-context steered policy optimization. In *Findings of the Association for Computational Linguistics: ACL 2026*, pages 2758–2776, 2026. URL <https://aclanthology.org/2026.findings-acl.132/>.
- [25] Alexis Limozin, Eduard Durech, Torsten Hoeffler, Imanol Schlag, and Valentina Pyatkin. SFT-then-RL outperforms mixed-policy methods for LLM reasoning, 2026. URL <https://arxiv.org/abs/2604.23747>.
- [26] Yuyang Wu, Yifei Wang, Tianqi Du, Stefanie Jegelka, and Yisen Wang. When more is less: Understanding chain-of-thought length in llms. *ArXiv*, abs/2502.07266, 2025. URL <https://api.semanticscholar.org/CorpusID:276259519>.
- [27] Michael Hassid, Gabriel Synnaeve, Yossi Adi, and Roy Schwartz. Don’t overthink it. preferring shorter thinking chains for improved LLM reasoning, 2026. URL <https://openreview.net/forum?id=nhU1A8iMkD>.
- [28] Jinhe Bi, Yujun Wang, Haokun Chen, Xun Xiao, Artur Hecker, Volker Tresp, and Yunpu Ma. LLaVA steering: Visual instruction tuning with 500x fewer parameters through modality linear representation-steering. In Wanxiang Che, Joyce Nabende, Ekaterina Shutova, and Mohammad Taher Pilehvar, editors, *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 15230–15250, Vienna, Austria, July 2025. Association for Computational Linguistics. ISBN 979-8-89176-251-0. URL <https://aclanthology.org/2025.acl-long.739/>.
- [29] Jinhe Bi, Yifan Wang, Danqi Yan, Xun Xiao, Artur Hecker, Volker Tresp, and Yunpu Ma. Prism: Self-pruning intrinsic selection method for training-free multimodal data selection. *ArXiv*, abs/2502.12119, 2025. URL <https://api.semanticscholar.org/CorpusID:276421326>.
- [30] Xuanle Zhao, Qiushi Sun, Jingyu Xiao, Xuexin Liu, Haoyue Yang, Qiaosheng Chen, Xianzhen Luo, Jing Huang, Yufeng Zhong, Lei Chen, Shuai Fu, Zhenlin Wei, Jinhe Bi, Lei Jiang, Haibo Qiu, Siqi Yang, Peng Shi, Jian Hu, and Zhixiong Zeng. Beyond nl2code: A structured survey of multimodal code intelligence, 2026. URL <https://arxiv.org/abs/2606.15932>.
- [31] Gengyuan Zhang, Jinhe Bi, Jindong Gu, Yanyu Chen, and Volker Tresp. Spot! revisiting video-language models for event understanding. *arXiv preprint arXiv:2311.12919*, 2023.

- [32] Minglai Yang, Xinyan Velocity Yu, Pengyuan Li, Xinyu Guo, Zhenting Qi, Konwoo Kim, Longtian Ye, Xiaolong Luo, Jinhe Bi, Henry Zhang, Haris Riaz, Xuan Zhang, Yunze Xiao, Bangya Liu, Tom Tang, Yunfei Zhao, Qunshu Lin, Zihan Wang, Minghao Liu, Michael Lingzhi Li, Yilun Du, Jesse Thomason, Rogerio Feris, Alex Pentland, and Zexue He. Dr. docbench: A comprehensive benchmark for expert-level and difficult document parsing, 2026. URL <https://arxiv.org/abs/2606.01393>.
- [33] Minglai Yang, Xinyu Guo, Zhengliang Shi, Jinhe Bi, Steven Bethard, Mihai Surdeanu, and Liangming Pan. Alignsae: Concept-aligned sparse autoencoders, 2026. URL <https://arxiv.org/abs/2512.02004>.
- [34] Kailin Jiang, Hongbo Jiang, Ning Jiang, Zhi Gao, Jinhe Bi, Yuchen Ren, Bin Li, Yuntao Du, Lei Liu, and Qing Li. Kore: Enhancing knowledge injection for large multimodal models via knowledge-oriented augmentations and constraints, 2025. URL <https://arxiv.org/abs/2510.19316>.
- [35] Yujun Wang, Aniri , Jinhe Bi, Soren Pirk, and Yunpu Ma. Ascd: Attention-steerable contrastive decoding for reducing hallucination in mllm. *Proceedings of the AAAI Conference on Artificial Intelligence*, 40(12): 10306–10314, Mar. 2026. doi: 10.1609/aaai.v40i12.38000. URL <https://ojs.aaai.org/index.php/AAAI/article/view/38000>.
- [36] Guancheng Wan, Lucheng Fu, Haoxin Liu, Yiqiao Jin, Hui Yi Leong, Eric Hanchen Jiang, Hejia Geng, Jinhe Bi, Yunpu Ma, Xiangru Tang, B. Aditya Prakash, Yizhou Sun, and Wei Wang. Beyond magic words: Sharpness-aware prompt evolving for robust large language models with tare, 2025. URL <https://arxiv.org/abs/2509.24130>.
- [37] Guancheng Wan, Xiaoran Shang, Yuxin Wu, Guibin Zhang, Jinhe Bi, Liangtao Zheng, Xin Lin, Yue Liu, Yanbiao Ma, Wenke Huang, and Bo Du. HYPERION: Fine-grained hypersphere alignment for robust federated graph learning. In *The Thirty-ninth Annual Conference on Neural Information Processing Systems*, 2025. URL <https://openreview.net/forum?id=TZB6YT80wr>.
- [38] Xuankun Rong, Wenke Huang, Jian Liang, Jinhe Bi, Xun Xiao, Yiming Li, Bo Du, and Mang Ye. Backdoor cleaning without external guidance in MLLM fine-tuning. In *The Thirty-ninth Annual Conference on Neural Information Processing Systems*, 2025. URL <https://openreview.net/forum?id=os4QYDf3Ms>.
- [39] Tianfan Peng, Yuntao Du, Pengzhou Ji, Shijie Dong, Kailin Jiang, Mingchuan Ma, Yijun Tian, Jinhe Bi, Qian Li, Wei Du, Feng Xiao, and Lizhen Cui. Can visual input be compressed? a visual token compression benchmark for large multimodal models, 2025. URL <https://arxiv.org/abs/2511.02650>.
- [40] Kailin Jiang, Ning Jiang, Yuntao Du, Yuchen Ren, Yuchen Li, Yifan Gao, Jinhe Bi, Yunpu Ma, Qingqing Liu, Xianhao Wang, Yifan Jia, Hongbo Jiang, Yaocong Hu, Bin Li, and Lei Liu. Mined: Probing and updating with multimodal time-sensitive knowledge for large multimodal models, 2025. URL <https://arxiv.org/abs/2510.19457>.
- [41] Hunter Lightman, Vineet Kosaraju, Yuri Burda, Harrison Edwards, Bowen Baker, Teddy Lee, Jan Leike, John Schulman, Ilya Sutskever, and Karl Cobbe. Let’s verify step by step. In *International Conference on Learning Representations*, volume 2024, pages 39578–39601, 2024.
- [42] Eric Zelikman, Yuhuai Wu, Jesse Mu, and Noah Goodman. Star: Bootstrapping reasoning with reasoning. *Advances in Neural Information Processing Systems*, 35:15476–15488, 2022.
- [43] Ke Wang, Houxing Ren, Aojun Zhou, Zimu Lu, Sichun Luo, Weikang Shi, Renrui Zhang, Linqi Song, Mingjie Zhan, and Hongsheng Li. Mathcoder: Seamless code integration in llms for enhanced mathematical reasoning. In *International Conference on Learning Representations*, volume 2024, pages 5009–5042, 2024.
- [44] Yuxian Gu, Li Dong, Furu Wei, and Minlie Huang. Minillm: Knowledge distillation of large language models. In *International Conference on Learning Representations*, volume 2024, pages 32694–32717, 2024.
- [45] Sean Welleck, Ximing Lu, Peter West, Faeze Brahman, Tianxiao Shen, Daniel Khashabi, and Yejin Choi. Generating sequences by learning to self-correct, 2022. URL <https://arxiv.org/abs/2211.00053>.

Appendix

A Prompt Templates

Here we present the prompt templates used in ReflectRL. During on-policy training, all model inputs are structured using a shared system prompt that guides the policy to generate systematic step-by-step reasoning within a designated thought container.

Direct Reasoning The direct reasoning interface applies `Chat_TempD`. We design a structured template to present the original problem alongside the system prompt, as shown in Figure 7.

Reflective Reasoning The reflective reasoning interface applies `Chat_TempR`. This template presents a pre-generated Golden Negative Trajectory (GNT) as contextual information, prompting the policy to identify its errors and repair the reasoning process, as shown in Figure 8.

Direct Reasoning Prompt

SYSTEM PROMPT

Your task is to follow a systematic, thorough reasoning process before providing the final solution. This involves analyzing, summarizing, exploring, reassessing, and refining your thought process through multiple iterations. Structure your response into two sections: Thought and Solution. In the Thought section, present your reasoning using the format: "`<think>` {thoughts} `</think>`". Each thought should include detailed analysis, brainstorming, verification, and refinement of ideas. After "`</think>`", in the Solution section, provide the final, logical, and accurate answer, clearly derived from the exploration in the Thought section. If applicable, include the answer in `boxed{ }` for closed-form results like multiple choices or mathematical solutions.

USER PROMPT

{problem}

Figure 7 The format of the Direct Reasoning Prompt (`Chat_TempD`).

Reflective Reasoning in OPD In On-Policy Distillation (OPD), the expert teacher model is guided by a specific reflective prompt to process the GNT as privileged context. As shown in Figure 9, this template instructs the teacher to view the trace as guidance rather than ground truth, avoid its errors, and derive the correct solution for the student to match.

B Detailed Evaluation Results

We report the exact evaluation accuracy numbers corresponding to Figure 4 in the main paper.

C Policy Transition Schedulers

To transition the guidance probability $g(t)$ from high reflection to standard RL over the training steps t , we define a set of schedulers. The generalized mathematical expressions for the six evaluated transition kernels are formulated below, governed by hyper-parameters: initial high probability p_h , final low probability p_l , warm-up steps t_w , decay horizon t_d , and a hard cutoff step t_c . In our experiments, we set $p_h = 0.5$, $p_l = 0.05$ (or 0.0 for cutoff variants), $t_w = 50$, $t_d = 250$, and $t_c = 300$. To simplify the notation, we denote the probability drop as $\Delta p = p_h - p_l$.

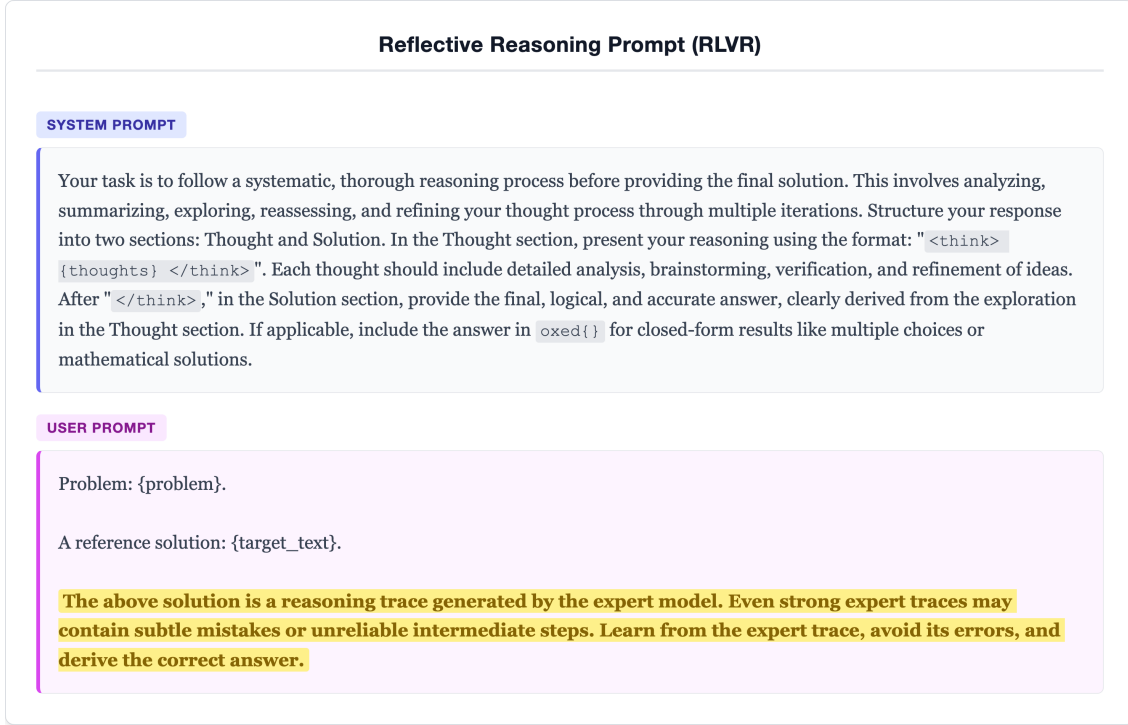


Figure 8 The format of the Reflective Reasoning Prompt (Chat_Temp_R).

Model / Method	In-Distribution Performance							Out-of-Distribution Performance			
	AIME24	AIME25	AMC	MATH-500	Minerva	Olympiad	Avg.	ARC-c	GPQA*	MMLU-Pro	Avg.
<i>Qwen2.5-1.5B-Instruct</i>											
Baseline	2.92	1.04	22.40	49.20	13.97	19.26	18.13	2.90	1.01	11.53	5.15
GRPO	2.92	1.15	25.68	54.00	16.54	22.52	20.47	0.34	1.01	18.63	6.66
+ReflectRL	4.37	1.04	26.88	58.00	18.75	21.63	21.78	18.60	2.53	23.15	14.76
<i>Qwen2.5-3B-Instruct</i>											
Baseline	6.04	2.50	34.15	62.00	23.53	29.63	26.31	0.43	0.51	41.77	14.24
GRPO	6.46	3.44	35.43	64.20	23.90	29.48	27.15	1.71	1.01	40.58	14.43
+ReflectRL	8.65	2.08	37.50	67.80	27.21	29.78	28.84	19.37	1.01	42.20	20.86
<i>Llama-3.1-8B-Instruct</i>											
Baseline	3.23	0.31	10.84	13.40	7.72	6.81	7.05	0.00	0.00	21.30	7.10
GRPO	1.25	0.10	5.53	6.00	5.88	4.59	3.89	0.00	0.00	24.05	8.02
+ReflectRL	4.90	0.31	16.00	28.20	18.38	13.78	13.60	0.17	0.00	26.67	8.95

Table 2 Detailed evaluation results of Baseline, GRPO, and ReflectRL (+ReflectRL) across Qwen2.5-1.5B-Instruct, Qwen2.5-3B-Instruct, and Llama-3.1-8B-Instruct on 9 in-distribution (ID) and out-of-distribution (OOD) benchmarks.

Reflective Reasoning Prompt (OPD Teacher)

SYSTEM PROMPT

Your task is to follow a systematic, thorough reasoning process before providing the final solution. This involves analyzing, summarizing, exploring, reassessing, and refining your thought process through multiple iterations. Structure your response into two sections: Thought and Solution. In the Thought section, present your reasoning using the format: "`<think>` {thoughts} `</think>`". Each thought should include detailed analysis, brainstorming, verification, and refinement of ideas. After "`</think>`", in the Solution section, provide the final, logical, and accurate answer, clearly derived from the exploration in the Thought section. If applicable, include the answer in `boxed{ }` for closed-form results like multiple choices or mathematical solutions.

USER PROMPT

{prompt}

The following is a reasoning trace generated by the stronger model DeepSeek-R1.

Even strong teacher traces may contain subtle mistakes or unreliable intermediate steps.

Use it as teacher guidance rather than ground truth, avoid its errors, and derive the correct answer.

{target}

Solve the original question correctly.

Figure 9 The format of the Reflective Reasoning Prompt for the OPD Teacher.

1. UFT Cosine + Cutoff

$$g(t) = \begin{cases} p_h, & t < t_w, \\ p_l + \frac{\Delta p}{2} \left[1 + \cos \left(\pi \frac{t-t_w}{t_d} \right) \right], & t_w \leq t < t_c, \\ 0, & t \geq t_c. \end{cases}$$

2. Linear

$$g(t) = \begin{cases} p_h - \Delta p \cdot \frac{t}{t_d}, & t < t_d, \\ p_l, & t \geq t_d. \end{cases}$$

3. Cosine

$$g(t) = \begin{cases} p_h, & t < t_w, \\ p_l + \frac{\Delta p}{2} \left[1 + \cos \left(\pi \frac{t-t_w}{t_d-t_w} \right) \right], & t_w \leq t < t_d, \\ p_l, & t \geq t_d. \end{cases}$$

4. Plateau + Linear

$$g(t) = \begin{cases} p_h, & t < t_w, \\ p_h - \Delta p \cdot \frac{t-t_w}{t_d-t_w}, & t_w \leq t < t_d, \\ p_l, & t \geq t_d. \end{cases}$$

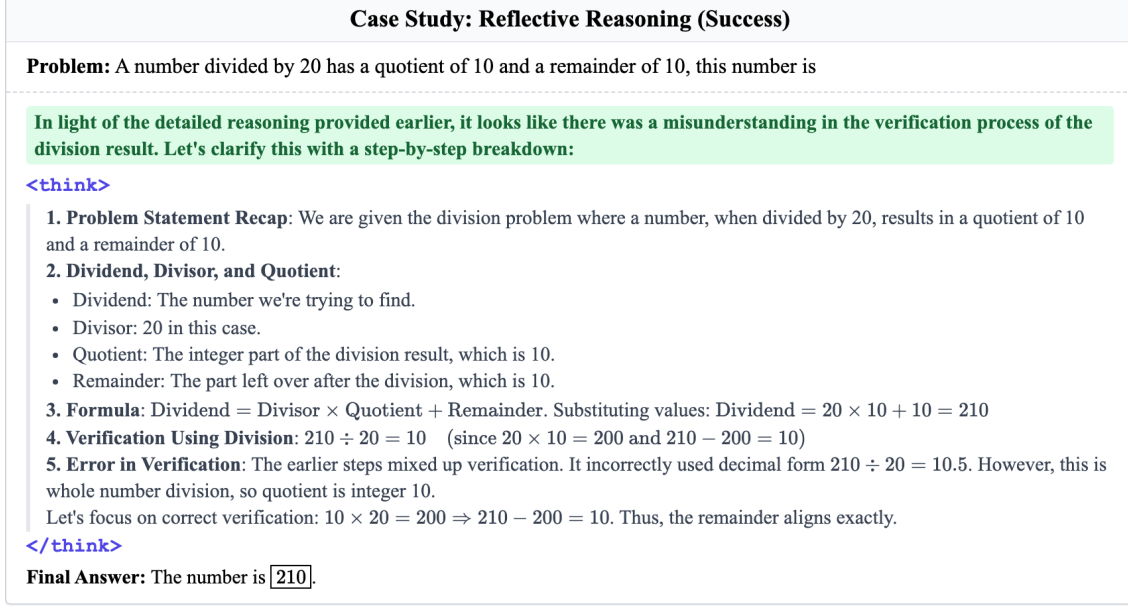


Figure 10 Case Study: Reflective Reasoning (Success).

5. Plateau + Cutoff

$$g(t) = \begin{cases} p_h, & t < t_w, \\ p_h - \Delta p \cdot \frac{t - t_w}{t_d - t_w}, & t_w \leq t < t_d, \\ p_l, & t_d \leq t < t_c, \\ 0, & t \geq t_c. \end{cases}$$

6. Inverse Sigmoid

$$g(t) = p_l + \frac{\Delta p}{1 + \exp(k(t - t_m))}$$

where $t_m = \frac{t_w + t_d}{2}$ and k controls the steepness of the curve.

D Related Work

Reinforcement Learning with Verifiable Rewards (RLVR) Recently, large language models and multi-modal LLMs (MLLMs) have demonstrated remarkable capabilities across various complex reasoning tasks [28, 29, 30, 31, 12, 32, 33, 34, 35, 36, 37, 38, 39, 40]. To further enhance these capabilities, Reinforcement Learning with Verifiable Rewards has emerged as a predominant paradigm for post-training on reasoning tasks [41, 1]. Unlike traditional RLHF which relies on reward models trained on human preferences, RLVR leverages rule-based verifiers or deterministic outcome signals (e.g., matching a mathematical answer or passing unit tests) to provide unambiguous reward signals [42, 43]. Recent advancements in this space, such as Group Relative Policy Optimization (GRPO), eliminate the need for an external critic model by computing advantages relative to a sampled group of rollouts [1]. While RLVR is highly effective at exploring and reinforcing correct reasoning paths, it heavily relies on the model’s intrinsic capability to occasionally sample the correct answer. On highly complex problems where the model fails to generate any correct trajectory, the reward signal becomes sparse, leading to inefficient exploration and degraded policy updates [8]. ReflectRL builds upon this paradigm by injecting Reflective Reasoning into the RLVR process, ensuring that even when direct exploration fails, the model can still receive dense and constructive signals by reflecting on Golden Negative Trajectories.

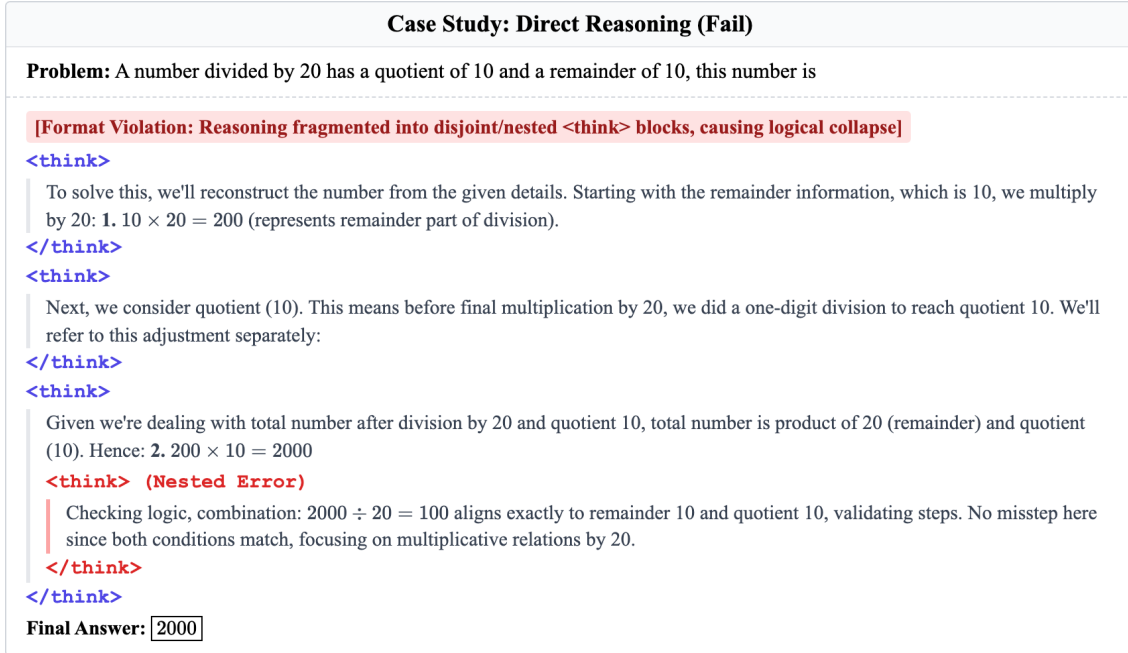


Figure 11 Case Study: Direct Reasoning (Fail).

On-Policy Distillation (OPD) On-Policy Distillation aims to transfer knowledge from a stronger expert model (teacher) to a target model (student) using the student’s own generated trajectories [44, 11, 7]. By computing the Kullback-Leibler (KL) divergence between the teacher and student distributions on on-policy states, OPD mitigates the distribution shift and exposure bias issues typically encountered in offline Supervised Fine-Tuning (SFT) [12]. In standard OPD, the teacher model evaluates the student’s reasoning path and provides a token-level distribution to guide the student. However, when the problem is challenging, the teacher might also lack sufficient context to provide optimal step-by-step guidance. ReflectRL extends the OPD framework by providing the Golden Negative Trajectory as privileged contextual information to the teacher model. This allows the teacher to perform Reflective Reasoning and generate higher-quality target distributions, while the student model distills this error-correction capability directly into its Direct Reasoning pathway without relying on the external trajectory during inference.

Learning from Expert Trajectories The use of expert trajectories is a common strategy to improve reasoning capabilities in language models [10, 9]. Traditional methods primarily treat successful expert trajectories as positive demonstrations to be imitated via behavioral cloning [10]. In the context of on-policy training, recent works have explored utilizing correct expert trajectories to initialize policy search or to serve as high-reward anchors to guide rollout generation [9]. However, these approaches uniformly discard expert failures as unusable negative samples. Some studies have investigated learning from negative examples or self-generated mistakes [45], but these typically focus on simple contrastive objectives or filtering heuristics. In contrast, ReflectRL uniquely identifies the *Reflection Advantage* inherent in structured expert failures (Golden Negative Trajectories). Rather than discarding these failures or treating them as negative contrastive targets, ReflectRL leverages them as a contextual scaffold to elicit explicit Reflective Reasoning, demonstrating that reflecting on high-quality mistakes is often more effective than learning from scratch.

E Training Details

We implemented our training pipeline based on the open-source `verl` framework. Below are the key hyperparameters and configuration details used for ReflectRL in the on-policy rollout settings:

- **Data Configuration:** We utilize a subset of the OpenR1-Math-220k dataset for training. The global training batch size is set to 128, and the validation batch size is 512. To ensure proper context parsing, we

limit both the maximum prompt length and the maximum response length to 2048 tokens.

- **Rollout Generation:** For each training query, we sample $N = 8$ responses using vLLM for high-throughput generation with a tensor parallel size of 2. The sampling temperature is set to 1.0 during training to encourage exploration and 0.6 during validation for stable evaluation.
- **PPO & Optimization:** We employ the GRPO advantage estimator. The actor learning rate is set to 1×10^{-6} . For policy optimization, we utilize a PPO micro-batch size and mini-batch size of 64. To maintain continuous exploration, the entropy coefficient is set to 0.001. The KL penalty coefficient is set to 0.0 to prevent interference with the Reflective-to-Direct transition mechanism and allow the policy to freely shift away from the initial reference model.
- **Hardware and Distribution:** The models are trained across NVIDIA GPUs with DeepSpeed integration. Gradient checkpointing is enabled to save memory, and the Ulysses sequence parallel size is set to 1.

F Case Study

To further demonstrate the effectiveness of Reflective Reasoning, we present a detailed case study illustrating the behavioral differences between standard exploration and our proposed framework.

As shown in Figure 11, the Direct Reasoning trajectory completely fails to solve a relatively straightforward arithmetic problem from scratch. Not only does the policy struggle to organize the steps cohesively, but it critically violates the structural constraint by fragmenting its reasoning into multiple disjoint and nested `<think>` blocks, leading to a logical collapse. Under standard RLVR, such a trajectory receives a zero reward, providing the model with an entirely uninformative gradient update that fails to guide it toward the correct format or logic. In sparse-reward environments, repeated failures of this nature lead to early convergence to sub-optimal policies.

In contrast, Figure 10 demonstrates the power of the Reflection Advantage. When presented with the Golden Negative Trajectory as a contextual anchor, the policy successfully enters a Reflective Reasoning state. It explicitly acknowledges the shortcomings in the previous attempt (“The reference solution suggests there were some errors in the previous attempts. Recomputing:”), strictly adheres to the `<think>` reasoning structure, and correctly re-evaluates the arithmetic operations step-by-step. By learning to critique and reconstruct the solution from a high-quality mistake, ReflectRL converts a dead-end zero-reward exploration path into a dense, high-reward learning signal.