

Measured Sliders: Learning Continuous Controls from Differentiable Image Measurements

Yijia Chen, Boyu Wei, and Xuanhua Yin*

School of Computer Science, The University of Sydney
yche0587@uni.sydney.edu.au, bwei0951@sydney.edu.au,
xuanhua.yin@sydney.edu.au

Abstract. Continuous sliders are useful only when coefficient changes produce predictable image changes. Yet most diffusion sliders derive their axes from text or learned representations, leaving their scales disconnected from observable image properties. Consequently, we cannot tell in advance which attributes are learnable, compare control strengths directly, or anticipate interference when multiple controls are combined. We propose *Measured Sliders*, a framework that defines continuous controls through closed-form differentiable image measurements. A common measurement space unifies the pipeline. Before training, an observability test identifies usable supervision. During training, a measurement-guided objective learns target movement while suppressing non-target changes. After training, decoded calibration expresses controls in comparable units of realized image change. Multiple LoRA branches are stored in one checkpoint and composed without training on joint activations. Across SDXL and FLUX.1-dev, the resulting controls are ordered, selective, and composable. On 553 prompts, lighting direction reaches $\rho = 0.995$ and 98.9% monotone sweeps. A five-attribute checkpoint achieves average selectivity 2.59, compared with 1.50 for the strongest baseline, and preserves every requested direction in 96.7% of pair and 86.1% of triple compositions. The observability test also separates every subsequently successful measurement from the failed candidate. Overall, image-space measurement provides a common basis for learning, diagnosing, calibrating, and composing continuous generative controls.

Keywords: Diffusion models · Controllable generation · Attribute control · Evaluation protocols

1 Introduction

Text-to-image diffusion models generate high-quality content, yet fine-grained creation also requires continuous control of properties such as brightness, saturation, color temperature, and lighting direction while preserving subject, geometry, and composition [27, 26, 14, 37, 8]. Text can name an edit direction such as

* Corresponding author.

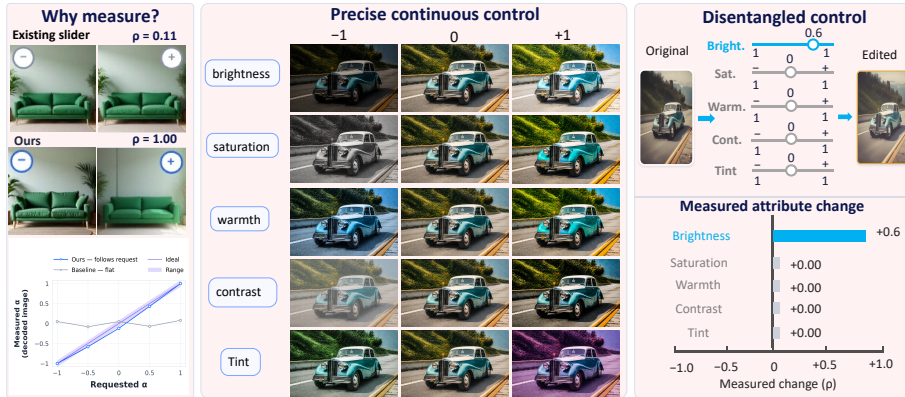


Fig. 1. Measured Sliders turn image measurements into precise, disentangled controls. Left: in the matched FLUX setting, the text-defined slider is nearly flat, whereas measurement supervision follows the requested direction. Center: one checkpoint provides continuous brightness, saturation, warmth, contrast, and tint axes. Right: activating brightness produces the requested decoded change while the other four measurements remain nearly unchanged.

“slightly brighter,” but it does not specify how much change should appear in the generated image [16, 4, 9, 13]. The distinction is especially important for scene-level attributes, whose control requires coordinated changes across the image without changing the scene itself [39, 41, 23].

Reusable sliders commonly learn a direction in parameter, embedding, or score space from opposing prompts, semantic representations, or editing instructions, and expose a raw coefficient α at inference time [16, 4, 9, 13, 38]. Unified variants store or compose several semantic controls in one model [34, 38], numerical-conditioning methods encode camera settings or intensities as tokens or embeddings [14, 37, 8], and output-aware guidance optimizes individual sampling trajectories [11]. These approaches broaden how controls are represented and combined, while the relation between their native coordinate and the realized image change remains implicit. Consequently, identical raw coefficients across attributes or methods need not represent comparable effects.

This gap affects learning and evaluation in three ways. First, increasing a coefficient need not yield an ordered or predictable response. Range, smoothness, and alignment can only diagnose the trajectory after it has been learned [16, 4, 13, 38]. Second, compositional objectives reduce semantic interference but do not directly specify a measured target change together with measured non-target invariance [34, 38]. Third, LoRA scales, embedding offsets, and guidance weights have no shared output unit, so equal-coefficient comparisons confound control quality with effect magnitude [4, 13]. When training uses an inexpensive differentiable preview, an additional question arises: whether that preview retains

enough information about a candidate decoded-image measurement to supervise it reliably.

Image-level guidance demonstrates that differentiable output objectives can steer diffusion [11], while multi-attribute sliders make interference and preservation explicit concerns [34, 38, 13]. Together they motivate defining a reusable control in the same measurement space in which its effect is evaluated. A vector of image measurements can state the desired displacement of one attribute and the invariance of the others in a single objective. Normalizing those measurements by natural image variation further provides a common effect scale across heterogeneous attributes.

We therefore propose **Measured Sliders**, a framework that converts differentiable image measurements into reusable continuous controls. As shown in Fig. 1, each LoRA branch learns a target displacement in one measurement while suppressing changes in the remaining measurements, and all branches are stored in one checkpoint. Before optimization, a pre-training observability analysis compares preview error with decoded natural variation to determine whether the training path preserves a usable signal. After optimization, decoded calibration maps raw coefficients to comparable units of realized image change. The same measurement space thus connects feasibility, learning, and evaluation.

Experiments on SDXL and FLUX.1-dev provide four complementary findings. On 553 prompts, Measured Sliders reaches $\rho = 0.995$ for lighting direction, 98.9% monotone sweeps, and $3.3\times$ the selectivity of the strongest external slider. In a controlled FLUX comparison that changes only the supervision, measurement supervision increases realized effect by $295\times$ and raises monotone sweeps from 9.6% to 99.8%. A jointly trained five-attribute checkpoint attains average selectivity 2.59 versus 1.50 for the strongest baseline average. Simultaneous activation moves every requested attribute in the intended direction in 96.7% of pairs and 86.1% of triples. Finally, pre-training observability predicts all six evaluated learnability outcomes, and decoded calibration reduces endpoint dispersion from $63.2\times$ to $2.2\times$. Our contributions are summarized as follows:

- We define a continuous slider by decoded-image measurements and jointly learn multiple LoRA branches with an objective that specifies target effect and non-target stillness.
- We use pre-training observability to identify usable measurements, natural-variation scaling to balance their optimization, and decoded calibration to express the resulting controls in comparable effect units.
- We evaluate the learned controls on SDXL and FLUX.1-dev in terms of decoded effect, drift, ordering, consistency, and zero-shot composition. Measured Sliders reaches $\rho = 0.995$ with 98.9% monotone lighting sweeps and preserves every requested direction in 96.7% of pair compositions.

2 Related Work

2.1 Continuous and Composable Control

Continuous diffusion control is commonly expressed as traversal in parameter or representation space. Concept Sliders learns low-rank parameter directions from opposing prompts or paired images [16]. Subject-specific control identifies directions in CLIP text representations [4]. SliderSpace discovers multiple interpretable LoRA directions from the distribution induced by one prompt [17]. SliderEdit decomposes compound editing instructions into independently weighted components [38], while PairEdit learns hard-to-verbalize transformations from paired source and target examples [22]. These methods establish continuous semantic coordinates across several model spaces.

Other editors obtain graded behavior without a persistent scalar parameter direction. Attribute Diffusion samples diverse attribute variations and supports controlled exploration [25]. Stable Flow edits through selected transformer features [1]. FeedEdit regulates guidance from the evolving edit degree [15]. UniEdit-I adds semantic verification [2], while visual-example methods infer edits from paired images rather than language [22, 12].

Recent work also increases the number and composability of controls. All-in-One Slider stores sparse text-embedding directions in one module [34], and CompSlider learns conditional priors for simultaneous multi-attribute generation [42]. Unified editors and adapters cover many generation and editing tasks [6, 32, 36], while Conditional Balance selects condition-sensitive layers to trade off competing inputs [10]. Prior work improves preservation with causal representations [19], separate subject and context control [31], and text conditioning designed to prevent leakage [24]. Measured Sliders defines its coordinate by decoded-image measurements, placing target displacement and named non-target invariances in the same space.

2.2 Measurement-Aware Learning and Evaluation

Differentiable output objectives provide another route to controllable generation. Classifier guidance modifies denoising with auxiliary gradients [11]. Universal Guidance accepts general differentiable guidance functions [3]. FreeDoM uses time-independent energies from pretrained networks [35]. ADMMDiff decouples the diffusion prior and differentiable guidance loss [40]. Constrained diffusion learning combines multiple reward and distributional constraints through joint primal and dual optimization [20]. Direct clean-image supervision accelerates spatially controllable generation [28]. These approaches demonstrate that image-level measurements can guide sampling or distribution learning. Our setting uses the measurement to construct a persistent LoRA coordinate, which makes the same output quantity available for training, deployment, and evaluation. Before training, we additionally test whether the inexpensive preview used for gradients preserves the decoded variation of each candidate measurement. This candidate-specific observability analysis is distinct from factor-level identifiability results for weakly supervised diffusion models [30].

Continuous-control evaluation measures response, monotonicity, preservation, and interference [4, 42]. FreeSliders further detects saturation and reparameterizes nonlinear traversal within one axis [13]. General image-editing benchmarks evaluate perceptual quality, instruction alignment, preservation, and semantic stability [33, 29, 21]. These criteria assess whether an edit is effective and visually faithful. We address the orthogonal cross-axis question: coefficients from different controls are first mapped to decoded natural-variation units, after which target response and non-target drift can be compared at matched realized effect.

3 Method

Measured Sliders constructs a control coordinate in three stages. First, *pre-training observability analysis* determines whether the differentiable preview used for optimization can resolve the natural variation of a candidate measurement on decoded images. Second, *multi-control learning* trains branch-specific LoRA updates against a shared vector of target and non-target measurements. Third, *decoded calibration* converts each branch’s raw coefficient into a common image-space effect scale. Figure 2 summarizes the pipeline.

3.1 Measurements and Pre-Training Observability

Image measurements. For an RGB image I , we represent a panel of attributes by

$$\mathbf{M}^q(I) = [M_1^q(I), \dots, M_N^q(I)]^\top, \quad q \in \{\text{pre}, \text{dec}\}, \quad (1)$$

where N is the number of controls and q identifies the differentiable preview or final decoded implementation. We use closed-form, parameter-free statistics, where K , S , W , C , T , and L denote brightness, saturation, warmth, contrast, tint, and spatial lighting direction. In particular, $M_L(I) = \langle Y \rangle_{\text{right}} - \langle Y \rangle_{\text{left}}$, where $Y = 0.299I_R + 0.587I_G + 0.114I_B$ is luma and $\langle \cdot \rangle$ denotes a spatial mean. The remaining measurements are $M_S = \langle (\max_b I_b - \min_b I_b) / \max(\max_b I_b, \epsilon_S) \rangle$, $M_W = \langle I_R - I_B \rangle$, $M_C = \text{std}(Y)$, and $M_T = \langle (I_R + I_B)/2 - I_G \rangle$, where $b \in \{R, G, B\}$ and ϵ_S prevents division by zero. Brightness combines mean luma with the fraction of pixels above the fixed shadow threshold $\tau_d = 0.2$. Its preview replaces the hard threshold by $\text{sigmoid}(20(\tau_d - Y))$.

Differentiable preview. Decoding a clean-latent estimate at every training step is expensive. We therefore fit and freeze the affine preview

$$P(z) = \text{clip}_{[0,1]}(W_P^\top z + b_P), \quad (2)$$

where $z \in \mathbb{R}^{C_z \times H \times W}$ is an unpacked latent, $W_P \in \mathbb{R}^{C_z \times 3}$ and $b_P \in \mathbb{R}^3$ are obtained by ridge regression against downsampled decoded images, and $P(z)$ is an RGB preview at latent resolution. Training uses $\mathbf{M}^{\text{pre}}(P(z))$. Observability analysis, calibration, and evaluation use $\mathbf{M}^{\text{dec}}(D(z))$, where D is the frozen VAE decoder.

Pre-training observability. A preview is useful only when its error is smaller than the decoded variation that it must resolve. For candidate k , we compute

$$\varepsilon_k^2 = \frac{1}{|\mathcal{H}|} \sum_{z \in \mathcal{H}} [M_k^{\text{pre}}(P(z)) - M_k^{\text{dec}}(D(z))]^2, \quad (3)$$

$$s_k = Q_{95}(\mathcal{V}_k) - Q_5(\mathcal{V}_k), \quad \text{SNR}_k = \frac{s_k}{\varepsilon_k},$$

where $\mathcal{H}$ is a held-out latent set, $\mathcal{V}_k = \{M_k^{\text{dec}}(D(z)) : z \in \mathcal{S}_{\text{ref}}\}$ contains measurements from an independent neutral reference set, s_k is its robust decoded range, Q_{95} and Q_5 denote the indicated percentiles, and SNR_k is the pre-training observability ratio. We retain a candidate when $\text{SNR}_k > 1$, meaning that decoded natural variation exceeds preview RMSE. This test uses only the frozen preview, decoder, and reference images.

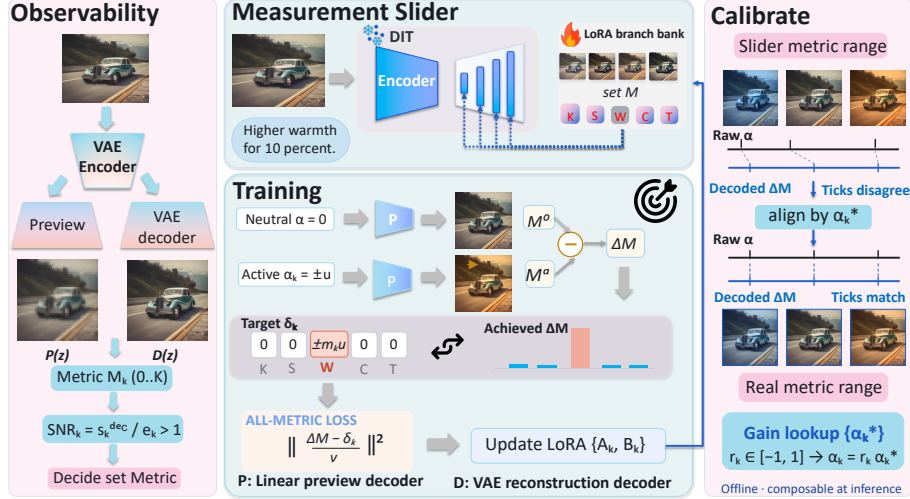


Fig. 2. Measured Sliders pipeline. *Observability:* preview and decoded measurements are compared before training to retain candidates with a reliable optimization signal. *Train:* an active LoRA branch matches its target displacement while the remaining measurements are held still. *Calibrate:* decoded responses map raw coefficients to comparable image-space effect units for inference.

3.2 Measurement-Supervised Multi-Control Learning

Multi-branch controller. Let $f_\theta^\alpha(z_t, t, c)$ be a frozen diffusion backbone with control vector $\alpha = (\alpha_1, \dots, \alpha_N)$, where z_t is a noisy latent, t is the diffusion timestep,

and c is the condition. Each selected linear projection is augmented as

$$W(\boldsymbol{\alpha})x = W_0x + \gamma \sum_{k=1}^N \alpha_k B_k A_k x, \quad (4)$$

where x is the input activation, W_0 is frozen, $A_k \in \mathbb{R}^{r_L \times d_{\text{in}}}$ and $B_k \in \mathbb{R}^{d_{\text{out}} \times r_L}$ are the rank- r_L LoRA factors of branch k , and γ is the fixed LoRA scale. We zero-initialize B_k , so $\boldsymbol{\alpha} = \mathbf{0}$ exactly recovers the backbone. All branches are optimized in one run and stored in one checkpoint, while their factors remain branch-specific.

Let $\mathcal{R}_t$ recover a clean-latent estimate from the backbone output and define

$$\begin{aligned} \hat{z}_0^\alpha &= \mathcal{R}_t(z_t, f_\theta^\alpha(z_t, t, c_0)), \\ \Delta \mathbf{M}(\boldsymbol{\alpha}) &= \mathbf{M}^{\text{pre}}(P(\hat{z}_0^\alpha)) - \mathbf{M}^{\text{pre}}(P(\hat{z}_0^0)), \end{aligned} \quad (5)$$

where c_0 is a neutral content condition and $\Delta \mathbf{M} \in \mathbb{R}^N$ is the preview measurement displacement from the frozen-model output.

Effect-and-stillness objective. At each update, we sample branch k , polarity $\pi \in \{-1, +1\}$, and magnitude $u \sim \mathcal{U}(u_{\min}, u_{\max})$, then set $\boldsymbol{\alpha} = \pi u \mathbf{e}_k$. The measurement loss is

$$\mathcal{L}_{\text{meas}} = \|\text{diag}(\boldsymbol{\nu})^{-1} [\Delta \mathbf{M}(\pi u \mathbf{e}_k) - \pi u m_k \mathbf{e}_k]\|_2^2, \quad (6)$$

where $\mathbf{e}_k$ is the k th standard basis vector, $m_k > 0$ is the requested movement of measurement k , and $\boldsymbol{\nu} = (\nu_1, \dots, \nu_N)$ contains fixed training normalizers. The k th residual specifies the target effect. Every other residual has a zero target and therefore specifies non-target stillness. Normalization prevents a large-unit measurement from dominating the joint objective.

The complete loss is

$$\mathcal{L} = \lambda_{\text{m}} \mathcal{L}_{\text{meas}} + \lambda_{\text{a}} \mathcal{L}_{\text{anchor}} + \lambda_{\text{cb}} \mathbf{1}[k = K] \mathcal{L}_{\text{cb}}, \quad (7)$$

where $\mathcal{L}_{\text{anchor}}$ is an optional frozen-text consistency term, $\mathcal{L}_{\text{cb}}$ preserves color balance for brightness, and the λ terms are their weights. These terms select a content-preserving realization without redefining the measurement target. Specifically, the anchor matches the controlled prediction to the neutral prediction plus a frozen direction between the positive and negative text conditions. The brightness term penalizes the ℓ_1 difference between controlled and neutral mean chroma $\langle I - Y(I) \mathbf{1} \rangle_{h,w}$.

3.3 Decoded Calibration and Multi-Control Interface

Raw LoRA coefficients are specific to a branch. We evaluate a positive ladder $\mathcal{A} = \{0 < a_1 < \dots < a_J\}$ on a fixed calibration set $\mathcal{C}$ and compute

$$\bar{d}_k(a) = \frac{1}{|\mathcal{C}|} \sum_{\xi \in \mathcal{C}} [M_k^{\text{dec}}(G_{a\mathbf{e}_k}(\xi)) - M_k^{\text{dec}}(G_{\mathbf{0}}(\xi))], \quad (8)$$

Table 1. Lighting-direction control on 553 GenEval prompts. All statistics use final decoded images. Effect and drift use fixed backbone-specific natural ranges and are not compared across panels. Monotonicity is reported as a percentage.

Method	Effect	Drift↓	Sel.↑	ρ ↑	Mono.↑	DINO↑
<i>SDXL: decoded natural-variation units</i>						
Concept Sliders	0.039	0.085	0.453	0.122	33.5	0.924
Attr. Control	0.106	0.214	0.496	−0.112	18.4	0.810
Attr. Control, learned	0.101	0.254	0.395	0.117	24.6	0.818
FreeSliders	0.026	0.053	0.497	−0.035	26.2	0.944
Text Slider	0.020	0.037	0.537	−0.077	21.3	0.957
Prompt ladder	0.204	0.363	0.560	N/A	N/A	N/A
Measured Sliders (ours)	0.153	0.087	1.761	0.995	98.9	0.957
<i>FLUX.1-dev: fixed SDXL-derived decoded-reference units</i>						
Text anchor	0.010	0.015	0.716	0.111	9.6	0.992
Attr. Control	0.058	0.097	0.598	−0.037	20.3	0.944
Prompt ladder	1.122	1.534	0.731	0.824	64.4	0.722
FreeSliders	1.949	0.652	2.990	0.984	98.2	0.785
Ours	3.070	0.915	3.356	0.998	99.8	0.792

where ξ pairs a prompt with a seed, $G_{\alpha}(\xi)$ is its fully decoded generation, and $\bar{d}_k(a)$ is the mean decoded response of branch k . Let $\tilde{d}_k(a_j) = \max_{\ell \leq j} \bar{d}_k(a_{\ell})$ be the running-max response. The calibrated endpoint is

$$\alpha_k^* = \tilde{d}_k^{-1}(\tau s_k), \quad (9)$$

where τs_k is the desired decoded effect, $\tau > 0$ is shared across attributes, and the inverse denotes the earliest crossing of the linearly interpolated running-max curve, clipped to $[a_1, a_J]$. This construction avoids extrapolation and prevents a local response reversal from selecting a later crossing.

Finally, a user specifies $\mathbf{r} \in [-1, 1]^N$ through

$$\boldsymbol{\alpha}(\mathbf{r}) = (r_1 \alpha_1^*, \dots, r_N \alpha_N^*), \quad (10)$$

where r_k is the normalized position of slider k . Calibration changes no model weight and adds no denoising step. One nonzero coordinate activates an individual control. Several nonzero coordinates compose the corresponding branches without retraining.

4 Experiments

4.1 Experimental Setup

Models and training. We use frozen SDXL [26] and FLUX.1-dev [5] backbones and train rank-4 LoRA branches with AdamW at learning rate 10^{-4} on one

NVIDIA RTX 5090 with 32 GB memory. The SDXL appearance checkpoint jointly stores K for brightness, S for saturation, W for warmth, C for contrast, and T for tint. It uses $270\,768^2$ images and 600 updates. A separate SDXL branch uses L for lighting direction. The FLUX checkpoint stores L, K, S, C and uses $64\,512^2$ images and 800 cyclic updates. The preview is fitted once from 60 images and then frozen. Appearance endpoints use four calibration contents and target $\tau = 0.6$ in Eq. (9). SDXL augments 368 decoder-half attention projections and uses neutralized captions with $(\lambda_m, \lambda_a, \lambda_{cb}) = (4, 1, 6)$. FLUX augments 97 later-half attention projections, uses empty conditioning, and optimizes the measurement loss alone.

Benchmarks and baselines. Lighting direction is evaluated on all 553 GenEval prompts [18] with one seed and five coefficient levels. The appearance benchmark uses 12 contents, two seeds, and seven levels: six contents select baseline operating ranges and the disjoint six form the test split. We compare official Concept Sliders [16], AttributeControl [4], Text Slider [9], FreeSliders [13], and an ordered prompt ladder. Baseline ranges maximize selectivity on the selection split subject to mean DINO similarity ≥ 0.80 , then remain fixed on the test split. All methods use two seeds except the archived FreeSliders run, which uses one. Zero-shot composition enumerates all ten pairs and ten triples, all sign patterns, and both seeds without composition training. In the FLUX supervision comparison, the text-anchor control matches our architecture, data, optimizer, and update budget. Only the training objective changes.

Metrics and statistics. For driven attribute k , effect is $e_k = \Delta_k/s_k$, where Δ_k is its decoded sweep range and s_k is the decoded natural range from Eq. (3). Drift is $d_k = \max_{j \neq k} \Delta_j/s_j$, where the maximum spans the four non-target appearance measurements for appearance control and all five for lighting. Selectivity is $R = \mathbb{E}[e_k]/\mathbb{E}[d_k]$. We also report Spearman correlation ρ , the percentage of monotone sweeps with $\rho > 0.8$, and mean pairwise DINO cosine similarity [7]. Statistics are aggregated per combination of prompt and seed. The 95% confidence intervals use 10,000 bootstrap resamples and cluster two-seed experiments by content. Effect units are fixed within each result panel and are not compared across backbones. For composition, all-sign success requires every active measurement to move in its requested direction. we additionally report the weakest active effect, additivity error, inactive drift, and DINO similarity.

4.2 Main Results

Measurement supervision produces an ordered, selective axis. In the matched FLUX comparison, replacing the text prediction-difference target with Eq. (6) increases decoded lighting response by $295\times$, raises ρ from 0.111 to 0.998, and increases monotone sweeps from 9.6% to 99.8%, as reported in Table 1. On SDXL, Measured Sliders reaches selectivity 1.761, a $3.3\times$ gain over the strongest external slider, with $\rho = 0.995$ and 98.9% monotone sweeps. Its selectivity has 95% CI [1.692, 1.832]. The prompt ladder has greater raw movement but $4.2\times$



Fig. 3. Pre-training observability predicts usable supervision. Each row pairs the observability ratio in the left panel with the subsequently measured decoded monotonicity in the right panel. Dashed lines mark the fixed retention threshold $\text{SNR}_k = 1$ and learned-control threshold $\rho = 0.8$. Five retained measurements exceed both thresholds. Sharpness falls below both.

more non-target drift, with values of 0.363 and 0.087, respectively. The result holds across a latent-diffusion UNet and a flow-matching transformer.

Observability predicts usable supervision and calibration aligns effects. The five retained measurements have observability ratios $\text{SNR}_k \in [2.82, 9.13]$ and yield mean decoded $\rho \geq 0.967$ after training. Sharpness has $\text{SNR}_k = 0.419$ and produces an oppositely ordered response with $\rho = -0.232$. This outcome was predicted before its adapter was trained, as shown in Fig. 3. Applying one preview-scaled coefficient to all branches produces $63.2\times$ endpoint dispersion, whereas decoded calibration on four separate contents reduces it to $2.2\times$ on the unseen split without changing model weights.

One checkpoint exposes individually controllable and composable axes. The five-branch checkpoint reaches average selectivity 2.59, compared with 1.50 for the strongest baseline average, and leads on brightness, contrast, and warmth in the individual-control panel of Table 2. Every branch has mean effect at least 0.57, mean $\rho \geq 0.967$, and DINO consistency of 0.944. Without joint-activation training, all requested directions are simultaneously correct in 96.7% of pair outputs, with a 95% CI of [93.8, 99.4], and 86.1% of triple outputs, with a 95% CI of [80.3, 92.0]. Pair and triple minimum effects remain 0.356 and 0.240 natural ranges, with additivity errors of 0.065 and 0.116, respectively, as reported

in the simultaneous-control panel of Table 2. Figure 5 shows that these measured responses correspond to coherent visual traversals from a shared neutral generation.

Table 2. Multi-control performance on six unseen contents. Upper: normalized selectivity of five branches in one checkpoint. Lower: zero-shot activation of all ten pairs and triples across every sign pattern and two seeds. All-sign success is a percentage.

Individually activated controls						
Method	Bright. K	Satur. S	Warmth W	Contrast C	Tint T	Avg.
Concept Sliders	0.47	1.19	0.81	0.76	0.55	0.76
Attr. Control	2.18	1.10	1.08	0.73	0.76	1.17
FreeSliders [†]	1.41	1.47	1.61	0.86	2.14	1.50
Text Slider	1.81	0.99	1.36	0.64	1.06	1.17
Ours, one checkpoint	4.62	0.97	1.79	3.76	1.79	2.59

Simultaneously activated controls					
Active	All signs $\uparrow$	Min. effect $\uparrow$	Add. error $\downarrow$	Drift $\downarrow$	DINO $\uparrow$
Pairs	96.7	0.356	0.065	0.349	0.878
Triples	86.1	0.240	0.116	0.406	0.822

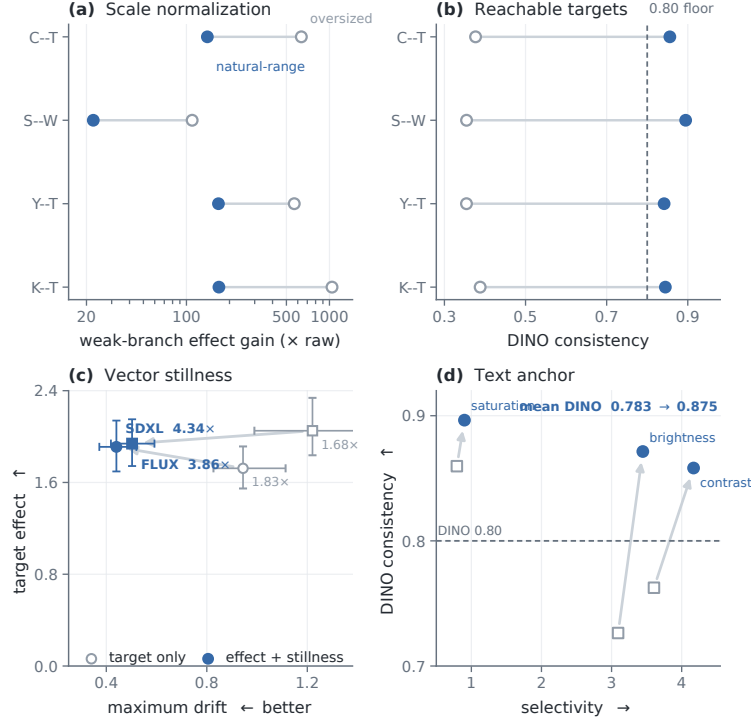


Fig. 4. Component analysis. Panels a through d evaluate natural-variation normalization, reachable targets, explicit stillness, and the frozen-text anchor. They test weak-coordinate balance, content consistency, non-target drift, and visual consistency, respectively.

Component analysis. Natural-variation normalization prevents weak-coordinate collapse: across four measurement pairs, it raises weak-branch response by factors ranging from 22 to 169 under reachable targets, while changing oversized to natural-range targets restores DINO similarity from the range 0.35 to 0.39 to the range 0.84 to 0.90. The zero targets in Eq. (6) reduce maximum drift by 53.4% on SDXL and 58.8% on FLUX at comparable effect, increasing selectivity from 1.83 to 4.34 and 1.68 to 3.86, respectively. Removing the optional semantic anchor lowers mean DINO similarity from 0.875 to 0.783, as shown in Fig. 4. Full objective averages across brightness, contrast, and saturation are 1.493 effect, 0.664 drift, 2.839 selectivity, and 0.875 DINO. Without the text anchor they become 1.701, 0.780, 2.497, and 0.783, respectively.



Fig. 5. Five continuous controls from one checkpoint. Calibrated branches share an unseen prompt, seed, noise, and sampler. Rows use $r_k \in \{-0.67, 0, +0.67\}$. Blue denotes the pixel-identical neutral.

Composition under the full criterion. The strict criterion requires correct signs, effects of at least 0.2 natural ranges, target errors at most 0.25, inactive drift at most 0.5, and DINO of at least 0.8. Under it, 45.2% of pairs and 15.1% of triples pass. The gap from directional success isolates failures in magnitude, interference, or consistency.

5 Conclusion

Measured Sliders grounds continuous generative controls in differentiable image measurements shared by observability, learning, and calibration. Across SDXL and FLUX.1-dev, it yields an ordered lighting axis and a five-branch checkpoint for calibrated appearance control and zero-shot composition. The pre-training test predicts all six learnability outcomes, while calibration reduces endpoint dispersion by nearly $29\times$. Decoded units separate control quality from LoRA scale and reveal higher-order branch interference. Content-adaptive calibration and broader measurement panels remain open directions.

References

- Avrahami, O., Patashnik, O., Fried, O., Nemchinov, E., Aberman, K., Lischinski, D., Cohen-Or, D.: Stable flow: Vital layers for training-free image editing. In: CVPR. pp. 7877–7888 (2025)
- Bai, C., Chen, J., Bai, X., Chen, Y., She, Q., Lu, M., Zhang, S.: UniEdit-I: Training-free image editing for unified VLM via iterative understanding, editing and verifying. In: CVPR. pp. 29750–29759 (2026)
- Bansal, A., Chu, H.M., Schwarzschild, A., Sengupta, S., Goldblum, M., Geiping, J., Goldstein, T.: Universal guidance for diffusion models. In: CVPR Workshops. pp. 843–852 (2023)
- Baumann, S.A., Krause, F., Neumayr, M., Stracke, N., Sevi, M., Hu, V.T., Ommer, B.: Continuous, subject-specific attribute control in t2i models by identifying semantic directions. In: CVPR. pp. 13231–13241 (2025)
- Black Forest Labs: FLUX. Model release, <https://github.com/black-forest-labs/flux> (2024)
- Black Forest Labs, Batifol, S., Blattmann, A., Boesel, F., Consul, S., Diagne, C., Dockhorn, T., English, J., Zisling, Z., Esser, P., Kulal, S., Lacey, K., Levi, Y., Li, C., Lorenz, D., Müller, J., Podell, D., Rombach, R., Saini, H., Sauer, A., Smith, L.: FLUX.1 Kontext: Flow matching for in-context image generation and editing in latent space. arXiv preprint arXiv:2506.15742 (2025)
- Caron, M., Touvron, H., Misra, I., Jégou, H., Mairal, J., Bojanowski, P., Joulin, A.: Emerging properties in self-supervised vision transformers. In: ICCV. pp. 9650–9660 (2021)
- Chen, D., Duan, Z., Li, Z., Chen, C., Chen, D., Li, Y., Chen, Y.: Attrictrl: Fine-grained control of aesthetic attribute intensity in diffusion models. arXiv preprint arXiv:2508.02151 (2025)
- Chiu, P.Y., Fang, I.S., Chen, J.C.: Text slider: Efficient and plug-and-play continuous concept control for image/video synthesis via lora adapters. In: WACV. pp. 613–622 (2026)
- Cohen, N.Z., Nir, O., Shamir, A.: Conditional balance: Improving multi-conditioning trade-offs in image generation. In: CVPR. pp. 2641–2650 (2025)
- Dhariwal, P., Nichol, A.: Diffusion models beat gans on image synthesis. In: NeurIPS. vol. 34, pp. 8780–8794 (2021)
- Elezabi, O., Zamfir, E., Wu, Z., Timofte, R.: Language-free generative editing from one visual example. In: CVPR. pp. 1078–1088 (2026)
- Ezra, R., Zisling, H., Berman, N., Naiman, I., Gorkor, A., Nochumsohn, L., Nachmani, E., Azencot, O.: Freesliders: Training-free, modality-agnostic concept sliders for fine-grained diffusion control in images, audio, and video. arXiv preprint arXiv:2511.00103 (2025)
- Fang, I.S., Han, Y.H., Chen, J.C.: Camera settings as tokens: Modeling photography on latent diffusion models. In: SIGGRAPH Asia 2024 Conference Papers. pp. 62:1–62:11 (2024). <https://doi.org/10.1145/3680528.3687635>
- Fu, F., Zhang, L., Huang, M., Mao, Z.: Feededit: Text-based image editing with dynamic feedback regulation. In: CVPR. pp. 2661–2670 (2025)
- Gandikota, R., Materzyńska, J., Zhou, T., Torralba, A., Bau, D.: Concept sliders: Lora adaptors for precise control in diffusion models. In: ECCV. pp. 172–188 (2024). https://doi.org/10.1007/978-3-031-73661-2_10
- Gandikota, R., Wu, Z., Zhang, R., Bau, D., Shechtman, E., Kolkin, N.: Sliderspace: Decomposing the visual capabilities of diffusion models. In: ICCV. pp. 15994–16003 (2025)
- Ghosh, D., Hajishirzi, H., Schmidt, L.: Geneval: An object-focused framework for evaluating text-to-image alignment. In: NeurIPS. vol. 36, pp. 52132–52152 (2023). <https://doi.org/10.52202/075280-2270>
- Huang, S., Li, H., Zheng, C., Wang, L., Liao, G., Gong, Z., Yang, H., Liu, L.: Visual representation learning through causal intervention for controllable image editing. In: CVPR. pp. 23484–23493 (2025)
- Khalafi, S., Hounie, I., Ding, D., Ribeiro, A.: Composition and alignment of diffusion models using constrained learning. In: NeurIPS. vol. 38, pp. 18629–18676 (2025). <https://doi.org/10.52202/085713-0628>
- Li, J., Cao, S., Li, X., Zhang, Z., Zhu, K., Duan, Y., Qiao, Y., Zhang, J., Liu, Y.: StableI2I: Spotting unintended changes in image-to-image transition. In: ICML (2026)
- Lu, H., Chen, J., Yang, Z., Gnanha, A., Wang, F.L., Li, Q., Mao, X.: Pairedit: Learning semantic variations for exemplar-based image editing. In: NeurIPS. vol. 38, pp. 31867–31894 (2025). <https://doi.org/10.52202/085713-1071>
- Lu, J., Xie, R., Xie, Z., Wu, Z., Xi, D., Ye, Q., Wang, R., Bao, H., Huo, Y.: IntrinsicControlNet: Cross-distribution image generation with real and unreal. In: ICCV. pp. 27315–27325 (2025)
- Mun, S., Nam, J., Cho, S., Ok, J.: Addressing text embedding leakage in diffusion-based image editing. In: ICCV. pp. 16451–16460 (2025)
- Parihar, R., Balaji, P., Magazine, R., Vora, S., Jampani, V., Radhakrishnan, V.B.: Attribute diffusion: Diffusion driven diverse attribute editing. In: WACV. pp. 3721–3731 (2025)
- Podell, D., English, Z., Lacey, K., Blattmann, A., Dockhorn, T., Müller, J., Penna, J., Rombach, R.: Sdxl: Improving latent diffusion models for high-resolution image synthesis. In: ICLR (2024)
- Rombach, R., Blattmann, A., Lorenz, D., Esser, P., Ommer, B.: High-resolution image synthesis with latent diffusion models. In: CVPR. pp. 10684–10695 (2022)
- Sangare, A.S., Maglo, A., Chaouch, M., Luvison, B.: Improving controllable generation: Faster training and better performance via x_0 -supervision. In: CVPR. pp. 9106–9115 (2026)

29. Wang, J., Wang, J., Duan, H., Kang, J., Zhai, G., Min, X.: I2I-Bench: A comprehensive benchmark suite for image-to-image editing models. In: CVPR. pp. 15354–15364 (2026)
30. Wang, L., Mirza, M.J., Gong, Y., Gong, Y., Zhang, J., Tracey, B., Placek, K., Vilela, M., Glass, J.: Can diffusion models disentangle? a theoretical perspective. In: NeurIPS. vol. 38, pp. 433–492 (2025). <https://doi.org/10.52202/085713-0015>
31. Wang, W., Jia, G., Zhang, Z., Lin, L., Yang, J.: PS-Diffusion: Photorealistic subject-driven image editing with disentangled control and attention. In: CVPR. pp. 18302–18312 (2025)
32. Xia, B., Zhang, Y., Li, J., Wang, C., Wang, Y., Wu, X., Yu, B., Jia, J.: Dreamomni: Unified image generation and editing. In: CVPR. pp. 28533–28543 (2025)
33. Xu, Z., Duan, H., Liu, B., Ma, G., Wang, J., Yang, L., Gao, S., Wang, X., Wang, J., Min, X., Zhai, G., Lin, W.: LMM4Edit: Benchmarking and evaluating multimodal image editing with LMMs. In: ACM MM. pp. 6908–6917 (2025). <https://doi.org/10.1145/3746027.3755294>
34. Ye, W., Zhu, H., Wang, W., Liu, Y., Wang, M., Nie, X.: All-in-one slider for attribute manipulation in diffusion models. In: CVPR. pp. 18693–18702 (2026)
35. Yu, J., Wang, Y., Zhao, C., Ghanem, B., Zhang, J.: FreeDoM: Training-free energy-guided conditional diffusion model. In: ICCV. pp. 23174–23184 (2023)
36. Yu, Q., Chow, W., Yue, Z., Pan, K., Wu, Y., Wan, X., Li, J., Tang, S., Zhang, H., Zhuang, Y.: Anyedit: Mastering unified high-quality image editing for any idea. In: CVPR. pp. 26125–26135 (2025)
37. Yuan, Y., Wang, X., Sheng, Y., Chennuri, P., Zhang, X., Chan, S.: Generative photography: Scene-consistent camera control for realistic text-to-image synthesis. In: CVPR. pp. 7920–7930 (2025)
38. Zarei, A., Basu, S., Pournemat, M., Nag, S., Rossi, R.A., Feizi, S.: Slideredit: Continuous image editing with fine-grained instruction control. In: CVPR. pp. 14430–14439 (2026)
39. Zeng, C., Dong, Y., Peers, P., Kong, Y., Wu, H., Tong, X.: Dilightnet: Fine-grained lighting control for diffusion-based image generation. In: ACM SIGGRAPH 2024 Conference Papers. pp. 1–12 (2024). <https://doi.org/10.1145/3641519.3657396>
40. Zhang, Y., Liu, Z., Li, Z., Li, Z., Clark, J.J., Si, X.: Decoupling training-free guided diffusion by ADMM. In: CVPR. pp. 23292–23302 (2025)
41. Zhang, Y., Zheng, D., Gong, B., Wang, S., Chen, J., Yang, M., Dong, W., Xu, C.: Lumisculpt: Enabling consistent portrait lighting in video generation. arXiv preprint arXiv:2410.22979 (2024)
42. Zhu, Z., Duarte, K., Rizve, M.N., Xu, C., Kalarot, R., Yuan, J.: Compslider: Compositional slider for disentangled multiple-attribute image generation. In: ICCV. pp. 16682–16691 (2025)