

Cross-Domain Tracker Adaptation Without Target-Domain Labels via Vision-Language Agents

Daniel Davila
ddavila2@cisco.com

Cisco Systems, Inc.
San Jose, CA

Ravikumar Balakrishnan
ravikuba@cisco.com

Mike Cochran
mikecochr@cisco.com

Abstract

We present a system that uses a Vision-Language Model (VLM) as a diagnostic agent for adapting a detect-to-track pipeline to a new target domain without access to target-domain labels. Rather than optimizing against annotated metrics, the VLM directly inspects rendered tracking outputs, identifies visual failure modes, and recommends parameter updates through an iterative tuning loop. We first demonstrate that ground-truth-supervised hyperparameter transfer can be brittle. On MOT17→MOT20, applying a source-derived oracle configuration reduces mean HOTA by 0.090, from a target-domain ceiling of 0.357, to 0.267. Without using any target-domain labels, our VLM-based tuner recovers 67.8% of this lost headroom, finishing within 0.029 HOTA of the target ceiling; on the highest-density target sequence, it recovers up to 86.7%. We further show that label-free Bayesian optimization with handcrafted proxy objectives struggles under large domain shifts and can degrade configurations that are already strong. In contrast, the VLM tuner acts selectively: when its visual diagnosis reveals no clear failure mode, it declines to modify the configuration, preserving performance on easy transfers while improving hard ones. Finally, we characterize the conditions under which this approach succeeds, namely, when domain shift manifests through exposed detection-level parameters, versus where it is less effective, such as MOT17→DanceTrack, where the source oracle is already near-optimal.

Introduction

Detect-to-track systems deployed in new visual domains typically suffer performance degradation due to domain shift in scene density, camera viewpoint, and target dynamics. In the wild, practitioners often tune trackers by visually inspecting the output and adjusting hyperparameters until results appear qualitatively acceptable. This is a time-consuming, error-prone process that cannot be easily automated or repeated when operating conditions change. Additionally, similar challenges arise when scene dynamics drift over time, though we focus on the cross-domain case here. While methods exist to detect out-of-domain deployment

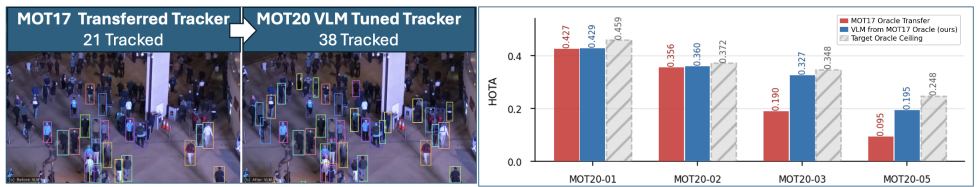


Figure 1: Cross-domain tracker adaptation without target-domain labels. (Left) A MOT20-03 frame under MOT17-tuned parameters, and then again after VLM-guided adaptation on the target sequence without target-domain labels. Tuning increases number of persons tracked in difficult scene. (Right) Per-sequence HOTA on MOT20: our VLM-tuned configuration (blue) closes most of the gap between oracle transfer (red) and the target per-sequence oracle ceiling (gray hatched), with the largest gains on the hardest sequences MOT20-03/05.

in online systems, few address how to adapt the hyperparameter space to the new domain without ground truth or human feedback.

In this paper, we first establish the brittleness of scene-specific tracker hyperparameters. For each scene, we compute an oracle configuration by performing a grid search over the tracker’s exposed parameter space, thereby defining an empirical performance ceiling for that scene. We do this using ground-truth annotations for videos from MOT17, MOT20, and DanceTrack. We then transfer each oracle configuration to other videos and measure the resulting degradation relative to the oracle configuration computed directly on the target scene. Our results show a consistent drop in HOTA and other key tracking metrics under cross-domain transfer, with the degradation most pronounced when moving to high-density scenes such as MOT20-03 and MOT20-05, or from lower- to higher-motion regimes, as in transfers from MOT to DanceTrack.

Based on these findings and the observation that subject matter experts often can and do perform manual qualitative adjustments to live tracking systems, we propose a tracker adaptation framework using vision-language feedback that, starting from a source-domain oracle and using no target-domain labels, automatically tunes the tracker on a new target domain. A representative result from this method is shown in Figure 1. The VLM consumes purpose-built visual diagnostics including detection collages, scene-level dot panels, and track-identity strips, which surface failure modes across detection (missed detections, false positives) and tracking (identity switches, fragmentation). Without access to target-domain ground truth, the VLM prescribes targeted parameter adjustments through a sequential two-phase protocol (detection $\rightarrow$ tracking), recovering 67.8% of the per-sequence oracle headroom on MOT17 $\rightarrow$ MOT20 and reaching within 0.029 HOTA of the target-domain oracle.

The contributions of this paper are summarized as follows:

- We demonstrate that ground-truth-optimized tracker configurations are brittle under domain shift, with supervised oracle transfer from MOT17 to MOT20 falling 0.090 HOTA below the target-domain per-sequence oracle, establishing that careful per-domain tuning does not transfer sufficiently.
- We propose a tracker adaptation framework using vision-language feedback that, starting from a source-domain oracle and using no target-domain labels, recovers up to 86.7% of per-sequence oracle headroom on the highest-density target sequence and 67.8% mean recovery across MOT17 $\rightarrow$ MOT20.

- We release as open source the complete toolkit and a full prompt-engineering experimentation log (40+ iterations) documenting the design phenomenology of VLM-in-the-loop optimization, including failure modes, prompt evolution, and feedback representation design Available at https://github.com/dsdavila/vlm_tracker_tuner.

2 Related Work

2.1 Multi-Object Tracking Pipelines

The dominant paradigm in multi-object tracking is tracking-by-detection. A per-frame detector produces candidate boxes that a separate stage associates into tracks. The SORT family [10, 11, 12, 13] is a well-studied baseline, with ByteTrack [14] and BoT-SORT [15] the current standard on pedestrian benchmarks. These systems expose a small set of operating parameters (confidence thresholds, NMS aggressiveness, IoU gates, lost-track survival) and are known to be sensitive to them. Additionally, operating-point sensitivity to scene density is well documented across the family. We adopt YOLOv11-Large [16] with ByteTrack as a representative, widely-used instance of this paradigm.

2.2 Domain Adaptation for Tracking

The standard approach to domain shift in MOT adapts the underlying *model* on the target domain. DARTH [17] introduces a test-time adaptation framework for MOT, jointly adapting detection (via a self-supervised detection-consistency loss) and instance appearance (via a patch contrastive loss). Path Consistency [8] learns object matching without identity labels by enforcing consistency across frame-skipping observation paths. GeneralTrack [18] takes a generalization view, with an architecture that handles cross-scenario motion and appearance variability, and PASTA [19] trains per-attribute expert modules composed in parameter space for new domains. LTTrack [16] is a trainable end-to-end tracker with a learned language representation, trained on the source domain to generalize to the target. It uses weight updates based on a training signal.

These approaches all bridge the domain gap by modifying the model. We instead address *operating-parameter* adaptation with detector and tracker weights fixed and only runtime thresholds and gates adjusted, the regime practitioners face when retraining is impractical. SQE [9] is closest in spirit, using Bayesian optimization against a tracker-output proxy for label-free cross-domain adaptation; we include a baseline of this kind (Section 5) and find it underperforms VLM-guided adaptation and can degrade already-good configurations. To our knowledge, no prior work addresses operating-parameter adaptation under no target-domain labels with visual feedback of tracker output.

2.3 Hyperparameter Optimization and LLM Agents

Classical hyperparameter optimization, such as Bayesian optimization and Population-Based Training [6, 13], treats HPO as black-box search guided by a scalar reward computed against a labeled validation set. That labeled set is load-bearing as it defines the optimization target. Without it these methods have no direction to search in. A recent line of work casts Large Language Models as HPO agents; AgentHPO [7] has an LLM propose configurations, observe performance, and refine its proposals. This replaces the search heuristic with language-

model reasoning but leaves the feedback signal a supervised metric computed against ground truth. The LLM makes search more sample-efficient and interpretable, but does not remove the labeled-data requirement.

Our work differs from previous works here. We assume no target-domain labels, so the signal driving optimization is not a supervised metric but a structured set of *visual diagnostics* (detection collages, dot panels, NMS-orphan overlays) consumed by a VLM in lieu of ground truth. This is what motivates a VLM rather than an LLM as the diagnostic agent. The strongest available signal about target-domain performance is what the tracker’s output *looks like*, which we show in our ablations.

2.4 VLMs as Diagnostic Agents

A growing body of work uses Vision-Language Models as evaluators or critics over visual content. Prometheus-Vision [8] trains a VLM evaluator that scores generated content against user-defined criteria, and Critic-V [14] trains critic VLMs to catch errors in other VLMs’ multimodal reasoning. In these works, the VLM acts as an evaluator on a fixed system’s output, producing an assessment, critique, or score. We take the framing one step further: the VLM does not merely *assess* output, it prescribes *interventions* on the system’s operating parameters, returning structured diagnoses together with parameter adjustments applied to the tracker on the next iteration. To our knowledge, this is the first use of a VLM in a closed-loop control role for a perception pipeline, rather than as an open-loop evaluator.

3 Method

3.1 System Overview

The full system architecture is illustrated in Figure 2. Our method takes a fixed detect-to-track pipeline and a new target domain, and produces a target-adapted parameter configuration without using any target-domain labels, in four stages. Importantly, tuning runs asynchronously with respect to the tracker loop.

Stage 1 — Source-domain initialization. We first use the labeled *source* domain to compute a supervised initialization for the tracker parameters. Specifically, for each source sequence, we obtain an *oracle* configuration by grid search over the tracker’s exposed parameter space, as described in Section 3.3. This configuration serves as the source-supervised reference point from which target-domain adaptation begins. After this initialization step, the method does not use source or target labels.

Stage 2 — Two-phase target-domain adaptation. Adaptation on the unlabeled *target* domain is performed in two sequential phases: the *detection phase*, which updates detection-related parameters, and the *tracking phase*, which updates tracking and association parameters. This decomposition reduces the complexity of each VLM reasoning step and separates detection failures from downstream association failures. Each phase uses a phase-specific visual diagnostic suite and failure-mode taxonomy, but both phases follow the same adaptation structure.

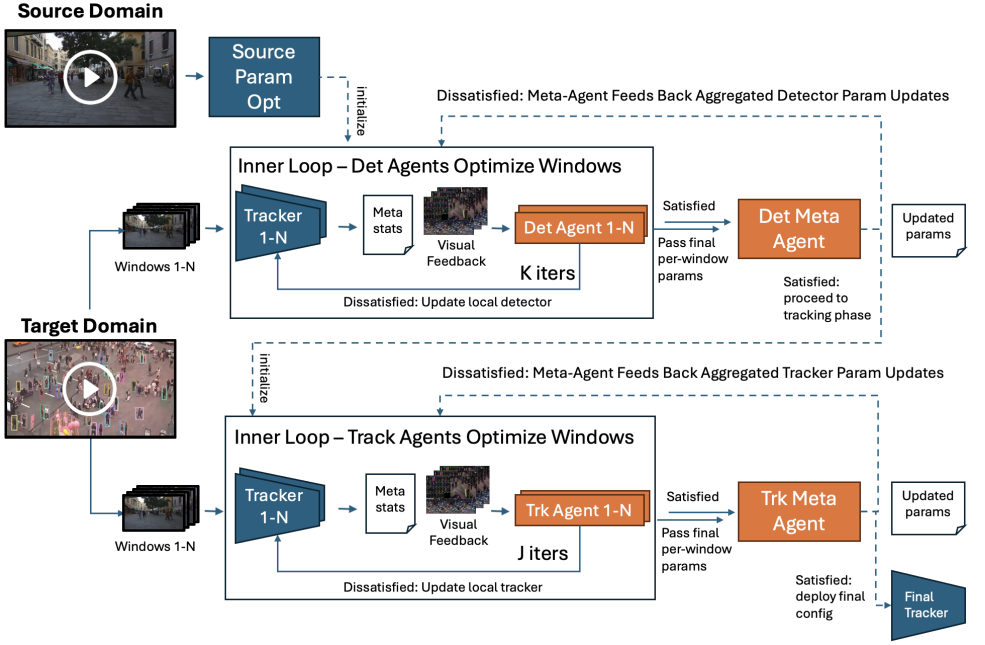


Figure 2: Overview of VLM Tracker Tuner for cross-domain tracker adaptation without target-domain ground truth.

Stage 3 — Window-level diagnosis and sequence-level aggregation. Each adaptation phase consists of an inner window-level diagnosis step and an outer sequence-level aggregation step. The target sequence is partitioned into N temporal windows. In the inner step, each window is analyzed independently by a VLM-based diagnostic agent, which observes structured visual diagnostics rendered from the current tracker output, applies a phase-specific diagnostic procedure, and returns both a failure-mode diagnosis and a parameter recommendation. In the outer step, a meta-agent aggregates the N window-level recommendations into a single sequence-level parameter update. The updated configuration is then applied to all windows in the next iteration.

Stage 4 — Termination and deployment. Each phase terminates when all window-level agents return one of two terminal diagnosis. The first, `clean`, indicates that no visible failure remains. The second, `no_lever`, indicates that the observed failure is not addressable by the exposed parameters. A phase also terminates if its phase-specific iteration budget is exhausted. After the detection phase terminates, its final configuration initializes the tracking phase. The final configuration after the tracking phase is deployed as the target-adapted tracker.

The remainder of this section zooms in on each component: the pipeline and parameter space (3.2), the source oracle (3.3), the adaptation loop mechanics (3.4), and the two phase-specific diagnostic designs (3.5, 3.6). The experimental setup and Bayesian-optimization baseline appear in Section 4.1, with results in Section 5.

3.2 Pipeline and Tunable Parameter Space

We use a standard detect-to-track pipeline: a YOLOv11-Large detector followed by ByteTrack association. The detector is used without architectural modification and restricted to the person class. The pipeline exposes eight tunable parameters, partitioned according to the two adaptation phases. The *detection-phase* parameters are `conf_thresh`, the confidence threshold below which YOLO outputs are discarded, and `nms_thresh`, the IoU threshold above which Non-Maximum Suppression removes the lower-confidence detection. The *tracking-phase* parameters — `match_thresh`, `spawn_thresh`, `max_lost_age`, `velocity_decay`, `min_hits`, and `appearance_thresh` — control detection-to-track association, track initialization, persistence through missed detections, motion extrapolation, track-emission gating, and appearance-based re-identification, respectively.

3.3 Source-Domain Oracle Computation

For each source sequence, we compute a per-sequence oracle by grid search over the parameter space of 3.2, evaluating each grid point against ground-truth-supervised HOTA and selecting the HOTA-maximizing configuration. The grid resolution is chosen to bound search cost while sampling each parameter densely enough that the oracle approaches the local performance ceiling within the exposed parameter space. The oracle serves as both the GT-supervised transfer baseline and the initialization point for VLM-guided adaptation.

3.4 Adaptation Loop Architecture

Both the per-window agents and the meta-agent use the same VLM, Gemma-4-31B, served through a local inference deployment; their distinct roles are specified entirely by the phase-specific system prompt and diagnostic suite with no shared context between agents. Each window agent also receives a small set of lightweight calibration metrics computed only from tracker outputs. The prompt instructs the agent to use these metrics only to scale the magnitude of parameter changes, never to set their direction. The meta-agent observes all per-window proposals together with the visual evidence motivating them, and resolves conflicts, e.g., one window proposing to lower `conf_thresh` while another proposes to raise it, by reasoning over the joint evidence rather than averaging recommendations.

A phase terminates when all per-window agents return `clean` or `no_lever` in the same iteration, or when the phase-specific iteration budget is exhausted. `clean` indicates that no visible actionable failure remains in the window; `no_lever` indicates that the observed failure cannot be addressed by the exposed parameters. The detection-phase output configuration initializes the tracking phase. The complete system prompts, prompt-engineering log with more than 40 iterations, panel rendering toolkit, and representative transcripts for successful and failed runs are provided as supplementary material.

3.5 Detection Phase: Design

The detection-phase agent applies a four-step diagnostic to each window, with each step grounded in a specific panel of Figure 3. (1) **Recall census:** the agent first enumerates persons in the full-scene and zoomed *dot panels*, which overlay confidence-encoded detections on raw frames. This precedes inspection of box-level detector outputs and reduces anchoring on existing boxes. (2) **Precision check:** it scans the *above-threshold collage*, containing all

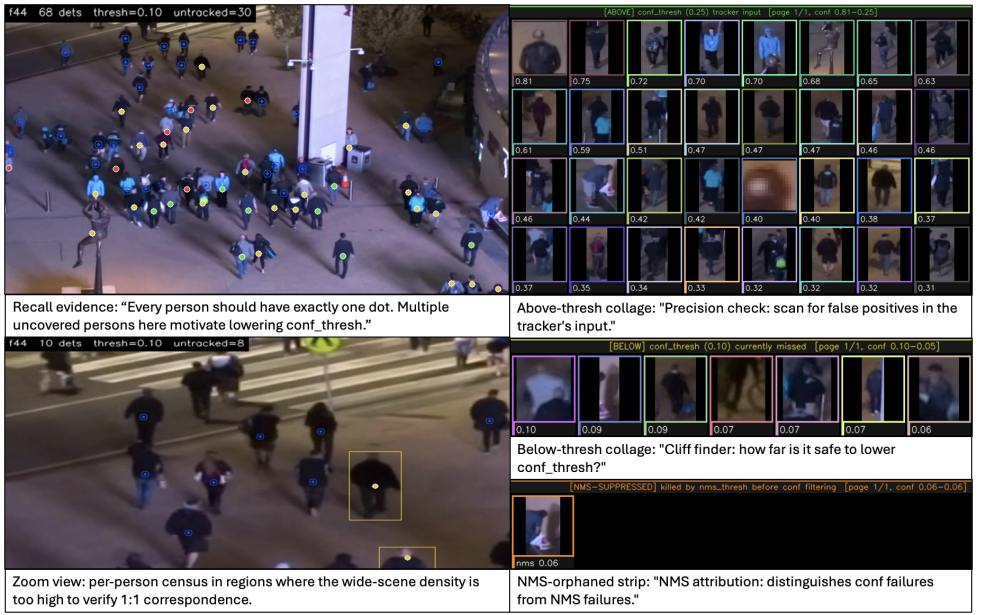


Figure 3: Detection-phase visual diagnostic suite. Each window of tracker output is rendered into five panel types delivered to the VLM as a single multimodal prompt: a full-scene dot panel and a zoomed dot panel (left) for recall evidence, above- and below-threshold collages (right) for precision and quality-cliff evidence, and an NMS-orphaned strip (bottom right) attributing suppressed detections to `nms_thresh`.

detections currently passed to the tracker and sorted by confidence, for false positives. (3) **Cliff search:** if Step 1 identifies a missed person not explained by existing detections, the agent inspects the *below-threshold collage* (sub-threshold crops sorted closest-to-threshold first) to estimate how far `conf_thresh` can be safely lowered; this gate prevents duplicate detections from spuriously lowering the threshold. (4) **Diagnosis under hard gates:** using the *NMS-orphaned strip*, which isolates detections suppressed by NMS before confidence filtering, the agent selects the appropriate lever, `conf_thresh` or `nms_thresh`, and attributes recall failures to the corresponding cause.

Alongside the panels, the agent receives `near_threshold_fraction` (detections within 0.10 of `conf_thresh`), `conf_p50_margin` (median-confidence distance from threshold), and active-track population statistics. These gate only the *magnitude* of parameter changes, never their direction, which is set by the panels. The relative contributions of visual and scalar evidence, and of the two phases, are ablated in Section 5; the full agent prompts appear in the supplementary. A representative trace is shown in Figure 4, with additional traces and failure cases in the supplementary.

3.6 Tracking Phase: Design

The tracking phase follows the same per-window-plus-meta-agent template, with three substitutions: the parameter set is `{match_thresh, spawn_thresh, max_lost_age, velocity_decay, min_hits, appearance_thresh}`, the diagnostics target track-

Round: 0 Window: MOT20-03 frame 44

Initial config: `conf_thresh=0.25, nms_thresh=0.45`

Diagnosis: `false_negative_detections` (confidence 0.9)

Recommendation: raise `nms_thresh`: 0.45 $\rightarrow$ 0.65

Reasoning (verbatim): “The dot panels and zoomed crops reveal significant under-detection (FNs) in a crowded scene. Crucially, multiple ‘nms_orphan’ dashed orange boxes are present [in the scene panels]. These orphans represent people the detector found with high confidence but were killed by NMS because they overlapped with another detection. Because these targets were suppressed by NMS **before** the confidence filter, lowering `conf_thresh` cannot recover them. To fix this, `nms_thresh` must be raised to be less aggressive in crowded environments. While there is some room to lower `conf_thresh` based on the quality cliff (~ 0.12), the primary driver of misses here is NMS suppression in the crowd.”

Figure 4: Representative VLM diagnostic trace (MOT20-03, frame 44, round 0). The agent identifies NMS-orphan markers, attributes the recall failure to NMS rather than `conf_thresh`, and raises `nms_thresh` accordingly. Image-index references in the original output are replaced with bracketed descriptors for clarity.

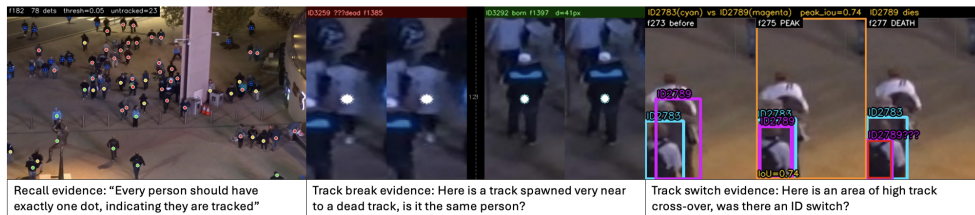


Figure 5: Tracking-phase visual diagnostic suite. Three panel types per window: (left) the scene/dot panel for recall evidence; (middle) track-break visualizations showing spawns near a dead-track endpoint to test whether a track was broken and re-established; and (right) track-approach visualizations showing likely crossover points, to check for ID switching.

level rather than detection-level failures, and the taxonomy covers identity and continuity failures. As shown in Figure 5, the agent receives an enhanced dot panel, re-ID death $\rightarrow$ birth panels, and closest-approach strips. The dot panel uses green/yellow/red filled circles for active tracks and blue hollow circles for untracked detections. The re-ID panels pair a dying track’s final crops with a nearby new track’s first crops to distinguish fragmentation from coincidental proximity. The closest-approach strips show a track pair at peak IoU across three frames to expose ID switches at crossings. Table 1 summarizes the failure-mode-to-parameter decision tree; each mode maps to one or two primary levers, with secondary fallbacks when the primary lever is exhausted across prior iterations.

4 Experiments

4.1 VLM Domain Transfer

We evaluate cross-domain transfer across the three-way source/target matrix formed by MOT17, MOT20, and DanceTrack ($3 \times 3 = 9$ source/target pairs, including same-domain

Failure mode	Primary parameter response
id_switch	↓ match_thresh
ghost_tracks	↑ min_hits, ↑ spawn_thresh
fragmented_tracks	↑ max_lost_age; then ↓ velocity_decay
frequent_id_switches	↑ match_thresh, ↓ max_lost_age
track_drift	adjust velocity_decay

Table 1: Tracking-phase failure-mode-to-parameter mapping. Arrows indicate direction; magnitude is sized by lifecycle statistics (death→birth pairs, conf-at-death sequences). Secondary levers and fallback rules omitted; see released prompts.

self-transfer). For each pair we report HOTA under three conditions: *oracle transfer* (apply the source per-sequence oracle to the target without further tuning; requires source-domain GT only), *VLM from oracle* (initialize from the source oracle, then run the full two-phase VLM adaptation loop on the target without target-domain labels), and the *target per-sequence oracle* (grid search on the target sequence directly; requires target-domain GT and serves as the within-parameter-space ceiling). We additionally report agent ablations isolating the detection and tracking phases to attribute gains across the two-phase protocol, as well as the contributions of the visual and text feedback mechanisms. We evaluate on the MOT17 training set (7 FRCNN sequences), the MOT20 training set (4 sequences), and the DanceTrack validation set (8 sequences), using TrackEval [9] version 1.1.0 with HOTA as the primary metric.

The detect-to-track pipeline uses YOLOv11-Large [14] with pretrained COCO weights at 1280×736 input resolution, followed by the BoxMOT implementation of ByteTrack [18]. The VLM is Gemma 4 31B [9] (instruction-tuned variant `google/gemma-4-31B-it`), a 31-billion-parameter dense multimodal model released by Google DeepMind in April 2026, accessed through an OpenAI-compatible local inference endpoint with `max_tokens=2048`, vision input enabled, and the endpoint’s default temperature of 1.0. Each adaptation run uses 3 detection-phase windows and 3 tracking-phase windows selected by event-targeted sampling rather than uniform partitioning, with a base window length of 300 frames and an adaptive floor of 143 frames for short sequences. The per-phase revisit budget is $K_{\text{det}} = 3$ and $K_{\text{trk}} = 4$ revisits per window; only the meta-agent’s decision writes the next iteration’s tracker configuration, ensuring per-window agents propose against a frozen baseline rather than overwriting each other. Inference was conducted on an NVIDIA L40S GPU; VLM calls average 22.9 s per call and the end-to-end adaptation pipeline averages 10.1 s per window across cached and fresh inferences.

4.2 Comparison to Bayesian Optimizer

As a label-free optimizer baseline, we run Bayesian optimization over the same exposed parameter space as the oracle grid search (Section 3.3), but replace the ground-truth HOTA objective with a scalar proxy computed entirely from tracker output:

$$\text{proxy} = \frac{n_{\text{tracks}} \cdot \bar{\ell}}{1 + \rho_{\text{frag}}}, \quad (1)$$

where n_{tracks} is the number of confirmed tracks, $\bar{\ell}$ is their mean lifetime in frames, and ρ_{frag} is the fragmentation ratio, defined as the number of track interruptions divided by the estimated number of underlying trajectories (inferred from track lifetimes, not from labels). The

Oracle Source	Target	Target Oracle	Oracle xfer	BO-proxy	VLM (ours)
MOT17	MOT20	0.357	0.267	0.305	0.328
MOT20	MOT20	0.357	0.338	0.322	0.349
DT	MOT20	0.357	0.312	0.305	0.326
MOT17	DT	0.501	0.467	0.431	0.452
MOT20	DT	0.501	0.428	0.412	0.441
DT	DT	0.501	0.460	0.402	0.477
MOT17	MOT17	0.457	0.440	0.285	0.433
MOT20	MOT17	0.457	0.430	0.399	0.428
DT	MOT17	0.457	0.438	0.322	0.430

Table 2: Cross-domain transfer and recovery. We compute a source domain configuration oracle for each of MOT17, MOT20 and DanceTrack (DT). Each row shows four metrics for each combination of source→target domain transfer: The oracle computed on the target domain (near-optimal ceiling for that domain); the results of transferring the source domain oracle to that new domain; the results of a Bayesian Optimization of the new target domain using the proxy metric in Equation 1; and finally the results of allowing the VLM to optimize tracker performance on the new domain, starting from the transferred source oracle. Our VLM-based tracker tuner excels at overcoming large domain shifts, such as between MOT17→MOT20 and MOT17/20→DanceTrack, while avoiding catastrophic regressions for transfers where the starting conditions are already near optimal such as all →MOT17 transfers. For same-domain rows (e.g. MOT17→MOT17), *oracle xfer* applies a single configuration pooled across the source sequences, whereas *target oracle* averages per-sequence fits; the diagonal gap between them therefore reflects per-sequence specialization, not domain shift.

proxy rewards configurations that produce many long, unbroken tracks and penalizes fragmentation; it requires no target-domain labels. We optimize (1) for 50 trials per sequence, reporting the HOTA of the proxy-maximizing configuration.

5 Results

Here we address four questions: how brittle is ground-truth-supervised hyperparameter transfer (Section 5.1); does VLM-guided adaptation recover the lost performance (Section 5.2); which agent and which signal modality drive the gain (Section 5.3); and where does the approach fail (Section 5.4)?

5.1 Brittleness of Oracle Transfer

Table 2 reports mean HOTA for all 3×3 source/target pairs. Cross-domain oracle transfer underperforms the target per-sequence oracle ceiling in every row, and the shortfall grows with the magnitude of the domain shift: denser crowds (MOT17→MOT20) and faster motion (MOT17/MOT20→DanceTrack) both widen the gap. The most severe case is MOT17→MOT20, a 0.090 HOTA shortfall (0.267 vs. a 0.357 ceiling).

This mean shortfall hides extreme per-sequence variation (Table 3). The moderate-density sequences MOT20-01 and MOT20-02 lose under 0.032 HOTA, while the dense MOT20-03 and MOT20-05 fall catastrophically, more than 0.15 HOTA below their target

Source	Condition	01	02	03	05	Mean
MOT17	Oracle transfer	0.427	0.356	0.190	0.095	0.267
MOT20	Oracle transfer	0.446	0.388	0.312	0.206	0.338
DanceTrack	Oracle transfer	0.424	0.374	0.289	0.160	0.312
MOT17	VLM from oracle	0.429	0.360	0.327	0.195	0.328
MOT20	VLM from oracle	0.446	0.393	0.312	0.247	0.349
DanceTrack	VLM from oracle	0.407	0.369	0.333	0.195	0.326
<i>Target per-sequence oracle (GT ceiling)</i>		0.459	0.372	0.348	0.248	0.357

Table 3: MOT20 domain transfer per sequence (HOTA). The first three rows show the performance of various source oracles transferred to each of the MOT20 video sequences, which HOTA numbers displayed across the columns. The bottom 3 rows show the results of running our VLM tracker tuner from these oracle transfer starting points, recovering performance significantly on the more complex scenes (MOT20-03 and -05). Bold marks the best non-ceiling result per column.

M17→M20	01	02	03	05	Mean
Oracle xfer	.427	.356	.190	.095	.267
VLM ($m \pm \sigma$)	.406 $\pm$.006	.346 $\pm$.006	.320 $\pm$.017	.192 $\pm$.002	.316 $\pm$.005

Table 4: We re-run the M17→M20 5 times to determine whether the performance gains at temperature 1 are noise. The largest gains, in MOT20-03 and -05, clear 2σ while the simpler videos -01 and -02 a stable tendency not to drift parameters away from good starting points.

oracles, and together account for the majority of the cross-domain degradation. The mechanism is detection-stage under-coverage: MOT17’s per-sequence oracle settles on `conf_thresh` in the 0.20–0.30 range, well-tuned for MOT17’s moderate density but high enough to reject a large fraction of valid detections in dense MOT20 crowds.

5.2 VLM-Guided Recovery

For each source/target pair we initialize the tracker with the source-domain oracle and run the two-phase adaptation loop (Section 3.4) on the target sequences, using no target-domain labels. On MOT17→MOT20, adaptation lifts mean HOTA from 0.267 to 0.328 (+0.061), recovering 67.8% of the 0.090 shortfall and landing within 0.029 of the ceiling. The gains concentrate exactly where the brittleness did (Table 3): MOT20-03 and MOT20-05 recover 86.7% and 65.4% of their per-sequence headroom, while the already-near-ceiling moderate sequences move little. This is the expected behavior of a system whose diagnostic signal scales with the visibility of failure modes: severe mis-detection gives the VLM dense visual evidence to act on; a near-correct configuration gives it little.

This produces a useful asymmetry across the matrix (Table 2). On high-shift transfers (MOT17→MOT20, MOT20→DanceTrack, DanceTrack→MOT20) the VLM closes most of the gap; on low-shift transfers (→MOT17), where oracle transfer is already within ~ 0.010 of the ceiling, it produces only small changes ($|\Delta| < 0.010$). The single substantial regression, MOT17→DanceTrack (−0.015), is analyzed in Section 5.4.

The Bayesian-optimization baseline (*BO-proxy*), also label-free, optimizes the same parameter space against the scalar proxy of Equation 1. It recovers part of the high-shift gap

Condition	01	02	03	05	Mean
Transfer from MOT17 Oracle	0.427	0.356	0.190	0.095	0.267
+ Detection agent only	0.398	0.335	0.312	0.190	0.309
+ Tracking agent only	0.402	0.346	0.230	0.131	0.277
+ Both agents	0.429	0.360	0.327	0.195	0.328
<i>Target per-sequence oracle</i>	0.459	0.372	0.348	0.248	0.357

Table 5: Agent Ablation: MOT17→MOT20 transfer. All VLM conditions start from the MOT17 oracle config (same as oracle transfer). *Detection agent only* tunes {conf_thresh,nms_thresh}; *tracking agent only* tunes {match_thresh,spawn_thresh,max_lost_age,velocity_decay,min_hits,appearance_thresh}. The detection agent is responsible for the majority of the gain (+0.042 of +0.061 total), concentrated on the two hardest sequences (MOT20-03/05) where conf mismatch is catastrophic. The tracking agent contributes +0.010 in isolation and a marginal +0.019 when applied after detection, and the agents compose near-additively ($0.042 + 0.010 \approx 0.061$). Bold marks the best non-ceiling result per column.

Condition	01	02	03	05	Mean
Oracle transfer	0.427	0.356	0.190	0.095	0.267
VLM text-only	0.407	0.348	0.235	0.131	0.281
VLM visual-only	0.449	0.340	0.312	0.219	0.330
VLM text+vision	0.429	0.360	0.327	0.195	0.328
Target oracle (ceiling)	0.459	0.372	0.348	0.248	0.357

Table 6: Signal modality ablation on MOT17→MOT20. Text-only (scalars without visual panels) barely improves on oracle transfer; visual-only (panels without scalars) matches the full system within noise. The text-only agent improves the hardest sequences modestly via tracking-side intervention but cannot diagnose the detection-stage failures that drive the cross-domain gap. Bold marks the best non-ceiling result per column.

but is outperformed by the VLM on every →MOT20 and →DanceTrack sequence. The revealing contrast is on low-shift transfers: BO-proxy regresses sharply (e.g. $0.440 \rightarrow 0.285$ on MOT17→MOT17), while the VLM holds steady. A black-box optimizer has no notion of “leave the configuration alone”. It searches until the proxy is satisfied, and a miscalibrated proxy drives it off a good operating point. The VLM instead returns `clean/no_lever` when its diagnostics show no failure mode, which is what produces the no-harm behavior.

5.3 Agent Ablation: Where Do the Gains Come From?

To attribute the MOT17→MOT20 recovery across the two phases, we run each agent in isolation from the same MOT17 oracle initialization (Table 5). The detection agent alone recovers +0.042 HOTA, the majority of the +0.061 total, concentrated on the two hardest sequences. The tracking agent alone recovers only +0.010: the MOT17 oracle’s tracking parameters (`match_thresh=0.90`, `max_lost_age=15`) are not catastrophically mistuned for MOT20’s pedestrian-speed motion, so it has less to correct. Run in sequence, the two phases compose near-additively: the tracking agent’s marginal contribution rises from +0.010 in isolation to +0.019 when applied after detection ($0.042 + 0.019 \approx 0.061$),

Condition	04	05	07	10	19	34	47	58	Mean
MOT17 Oracle	0.51	0.48	0.51	0.61	0.32	0.38	0.33	0.59	0.47
+ Det agent	0.34	0.56	0.50	0.47	0.27	0.38	0.30	0.55	0.42
+ Tracking agent	0.39	0.56	0.49	0.47	0.28	0.36	0.37	0.44	0.42
+ Both agents	0.35	0.43	0.50	0.61	0.34	0.39	0.40	0.59	0.45

Table 7: Agent Ablation: MOT17→DanceTrack transfer (HOTA). All VLM conditions start from the MOT17 oracle config. Unlike the MOT20 case, *neither agent alone improves* on oracle transfer (−0.046 each): the MOT17 oracle (match=0.90, age=15) is already near-optimal for DanceTrack’s fast motion, so each isolated agent perturbs away from it without sufficient feedback to self-correct. The full two-phase loop limits the regression to −0.015 through inter-phase correction. DT-0047 is the revealing exception: the tracking agent alone yields +0.033 over oracle transfer (0.367 vs. 0.334) while the detection agent hurts (−0.033). This sequence has reliable detections but identity fragmentation. The tracking agent correctly tightens match/spawn, but the detection agent incorrectly intervenes on conf and destroys the gain. Bold marks the best VLM result per column.

a small positive interaction. The tracking phase does not undo the detection phase’s gains, validating the sequential ordering. On moderate-density sequences (MOT20-01: −0.029, MOT20-02: −0.021) the detection agent slightly over-tunes, which is the same noise-floor behavior examined in Section 5.4. On MOT17→MOT20, then, adaptation is fundamentally a detection-phase intervention.

We further separate the contribution of visual evidence from scalar metrics with two restricted variants: *visual-only* omits the scalar calibration metrics, *text-only* omits the visual panels (Table 6). Visual-only matches the full system (0.330 vs. 0.328); text-only reaches only 0.281, barely above oracle transfer. The traces explain why: scalar metrics like `near_threshold_fraction` cannot distinguish “operating point is fine” from “operating point catastrophically misses pedestrians in a dense crowd” as the same numeric signature arises from either regime. The text-only agent therefore barely touches detection parameters and acts mostly on tracking, which helps modestly but cannot recover the detection-stage failure driving the gap. The operative signal in our framework is the structured visual evidence, not the scalars. A classical optimizer over those same scalars, like BO-proxy and the text-only agent, would be equally blind to the detection failures that dominate cross-domain brittleness.

5.4 Failure Case: MOT17→DanceTrack

MOT17→DanceTrack is the only matrix cell where adaptation regresses substantially. Both isolated agents regress by an identical −0.046 HOTA, and the full loop limits the regression to −0.015 through inter-phase correction (Table 7), the mirror image of the MOT20 case, where both agents helped and the loop accumulated the gains. The cause is that the MOT17 oracle is well-matched to the target: its tracking parameters suit DanceTrack’s fast motion, and detection coverage is adequate at the source threshold since scene density is comparable. With no clear failure mode to diagnose, the agents nonetheless act on local visual residuals and perturb an already near-optimal configuration.

DT-0047 illustrates the mechanism: detection is reliable but identity fragmentation dominates. The tracking agent correctly tightens `match_thresh/spawn_thresh` (+0.033),

while the detection agent, lacking a detection-stage failure to act on, intervenes on `conf_thresh` and loses -0.033 ; the full loop’s tracking phase partially repairs the detection-phase damage ($+0.064$ overall). It is the clearest case where two-phase composition matters. A single agent helps or hurts decisively depending on which failure mode is present.

This is a failure of applicability, not of mechanics: the agents return well-formed diagnoses and the meta-agent reconciles them correctly; the system is simply being asked to improve a configuration already near a local optimum. Synthesizing across Sections 5.2–5.4, VLM-guided tuning is effective when two conditions hold: the domain shift produces visible failure modes that map onto the exposed parameters, and the source configuration is mistuned enough that the adaptation signal exceeds the noise floor of agent intervention. MOT17→MOT20 satisfies both; MOT17→DanceTrack satisfies neither. This suggests a deployment heuristic: apply VLM tuning when the source-target gap is large and detection-concentrated, and skip it when the source transfers well, which a practitioner can estimate from a small held-out set or even qualitative inspection before committing to the adaptation.

6 Conclusion

We presented a system for cross-domain tracker adaptation that uses a Vision-Language Model as a diagnostic agent operating over rendered tracker output, calibration metrics, and a structured decision procedure encoded in the agent’s system prompt. The system requires no target-domain labels to tune the exposed parameter space of a fixed detect-to-track pipeline.

Our results establish three claims. First, source-domain oracle configurations underperform target-domain oracles by up to 0.158 HOTA on individual sequences for the MOT17 to MOT20 transfer, with the degradation concentrating on sequences whose density regime differs from the source. Second, VLM-guided adaptation from a source-oracle initialization recovers 67.8% of the per-sequence oracle headroom on MOT17→MOT20 and up to 86.7% on the highest-density target sequence, without target labels. Third, the recovery exhibits an asymmetric profile across the transfer matrix. We achieve substantial gains when the source configuration transfers poorly, yet no significant perturbation when it transfers well. Whereas, a label-free Bayesian-optimization baseline driven by a scalar proxy can degrade near-optimal configurations (e.g. $0.440 \rightarrow 0.285$ on MOT17→MOT17). The single substantive regression (MOT17→DanceTrack) is due to a source configuration that is already near-optimal for the target.

The method has limits that the results make explicit. VLM-guided adaptation only acts within the exposed parameter space of the underlying tracker; domain shifts that demand changes to detector weights, association features, or appearance models are outside its reach. The system also requires source-domain labels to compute the oracle initialization, so the contribution is best understood as label-free *target* adaptation rather than label-free tuning end-to-end. Finally, the agents can perturb already-good configurations when no clear failure mode is present, producing small regressions on low-shift transfers; the two-phase composition mitigates but does not eliminate this behavior.

Several directions merit further study. First, within the domain of tracking system, we only explore here a small subset of the tools, parameters, models and other tuning variables that could be exposed to the VLM. Secondly, there is a large exploration space remaining of methods for visualizing tracker performance for the tuning model. Lastly, we encourage the community to explore additional perception tasks which suffer from similar open-loop failure modes, and which could benefit from automated VLM tuning.

References

- [1] Nir Aharon, Roy Orfaig, and Ben-Zion Bobrovsky. BoT-SORT: Robust associations multi-pedestrian tracking. *arXiv preprint arXiv:2206.14651*, 2022.
- [2] Alex Bewley, Zongyuan Ge, Lionel Ott, Fabio Ramos, and Ben Upcroft. Simple online and realtime tracking. In *2016 IEEE International Conference on Image Processing (ICIP)*, pages 3464–3468. IEEE, 2016. doi: 10.1109/ICIP.2016.7533003.
- [3] Google DeepMind. Gemma 4: Byte for byte, the most capable open models. <https://deepmind.google/models/gemma/gemma-4/>, 2026. Accessed 2026.
- [4] Yanru Huang, Feiyu Zhu, Zheni Zeng, Xi Qiu, Yuan Shen, and Jianan Wu. Sqe: a self quality evaluation metric for parameters optimization in multi-object tracking, 2020. URL <https://arxiv.org/abs/2004.07472>.
- [5] Max Jaderberg, Valentin Dalibard, Simon Osindero, Wojciech M. Czarnecki, Jeff Donahue, Ali Razavi, Oriol Vinyals, Tim Green, Iain Dunning, Karen Simonyan, Chrisantha Fernando, and Koray Kavukcuoglu. Population based training of neural networks. *arXiv preprint arXiv:1711.09846*, 2017.
- [6] Seongyun Lee, Seungone Kim, Sue Hyun Park, Geewook Kim, and Minjoon Seo. Prometheus-Vision: Vision-language model as a judge for fine-grained evaluation. In *Findings of the Association for Computational Linguistics: ACL 2024*, pages 11286–11315. Association for Computational Linguistics, 2024.
- [7] Siyi Liu, Chen Gao, and Yong Li. AgentHPO: Large language model agent for hyperparameter optimization. In *Proceedings of the International Conference on Automated Machine Learning (AutoML)*, volume 280 of *Proceedings of Machine Learning Research*. PMLR, 2025.
- [8] Zijia Lu, Bing Shuai, Yanbei Chen, Zhenlin Xu, and Davide Modolo. Self-supervised multi-object tracking with path consistency. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2024.
- [9] Jonathon Luiten and Arne Hoffhues. Trackeval. <https://github.com/JonathonLuiten/TrackEval>, 2020.
- [10] Gianluca Mancusi, Mattia Bernardi, Aniello Panariello, Angelo Porrello, Rita Cucchiara, and Simone Calderara. Is multiple object tracking a matter of specialization? In *Advances in Neural Information Processing Systems (NeurIPS)*, 2024.
- [11] Zheng Qin, Le Wang, Sanping Zhou, Panpan Fu, Gang Hua, and Wei Tang. Towards generalizable multi-object tracking. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2024.
- [12] Mattia Segu, Bernt Schiele, and Fisher Yu. DARTH: Holistic test-time adaptation for multiple object tracking. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 9717–9727, 2023.
- [13] Jasper Snoek, Hugo Larochelle, and Ryan P. Adams. Practical bayesian optimization of machine learning algorithms. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2012.

- [14] Ultralytics. YOLO11: Real-time object detection. <https://docs.ultralytics.com/models/yolol11/>, 2024. Accessed 2026.
- [15] Nicolai Wojke, Alex Bewley, and Dietrich Paulus. Simple online and realtime tracking with a deep association metric. In *2017 IEEE International Conference on Image Processing (ICIP)*, pages 3645–3649. IEEE, 2017.
- [16] En Yu, Songtao Liu, Zhuoling Li, Jinrong Yang, Zeming Li, Shoudong Han, and Wenbing Tao. Generalizing multiple object tracking to unseen domains by introducing natural language representation. In *Proceedings of the AAAI conference on artificial intelligence*, volume 37, pages 3304–3312, 2023.
- [17] Di Zhang, Jingdi Lei, Junxian Li, Xunzhi Wang, Yujie Liu, Zonglin Yang, Jiatong Li, Weida Wang, Suorong Yang, Jianbo Wu, Peng Ye, Wanli Ouyang, and Dongzhan Zhou. Critic-V: VLM critics help catch VLM errors in multimodal reasoning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2025.
- [18] Yifu Zhang, Peize Sun, Yi Jiang, Dongdong Yu, Fucheng Weng, Zehuan Yuan, Ping Luo, Wenyu Liu, and Xinggang Wang. Bytetrack: Multi-object tracking by associating every detection box. In *Proceedings of the European Conference on Computer Vision (ECCV)*, 2022.