

MEOX: Compact Multimodal Mixture-of-Experts for Earth Observation

Mohanad Albughdadi

European Centre for Medium-Range Weather Forecasts

Bonn, Germany

mohanad.albughdadi@ecmwf.int

This work has been submitted to the IEEE for possible publication. Copyright may be transferred without notice, after which this version may no longer be accessible.

Abstract—Recent advances in Earth Observation representation learning accommodate heterogeneous sensors and missing observations, often through larger architectures. We present MEOX (Multimodal Earth Observation with eXperts), a multimodal masked autoencoder with a 2.939 million-parameter encoder and 3.115 million parameters in total. Sensor-specific adapters, explicit validity signals, and a shared sparse-expert block preserve modality-dependent processing before a learned patch-wise fusion. Four metadata tokens then accompany a single spatial sequence through fourteen further encoder blocks. Shared expert projections with private low-rank residuals constrain parameter growth, while rotary attention supports downstream spatial grids different from pretraining. The model is pretrained on 1.228 million MMEarth64 samples using modality-balanced masked reconstruction and structured sensor dropout. Frozen transfer is evaluated on six GEO-Bench tasks at both 64 and 224 pixels. The model reaches 64.42% mean intersection-over-union on cashew segmentation at 64 pixels and 90.56% average accuracy on EuroSAT at 224 pixels, exceeding the corresponding reported CSMoE results. BigEarthNet finetuning reaches 72.95% micro-average precision. Routing diagnostics distinguish expert participation, spatial dependence, modality association, and functional contribution. A held-out WorldCover probe measures a 0.64-percentage-point benefit from metadata, while retrieval separates same-sensor semantics from cross-sensor alignment. These results demonstrate sensor-flexible representation learning and strong task transfer using a compact parameter budget.

Index Terms—Earth observation, multimodal learning, masked autoencoders, mixture of experts, remote sensing, compact representation learning.

I. INTRODUCTION

FOUNDATION models offer a task-agnostic general representation in Earth Observation (EO). Optical imagery, synthetic-aperture radar (SAR), and environmental metadata provide complementary information, but operational inputs are rarely complete. Optical bands differ across archives; radar acquisition geometry varies; metadata may be unavailable; and downstream applications may require different spatial grids. A reusable encoder must distinguish these cases from valid numerical observations. At the same time, model size and inference cost matter when processing large archives or deploying on limited hardware.

Recent EO models explore multimodal pretraining, multi-scale imagery, and broad sensor interfaces [1]–[5], which motivates a complementary question: how much of this flexibility

can be retained in an encoder with only a few million parameters. Sparse mixture-of-experts (MoE) layers offer conditional computation, but sparsity alone does not guarantee either compact storage or useful specialization [6]. Experts may be active but functionally similar, and aggregate probability balance may conceal imbalanced discrete dispatch. A convincing compact MoE therefore requires both downstream evidence and direct analysis of its executed routes.

This work extends Geo-MoE-MAE [7] from a metadata-aware autoencoder for Landsat to MEOX, a Sentinel-1 (S1)/Sentinel-2 (S2) representation learner. Its defining choice is *delayed, validity-aware fusion*: one shared transformer-MoE block processes each available sensor independently, after which learned patch-wise weights reduce the streams to a single sequence. This preserves an opportunity for sensor-dependent routing without carrying separate modality sequences through the entire encoder. Named-band adapters and missingness signals make unavailable inputs explicit. Axial rotary position encoding (RoPE) supplies geometry to attention rather than adding absolute positional vectors directly to routed residual features. The contribution is the joint architecture and its measured accuracy/resource trade-off, integrating established masked modeling, sparse routing, low-rank projections, and RoPE. Specifically, we provide:

- 1) A compact multimodal architecture combining independent shared-weight sensor processing, validity-aware fusion, metadata tokens, and partially shared sparse experts in a 2.939M-parameter encoder.
- 2) A pretraining objective that balances modalities by valid target elements and reconstructs deliberately omitted sensors, together with a deterministic, variable-grid inference interface.
- 3) An evaluation linking six frozen downstream tasks, two spatial protocols, BigEarthNet adaptation, retrieval, metadata ablation, and measurements of actual routing and expert contribution.

II. RELATED WORK

A. Masked and Multimodal EO Representation Learning

Masked autoencoders learn representations by reconstructing hidden image content with an asymmetric encoder–decoder architecture [8]. SatMAE adapts masked modeling to temporal and multispectral satellite imagery [9]; Scale-MAE explicitly addresses physical scale [10]. MultiMAE generalizes masking

TABLE I
CHANGES RELATIVE TO GEO-MOE-MAE.

Component	Original	MEOX
Raster inputs	Seven-band Landsat	S2, S1 ascending/descending; named subsets
Metadata	Lat., lon., week, hour	Lat., lon., month, ERA5; explicit missingness
Fusion	Single raster stream	Shared sensor block, then validity-aware gating
Position Experts	Additive learned table Shared value/output	Axial RoPE in attention Shared value/output + rank-8 residuals
Decoder	Two self-attention blocks with top-2 MoE feed-forward layers	Two self-attention blocks with dense SwiGLU feed-forward layers
Objective	Masked-patch MSE + weighted visible-patch MSE + summed CV-based load and importance penalties	Modality-averaged masked MSE over valid target elements + depth-averaged Switch-style routing balance

across modalities and prediction tasks [11], while MMEarth investigates diverse geospatial pretext targets in a globally distributed multimodal archive [1]. CROMA combines radar and optical reconstruction with contrastive learning [2]. Such latent alignment is conceptually different from reconstructing several sensors through modality-specific output heads, which does not force single-sensor embeddings into the same feature space. DOFA uses a wavelength-conditioned input interface [3], AnySat supports varied resolutions and modalities [4], and TerraMind explores large-scale generative multimodality [5]. Prithvi-EO-2.0 incorporates temporal and location embeddings in large-scale EO pretraining [12]. Compared to these models, our contribution is narrower but explicit: a compact representation learning model that supports subsets of configured sensors and named bands, not arbitrary unseen instruments. Such compact pretrained EO models are valuable in their own right, particularly for time-series inputs [13]. Here the emphasis is compact spatial imagery and dense transfer.

B. Experts, Parameter Sharing, and Spatial Encoding

Sparse top- k routing originates in large MoE systems [14] and has been applied to vision transformers [15]. Switch Transformers simplify balancing through a probability assignment product [16]. Soft MoE instead aggregates tokens into expert slots [17], which was applied in CSMoE to cross-sensor EO learning and supplies the closest published benchmark comparison [18]. Our discrete top-2 experts process individual tokens, with no capacity pruning or forced dispatch quotas.

Geo-MoE-MAE already introduced the compact staged-expert backbone, shrinking expert hidden widths, and shared value/output projections used as the starting point here [7]. We retain these ideas and add expert-private rank-8 residual projections, related in parameterization to low-rank adaptation [19]. Rotary attention [20], [21] replaces an additive absolute-position table. It permits variable token grids but does not, by itself, establish invariance to physical ground-sampling distance. Table I distinguishes inherited elements from the multimodal extension.

III. METHOD

A. Inputs and Missingness

Let $\mathcal{M}$ be the configured sensor set and $\mathcal{A} \subseteq \mathcal{M}$ the sensors available to the encoder. For each sensor m , the raster is $X_m \in \mathbb{R}^{B \times C_m \times H \times W}$, where B is the batch size, C_m is the channel count, and $H \times W$ is the spatial size. Its validity mask V_m has the same shape. Band names map supplied channels into the configured physical order; a band-presence vector r_m equals one for supplied channels and zero for unavailable channels. Missing elements are numerically zero-filled only after validity is retained. Consequently, a missing value differs from a valid observation equal to its normalization mean.

Each sensor image is divided into nonoverlapping $P \times P$ patches. An image of size $H \times W$ therefore produces $N = HW/P^2$ spatial tokens. For sensor m , the token representing patch i is

$$t_{m,i} = A_m(X_m)_i + Q_m(V_m)_i + \epsilon_m + R_m r_m. \quad (1)$$

The four terms provide complementary information. $A_m(X_m)_i$ is the patch-content embedding produced by the convolutional adapter of sensor m . $Q_m(V_m)_i$ embeds the corresponding validity mask, allowing the model to distinguish unavailable values from valid normalized zeros; this projection is initialized to zero so that it does not perturb the initial image representation. The learned vector ϵ_m identifies the sensor, while r_m describes which expected bands are available and R_m projects this band-presence vector to the token dimension. All terms have width d and are added to form one sensor-aware, validity-aware patch token. In the active configuration, Sentinel-2 has 13 bands, while ascending and descending Sentinel-1 each use VV and VH. With $H = W = 64$ and $P = 4$, each sensor produces $N = 16 \times 16 = 256$ tokens of width $d = 144$.

Metadata is represented by four additional tokens, one each for latitude, longitude, month, and ERA5 climate context. Latitude, longitude, and month are represented by two sine/cosine components, while ERA5 provides 12 temperature and precipitation variables covering recent and longer time windows. For metadata group j , let x_j denote its values and let v_j be a binary vector indicating which components are available. Its token is

$$u_j = W_j(x_j \odot v_j) + \gamma_j + \epsilon_j^{\text{type}} + (1 - \bar{v}_j)\epsilon_j^{\text{miss}}. \quad (2)$$

where $\odot$ denotes elementwise multiplication, γ_j is the projection bias, and $\bar{v}_j$ is the fraction of available components. The first term projects the available values, ϵ_j^{type} identifies the metadata group, and ϵ_j^{miss} represents missingness. The missing-state contribution is zero when all components are present and increases as more components become unavailable. Consequently, omitting metadata produces an explicit missing-data representation rather than being interpreted as a genuine value of zero. Figure 1 summarizes the complete pretraining and inference paths.

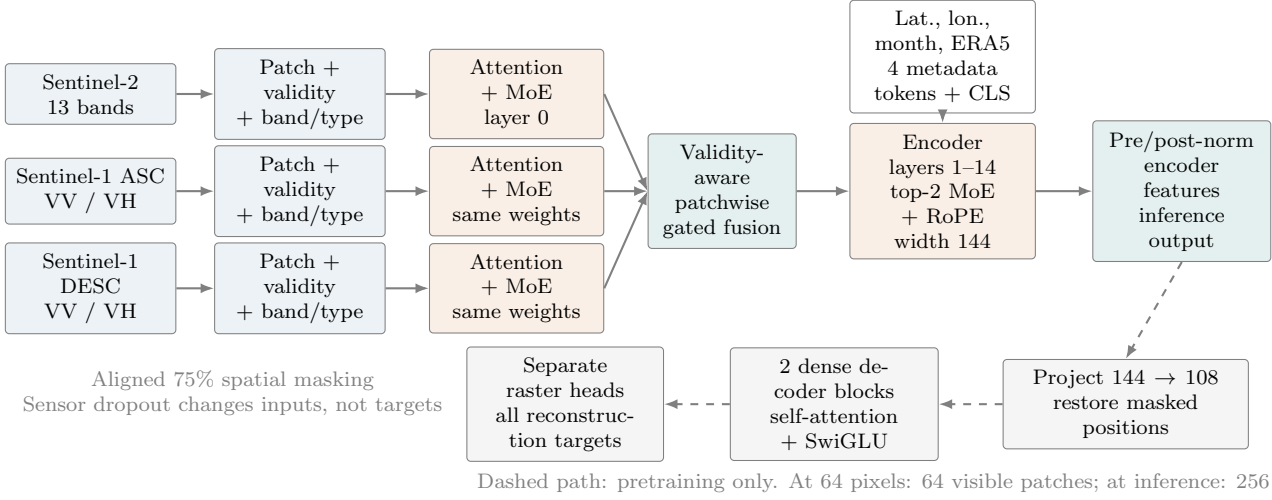


Fig. 1. MEOX pretraining. All supplied rasters share spatial mask indices. The same layer-0 parameters process each sensor independently; gated fusion yields one spatial sequence. Metadata and CLS enter only after fusion. The dense decoder reconstructs every available target sensor, including sensors deliberately removed from encoder inputs. At inference the decoder and spatial mask are omitted, and pre- or post-norm encoder features are returned.

B. Shared Sensor Processing and Delayed Fusion

Before fusion, MEOX processes each sensor $m \in \mathcal{A}$ independently using the same transformer-MoE block. Let t_m be its patch-token sequence. The shared block produces

$$z_m = F_\theta(t_m),$$

where $z_{m,i} \in \mathbb{R}^d$ is the representation of spatial patch i . Although the parameters θ are shared, each sensor sequence is processed separately. Attention and expert routing therefore operate on sensor-specific observations before cross-sensor fusion.

At each spatial position, the model computes one fusion score for every available sensor:

$$a_{m,i} = w_f^\top \text{LN}(z_{m,i}) + c_m + \log(\max(q_{m,i}, 10^{-6})), \quad (3)$$

$$\alpha_{m,i} = \frac{\exp(a_{m,i})}{\sum_{m' \in \mathcal{A}} \exp(a_{m',i})}, \quad z_i = \sum_{m \in \mathcal{A}} \alpha_{m,i} z_{m,i}. \quad (4)$$

Here, $a_{m,i}$ is the unnormalized fusion score, $w_f \in \mathbb{R}^d$ is a learned vector that scores the normalized patch representation, and c_m is a learned sensor-specific bias. The quantity $q_{m,i} \in [0, 1]$ is the fraction of valid elements in patch i of sensor m . Its logarithm acts as a validity prior: it is zero for a fully valid patch and increasingly negative as the valid fraction decreases. The lower bound 10^{-6} prevents numerical evaluation of $\log(0)$. The softmax produces nonnegative fusion weights $\alpha_{m,i}$ that sum to one across the available sensors. Their weighted sum gives the fused patch representation z_i . Sensors that are not supplied are excluded from both the softmax and the weighted sum. If all supplied sensors are invalid at a position, the lower bound keeps the computation finite, while the corresponding invalid target elements remain excluded from the reconstruction loss. The fusion parameters w_f and c_m are initialized to zero, so equally valid sensors initially receive equal weights. Because the scores are computed separately at each patch, the model can later learn to favor different sensors at different spatial positions.

After fusion, the four metadata tokens and the CLS token are prepended to the single fused patch sequence. Fourteen additional transformer-MoE blocks then process this common sequence. With three sensors, the shared pre-fusion block is evaluated three times, but the deeper encoder processes only one spatial stream. Let N_{vis} be the number of spatial patches retained after masking. After fusion, the deeper encoder processes $N_{\text{vis}} + 5$ tokens during masked pretraining and $N + 5$ tokens during inference. If the three sensor token sequences were instead concatenated, these lengths would increase to $3N_{\text{vis}} + 5$ and $3N + 5$, respectively.

C. Compact Sparse Experts

Each encoder block contains a pre-normalized self-attention sublayer followed by a pre-normalized MoE feed-forward sublayer, both with residual connections. Layer l contains E_l experts: three in layers 0–4, four in layers 5–9, and five in layers 10–14. The expert hidden width decreases gradually from 144 in the first layer to 72 in the last layer, while the token width remains $d = 144$ throughout the encoder. All encoder blocks use eight attention heads. Let $x \in \mathbb{R}^d$ be one normalized token entering the MoE sublayer. To reduce clutter, the layer index l is omitted from router logits, gates, and projection matrices below. These parameters are independent across layers; within a layer, only matrices explicitly identified below are shared across experts. The router computes one clean logit for each of the E_l experts:

$$\ell(x) = W_r x + b_r,$$

where $W_r \in \mathbb{R}^{E_l \times d}$ and $b_r \in \mathbb{R}^{E_l}$ are learned router parameters. It also computes a positive, input-dependent noise scale:

$$s(x) = \text{softplus}(W_s x + b_s) + \delta,$$

where $W_s \in \mathbb{R}^{E_l \times d}$ and $b_s \in \mathbb{R}^{E_l}$ are learned parameters, and $\delta = 10^{-9}$ prevents a zero noise scale. During training, the routing logits are

$$\tilde{\ell}(x) = \ell(x) + \eta \odot s(x), \quad \eta \sim \mathcal{N}(0, I_{E_l}),$$

with independent Gaussian samples for each token and expert. During evaluation, routing is deterministic and uses

$$\tilde{\ell}(x) = \ell(x).$$

Let

$$\mathcal{K}(x) = \text{Top2}(\tilde{\ell}(x))$$

denote the indices of the two experts with the largest routing logits. The weight assigned to expert e is

$$g_e(x) = \mathbf{1}[e \in \mathcal{K}(x)] \frac{\exp(\tilde{\ell}_e(x))}{\sum_{e' \in \mathcal{K}(x)} \exp(\tilde{\ell}_{e'}(x))}. \quad (5)$$

Here, $\mathbf{1}[e \in \mathcal{K}(x)]$ is one if expert e is selected and zero otherwise. Thus, unselected experts receive zero weight, while the weights of the two selected experts are positive and sum to one. The MoE output is

$$\text{MoE}_l(x) = \sum_{e=1}^{E_l} g_e(x) \mathcal{E}_{l,e}(x), \quad (6)$$

where $\mathcal{E}_{l,e}(x)$ is the transformation produced by expert e in layer l . Both selected experts are evaluated. Because MEOX does not impose a per-expert capacity limit, no token is dropped when an expert receives many assignments. Each expert is a SwiGLU feed-forward network [22]. Let d_h denote the hidden width of the current layer and let $\rho = 8$ be the rank of the expert-specific residual paths. Omitting biases and output dropout for readability, expert e computes

$$h_e = \text{SiLU}(W_{g,e}x) \odot (W_vx + U_{v,e}D_{v,e}x), \quad (7)$$

$$\mathcal{E}_{l,e}(x) = W_o h_e + U_{o,e}D_{o,e}h_e. \quad (8)$$

The matrix

$$W_{g,e} \in \mathbb{R}^{d_h \times d}$$

is the expert-specific SwiGLU gating projection. The value and output projections

$$W_v \in \mathbb{R}^{d_h \times d}, \quad W_o \in \mathbb{R}^{d \times d_h}$$

are shared by all experts within the same layer.

Each expert also has two private rank- ρ residual paths. Their dimensions are

$$D_{v,e} \in \mathbb{R}^{\rho \times d}, \quad U_{v,e} \in \mathbb{R}^{d_h \times \rho}$$

for the value projection, and

$$D_{o,e} \in \mathbb{R}^{\rho \times d_h}, \quad U_{o,e} \in \mathbb{R}^{d \times \rho}$$

for the output projection. These low-rank paths allow each expert to modify the shared transformations without storing complete private copies of W_v and W_o . The U matrices are initialized to zero, so the private residual contributions initially vanish and emerge during training. The projections are shared only among experts in the same layer; different encoder layers have independent parameters.

D. Position and Reconstruction Decoder

Axial two-dimensional RoPE rotates attention queries and keys using the runtime patch coordinates. No absolute-position vector is added to the residual stream. This removes a direct positional input to the router, although contextual features may still contain spatial information. Both image dimensions must be divisible by P ; rectangular inputs are supported.

During pretraining, 75% of spatial patches are masked using the same indices across sensors. The encoder sees 64 visible patches at 64 pixels. Its post-norm outputs are projected to width 108, visible patch positions are restored, and a learned mask token fills the remaining locations. The five prefix tokens are retained. Two dense transformer blocks with RoPE, SwiGLU hidden width 54, and separate sensor heads predict all patch elements. The decoder has 176,096 parameters, or 5.65% of the 3,114,993-parameter complete model. It has neither MoE layers nor cross-attention shortcuts.

E. Pretraining Objective

During pretraining, sensor dropout changes only the inputs given to the encoder. The reconstruction targets are created before dropout and therefore still contain all three sensor streams: Sentinel-2, ascending Sentinel-1, and descending Sentinel-1. In 90% of batches, all three sensors are supplied to the encoder. In the remaining 10%, one of the following six input combinations is selected uniformly:

$$\begin{aligned} &\{\text{S2}\}, \{\text{S1}_{\text{asc}}\}, \{\text{S1}_{\text{desc}}\}, \{\text{S2}, \text{S1}_{\text{asc}}\}, \\ &\{\text{S2}, \text{S1}_{\text{desc}}\}, \{\text{S1}_{\text{asc}}, \text{S1}_{\text{desc}}\}. \end{aligned}$$

The decoder must still reconstruct all three targets, including sensors omitted from the encoder input. This trains the model to operate with missing sensors and to predict information about one sensor from the others. Each sensor is absent in three of the six dropout combinations. Thus, each sensor is omitted in approximately 5% of training batches. The same sensor combination is used for every sample in a batch. Random removal of individual bands is not used in this pretraining run. The reconstruction loss is calculated only on spatially masked and valid target values. Let m identify a sensor, n a sample in the batch, i a spatial patch, and k an element within that patch, including its pixel and channel position. Let $Y_{m,n,i,k}$ be the target value and $\hat{Y}_{m,n,i,k}$ the corresponding decoder prediction. The binary mask

$$M_{n,i} = \begin{cases} 1, & \text{if patch } i \text{ is masked,} \\ 0, & \text{if patch } i \text{ is visible} \end{cases}$$

is shared across sensors. The target-validity indicator, obtained by patchifying and indexing the corresponding raster mask V_m , is

$$\Omega_{m,n,i,k} = \begin{cases} 1, & \text{if the target element is valid,} \\ 0, & \text{if it is nodata or unavailable} \end{cases}.$$

This indicator excludes invalid values. The reconstruction loss for sensor m is

$$\mathcal{L}_m = \frac{\sum_{n,i,k} M_{n,i} \Omega_{m,n,i,k} (\hat{Y}_{m,n,i,k} - Y_{m,n,i,k})^2}{\max(1, \sum_{n,i,k} M_{n,i} \Omega_{m,n,i,k})}. \quad (9)$$

The numerator is the total squared error over valid elements in masked patches. The denominator is the number of such elements, so $\mathcal{L}_m$ is their mean squared error. The maximum with one prevents division by zero when a sensor has no valid masked target in a batch. Visible patches and invalid target values do not contribute to this loss. Let $\mathcal{M}_{\text{valid}} \subseteq \mathcal{M}$ be the set of sensors having at least one valid masked target in the current batch. Their losses are averaged:

$$\mathcal{L}_{\text{rec}} = \frac{1}{|\mathcal{M}_{\text{valid}}|} \sum_{m \in \mathcal{M}_{\text{valid}}} \mathcal{L}_m. \quad (10)$$

Each sensor therefore contributes one sensor-level loss, regardless of its number of channels. Without this normalization, the 13-band Sentinel-2 target would contribute approximately $13/2 = 6.5$ times as many error terms as either two-band Sentinel-1 target. Equal sensor averaging prevents this channel-count difference from dominating training. The final objective also includes an auxiliary term that encourages balanced expert routing. In encoder layer l , let T_l be the number of routed tokens. For token x_t , let $p_{l,e}(x_t)$ be the clean softmax probability assigned to expert e , before top-2 selection. Its average over tokens is

$$P_{l,e} = \frac{1}{T_l} \sum_{t=1}^{T_l} p_{l,e}(x_t). \quad (11)$$

Let $\mathcal{K}_l(x_t)$ contain the two experts executed for token x_t . The normalized fraction of executed assignments received by expert e is

$$f_{l,e} = \frac{1}{2T_l} \sum_{t=1}^{T_l} \mathbf{1}[e \in \mathcal{K}_l(x_t)]. \quad (12)$$

Because every token selects two experts, both $\sum_e P_{l,e}$ and $\sum_e f_{l,e}$ equal one. The executed fractions $f_{l,e}$ are detached from gradient computation because top-2 selection is discrete. The balance loss for layer l is

$$\mathcal{B}_l = E_l \sum_{e=1}^{E_l} f_{l,e} P_{l,e}. \quad (13)$$

This term is approximately one under uniform routing and becomes larger when router probabilities and executed assignments concentrate on a small number of experts. Let $L_{\text{enc}} = 15$ be the number of encoder layers. The complete pretraining objective is

$$\mathcal{L}_{\text{total}} = \mathcal{L}_{\text{rec}} + \frac{\beta}{L_{\text{enc}}} \sum_{l=0}^{L_{\text{enc}}-1} \mathcal{B}_l, \quad \beta = 0.01. \quad (14)$$

The shared pre-fusion block, layer 0, is evaluated separately for every supplied sensor. Its sensor-specific balance losses are first averaged to obtain a single value $\mathcal{B}_0$. The balance losses are then averaged across all 15 layers, preventing their scale from increasing with encoder depth. No position penalty, dispatch guard, latent alignment objective, visible-patch reconstruction loss, or auxiliary semantic loss is included.

IV. EXPERIMENTAL PROTOCOL

A. MMEarth64 Pretraining

The MMEarth64 release used here contains 1,240,526 samples [1]. A deterministic 1% holdout yields 1,228,121 training and 12,405 validation samples. We use S2, ascending/descending S1 VV/VH, and the four metadata groups. Dynamic World and WorldCover labels are not pretraining targets. Release-provided band statistics normalize valid rasters; S2 statistics follow the tile's L1C/L2A metadata, and S1 uses the appropriate orbit-channel offsets. Nodata sentinels and nonfinite values are identified before normalization.

Training uses AdamW for 50 epochs, batch size 128, peak learning rate 3×10^{-4} , weight decay 0.05, and gradient clipping at 1.0. A linear warmup covers 5% of optimizer steps, followed by cosine decay. Biases, normalization parameters, and learned token/type/missingness embeddings are excluded from weight decay. Mixed precision is used on an A100 MIG 2g.20gb partition. Validation uses all sensors, deterministic routing, and a repeated mask sequence with a fixed seed. The checkpoint minimizing total validation loss is selected without downstream labels.

Following the archive-pixel convention used by CSMoE, pretraining scale is $1,228,121 \times 64^2 = 5.030\text{G}$ spatial pixels. This excludes channels, held-out samples, and repeated epochs, and is not a count of unique geographic ground area. Recorded elapsed time is approximately 166.9 h on the MIG partition; no conversion to full-GPU hours is assumed.

B. Frozen Transfer and Spatial Protocols

GEO-Bench v1 supplies official task splits and normalization statistics [23]. All physically available bands compatible with the checkpoint are used (Table II). The encoder is frozen with deterministic routing, and no training augmentation is applied to the downstream heads.

The 12-band tasks omit S2 B10. Physical band names, rather than array offsets alone, determine the model channel mapping. So2Sat does not supply orbit direction, so its VV/VH stream uses the ascending adapter once, without duplication into both SAR adapters. GEO-Bench BigEarthNet has 43 labels, distinct from the 19-label retrieval nomenclature. All four metadata groups are absent from these benchmark loaders.

Two protocols are fixed in advance: *native-grid 64* resizes input imagery to the pretraining dimensions, whereas *standard-grid 224* uses 224×224 imagery. Invalid raster pixels do not contribute to nodata-aware bilinear input resizing. Classification labels are unchanged. For segmentation, both protocols retain 224×224 ground-truth class maps and evaluate logits at that resolution; nearest-neighbor interpolation preserves class IDs when resizing labels, while model logits are resized bilinearly. Thus, a 64-pixel input does not imply 64-pixel supervision or evaluation. Resizing changes image sampling and token count, not the physical geographic extent of a sample, an important distinction because preprocessing itself affects EO benchmarks [24].

TABLE II
EVALUATION INPUTS AND ENCODED METADATA.

Dataset/task	Raster input	Lat./lon./month/ERA5
m-BigEarthNet	S2, 12 bands	All absent
m-brick-kiln	S2, 13 bands	All absent
m-EuroSAT	S2, 13 bands	All absent
m-So2Sat	S2, 10; S1 VV/VH	All absent
m-cashew-plant	S2, 12 bands	All absent
m-SA-crop-type	S2, 12 bands	All absent
BENv2-14k CBIR	S2, 10; S1 VV/VH	All absent
MMEarth WorldCover	S2 + both S1 streams	Present/ablated

C. Comparison and Analysis Controls

CSMoE is the closest published comparison because it reports the same six tasks with frozen encoders, linear classification heads, and UPerNet segmentation heads [18]. We use its exact Table IV values and identify other-model values digitized from its comparison figures as approximate. We do not rerun competing models. The comparison matches tasks, primary metrics, and the broad probing regime, not every input band, pretraining distribution, or implementation choice. CSMoE uses CLS features for classification; our pooling policy is selected independently on validation data.

Routing analysis uses 128 complete samples from a pretraining-validation fixture and the selected best checkpoint. Seven sensor combinations and a masked-input pass distinguish sensor availability from masking. Actual returned sparse gates are accumulated by token count, with layer-0 sensor streams separated from fused fine tokens; metadata and CLS are excluded from spatial statistics. The semantic diagnostic uses Dynamic World patch labels. This is a checkpoint diagnostic on the stated sample set, not a claim of exhaustive routing coverage over the archive.

V. RESULTS

A. Learning and Frozen Transfer

Validation reconstruction falls from 0.1598 at epoch 1 to 0.1046 at the selected epoch 31; total validation loss is 0.1146 and the weighted balance term remains near 0.0100. Epoch 50 reconstruction is 0.1057, confirming that later training does not improve checkpoint selection. These normalized losses are not directly comparable across target scalings.

Table III reports frozen transfer. At 64 pixels, EuroSAT reaches 89.70% AA and cashew 64.42% mIoU, exceeding the strongest reported CSMoE variants by 1.40 and 5.02 points. Figure 2 shows representative cashew predictions. The 224 grid improves four tasks, most notably crop type by 4.68 points, but changes cashew little and reduces So2Sat by 2.43 points. Spatial resampling is therefore task dependent. BigEarthNet and crop type remain the principal frozen-transfer gaps, and the strong cashew result should not be generalized to every agricultural task.

B. Parameter and Computation Trade-Off

Table IV separates full-model storage from encoder-only computation. FLOPs count one multiply-add as one operation

for batch-one S2 extraction and exclude the decoder, downstream head, and unsupported elementwise operations; they are not end-to-end UPerNet cost or throughput.

The complete model has approximately 87 times fewer parameters than CSMoE $P = 14$ and uses 2.88 times fewer archive pixels. Native-grid S2 inference costs 2.84 times fewer counted operations than CSMoE $P = 32$. At 224, however, $P = 4$ gives 3,136 patches and global attention raises the count to 51.477G. The parameter advantage remains, but the compute advantage does not (Figure 3).

C. Routing and Expert Specialization

Each token executes exactly two experts. We measure expert use in three ways. The execution rate is the fraction of tokens for which an expert is selected among the top two; because every token selects two experts, these rates sum to 200% across experts. The gate share is the average routing weight assigned to an expert after top-2 selection and sums to 100%. The top-1 rate counts only the highest-ranked expert and also sums to 100%. Across fused layers 1–14, the minima over all layer-expert pairs are 25.12% execution rate, 11.55% gate share, and 9.28% top-1 rate. Thus, every expert receives tokens on the 128-sample diagnostic set. We separately measure the entropy of the dense router probabilities before top-2 selection. The normalized entropy is 0.984–0.999 after aggregating tokens, but 0.886–0.956 when averaged per token. Routing is therefore balanced globally while remaining selective for individual tokens.

We next test whether routers repeatedly assign experts according to absolute image position rather than image content. For each fused layer, we compute the normalized mutual information (NMI) between patch position and the top-1 expert. We compare this value with shuffled expert assignments that preserve the overall number of tokens assigned to each expert. The observed NMI ranges from 0.00189 to 0.00623 and remains close to the shuffled baseline (Figure 4). At layer 14, for example, the observed NMI is 0.00623 compared with a permutation mean of 0.00557. This small excess provides no evidence of a fixed spatial routing template, although attention can still transmit spatial information to the router.

Sensor-dependent routing is visible in the shared pre-fusion block. Expert 1 receives an average gate share of 33.05% for S2 tokens, 52.86% for ascending-S1 tokens, and 42.02% for descending-S1 tokens. Because the same block and router process every sensor, these differences show that routing responds to sensor-conditioned representations. They do not make expert 1 exclusively a SAR expert, since it also processes S2 tokens. Separately, the fusion module assigns mean weights of 25.03%, 37.83%, and 37.14% to S2, ascending S1, and descending S1, respectively; these three weights sum to 100%. When one sensor is marked invalid, its fusion weight falls below approximately 1.5×10^{-6} whenever valid alternatives are available.

Dynamic World class/top-1-expert NMI ranges from 0.0270 to 0.1232, compared with permutation means of 0.00013–0.00031. Layer 2 has the largest observed association. This supports land-cover-dependent routing without requiring one

TABLE III
FROZEN GEO-BENCH TRANSFER (%). OURS IS MEAN $\pm$ STANDARD DEVIATION ACROSS FIVE HEADS. COMPARATOR VALUES FOLLOW CSMoE [18]; $\dagger$ MARKS FIGURE-DIGITIZED VALUES. BOLD EXCEEDS EVERY CSMoE VARIANT FOR THAT TASK.

Model	Input	BigEarthNet micro-mAP	Brick-kiln AA	EuroSAT AA	So2Sat AA	Cashew mIoU	SA crop type mIoU
CSMoE $P = 32$	224	62.6	93.2	84.9	44.1	46.0	35.8
CSMoE $P = 28$	224	65.1	93.8	84.9	46.3	48.3	36.7
CSMoE $P = 16$	224	66.5	94.3	86.2	48.0	55.7	38.6
CSMoE $P = 14$	224	66.0	94.4	88.3	49.6	59.4	39.8
DOFA $\dagger$	224	62.0	94.4	93.9	57.4	56.3	38.0
Prithvi V2-600 $\dagger$	224	66.2	95.3	93.3	55.5	61.9	41.8
TerraMind $\dagger$	224	72.2	94.9	94.5	57.1	58.8	42.8
MEOX	64	55.16 $\pm$ 0.16	91.60 $\pm$ 0.54	89.70 $\pm$ 0.30	46.02 $\pm$ 0.32	64.42 $\pm$ 0.22	27.65 $\pm$ 0.47
MEOX	224	57.22 $\pm$ 0.11	92.04 $\pm$ 0.23	90.56 $\pm$ 0.27	43.59 $\pm$ 0.76	64.08 $\pm$ 1.07	32.33 $\pm$ 0.23

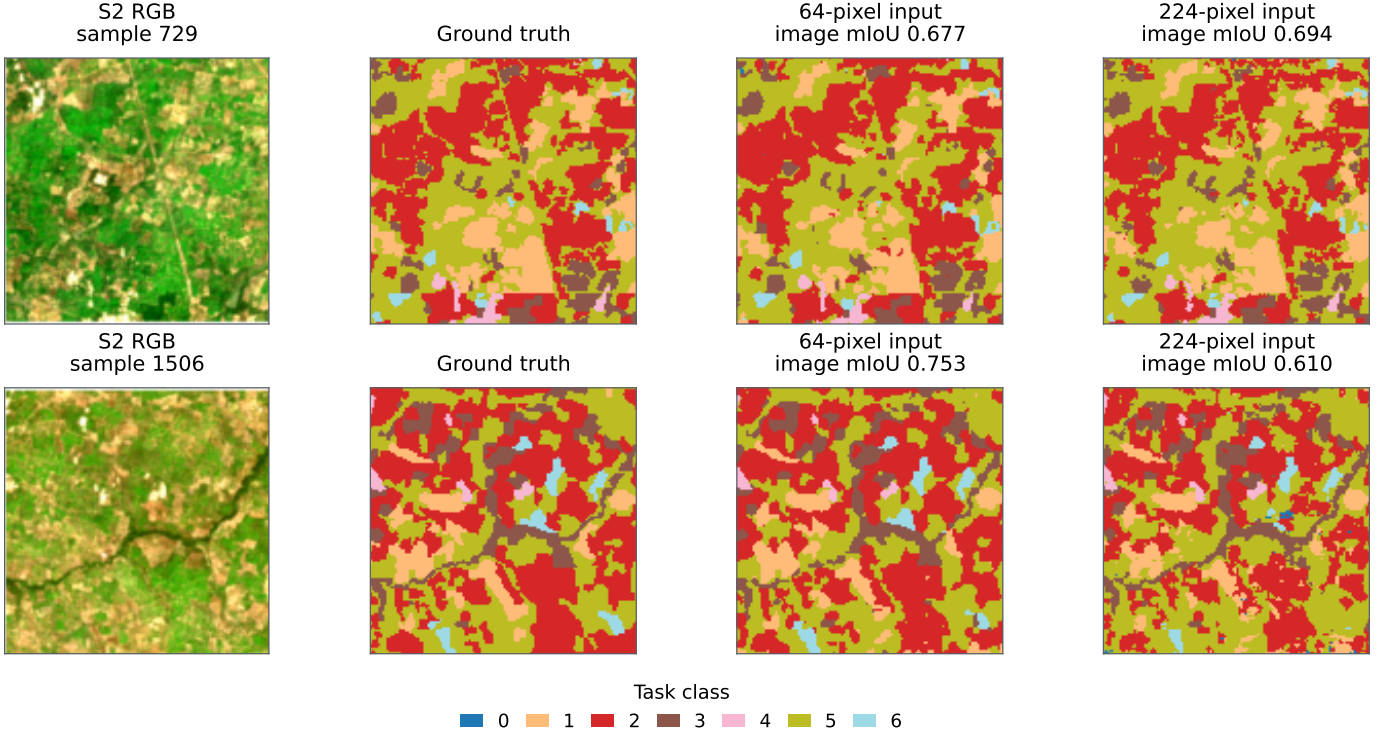


Fig. 2. Cashew segmentation for two fixed test scenes from the visualization notebook’s seeded random sample. The same seven task-class colors are used for ground truth and predictions. Per-image mIoU is illustrative; aggregate results are in Table III.

TABLE IV
MODEL SCALE. OUR ENCODER ALONE IS 2.939M PARAMETERS. FLOPS COVER S2 EXTRACTION; PT PIX COUNTS TRAINING-ARCHIVE PIXELS.

Model	Input	Params (M)	FLOPs (G)	PT PIX (G)
MEOX	64	3.115	1.029	5.030
MEOX	224	3.115	51.477	5.030
CSMoE $P = 32$	224	277	2.92	14.5
CSMoE $P = 28$	224	275	3.67	14.5
CSMoE $P = 16$	224	271	10.11	14.5
CSMoE $P = 14$	224	271	13.40	14.5

expert per semantic class. Evaluating different experts on the same normalized tokens gives output cosine similarities of approximately 0.68–0.89 in early layers and 0.39–0.69 in deeper five-expert layers, showing differentiation despite shared projections.

Finally, output suppression tests whether executed experts matter. For a fixed masked batch of eight images, baseline reconstruction loss is 0.08933. Suppressing each layer-0 expert raises loss by 0.00215–0.00334; layer-7 increases are 0.00014–0.00062. At layer 14, expert 0 has a larger effect (0.00325) than the remaining experts (0.00013–0.00090). The intervened layer keeps its gate choices and does not redistribute the removed weight; subsequent layers process the changed representation normally. This measures a local functional intervention, not a population-average effect or the gain from retraining without that expert. Unequal contribution is compatible with all experts receiving tokens.

D. Embedding Selection and Geometry

We use a predefined EuroSAT pilot containing 2,000 training and 1,000 validation samples to select the encoder

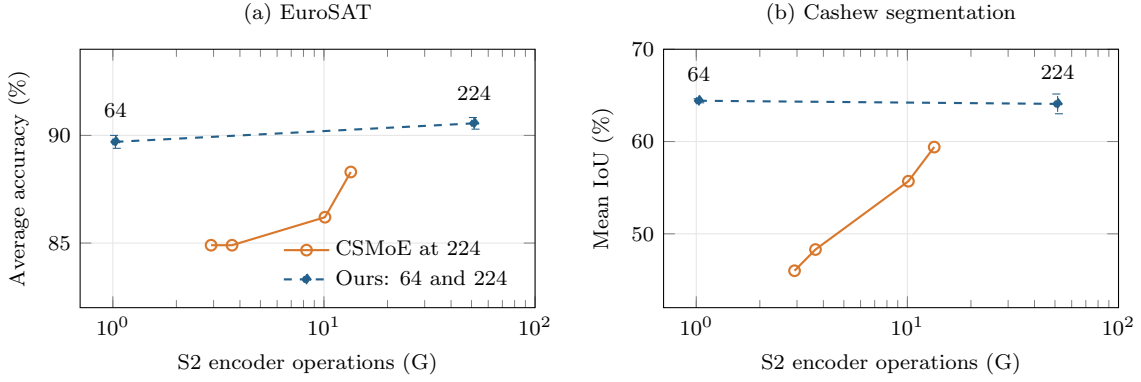


Fig. 3. Frozen transfer versus counted S2 encoder operations. The same MEOX checkpoint is evaluated at 64 and 224 pixels; CSMoE variants use 224 pixels. Axes are logarithmic, error bars show head-run standard deviations, and lines only connect related operating points.

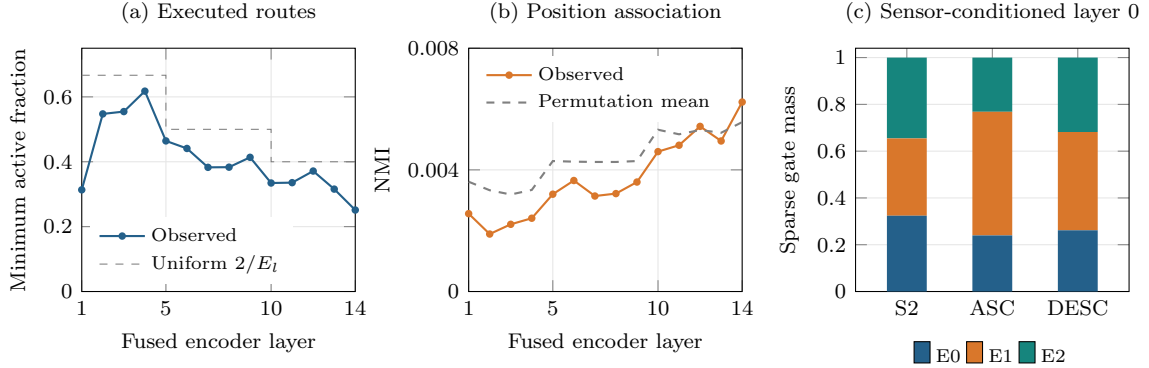


Fig. 4. Routing diagnostics for the selected checkpoint on 128 validation-fixtured samples. Left: minimum fraction of fine tokens executing an expert, with the uniform top-2 fraction $2/E_l$ for context. Middle: absolute-position/top-1 NMI and its permutation mean. Right: layer-0 gate mass by sensor. These measurements distinguish active dispatch, spatial association, and modality-conditioned routing; none alone establishes semantic specialization.

representation, after which the choice is fixed for all main experiments. Table V compares tokens taken before and after the encoder’s final LayerNorm and several pooling strategies. Averaging all pre-norm tokens gives the highest AA, 89.68%, but averaging only the fine spatial tokens is within the pre-defined 0.5-percentage-point tie threshold. We therefore select pre-norm mean-fine features because they exclude CLS and metadata tokens and correspond directly to the spatial features used for dense prediction. Concatenating CLS and metadata tokens provides no improvement in this pilot.

We next examine whether the embedding space is dominated by a small number of directions. For centered covariance eigenvalues λ_i , let $p_i = \lambda_i / \sum_j \lambda_j$; the effective rank is

$$r_{\text{eff}} = \exp \left(- \sum_i p_i \log p_i \right). \quad (15)$$

On 1,000 EuroSAT validation images, the effective rank is 8.44 out of 144 for pre-norm features and 6.18 for post-norm features. Raw embeddings also have high mean pairwise cosine similarity, 0.5406 and 0.5347, but these values fall to 0.0104 and 0.0129 after subtracting the training mean. Thus, much of the high cosine similarity comes from a shared mean direction, while the low effective rank shows that the remaining variance is still concentrated in relatively few dimensions.

Per-dimension standardization increases the effective ranks to 15.00 and 15.61, but a more uniform geometry does not necessarily preserve task-relevant information [25].

We test this directly by centering the embeddings, removing the k leading principal components, and applying L2 normalization, with all transformation statistics fitted only on training data. For pre-norm features, probe accuracy decreases from 89.0% at $k = 0$ to 88.8% at $k = 1$, 86.8% at $k = 2$, and 70.1% at $k = 8$. The dominant components therefore contain useful semantic information rather than only nuisance variation. Standardization modestly improves nearest-neighbor retrieval but does not outperform raw pre-norm features in the linear probe. We consequently retain raw features for the main experiments. t-SNE [26] is used only for visualization.

Finally, we evaluate input normalization independently of embedding post-processing. The EuroSAT pilot obtains 90.60% validation AA with MMEarth statistics, 89.60% with statistics estimated from the EuroSAT training split, 89.52% with official GEO-Bench statistics, and 61.36% without z-scoring. Although MMEarth normalization performs best in this pilot, all main GEO-Bench experiments use the official task statistics to preserve comparability with published results. These experiments separately evaluate token selection, embedding geometry, and input normalization rather than treating

TABLE V
EUROSAT VALIDATION REPRESENTATION SELECTION (AA, %). “ALL” INCLUDES PREFIX TOKENS; “FINE” INCLUDES SPATIAL PATCHES ONLY. SELECTION USES VALIDATION, NOT THE FINAL TEST SCORES.

Pooling	Dim.	Pre-norm	Post-norm
Mean all	144	89.68 ± 0.18	89.56 ± 0.22
Mean fine (selected)	144	89.52 ± 0.22	89.40 ± 0.14
CLS + mean fine	288	86.84 ± 0.73	89.00 ± 0.20
CLS + metadata	720	81.02 ± 0.56	81.70 ± 0.83
CLS	144	80.66 ± 0.36	78.40 ± 0.41

TABLE VI
WORLDcover METADATA ABLATION: TEST mIoU (%). MATCHED SETTINGS RETRAIN THE HEAD; REMOVAL KEEPS THE ALL-METADATA HEAD.

Metadata	Matched	Δ	Removal	Δ
All	30.454	0	30.454	0
None	29.814	-0.640	29.730	-0.724
No location	30.333	-0.120	30.284	-0.170
No month	30.450	-0.003	30.400	-0.054
No ERA5	30.162	-0.292	30.139	-0.315

them as the same problem.

E. Metadata Availability on Held-Out WorldCover

This experiment isolates metadata without rerunning pre-training. The 12,405-image pretraining-validation pool is partitioned into 7,443 probe-training, 2,481 validation, and 2,481 test images. Because this pool supported unsupervised checkpoint selection, it is a held-out-label, same-corpus diagnostic rather than an independent benchmark.

All rasters remain present. A 1,595-parameter 1×1 head maps frozen pre-norm features to 11 WorldCover classes at 64×64 . AdamW uses learning rate 10^{-3} , weight decay 10^{-4} , batch size 128, and up to 50 epochs. Latitude, longitude, and month are fully valid; 98.01% of ERA5 components are valid.

All metadata yields 30.45% test mIoU (Table VI). Removing everything costs 0.64 points with a matched head and 0.72 points with the original head. ERA5 contributes the largest isolated measured change; month removal has little effect. These effects are not additive, since metadata groups and image content can be redundant. Nine of eleven classes improve with all metadata relative to none, and matched predictions disagree on 3.46% of valid pixels. The result supports a modest positive role for context and graceful operation without it. It does not establish that metadata was unnecessary during pretraining, nor predict the benefit of recovering metadata in every downstream archive.

F. Task Adaptation and Retrieval

BigEarthNet adaptation retains the split, band mapping, and pooling but enables all encoder blocks while freezing 17,400 router parameters. The top learning rate is 10^{-4} with layer decay 0.75; the head uses 10^{-3} . After one head-only epoch, two-epoch warmup and cosine decay span 20 epochs with training-only rotations and reflections. Micro-mAP rises from 55.16% to 67.78% at 64 and from 57.22% to 72.95% at

TABLE VII
BIGEARTHNET ADAPTATION (%). FINETUNING INCLUDES SPATIAL AUGMENTATION AND IS DISTINCT FROM FROZEN PROBING.

Input	Encoder	Micro-mAP	Macro-mAP	Micro-F1
64	Frozen	55.16	44.32	45.89
64	Adapted	67.78	58.43	54.17
224	Frozen	57.22	47.17	47.25
224	Adapted	72.95	66.82	62.67

TABLE VIII
BENV2-14k RETRIEVAL AT $K = 5$ (%). COMPARATOR F1 VALUES FOLLOW CSMoE TABLE VII [18]; MEOX PRECISION AND RECALL APPEAR BELOW ITS F1.

Model/metric	S1→S1	S2→S2	S1→S2	S2→S1
CSMAE	60.71	68.62	36.20	42.31
CSMoE $P = 32$	63.59	71.04	35.16	45.01
CSMoE $P = 28$	63.92	72.24	39.91	39.50
CSMoE $P = 16$	66.58	72.33	35.93	50.74
CSMoE $P = 14$	67.32	73.34	42.22	46.76
MEOX F1	64.41	66.33	39.49	40.00
Precision	62.39	65.42	37.76	45.03
Recall	66.57	67.26	41.39	35.98

224 (Table VII), demonstrating task-specific capacity without conflating adapted and frozen protocols.

BENV2-14k CBIR uses 13,683 paired optical/SAR images and 19 labels [27]; 3,255 validation queries search a 3,248-item test gallery. Images are resized to 64 pixels and normalized with MMEarth statistics. SAR is reordered from VH/VV to VV/VH, retained in dB, and assigned an orbit adapter from acquisition time. Exact cosine search retrieves five neighbors from raw L2-normalized mean-fine embeddings. Pair precision is $|Y_q \cap Y_r|/|Y_r|$, recall is $|Y_q \cap Y_r|/|Y_q|$, and their averaged harmonic mean matches the CSMoE definition.

Same-sensor F1 is 64.41% for S1 and 66.33% for S2 (Table VIII); cross-sensor F1 is lower. S1 retrieval exceeds CSMAE and the two coarser CSMoE variants, whereas S2 and the strongest cross-sensor directions remain below the best references. Multimodal reconstruction therefore yields useful sensor-specific semantics but not a fully aligned radar-optical metric space.

VI. DISCUSSION AND CONCLUSION

The central result is a compact multimodal EO encoder that combines useful frozen transfer, flexible configured inputs, and inspectable sparse computation. Its contribution is the combination of a shared sensor-specific block, validity-aware delayed fusion, private low-rank expert residuals, metadata missing states, and balanced missing-input reconstruction within a three-million-parameter system. The inherited Geo-MoE-MAE backbone is explicitly acknowledged, and the multimodal extension is evaluated beyond reconstruction alone.

Three distinctions are important. First, low storage cost is not equivalent to low inference cost at every grid: 64-pixel execution is the efficient operating point, while 224-pixel execution demonstrates grid flexibility at higher attention cost.

Second, active routing, semantic association, and causal contribution are different properties; the diagnostic suite measures each rather than inferring specialization from overlays. Third, geometric anisotropy does not imply representation collapse; the dominant embedding directions contain useful downstream information.

The empirical task profile is complementary to larger foundation models. Cashew and EuroSAT are strong frozen-transfer results; BigEarthNet improves substantially with task adaptation; and missing metadata causes only modest deterioration in the controlled WorldCover probe. Crop segmentation and cross-sensor retrieval remain priorities for multiscale learning and explicit radar-optical alignment. Random-band-removal robustness, matched component ablations against the original architecture, and large-scene overlapping-window inference are not established by the present results and are concrete next experiments. In particular, the current evidence validates the joint system rather than assigning a numerical gain to every architectural addition. MEOX therefore offers a reproducible compact alternative for multimodal EO representation learning. The two spatial protocols and separate adaptation results expose its practical operating choices, while missingness and routing diagnostics make the representation easier to inspect and reuse.

CODE AND DATA AVAILABILITY

The implementation and experiment notebooks are maintained at <https://github.com/AlbughdadiM/compact-multimodal-moe-eo>. Pretraining uses MMEarth64 and downstream evaluation uses GEO-Bench v1 and BENv2-14k. Dataset access remains subject to the respective providers' terms. The manuscript's source package records the experiment artifacts underlying its tables and figures.

REFERENCES

- [1] V. Nedungadi, A. Kariryaa, S. Oehmcke, S. Belongie, C. Igel, and N. Lang, "MMEarth: Exploring multi-modal pretext tasks for geospatial representation learning," in *European Conference on Computer Vision*. Springer, 2024, pp. 164–182.
- [2] A. Fuller, K. Millard, and J. Green, "CROMA: Remote sensing representations with contrastive radar-optical masked autoencoders," *Advances in Neural Information Processing Systems*, vol. 36, pp. 5506–5538, 2023.
- [3] Z. Xiong, Y. Wang, F. Zhang, A. J. Stewart, J. Hanna, D. Borth, I. Papoutsis, B. Le Saux, G. Camps-Valls, and X. X. Zhu, "Neural plasticity-inspired multimodal foundation model for earth observation," *arXiv preprint arXiv:2403.15356v2*, 2024. [Online]. Available: <https://arxiv.org/abs/2403.15356v2>
- [4] G. Astruc, N. Gonthier, C. Mallet, and L. Landrieu, "AnySat: One earth observation model for many resolutions, scales, and modalities," in *2025 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*. IEEE, 2025, pp. 19 530–19 540.
- [5] J. Jakubik, F. Yang, B. Blumenstiel, E. Scheurer, R. Sedona, S. Maurogiovanni, J. Bosmans, N. Dionelis, V. Marsocci, N. Kopp *et al.*, "TerraMind: Large-scale generative multimodality for earth observation," in *2025 IEEE/CVF International Conference on Computer Vision (ICCV)*. IEEE, 2025, pp. 7383–7394.
- [6] D. Pan, B. Li, Y. Zheng, J. Ma, and V. Fei, "The rise of sparse mixture-of-experts: A survey from algorithmic foundations to decentralized architectures and vertical domain applications," 2026. [Online]. Available: <https://arxiv.org/abs/2602.08019>
- [7] M. Albughdadi, "Lightweight metadata-aware mixture-of-experts masked autoencoder for earth observation," *arXiv preprint arXiv:2509.10919*, 2025. [Online]. Available: <https://arxiv.org/abs/2509.10919>
- [8] K. He, X. Chen, S. Xie, Y. Li, P. Dollár, and R. Girshick, "Masked autoencoders are scalable vision learners," in *2022 IEEE/CVF conference on computer vision and pattern recognition (CVPR)*. IEEE, 2022, pp. 15 979–15 988.
- [9] Y. Cong, S. Khanna, C. Meng, P. Liu, E. Rozi, Y. He, M. Burke, D. Lobell, and S. Ermon, "SatMAE: Pre-training transformers for temporal and multi-spectral satellite imagery," vol. 35, 2022, pp. 197–211.
- [10] C. J. Reed, R. Gupta, S. Li, S. Brockman, C. Funk, B. Clipp, K. Keutzer, S. Candido, M. Uyttendaele, and T. Darrell, "Scale-MAE: A scale-aware masked autoencoder for multiscale geospatial representation learning," in *2023 IEEE/CVF International Conference on Computer Vision (ICCV)*. IEEE, 2023, pp. 4065–4076.
- [11] R. Bachmann, D. Mizrahi, A. Atanov, and A. Zamir, "MultiMAE: Multi-modal multi-task masked autoencoders," in *European conference on computer vision*. Springer, 2022, pp. 348–367.
- [12] D. Szwarzman, S. Roy, P. Fraccaro, P. E. Gíslason, B. Blumenstiel, R. Ghosal, P. H. de Oliveira, J. L. de Sousa Almeida, R. Sedona, Y. Kang *et al.*, "Prithvi-EO-2.0: A versatile multi-temporal foundation model for earth observation applications," *IEEE Transactions on Geoscience and Remote Sensing*, 2025.
- [13] G. Tseng, R. Cartuyvels, I. Zvonkov, M. Purohit, D. Rolnick, and H. Kerner, "Lightweight, pre-trained transformers for remote sensing timeseries," *arXiv preprint arXiv:2304.14065*, 2023. [Online]. Available: <https://arxiv.org/abs/2304.14065>
- [14] N. Shazeer, A. Mirhoseini, K. Maziarz, A. Davis, Q. Le, G. Hinton, and J. Dean, "Outrageously large neural networks: The sparsely-gated mixture-of-experts layer," *arXiv preprint arXiv:1701.06538*, 2017. [Online]. Available: <https://arxiv.org/abs/1701.06538>
- [15] C. Riquelme, J. Puigcerver, B. Mustafa, M. Neumann, R. Jenatton, A. S. Pinto, D. Keysers, and N. Houlsby, "Scaling vision with sparse mixture of experts," vol. 34, 2021, pp. 8583–8595.
- [16] W. Fedus, B. Zoph, and N. Shazeer, "Switch transformers: Scaling to trillion parameter models with simple and efficient sparsity," *Journal of Machine Learning Research*, vol. 23, no. 120, pp. 1–39, 2022.
- [17] J. Puigcerver, C. Riquelme, B. Mustafa, and N. Houlsby, "From sparse to soft mixtures of experts," in *International Conference on Learning Representations*, vol. 2024, 2024, pp. 28 435–28 445.
- [18] L. Hackel, T. Burgert, and B. Demir, "CSMoE: An efficient remote sensing foundation model with soft mixture-of-experts," *arXiv preprint arXiv:2509.14104v2*, 2026. [Online]. Available: <https://arxiv.org/abs/2509.14104v2>
- [19] E. J. Hu, Y. Shen, P. Wallis, Z. Allen-Zhu, Y. Li, S. Wang, L. Wang, and W. Chen, "LoRA: Low-rank adaptation of large language models," 2021. [Online]. Available: <https://arxiv.org/abs/2106.09685>
- [20] J. Su, Y. Lu, S. Pan, A. Murtadha, B. Wen, and Y. Liu, "RoFormer: Enhanced transformer with rotary position embedding," *Neurocomputing*, vol. 568, 2024.
- [21] B. Heo, S. Park, D. Han, and S. Yun, "Rotary position embedding for vision transformer," in *European Conference on Computer Vision*. Springer, 2024, pp. 289–305.
- [22] N. Shazeer, "GLU variants improve transformer," *arXiv preprint arXiv:2002.05202*, 2020.
- [23] A. Lacoste, N. Lehmann, P. Rodriguez, E. D. Sherwin, H. Kerner, B. Lütjens, J. Irvin, D. Dao, H. Alemohammad, A. Drouin *et al.*, "GEO-Bench: Toward foundation models for earth monitoring," *Advances in Neural Information Processing Systems*, vol. 36, pp. 51 080–51 093, 2023.
- [24] I. Corley, C. Robinson, R. Dodhia, J. M. L. Ferres, and P. Najafirad, "Revisiting pre-trained remote sensing model benchmarks: Resizing and normalization matters," in *2024 IEEE/CVF Conference on Computer Vision and Pattern Recognition Workshops (CVPRW)*. IEEE, 2024, pp. 3162–3172.
- [25] O. Roy and M. Vetterli, "The effective rank: A measure of effective dimensionality," IEEE, 2007, pp. 606–610.
- [26] L. van der Maaten and G. Hinton, "Visualizing data using t-SNE," *Journal of Machine Learning Research*, vol. 9, pp. 2579–2605, 2008.
- [27] K. N. Clasen, L. Hackel, T. Burgert, G. Sumbul, B. Demir, and V. Markl, "reBEN: Refined BigEarthNet dataset for remote sensing image analysis," in *IGARSS 2025-2025 IEEE International Geoscience and Remote Sensing Symposium*. IEEE, 2025, pp. 1264–1268.