

Towards Neuro-Symbolic Procedural Reasoning for Long-Horizon Vision-Language-Action Manipulation

Vivek Chavan^{1,2} *, Yahuan Shi², Oliver Heimann¹, Kevin Haninger¹, and
Jörg Krüger^{1,2} 

¹ Fraunhofer IPK, Berlin, Germany

² Technische Universität Berlin, Berlin, Germany

Abstract. Vision-language-action (VLA) models can execute short manipulation skills, but remain brittle in long-horizon procedures requiring persistent task state, dependency-aware reasoning, conditional decisions, and reliable grounding. We investigate a neuro-symbolic framework that combines learned VLA control with explicit task graphs and multimodal procedural memory. Task graphs encode action dependencies, valid transitions, and branch conditions, while memory maintains the active step, completed actions, textual context, and task-relevant visual evidence. Together, these structures guide object selection, destination grounding, subgoal dispatch, and verification of expected state transitions. Human demonstrations provide additional spatial and temporal guidance through gaze or saliency cues. To isolate their effect on policy learning, our initial study bypasses cross-view gaze transfer and directly annotates pseudo-gaze in robot-view teleoperation videos. The resulting guidance is used during VLA fine-tuning and inference. We study two long-horizon manipulation domains, workspace clearing and surgical-instrument handling, which require ordered execution, visually grounded decisions, and conditional branching. We evaluate correct-object and destination selection, subtask completion, task progress, step-order consistency, complete-task success, and procedural or execution mistakes. This work positions structured symbolic reasoning and demonstration-derived visual guidance as complementary mechanisms for reliable long-horizon VLA manipulation.

Keywords: Vision-language-action models · neuro-symbolic AI · long-horizon manipulation · procedural reasoning · task graphs · multimodal memory · human-robot collaboration

1 Introduction

Vision-language-action (VLA) models transfer semantic knowledge from vision-language backbones into continuous robot control. OpenVLA and $\pi_{0.5}$ demonstrate broad manipulation capabilities [1, 4], but long procedures still require

* Project Lead. Correspondence: contact@vivekchavan.com

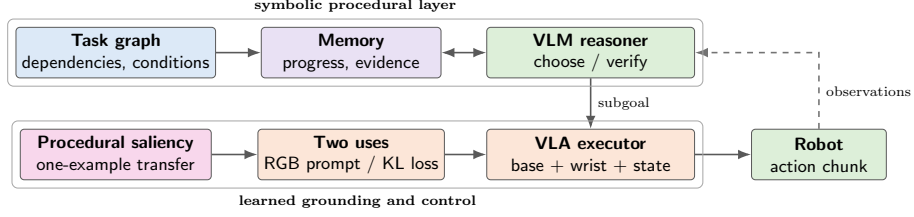


Fig. 1: Neuro-symbolic procedural pipeline. The graph and event memory constrain subgoal selection, while continuous fixed-base and wrist-view perception verifies state changes caused by the robot, a human collaborator, or another agent. Sparse saliency guides the VLA through an RGB prompt or attention regularization.

persistent progress, valid dependencies, conditional branches, and reliable object and destination grounding. Collaborative progress may also depend on a human or another embodied agent.

We address these requirements with a task graph and event memory for high-level decisions, continuous fixed-base and wrist-camera perception for transition verification, and a fine-tuned VLA for robot control. Sparse procedural saliency clarifies evidence in the stable global view. The pipeline follows an *observe-ground-remember-choose-execute-verify* loop (Fig. 1).

The approach connects neuro-symbolic and collaborative task structure [9, 14], hierarchical planning and feedback [2, 3, 5, 12], and visual prompting and gaze-guided learning [8, 10, 11, 13]. We contribute a graph-and-memory architecture with multiple executor roles, a shared saliency interface with explicit and internalized realizations, and initial evidence that both resolve the observed spatial-selection failures.

2 Neuro-Symbolic Procedural Pipeline

2.1 Task Structure, Memory, and Collaboration

Let $\mathcal{G} = (\mathcal{V}, \mathcal{E})$ be a directed task graph. A node

$$v_i = (\ell_i, \rho_i, \mathcal{P}_i^{\text{pre}}, \mathcal{P}_i^{\text{succ}}, \mathcal{P}_i^{\text{fail}}, z_i)$$

contains an instruction ℓ_i , executor role ρ_i , visually checkable conditions, and status z_i . Dependencies and preconditions determine readiness; ρ_i may identify the robot, a human, or another embodied agent.

An append-only memory $\mathcal{M}_t = [e_1, \dots, e_t]$ records decisions, observed transitions, and visual evidence. While acting or waiting, the system observes the fixed global view I_t^b and moving wrist view I_t^w . A verified collaborator action becomes an external event that updates memory and can enable a robot node. For example, after the robot exposes a marked board, a human sprays it; detecting this condition releases the subsequent wiping action.

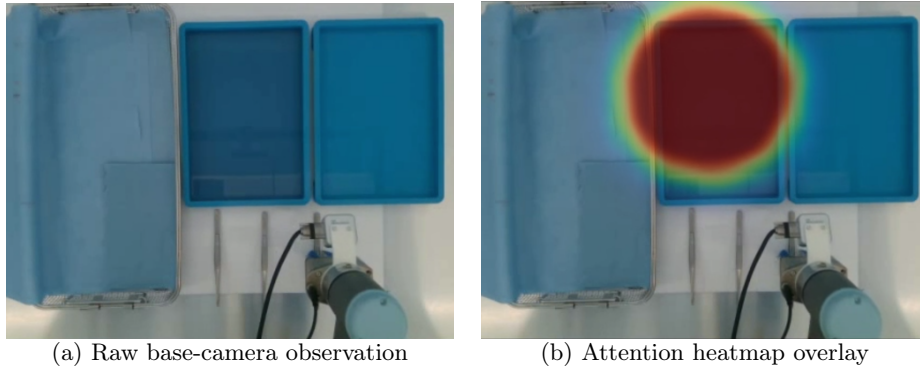


Fig. 2: Representative action-conditioned attention visualization. Left: the unmodified observation. Right: the same frame with the attention-regularized policy’s heatmap overlaid. The concentration around the task-relevant region illustrates alignment with procedural saliency; it serves as a qualitative diagnostic.

For a robot node, the dispatched subgoal conditions the low-level policy:

$$\hat{A}_t = \pi_\theta(I_t^b, I_t^w, q_t, \ell_i).$$

The graph determines *what is valid next*; the VLA determines *how to execute it*; perception links the two.

2.2 Sparse Procedural Saliency

We annotate one representative base-camera trajectory per guided subgoal with a time-varying point g_t . This *pseudo-gaze* denotes procedural relevance rather than measured gaze. DINOv2 features [7] provide temporal descriptors and dense spatial correspondence for transfer to repeated demonstrations, followed by pyramidal Lucas–Kanade optical-flow stabilization [6].

The signal supports two policy interfaces. *Prompt-as-input* renders a hollow magenta ring $\mathcal{R}(I_t^b, g_t)$ in the RGB observation. *Prompt-as-supervision* converts g_t into a token-level target distribution G_t and aligns action-conditioned attention S_t during fine-tuning:

$$\hat{A}_t^{\text{vis}} = \pi_{\theta_{\text{vis}}}(\mathcal{R}(I_t^b, g_t), I_t^w, q_t, \ell_i), \quad \mathcal{L}_{\text{reg}} = \mathcal{L}_{\text{act}} + \lambda D_{\text{KL}}(G_t \| S_t).$$

The regularized policy receives clean images at inference. In the present study, both interfaces clarify spatial relationships represented in the demonstrations; they do not yet establish arbitrary redirection to unseen coordinates.

3 Initial Grounding Study

We fine-tune $\pi_{0.5}$ [1] from 231 teleoperated episodes of a seven-step instrument-handling procedure observed by fixed-base and wrist cameras. Five subgoals are

Table 1: Initial real-robot results. Container scores aggregate the two spatially ambiguous routing subgoals. “Highlighted” denotes the generic instruction whose destination is supplied by the RGB cue.

Condition	RGB cue	Destination text	All	Container
Prompt-finetuned	none	highlighted	20/25	5/10
+ Visual-prompting	ring	highlighted	25/25	10/10
Regularization	none	left/right	25/25	10/10

scored under three conditions: a prompt-trained checkpoint without its expected overlay (**prompt-finetuned**), the same checkpoint with a **visual-prompt**, and a clean-input **regularized** checkpoint. Five trials per subgoal and condition yield 75 trials.

Both guided variants complete every trial (Table 1). Removing the expected cue reduces ambiguous container routing from 10/10 to 5/10; all five failures are wrong-destination placements. The methods tie behaviorally at the current ceiling but are mechanistically distinct: prompting supplies saliency in RGB, whereas regularization yields the target-aligned pattern in Fig. 2 with clean-image inference. Prompting improved behavior without an equally pronounced aggregate attention shift, so behavioral utility and visible alignment capture different properties.

4 Discussion and Outlook

Explicit prompting retains a visible spatial cue at deployment; regularization internalizes the supervision and removes the overlay. Base-only guidance is sufficient in the present multi-view policy, plausibly because the global view resolves spatial ambiguity while the wrist view supports close-range control. It does not establish geometric saliency transfer into wrist coordinates.

The current score is saturated, making generalization the next question. Reversing source–destination geometry, independently moving objects and containers, and testing held-out scenes will distinguish reusable spatial grounding from strengthened familiar trajectories. Camera perturbations can then quantify view-specific contributions.

The broader pipeline remains to be evaluated end to end. Future work will measure graph-valid ordering, recognition of human-completed dependencies, transition verification, recovery, and full-task success. Human egocentric gaze can replace pseudo-gaze through cross-view transfer without changing either policy interface. Symbolic structure can thereby coordinate *what* happens next, while sparse visual guidance improves *how* the current subgoal is grounded.

Acknowledgements

This work was supported by the Fraunhofer Internal Programs under Grant No. SME 40-12767

References

1. Black, K., Brown, N., Darpinian, J., Dhabalia, K., Driess, D., Esmail, A., Equi, M.R., Finn, C., Fusai, N., Galliker, M.Y., Ghosh, D., Groom, L., Hausman, K., Ichter, B., Jakubczak, S., Jones, T., Ke, L., LeBlanc, D., Levine, S., Li-Bell, A., Mothukuri, M., Nair, S., Pertsch, K., Ren, A.Z., Shi, L.X., Smith, L., Springenberg, J.T., Stachowicz, K., Tanner, J., Vuong, Q., Walke, H., Walling, A., Wang, H., Yu, L., Zhilinsky, U.: $\pi_{0.5}$: A vision-language-action model with open-world generalization. In: Proceedings of the 9th Conference on Robot Learning. Proceedings of Machine Learning Research, vol. 305, pp. 17–40. PMLR (2025), <https://proceedings.mlr.press/v305/black25a.html>
2. Huang, W., Xia, F., Xiao, T., Chan, H., Liang, J., Florence, P., Zeng, A., Tompson, J., Mordatch, I., Chebotar, Y., Sermanet, P., Jackson, T., Brown, N., Luu, L., Levine, S., Hausman, K., Ichter, B.: Inner monologue: Embodied reasoning through planning with language models. In: Proceedings of the 6th Conference on Robot Learning. Proceedings of Machine Learning Research, vol. 205, pp. 1769–1782. PMLR (2023), <https://proceedings.mlr.press/v205/huang23c.html>
3. Ichter, B., Brohan, A., Chebotar, Y., Finn, C., Hausman, K., Herzog, A., Ho, D., Ibarz, J., Irpan, A., Jang, E., Julian, R., Kalashnikov, D., Levine, S., Lu, Y., Parada, C., Rao, K., Sermanet, P., Toshev, A.T., Vanhoucke, V., Xia, F., Xiao, T., Xu, P., Yan, M., Brown, N., Ahn, M., Cortes, O., Sievers, N., Tan, C., Xu, S., Reyes, D., Rettinghouse, J., Quiambao, J., Pastor, P., Luu, L., Lee, K.H., Kuang, Y., Jesmonth, S., Joshi, N.J., Jeffrey, K., Ruano, R.J., Hsu, J., Gopalakrishnan, K., David, B., Zeng, A., Fu, C.K.: Do as i can, not as i say: Grounding language in robotic affordances. In: Proceedings of the 6th Conference on Robot Learning. Proceedings of Machine Learning Research, vol. 205, pp. 287–318. PMLR (2023), <https://proceedings.mlr.press/v205/ichter23a.html>
4. Kim, M.J., Pertsch, K., Karamcheti, S., Xiao, T., Balakrishna, A., Nair, S., Rafailov, R., Foster, E.P., Sanketi, P.R., Vuong, Q., Kollar, T., Burchfiel, B., Tedrake, R., Sadigh, D., Levine, S., Liang, P., Finn, C.: OpenVLA: An open-source vision-language-action model. In: Proceedings of the 8th Conference on Robot Learning. Proceedings of Machine Learning Research, vol. 270, pp. 2679–2713. PMLR (2025), <https://proceedings.mlr.press/v270/kim25c.html>
5. Liu, I., Cheng, A.C., Yan, R., Chen, G., Qiu, R.Z., Zou, X., Yi, S., Yin, H., Wang, X., Liu, S.: Long-horizon manipulation via trace-conditioned VLA planning. arXiv preprint arXiv:2604.21924 (2026), <https://arxiv.org/abs/2604.21924>
6. Lucas, B.D., Kanade, T.: An iterative image registration technique with an application to stereo vision. In: Proceedings of the 7th International Joint Conference on Artificial Intelligence. pp. 674–679 (1981)
7. Quab, M., Darcet, T., Moutakanni, T., Vo, H.V., Szafraniec, M., Khalidov, V., Fernandez, P., Haziza, D., Massa, F., El-Nouby, A., Assran, M., Ballas, N., Galuba, W., Howes, R., Huang, P.Y., Li, S.W., Misra, I., Rabbat, M., Sharma, V., Synnaeve, G., Xu, H., Jégou, H., Mairal, J., Labatut, P., Joulin, A., Bojanowski, P.: DINOv2: Learning robust visual features without supervision. Transactions on Machine Learning Research (2024), <https://openreview.net/forum?id=a68SUt6zFt>

8. Pani, A., Yang, Y.: Gaze-regularized vision-language-action models for robotic manipulation. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition Workshops. pp. 11332–11342 (2026), https://openaccess.thecvf.com/content/CVPR2026W/GRAIL-V/html/Pani_Gaze-Regularized_Vision-Language-Action_Models_for_Robotic_Manipulation_CVPRW_2026_paper.html
9. Paxton, C., Hundt, A., Jonathan, F., Guerin, K., Hager, G.D.: CoSTAR: Instructing collaborative robots with behavior trees and vision. In: 2017 IEEE International Conference on Robotics and Automation. pp. 564–571. IEEE (2017). <https://doi.org/10.1109/ICRA.2017.7989070>
10. Saran, A., Zhang, R., Short, E.S., Niekum, S.: Efficiently guiding imitation learning agents with human gaze. In: Proceedings of the 20th International Conference on Autonomous Agents and Multiagent Systems. pp. 1109–1117. IFAAMAS (2021), <https://www.ifaamas.org/Proceedings/aamas2021/pdfs/p1109.pdf>
11. Wang, Z., Chen, Y., Liu, Y., Ye, J., Chen, P., Lu, C., Liu, S., Jia, J.: VP-VLA: Visual prompting as an interface for vision-language-action models. arXiv preprint arXiv:2603.22003 (2026), <https://arxiv.org/abs/2603.22003>
12. Yang, Y., Sun, J., Kou, S., Wang, Y., Deng, Z.: LoHoVLA: A unified vision-language-action model for long-horizon embodied tasks. arXiv preprint arXiv:2506.00411 (2025), <https://arxiv.org/abs/2506.00411>
13. Zheng, R., Liang, Y., Huang, S., Gao, J., Daumé III, H., Kolobov, A., Huang, F., Yang, J.: TraceVLA: Visual trace prompting enhances spatial-temporal awareness for generalist robotic policies. In: International Conference on Learning Representations (2025), <https://openreview.net/forum?id=b1CVu9l5G0>
14. Zhu, Y., Tremblay, J., Birchfield, S., Zhu, Y.: Hierarchical planning for long-horizon manipulation with geometric and symbolic scene graphs. In: 2021 IEEE International Conference on Robotics and Automation. pp. 6541–6548. IEEE (2021). <https://doi.org/10.1109/ICRA48506.2021.9561548>