

Geometry-aware Prototype Learning for Cross-domain Few-shot Medical Image Segmentation

Feifan Song¹ Yuntian Bo¹ Haofeng Zhang¹

¹School of Computer Science and Engineering, Nanjing University of Science and Technology
{sff, yuntian.bo, zhanghf}@njust.edu.cn

Abstract

Cross-domain few-shot medical image segmentation (CD-FSMIS) requires a model to generalise simultaneously to novel anatomical categories and unseen imaging domains from only a handful of annotated examples. Existing prototypical approaches inevitably entangle anatomical structure with domain-specific appearance variations, and thus lack a stable reference for reliable matching under domain shift. We observe that the geometric structure of human anatomy constitutes a reliable, domain-transferable prior that has been overlooked. Building on this insight, we propose GeoProto, a geometry-aware CD-FSMIS framework that enriches prototypical matching with explicit structural priors. The core component, Geometry-Aware Prototype Enrichment (GAPE), augments each local appearance prototype with a learned geometric offset encoding its ordinal position within the organ’s interior topology. This offset is derived from an auxiliary Ordinal Shape Branch (OSB) trained under an ordinal consistency objective that enforces monotonic variation of geometric embeddings across interior strata, requiring no annotation beyond standard segmentation masks. Extensive experiments across seven datasets spanning three evaluation settings (cross-modality, cross-sequence, and cross-context) demonstrate that GeoProto achieves state-of-the-art performance. Code is available at <https://github.com/FeifanSong/Geoproto.git>.

1 Introduction

Medical image segmentation [1] is fundamental for computer-assisted diagnosis and treatment planning. While deep learning models [2, 3] have made impressive segmentation task outcomes, they require extensive pixel-level annotations that are prohibitively scarce in medical imaging. Few-shot medical image segmentation (FSMIS) [4, 5] addresses this by leveraging category-agnostic knowledge from base categories to segment novel anatomical structures from only a handful of labelled examples. In clinical practice, multiple imaging modalities (*e.g.*, CT, MRI) are routinely employed to capture complementary diagnostic information, introducing domain shifts that challenge the generalization ability of the FSMIS model. This has motivated the cross-domain few-shot medical image segmentation (CD-FSMIS) task [6, 7], where a model must generalise to both novel categories and unseen imaging domains simultaneously.

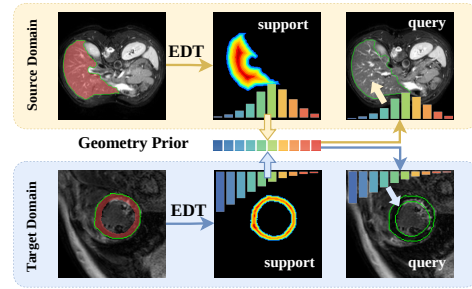


Figure 1: Motivation of GeoProto. Despite substantial appearance differences across imaging domains, the geometric structure of each organ, encoded as ordinal strata from boundary to centroid via EDT, remains consistent within each domain across individuals, providing a reliable, domain-transferable prior for cross-domain prototype matching.

Existing FSMIS methods predominantly rely on prototypical networks, where prototypes are constructed by aggregating support features to represent target categories. A dominant limitation is that support features are extracted by domain-specific encoders, causing the resulting prototypes to inevitably entangle anatomical structure with domain-specific imaging characteristics, such as scanner-induced appearance variations in ultrasound [8] or centre effects in mammography [9]. CD-FSMIS methods attempt to resolve this by suppressing domain-specific signals; however, such suppression is fundamentally entangled with structural content, leading to the inadvertent loss of critical organ details. Rather than suppressing domain signals, we argue that what a model truly needs is a stable, domain-invariant reference for reliable prototype-to-query matching when the query originates from an unseen domain.

Such a reference is, in fact, naturally available in medical imaging. Unlike natural images, where object shape and scale are highly variable, human anatomy exhibits a remarkable geometric regularity: *despite substantial appearance variation across imaging modalities, the geometric structure of anatomical organs remains inherently consistent across individuals, deforming only under extreme pathological conditions*. Inspired by [10], we formalise this regularity as the spatial relationship between organ boundaries and interior strata, a representation that is simultaneously simple, expressive, and stable across domains (empirically validated in Section 3).

This geometric structure constitutes a reliable, domain-transferable prior that existing methods [7, 11] have overlooked. As illustrated in Fig. 1, despite substantial appearance differences between CT and MRI, the ordinal strata from boundary to centroid of each organ remain consistent across individuals. Under the few-shot setting, we derive this geometry representation directly from the support samples, forming the structural scaffold that anchors prototype-to-query matching along the stable boundary-to-centroid axis.

Based on the observations above, we propose GeoProto, a geometry-aware CD-FSMIS framework that enriches prototypical matching with explicit structural priors. The core contribution is Geometry-Aware Prototype Enrichment (GAPE), which augments each local appearance prototype with a learned geometric offset encoding its ordinal position within the organ’s interior topology. This offset is derived from predicted distance-to-boundary bin distributions and injected additively into the prototype feature space, such that two local prototypes capturing the similar appearance but originating from distinct anatomical strata are displaced to geometrically differentiated regions of the feature space. To provide reliable geometric supervision, we introduce the Ordinal Shape Branch (OSB), trained jointly with the segmentation model. The OSB predicts quantised bin distributions from backbone features, supervised by an ordinaly consistent objective that enforces smooth, monotonic variation of the geometric embedding across interior strata. Crucially, the geometric supervision is derived entirely from binary segmentation masks, requiring no additional annotation.

In summary, our main contributions are:

- We propose GeoProto, a novel geometry-aware framework for CD-FSMIS that explicitly incorporates domain-transferable anatomical geometry into prototypical matching, providing a stable structural axis invariant to cross-domain appearance shifts.
- We introduce GAPE, which enriches local appearance prototypes with ordinal geometric offsets derived from predicted bin distributions, lifting prototype matching from feature-level comparison to geometry-conditioned discrimination.
- We design the OSB with an ordinaly consistent training objective that enforces monotonic variation of embeddings across geometric strata, requiring no annotation beyond standard segmentation masks.
- We conduct extensive experiments on seven benchmarks spanning cross-modality, cross-sequence, and cross-context settings, demonstrating state-of-the-art performance.

2 Related Work

Few-Shot Medical Image Segmentation. FSMIS [12, 13] addresses the scarcity of medical annotations by leveraging class-agnostic knowledge to segment novel categories from only a few labelled examples. Prototypical network-based approaches [14–16, 12, 17] dominate FSMIS, representing each class as one or more prototypes aggregated from support features and matched against query features to identify target regions. One line of work focuses on improving prototype quality: graph-based reasoning [18] propagates support information while preserving query context, and high-fidelity pro-

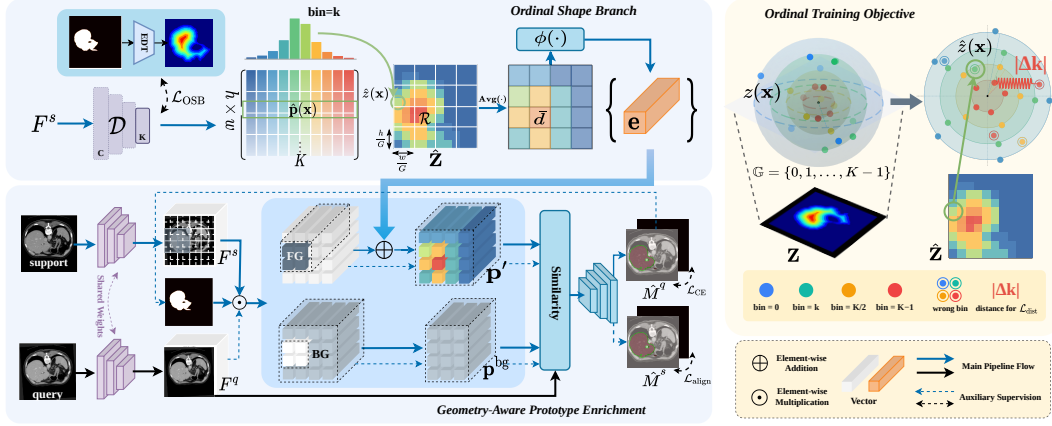


Figure 2: Overview of GeoProto. The shared ResNet backbone encodes support and query images into feature maps; the Ordinal Shape Branch predicts distance-to-boundary bin distributions from support features, which the Geometry-Aware Prototype Enrichment module uses to augment local prototypes with ordinal geometric offsets before cosine similarity matching against query features.

totypes [15] preserve both semantic and structural cues for improved matching accuracy. Another line improves generalisation through richer supervision: superpixel pseudo-labels [19] diversify episodic training tasks, prior mask generation [20] provides additional query guidance, and cross-slice context modelling [21] exploits the volumetric structure of medical images. However, these methods are designed for single-domain settings and do not generalise across imaging modalities [22].

Cross-Domain Few-Shot Medical Image Segmentation. CD-FSMIS extends FSMIS to the more challenging setting where the model must generalise across imaging domains without retraining. Existing approaches primarily address domain shift through domain-specific signal suppression and robust feature matching. RobustEMD [6] targets texture discrepancies across domains, proposing a domain-robust matching mechanism based on Earth Mover’s Distance that suppresses texture-sensitive signals while emphasising class boundary consistency. FAMNet [7] identifies cross-domain differences concentrated in specific frequency bands and adopts a band-wise matching strategy to selectively suppress domain-specific frequency components, enhancing generalisation while facilitating support-query feature de-biasing. C-Graph [11] constructs cross-domain prototype graphs to model inter-class relationships in a modality-agnostic space, further mitigating appearance-level domain gaps. However, none of these methods exploit domain-invariant structural priors, leaving prototype matching vulnerable to appearance-level domain shift.

3 Methodology

3.1 Problem Formulation

Cross-domain few-shot medical image segmentation (CD-FSMIS) seeks to transfer a segmentation model Θ , trained on a source domain $\mathcal{D}_s$ with labeled base categories $\mathcal{C}_b$, to an unseen target domain $\mathcal{D}_t$ containing novel categories $\mathcal{C}_n$, using only a handful of annotated examples. Crucially, $\mathcal{D}_s$ and $\mathcal{D}_t$ exhibit distributional shift induced by differences in imaging modality, acquisition protocol, or anatomical context, and their category sets are mutually exclusive, *i.e.*, $\mathcal{C}_b \cap \mathcal{C}_n = \emptyset$. The model is deployed on $\mathcal{D}_t$ directly, without any retraining or fine-tuning.

Following the episodic meta-learning paradigm, we construct training tasks by randomly sampling episodes $(\mathcal{S}, \mathcal{Q})$ from $\mathcal{D}_s$. Each episode comprises a support set $\mathcal{S} = \{(I_i^s, M_i^s(c))\}_{i=1}^S$ of S annotated image-mask pairs and a query set $\mathcal{Q} = \{(I^q, M^q(c))\}$, where I denotes an input image slice, $M(c) \in \{0, 1\}^{H \times W}$ its binary segmentation mask for the foreground class $c \in \mathcal{C}_b$, and S is the number of support shots. At inference, the model is evaluated on episodes drawn from $\mathcal{D}_t$, wherein query images carry no annotation and the segmentation target c is sampled from the novel set $\mathcal{C}_n$.

3.2 Overview of GeoProto

Fig. 2 illustrates the GeoProto pipeline. A shared ResNet [23] backbone encodes both support and query images into feature $F^s, F^q \in \mathbb{R}^{C \times h \times w}$, where C denotes the number of feature channels, and $h \times w$ is the feature spatial resolution.

The pipeline proceeds as follows. In Ordinal Shape Branch (OSB), support feature maps first pass through a lightweight decoder to produce the predicted K -bin map $\hat{\mathbf{Z}}$. It is then passed to the Geometry-Aware Prototype Enrichment (GAPE) module, which partitions support features into a $G \times G$ spatial grid, pools a masked-average prototype per foreground cell, and augments each prototype with a distance-aware geometric embedding $\phi(d)$. Finally, the enriched prototypes $\mathbf{p}'$ and background prototypes $\mathbf{p}^{\text{bg}}$ are matched against query features via softmax-weighted cosine similarity to produce the final prediction $\hat{M}^q$. The full training objective jointly optimises a segmentation loss, a bidirectional prototype alignment regulariser, and our geometry-aware OSB supervision.

3.3 Ordinal Shape Branch (OSB)

Medical organs exhibit predictable topological geometry: a consistent interior, smooth boundaries, and a stable centre-of-mass that generalises different domains. In this section, we discuss how to quantify this domain-agnostic geometry.

Bin construction. We uniformly partition the continuous distance-to-boundary range into K discrete intervals (termed **bins**), such that each foreground pixel is assigned a bin index reflecting its ordinal stratum within the organ. Since training model for regressing continuous distance values is unstable, we rephrase this geometric distance estimation as a bin classification problem.

Given the true label image M^s , we compute the Euclidean distance-to-boundary transform $\text{EDT}(M^s)$ over organ pixels and quantise it uniformly into K bins, yielding the ground-truth bin map $\mathbf{Z} \in \mathbb{G}^{h \times w}$, where $\mathbb{G} = \{0, 1, \dots, K-1\}$ denotes the discrete geometric stratum space: bin 0 marks the organ boundary, bin $K-1$ marks the region nearest the centroid, and intermediate bins encode concentric interior strata (see Appendix A for details).

Let $\Omega = \{\mathbf{x} \mid M^s(\mathbf{x}) = 1\}$ be the set of pixels on the foreground organ. During the forward pass, a lightweight convolutional decoder $\mathcal{D}$ maps support features to per-pixel bin logits $\mathcal{D}(F^s) \in \mathbb{R}^{K \times h \times w}$, from which the predicted bin map is obtained as:

$$\hat{\mathbf{Z}} = \arg \max_k \mathcal{D}(F^s)_k \in \mathbb{G}^{h \times w}. \quad (1)$$

Ordinal training objective. We design two effective geometric penalty terms to supervise OSB in learning an ordinally smooth bin representation. Let $\hat{p}_k(\mathbf{x})$ denote the predicted softmax probabilities over bins derived from logits, $z(\mathbf{x})$ the ground-truth bin, $\hat{z}(\mathbf{x}) = \arg \max_k \hat{p}_k(\mathbf{x})$ the predicted bin, and $\beta = \frac{1}{2|\Omega|}$ a foreground normalisation factor. The first term is a standard cross-entropy restricted to foreground pixels, which penalises the classification error for each geometric stratum equally:

$$\mathcal{L}_{\text{cls}} = -\beta \sum_{\mathbf{x} \in \Omega} \sum_{k=0}^{K-1} \mathbf{1}(z(\mathbf{x}) = k) \log \hat{p}_k(\mathbf{x}), \quad (2)$$

where $\hat{p}_k(\mathbf{x})$ is the probability that the strata of $\mathbf{x}$ belongs to k bin. The second term penalises misclassified pixels proportionally to their ordinal gap from the ground truth, providing gradient direction that smoothly pulls adjacent bin probabilities toward one another rather than treating all misclassifications equally:

$$\mathcal{L}_{\text{dist}} = -\beta \sum_{\mathbf{x} \in \Omega} \frac{|\hat{z}(\mathbf{x}) - z(\mathbf{x})|}{K} \log(1 - \max_k \hat{p}_k(\mathbf{x})). \quad (3)$$

As shown in Figure 4, as training episodes increase, $\hat{z}(\mathbf{x})$ vary monotonically with distance from boundary to centroid in the geometry stratum space, rather than collapsing abruptly at a single bin. Together, the combined OSB loss is:

$$\mathcal{L}_{\text{OSB}} = \mathcal{L}_{\text{cls}} + \lambda_{\text{dist}} \mathcal{L}_{\text{dist}}, \quad (4)$$

where λ_{dist} balances the contribution of the ordinal penalty relative to the classification term.

3.4 Geometry-Aware Prototype Enrichment (GAPE)

Prototype-based few-shot methods aggregate support features into a compact representation of the target class. As a result, prototypes capture *how* an organ appears (*e.g.*, texture, intensity) but remain blind to *where* within the organ each local feature originates. Having established a reliable ordinal

representation of organ geometry via OSB, we now describe how this signal is injected into the prototype feature space to remedy this limitation.

Local prototype pooling. Rather than pooling a global prototype, which discards all spatial structure, we partition each support feature map $F^s \in \mathbb{R}^{C \times h \times w}$ into a $G \times G$ spatial grid of non-overlapping cells, following [19]. Then, a masked-average prototype is pooled for each foreground cell:

$$\mathbf{p}_i^{\text{fg}} = \frac{\sum_{\mathbf{x} \in \mathcal{R}_i} F^s(\mathbf{x}) M^s(\mathbf{x})}{\sum_{\mathbf{x} \in \mathcal{R}_i} M^s(\mathbf{x})}, \quad (5)$$

where $\mathcal{R}_i$ is the receptive field of cell i . Cells whose average foreground occupancy falls below threshold τ are discarded, yielding n_{fg} active foreground prototypes per shot.

Geometric offset embedding. For each retained cell i , we compute the expected ordinal strata under the OSB bin probability distribution $\hat{p}_k(\mathbf{x})$:

$$\bar{d}_i = \frac{1}{|\mathcal{R}_i|} \sum_{\mathbf{x} \in \mathcal{R}_i} \sum_{k=0}^{K-1} k \cdot \hat{p}_k(\mathbf{x}) \in [0, K-1]. \quad (6)$$

Averaging over $\mathcal{R}_i$ yields a scalar $\bar{d}_i$ characterising the mean interior level of cell i : $\bar{d}_i \approx 0$ indicates a boundary-concentrated cell, while $\bar{d}_i \approx K-1$ indicates one near the centroid. Then, a lightweight two-layer MLP ϕ translates the scalar into a C -dimensional embedding:

$$\mathbf{e}_i = \phi\left(\frac{\bar{d}_i}{K-1}\right) = W_2 \sigma\left(W_1 \cdot \frac{\bar{d}_i}{K-1}\right), \quad (7)$$

where $W_1 \in \mathbb{R}^{H_e \times 1}$, $W_2 \in \mathbb{R}^{C \times H_e}$, and σ denotes ReLU. All weights are initialised near zero, ensuring geometric influence accrues gradually as the OSB learns increasingly ordinal representations.

Prototype enrichment. Finally, the enriched prototype is formed by additive conjunction of the appearance prototype and its geometric embedding (as ablated in Appendix 4.3):

$$\mathbf{p}'_i = \mathbf{p}_i^{\text{fg}} + \mathbf{e}_i. \quad (8)$$

Two prototypes with similar raw appearance yet distinct geometric strata receive different offsets $\mathbf{e}_i$, displacing them to different positions along the boundary-to-centroid axis in the feature space. This endows the feature space with an explicit geometric topology, where proximity reflects not only appearance similarity but also structural correspondence within the organ. Cosine similarity against these enriched prototypes thus anchors matching along this stable axis, rendering it robust to domain-specific appearance variations in novel imaging domains.

Background prototypes are computed without enrichment, as the geometric predicate is undefined for background pixels (as justified in Appendix C.2).

3.5 Query Classification and Alignment Regularisation

With enriched foreground prototypes $\{\mathbf{p}'_i\}$ and standard background ones $\{\mathbf{p}_j^{\text{bg}}\}$, each query pixel $\mathbf{x}$ receives a foreground score via softmax-weighted cosine similarity over all active prototype slots:

$$S_{\text{fg}}(\mathbf{x}) = \sum_i w_i(\mathbf{x}) \cdot \cos(F^q(\mathbf{x}), \mathbf{p}'_i), \quad (9)$$

where $w_i(\mathbf{x}) = \text{softmax}_i(\cos(F^q(\mathbf{x}), \mathbf{p}'_i))$ are attention weights over foreground prototypes. The background score $S_{\text{bg}}(\mathbf{x})$ is computed analogously using $\{\mathbf{p}_j^{\text{bg}}\}$, and the final prediction is obtained as $\hat{M}^q = \arg \max[S_{\text{bg}}, S_{\text{fg}}]$.

To regularise the feature space, we add a bidirectional alignment loss [24] by swapping support and query roles: raw query prototypes $\mathbf{p}_i^q$, pooled from the query feature map using the predicted mask $\hat{M}^q$, are used to segment the support image:

$$\mathcal{L}_{\text{align}} = \mathcal{L}_{\text{CE}}(\hat{M}^s, M^s), \quad (10)$$

where $\hat{M}^s$ denotes the support prediction under query prototypes. Geometric enrichment is deliberately withheld here to avoid a circular optimisation dependency between GAPE and the alignment branch. The full training objective is:

$$\mathcal{L} = \mathcal{L}_{\text{CE}}(\hat{M}^q, M^q) + \mathcal{L}_{\text{align}} + \lambda_{\text{geo}} \mathcal{L}_{\text{OSB}}, \quad (11)$$

where λ_{geo} balances geometric supervision against the primary segmentation objective.

Table 1: Quantitative results (DSC %) under cross-modality scenarios. The best results are in **bold**.

Method	Abdominal CT $\rightarrow$ MRI					Abdominal MRI $\rightarrow$ CT				
	Liver	LK	RK	Spleen	Mean	Liver	LK	RK	Spleen	Mean
SSL-ALP [19]	70.74	55.49	67.43	58.39	63.01	71.38	34.48	32.32	51.67	47.46
ADNet [21]	50.33	39.36	37.88	39.37	41.73	64.25	37.39	25.62	42.94	42.55
RPT [25]	49.22	42.45	47.14	48.84	46.91	65.87	40.07	35.97	51.22	48.28
GMRD [26]	63.15	61.79	67.69	56.89	62.38	66.12	57.38	56.37	54.56	58.61
PATNet [27]	57.01	50.23	53.01	51.63	52.97	75.94	46.62	42.68	63.94	57.29
PMNet [28]	64.50	60.16	61.83	51.80	59.57	66.82	39.21	30.87	47.49	46.10
IFA [29]	48.81	45.79	51.46	51.42	49.37	50.05	36.45	32.69	43.08	40.57
APM-M [30]	70.85	55.41	58.68	53.11	59.51	74.48	56.01	49.83	64.12	61.11
RobustEMD [6]	60.16	66.34	70.26	53.71	62.61	69.82	63.79	50.34	59.88	60.95
FAMNet [7]	73.01	57.28	74.68	58.21	65.79	73.57	57.79	61.89	65.78	64.75
C-Graph [11]	68.28	69.70	70.17	61.36	67.38	69.60	70.00	63.95	65.23	67.20
Ours	62.31	72.97	74.85	67.67	69.45	69.65	71.31	69.65	67.98	69.65

Table 2: Quantitative results (DSC %) under cross-sequence scenarios. The best results are in **bold**.

Method	Cardiac LGE $\rightarrow$ b-SSFP				Cardiac b-SSFP $\rightarrow$ LGE			
	LV-BP	LV-MYO	RV	Mean	LV-BP	LV-MYO	RV	Mean
SSL-ALP [19]	83.47	22.73	66.21	57.47	65.81	25.64	51.24	47.56
ADNet [21]	58.75	36.94	51.37	49.02	40.36	37.22	43.66	40.41
RPT [25]	60.84	42.28	57.30	53.47	50.39	40.13	50.50	47.00
GMRD [26]	76.23	36.87	62.91	58.67	66.69	47.19	58.21	57.36
PATNet [27]	65.35	50.63	68.34	61.44	66.82	53.64	59.74	60.06
PMNet [28]	73.46	32.11	68.70	58.09	57.14	30.13	60.12	49.13
IFA [29]	64.04	43.22	74.58	62.28	68.07	36.07	60.42	54.85
APM-M [30]	68.91	45.74	61.78	58.81	57.72	42.37	52.83	50.97
RobustEMD [6]	75.32	51.32	72.86	66.50	73.19	50.02	60.29	61.16
FAMNet [7]	86.64	51.84	76.26	71.58	77.37	52.05	54.75	61.39
C-Graph [11]	87.61	55.22	79.76	74.20	68.46	56.38	65.14	63.33
Ours	85.45	60.79	76.46	74.23	<u>74.91</u>	56.39	70.02	67.10

4 Experiments

4.1 Experiment Setup

Datasets. We evaluate on seven medical imaging datasets spanning four modalities. **Abdominal CT** comprises 20 3D CT scans collected from the MICCAI 2015 Multi-Atlas Labeling Challenge [31] and **Abdominal MRI** comprise 20 3D T2-SPIR MRI scans from the ISBI 2019 Combined Healthy Abdominal Organ Segmentation Challenge [32]. **Cardiac b-SSFP** and **Cardiac LGE** sourced from the MICCAI 2019 Multi-sequence Cardiac MR Segmentation Challenge [33, 34] with 45 3D cardiac MRI scans in each dataset acquired using the b-SSFP and LGE sequences, respectively. **MI-PMR** consists of 403 multi-institution prostate MRI scans sourced from UCLH [35] and NCI [36] with annotations by [37]. Three categories of labels are employed: Central Gland (CG), Bladder and Rectum. **Chest X-Ray** contains 704 X-Ray images for Tuberculosis collected by the National Library of Medicine, Maryland, USA [38, 39]. **ISIC2018** provides 2594 dermoscopic images for skin lesion segmentation collected by [40, 41].

Experimental Protocol. We consider three evaluation settings: **a. Cross-modality:** conducted on abdominal data, testing robustness to modality shift within the same anatomical region. **b. Cross-sequence:** conducted on cardiac data acquired under different MRI sequences, isolating the effect of sequence variation on the same organ. **c. Cross-context:** trained on Abdominal CT and evaluated on four structurally distinct targets, probing generalisation across anatomy, modality, and imaging context simultaneously. Throughout, we denote transfer directions as source $\rightarrow$ target.

For a fair comparison, we adopt the Dice Similarity Coefficient (DSC) [4] as the evaluation metric.

Implementation Details. All experiments are implemented in PyTorch and trained on two NVIDIA RTX A6000 GPUs. As in [21], supervoxel-based pseudo labels are generated to provide supervisory

Table 3: Quantitative results (DSC %) under cross-context scenarios. All methods are trained on abdominal CT and the best results are indicated in **bold**.

Method	CXR	ISIC	Cardiac b-SSFP MRI				MI-PMR			
			BP	MYO	RV	Mean	Bladder	CG	Rectum	Mean
SSL-ALP [19]	71.66	39.16	61.18	27.14	48.45	45.59	54.29	27.76	19.92	33.99
ADNet [21]	40.32	22.11	46.61	28.47	42.93	39.34	36.51	25.38	28.14	30.01
RPT [25]	58.48	35.44	69.35	42.79	53.11	55.08	66.17	38.84	26.94	43.98
GMRD [26]	52.31	39.66	41.45	28.36	38.59	36.13	36.08	22.33	24.61	27.67
PATNet [27]	77.65	42.88	69.88	46.09	52.97	56.31	56.5	46.98	38.22	47.23
PMNet [28]	75.65	37.28	62.42	21.34	57.93	47.23	57.08	51.54	44.84	51.15
IFA [29]	76.21	42.59	66.42	27.89	39.78	44.70	55.77	38.09	31.16	41.67
APM-M [30]	71.49	39.85	44.30	31.17	45.18	40.22	43.04	31.26	41.16	38.49
RobustEMD [6]	63.99	46.33	37.77	41.44	42.48	40.56	44.93	21.81	20.07	28.94
FAMNet [7]	67.02	36.45	58.44	33.00	51.34	47.59	42.78	27.06	29.44	33.09
C-Graph [11]	78.38	50.42	63.70	46.32	66.00	58.60	52.55	48.44	49.30	50.10
Ours	84.50	<u>47.45</u>	71.26	46.75	<u>65.09</u>	61.03	76.43	59.44	<u>47.83</u>	61.24

signals during model training. The backbone is a ResNet-101 [23] initialised with MS-COCO [42] weights. We train for 40K episodes for cross-modality and cross-sequence settings, and 45K episodes for cross-context. All experiments follow a 1-way 1-shot protocol [21, 43, 25].

The prototype grid size is set to $G = 8$, yielding a 4×4 local prototype layout after feature-map pooling. The OSB uses $K = 10$ distance-to-boundary bins. The full training objective is weighted by $\lambda_{\text{dist}} = 1.0$ for the ordinal penalty term and $\lambda_{\text{geo}} = 0.3$ for the OSB supervision. The network is optimised with SGD ($\text{lr} = 10^{-3}$, momentum = 0.9, weight decay = 5×10^{-4}), with the learning rate decayed by a factor of 0.95 every 1000 episodes.

4.2 Comparison with State-of-the-Art

We compare our method with state-of-the-art approaches, including CD-FSMIS methods RobustEMD [6], FAMNet [7] and C-Graph [11]; CD-FSS methods PATNet [27], PMNet [28], IFA [29], and APM-M [30]; and FSMIS methods SSL-ALP [19], ADNet [21], RPT [25], and GMRD [26].

As shown in Tables 1–3, GeoProto achieves consistent state-of-the-art performance across all three settings. Under cross-modality transfer, GeoProto attains mean DSC of 69.45% and 69.65% on $\text{CT} \rightarrow \text{MRI}$ and $\text{MRI} \rightarrow \text{CT}$, surpassing the previous best C-Graph [11] by 2.07% and 8%+ improvements on kidney classes over FAMNet [7] and RobustEMD [6]. Under cross-sequence transfer, GeoProto reaches 74.23% and 67.10% on $\text{LGE} \rightarrow \text{b-SSFP}$ and $\text{b-SSFP} \rightarrow \text{LGE}$, with the latter outperforming FAMNet [7] by 5.71%. Under the more challenging cross-context setting, GeoProto achieves the best results on CXR (84.50%), Cardiac b-SSFP (61.03%), and MI-PMR (61.24%), with an 11.14% gain over C-Graph [11] on MI-PMR, while remaining competitive on ISIC.

These results suggest that our model acquires a genuine capacity for structural generalisation rather than domain-specific overfitting, adapting to unseen anatomies and modalities from a single support sample by leveraging geometry as a modality-invariant prior. A detailed analysis is in Appendix B.

4.3 Ablation Study

Geometric prior validation. GeoProto rests on two premises: (i) different organs possess distinct geometric stratum distributions, and (ii) these distributions remain consistent across individuals, enabling geometric priors to transfer from support to query. As shown in Fig. 3 (Left), thin-walled structures (*e.g.*, LV-MYO) concentrate mass near the boundary strata, while compact organs (*e.g.*, RK, Bladder) exhibit flatter distributions, confirming that EDT bins carry discriminative structural information. Fig. 3 (Right) validates the second premise: three of four abdominal organs achieve median BC > 0.97 , confirming strong intra-episode geometric consistency. Spleen shows greater variability ($\text{BC} = 0.857 \pm 0.132$), attributable to its inter-subject shape irregularity.

Component analysis. Table 4 decomposes GeoProto against the baseline [19], trained on Abdominal CT. We first compare against position embedding (PE) as a spatial-context baseline, which yields +3.36% on Abdominal MRI and +12.75% on Cardiac b-SSFP. Notably, Geo-E alone (without OSB-

Table 4: Ablation study on geometric components. “PE” denotes position embedding; “Geo-E” denotes bin embedding; “OSB-L” denotes the ordinal shape branch loss $\mathcal{L}_{\text{OSB}}$. Δ denotes improvement over the baseline.

Method	Abdominal MRI		Cardiac b-SSFP	
	DSC (%)	Δ	DSC (%)	Δ
Baseline [19]	63.01	—	45.59	—
+ PE	66.37	+3.36	58.34	+12.75
+ Geo-E (w/o OSB-L)	66.31	+3.30	54.88	+9.29
+ OSB-L (w/o Geo-E)	68.13	+5.12	55.52	+9.93
Ours	69.45	+6.44	61.03	+15.44

Table 5: Comparison of computational complexity and inference efficiency. Latency is reported on an NVIDIA A6000 GPU.

Method	Latency (ms)		Params (M)
	Train	Test	
RPT [25]	133.44	51.18	45.1
RobustEMD [6]	168.45	89.32	42.1
FAMNet [7]	86.32	22.72	29.7
C-Graph [11]	318.81	147.39	81.9
GeoProto	112.67	12.87	43.4

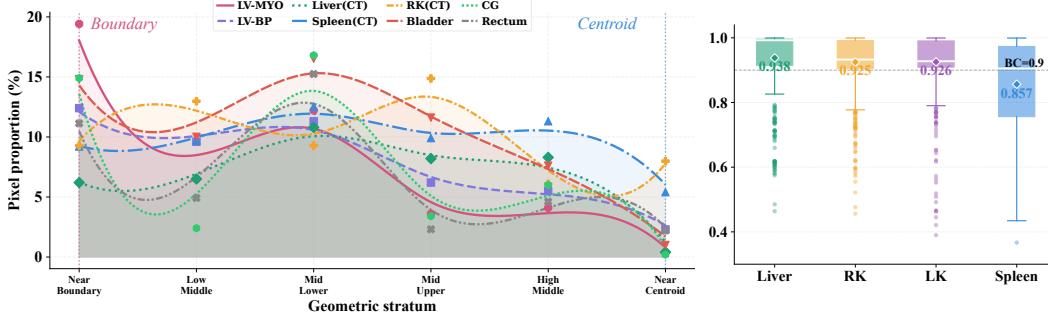


Figure 3: (Left) EDT bin distributions across representative organs and datasets. (Right) Bhatlacharyya coefficient (BC) between support and query EDT distributions over 500 intra-domain episodes per organ.

L) achieves nearly identical gains (+3.30%, +9.29%), suggesting that geometric offsets without ordinal supervision collapse to behaviour similar to PE, where the model lacks the structural signal needed to differentiate anatomical strata. Adding OSB-L alone already surpasses PE on both datasets (+5.12%, +9.93%), confirming that ordinal supervision is the key driver. The full model combining both components achieves the best performance (+6.44%, +15.44%), demonstrating that Geo-E and OSB-L are complementary: ordinal supervision provides the structural grounding that makes geometric embeddings semantically meaningful rather than spatially redundant.

Computational efficiency. As shown in Table 5, GeoProto introduces minimal overhead: with 43.4M parameters, it remains comparable to RobustEMD [6] (42.1M) while achieving substantially lower latency (112.67ms and 12.87ms for training and inference, respectively). This represents a $3\times$ reduction in training latency over the top-performing SOTA C-Graph [11] and a $2\times$ reduction in inference latency over FAMNet [7], demonstrating that geometry-aware enrichment via OSB and GAPE imposes negligible computational cost.

Effect of bin number K . Table 6 reports performance across $K \in \{5, 10, 15, 20\}$. All models are trained on Abdominal CT and evaluated on three settings. Performance is non-monotonic with K : too few bins ($K=5$) under-quantise the interior topology, while too many ($K \geq 15$) introduce label sparsity that destabilises ordinal supervision, particularly for smaller organs such as spleen and LV-MYO. $K=10$ yields the most consistent gains across all three settings, particularly on structurally complex cardiac targets where ordinal resolution matters most, and is adopted as the default throughout.

Geometric Offset Fusion Mode. We compare three fusion modes for injecting geometric embedding e_i into each local prototype: *concat*, which concatenates e_i to $\mathbf{p}_i^{\text{fg}}$ and projects back to the original dimension via a linear layer, and *scale*, which applies a multiplicative gate $\mathbf{p}_i' = \mathbf{p}_i^{\text{fg}} \odot (1 + \text{softplus}(e_i))$. All three variants share the same MLP architecture and are initialised identically. As shown in Table 7, additive fusion (Eq. 8) achieves the best overall performance. Scale gate outperforms additive fusion on bSSFP→LGE and CXR, suggesting that multiplicative modulation can be more effective when appearance and geometric cues are well-aligned; Concat with projection performs poorly across most settings, likely because the additional linear projection introduces parameters that are difficult to optimise under episodic training with limited support, and the concatenation disrupts the near-zero initialisation strategy that allows geometric influence to accrue gradually.

Table 6: Ablation on the number of bins K (DSC %). Best per column in **bold**.

K	Conventional FSMIS					Cross-modality					Cross-context			
	Abdominal CT					Abdominal MRI					CXR	Cardiac bSSFP		
	Liver	LK	RK	Spleen	Mean	Liver	LK	RK	Spleen	Mean		Lung	BP	MYO
5	70.83	74.74	76.77	72.12	73.62	61.52	74.04	74.64	68.76	69.74	83.93	67.38	39.60	58.81
10	71.49	75.66	78.09	73.09	74.58	62.31	72.97	74.85	67.67	69.45	84.50	71.26	46.75	65.09
15	69.69	77.71	75.22	74.49	74.28	58.45	74.41	71.27	64.49	67.21	83.63	68.71	40.94	56.01
20	71.52	76.47	76.60	76.93	75.38	60.81	72.57	73.89	67.50	68.69	83.86	68.79	39.99	56.93

Table 7: Comparison of geometric offset fusion modes (mean DSC %). Best per column in **bold**.

Fusion mode	Cross-modality		Cross-sequence		Cross-context		
	CT→MRI	MRI→CT	LGE→bSSFP	bSSFP→LGE	CXR	Cardiac bSSFP	MI-PMR
Additive (ours)	69.45	69.65	74.23	67.10	84.50	61.03	61.24
Concat + proj	63.93	68.57	70.70	67.63	82.70	51.99	51.11
Scale gate	63.99	69.64	72.02	70.94	86.57	55.68	56.40

Source-domain Performance. Table 8 reports GeoProto’s performance on source-domain conventional FSMIS benchmarks, where both training and evaluation are conducted within the same imaging domain. On Abdominal CT, GeoProto achieves the highest mean DSC (74.58%), outperforming all baselines including SSL-ALP. This strong in-domain performance demonstrates that the geometric prior introduced by GAPE is complementary to appearance-based matching rather than conflicting with it: even when domain shift is absent, enriching prototypes with ordinal geometric offsets provides additional discriminative structure that improves segmentation accuracy within the source domain.

OSB convergence visualisation. Fig. 4 illustrates the evolution of predicted bin maps across training episodes on three representative organs. At 10K iterations, predictions are coarse and spatially inconsistent; by 40K iterations, the bin distributions converge to smooth, concentrically-structured patterns that vary monotonically from boundary to centroid, closely matching the ground-truth EDT maps. This progressive convergence confirms that the ordinal training objective successfully instills geometric structure into the learned representations over the course of training.

Table 8: Source-domain results (DSC%) on conventional FSMIS. Best results in **bold**.

Method	Abdominal CT				
	Liver	LK	RK	Spleen	Mean
SSL-ALP [19]	78.29	72.36	71.81	70.96	73.35
ADNet [21]	77.24	72.13	79.06	63.48	72.97
RobustEMD [6]	79.30	66.67	54.75	67.10	66.96
FAMNet [7]	74.29	71.14	66.13	70.08	70.41
Ours	71.49	75.66	78.09	73.09	74.58

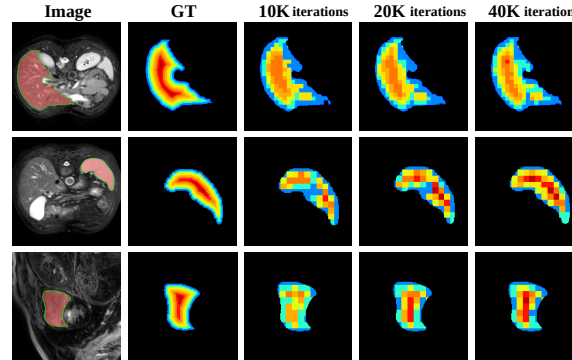


Figure 4: OSB Convergence Visualisation.

5 Conclusion

We presented GeoProto, a novel framework for CD-FSMIS that addresses a fundamental limitation of existing prototypical approaches: the entanglement of anatomical structure with domain-specific appearance in learned prototypes. The Ordinal Shape Branch (OSB) predicts quantised bin distributions, supervised by an ordinally consistent objective that enforces monotonic variation of geometric embeddings across interior strata using only standard segmentation masks. The Geometry-Aware Prototype Enrichment (GAPE) module injects these ordinal signals as additive geometric offsets into local prototypes, lifting prototype matching along the stable boundary-to-centroid axis. Extensive experiments across seven benchmarks spanning three evaluation settings demonstrate that GeoProto achieves state-of-the-art performance with minimal computational overhead. Limitations of our current design are shown in Appendix D.

References

- [1] James S. Duncan and Nicholas Ayache. Medical image analysis: Progress over two decades and the challenges ahead. *IEEE Trans. Pattern Anal. Mach. Intell.*, 22:85–106, 2000. URL <https://api.semanticscholar.org/CorpusID:16815557>.
- [2] Olaf Ronneberger, Philipp Fischer, and Thomas Brox. U-net: Convolutional networks for biomedical image segmentation. *ArXiv*, abs/1505.04597, 2015. URL <https://api.semanticscholar.org/CorpusID:3719281>.
- [3] Fabian Isensee, Paul F. Jaeger, Simon A. A. Kohl, Jens Petersen, and Klaus Hermann Maier-Hein. nnu-net: a self-configuring method for deep learning-based biomedical image segmentation. *Nature Methods*, 18: 203 – 211, 2020. URL <https://api.semanticscholar.org/CorpusID:227947847>.
- [4] Cheng Ouyang, Carlo Biffi, Chen Chen, Turkay Kart, Huaqi Qiu, and Daniel Rueckert. Self-supervision with superpixels: Training few-shot medical image segmentation without annotation. In *European Conference on Computer Vision*, 2020. URL <https://api.semanticscholar.org/CorpusID:220646864>.
- [5] Hao Tang, Xingwei Liu, Shanlin Sun, Xiangyi Yan, and Xiaohui Xie. Recurrent mask refinement for few-shot medical image segmentation. *2021 IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 3898–3908, 2021. URL <https://api.semanticscholar.org/CorpusID:236772039>.
- [6] Yazhou Zhu, Minxian Li, Qiaolin Ye, Shidong Wang, Tong Xin, and Haofeng Zhang. Robustemd: Domain robust matching for cross-domain few-shot medical image segmentation. *Artificial intelligence in medicine*, 167:103197, 2024. URL <https://api.semanticscholar.org/CorpusID:273026147>.
- [7] Yuntian Bo, Yazhou Zhu, Lunbo Li, and Haofeng Zhang. Famnet: Frequency-aware matching network for cross-domain few-shot medical image segmentation. In *AAAI Conference on Artificial Intelligence*, 2025. URL <https://api.semanticscholar.org/CorpusID:277755591>.
- [8] Yuanwei Bi, Zhongliang Jiang, Ricarda Clarenbach, Reza Ghotbi, Angelos Karlas, and Nassir Navab. Mi-segnet: Mutual information-based us segmentation for unseen domain generalization. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, 2023. URL <https://api.semanticscholar.org/CorpusID:257663295>.
- [9] Chu ran Wang, Jing Li, Xinwei Sun, Fandong Zhang, Yizhou Yu, and Yizhou Wang. Learning domain-agnostic representation for disease diagnosis. In *International Conference on Learning Representations*, 2023. URL <https://api.semanticscholar.org/CorpusID:259298185>.
- [10] Yan Wang, Xu Wei, Fengze Liu, Jieneng Chen, Yuyin Zhou, Wei Shen, Elliot K. Fishman, and Alan Loddon Yuille. Deep distance transform for tubular structure segmentation in ct scans. *2020 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 3832–3841, 2019. URL <https://api.semanticscholar.org/CorpusID:208910348>.
- [11] Yuntian Bo, Tao Zhou, Zechao Li, Haofeng Zhang, and Ling Shao. Contrastive graph modeling for cross-domain few-shot medical image segmentation. *IEEE transactions on medical imaging*, PP, 2025. URL <https://api.semanticscholar.org/CorpusID:284275872>.
- [12] Cheng Ouyang, Carlo Biffi, Chen Chen, Turkay Kart, Huaqi Qiu, and Daniel Rueckert. Self-supervision with superpixels: Training few-shot medical image segmentation without annotation. In *European Conference on Computer Vision*, 2020. URL <https://api.semanticscholar.org/CorpusID:220646864>.
- [13] Yi Lin, Yufan Chen, Kwang-Ting Cheng, and Hao Chen. Few shot medical image segmentation with cross attention transformer. *ArXiv*, abs/2303.13867, 2023. URL <https://api.semanticscholar.org/CorpusID:257757309>.
- [14] Yazhou Zhu, Shidong Wang, Tong Xin, Zheng Zhang, and Haofeng Zhang. Partition-a-medical-image: Extracting multiple representative subregions for few-shot medical image segmentation. *IEEE Transactions on Instrumentation and Measurement*, 73:1–12, 2023. URL <https://api.semanticscholar.org/CorpusID:262064157>.
- [15] Song Tang, Shaxu Yan, Xiaozhi Qi, Jianxin Gao, Mao Ye, Jianwei Zhang, and Xiatian Zhu. Few-shot medical image segmentation with high-fidelity prototypes. *Medical image analysis*, 100:103412, 2024. URL <https://api.semanticscholar.org/CorpusID:270737528>.
- [16] Ziming Cheng, Shidong Wang, Yang Long, Tao Zhou, Haofeng Zhang, and Ling Shao. Dual interspersion and flexible deployment for few-shot medical image segmentation. *IEEE Transactions on Medical Imaging*, 44:2732–2744, 2025. URL <https://api.semanticscholar.org/CorpusID:276714149>.

- [17] Yumin Zhang, Hongliu Li, Yajun Gao, Haoran Duan, Yawen Huang, and Yefeng Zheng. Prototype correlation matching and class- relation reasoning for few-shot medical image segmentation. *IEEE Transactions on Medical Imaging*, 43:4041–4054, 2024. URL <https://api.semanticscholar.org/CorpusID:270357354>.
- [18] Wendong Huang, Jinwu Hu, Junhao Xiao, Yang Wei, Xiuli Bi, and Bin Xiao. Prototype-guided graph reasoning network for few-shot medical image segmentation. *IEEE Transactions on Medical Imaging*, 44: 761–773, 2024. URL <https://api.semanticscholar.org/CorpusID:272645696>.
- [19] Cheng Ouyang, Carlo Biffi, Chen Chen, Turkey Kart, Huaqi Qiu, and Daniel Rueckert. Self-supervised learning for few-shot medical image segmentation. *IEEE Transactions on Medical Imaging*, 41:1837–1848, 2022. URL <https://api.semanticscholar.org/CorpusID:246700149>.
- [20] Ziming Cheng, Jianqin Zhao, Jingjing Deng, and Haofeng Zhang. Few-shot medical image segmentation with high-confidence prior mask. *IEEE Journal of Biomedical and Health Informatics*, 29:8928–8939, 2025. URL <https://api.semanticscholar.org/CorpusID:277106625>.
- [21] Stine Hansen, Srishti Gautam, Robert Jenssen, and Michael C. Kampffmeyer. Anomaly detection-inspired few-shot medical image segmentation through self-supervision with supervoxels. *Medical image analysis*, 78:102385, 2022. URL <https://api.semanticscholar.org/CorpusID:246788826>.
- [22] Yazhou Zhu and Haofeng Zhang. Maup: Training-free multi-center adaptive uncertainty-aware prompting for cross-domain few-shot medical image segmentation. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, 2025. URL <https://api.semanticscholar.org/CorpusID:280526687>.
- [23] Kaiming He, X. Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. *2016 IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 770–778, 2015. URL <https://api.semanticscholar.org/CorpusID:206594692>.
- [24] Kaixin Wang, Jun Hao Liew, Yingtian Zou, Daquan Zhou, and Jiashi Feng. Panet: Few-shot image semantic segmentation with prototype alignment. *2019 IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 9196–9205, 2019. URL <https://api.semanticscholar.org/CorpusID:201070109>.
- [25] Yazhou Zhu, Shidong Wang, Tong Xin, and Haofeng Zhang. Few-shot medical image segmentation via a region-enhanced prototypical transformer. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, 2023. URL <https://api.semanticscholar.org/CorpusID:261681778>.
- [26] Ziming Cheng, Shidong Wang, Tong Xin, Tao Zhou, Haofeng Zhang, and Ling Shao. Few-shot medical image segmentation via generating multiple representative descriptors. *IEEE Transactions on Medical Imaging*, 43:2202–2214, 2024. URL <https://api.semanticscholar.org/CorpusID:267210982>.
- [27] Shuo Lei, Xuchao Zhang, Jianfeng He, Fanglan Chen, Bowen Du, and Chang-Tien Lu. Cross-domain few-shot semantic segmentation. In *European Conference on Computer Vision*, 2022. URL <https://api.semanticscholar.org/CorpusID:253448730>.
- [28] Hao Chen, Yonghan Dong, Zheming Lu, Yunlong Yu, and Jungong Han. Pixel matching network for cross-domain few-shot segmentation. *2024 IEEE/CVF Winter Conference on Applications of Computer Vision (WACV)*, pages 967–976, 2024. URL <https://api.semanticscholar.org/CorpusID:269036094>.
- [29] Jiahao Nie, Yun Xing, Gongjie Zhang, Pei Yan, Aoran Xiao, Yap-Peng Tan, Alex Chichung Kot, and Shijian Lu. Cross-domain few-shot segmentation via iterative support-query correspondence mining. *2024 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 3380–3390, 2024. URL <https://api.semanticscholar.org/CorpusID:267027623>.
- [30] Jintao Tong, Yixiong Zou, Yuhua Li, and Ruixuan Li. Lightweight frequency masker for cross-domain few-shot semantic segmentation. *ArXiv*, abs/2410.22135, 2024. URL <https://api.semanticscholar.org/CorpusID:273661663>.
- [31] harigr. Segmentation outside the cranial vault challenge, 2015. URL <https://repo-prod.prod.sagebase.org/repo/v1/doi/locate?id=syn3193805&type=ENTITY>.
- [32] Ali Emre Kavur, Naciye Sinem Gezer, Mustafa Mahmut Baris, Pierre-Henri Conze, Vladimir Groza, Duc Duy Pham, Soumick Chatterjee, Philipp Ernst, Savas Özkan, Bora Baydar, D. Lachinov, Shuo Han, Josef Pauli, Fabian Isensee, Matthias Perkonig, Rachana Sathish, Ronnie Rajan, Sinem Aslan, Debodoot Sheet, Gurbandurdy Dovletov, Oliver Speck, A. Nürnberger, Klaus Hermann Maier-Hein, Gozde Bozdagi Akar, Gözde B. Ünal, Oğuz Dicle, and Mustafa Alper Selver. Chaos challenge - combined (ct-mr) healthy abdominal organ segmentation. *Medical image analysis*, 69:101950, 2020. URL <https://api.semanticscholar.org/CorpusID:210839730>.

- [33] Xiahai Zhuang, Jiahang Xu, Xinzhe Luo, Chen Chen, Cheng Ouyang, Daniel Rueckert, Víctor M. Campello, Karim Lekadir, Sulaiman Vesal, Nishant Ravikumar, Yashu Liu, Gongning Luo, Jingkun Chen, Hongwei Li, Buntheng Ly, Maxime Sermesant, Holger R. Roth, Wentao Zhu, Jiexiang Wang, Xinghao Ding, Xinyue Wang, Sen Yang, and Lei Li. Cardiac segmentation on late gadolinium enhancement mri: A benchmark study from multi-sequence cardiac mr segmentation challenge. *Medical image analysis*, 81:102528, 2020. URL <https://api.semanticscholar.org/CorpusID:219966673>.
- [34] Xiahai Zhuang. Multivariate mixture model for myocardial segmentation combining multi-source images. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 41:2933–2946, 2016. URL <https://api.semanticscholar.org/CorpusID:17758390>.
- [35] Louise Dickinson, Louise Dickinson, Hashim U. Ahmed, Hashim U. Ahmed, Alex P. Kirkham, Clare Allen, Alex Freeman, Julie Barber, Richard Hindley, Tom Leslie, Tom Leslie, Chris Ogden, Raj Persad, Mathias Winkler, Mark Emberton, and Mark Emberton. A multi-centre prospective development study evaluating focal therapy using high intensity focused ultrasound for localised prostate cancer: The index study. *Contemporary Clinical Trials*, 36:68 – 80, 2013. URL <https://api.semanticscholar.org/CorpusID:6782500>.
- [36] Peter Choyke, Baris Turkbey, Peter Pinto, Maria Merino, and Bradford Wood. Data from PROSTATE-MRI, 2016. URL <https://doi.org/10.7937/K9/TCIA.2016.6046GUDV>.
- [37] Yiwen Li, Yunguan Fu, J.M.B. Gayo, Qianye Yang, Zhe Min, Shaheer U. Saeed, Wen Yan, Yipei Wang, J. Alison Noble, Mark Emberton, Matthew J. Clarkson, Henkjan J. Huisman, Dean C. Barratt, Victor Adrian Prisacariu, and Yipeng Hu. Prototypical few-shot segmentation for cross-institution male pelvic structures with spatial registration. *Medical image analysis*, 90:102935, 2022. URL <https://api.semanticscholar.org/CorpusID:282274890>.
- [38] Stefan Jaeger, Alexandros Karargyris, Sema Candemir, Les R. Folio, Jenifer Siegelman, Fiona M. Callaghan, Zhiyun Xue, Kannappan Palaniappan, Rahul Kumar Singh, Sameer Kiran Antani, George R. Thoma, Yixiang Wang, Pu-Xuan Lu, and Clement J. McDonald. Automatic tuberculosis screening using chest radiographs. *IEEE Transactions on Medical Imaging*, 33:233–245, 2014. URL <https://api.semanticscholar.org/CorpusID:5561023>.
- [39] Sema Candemir, Stefan Jaeger, Kannappan Palaniappan, Jonathan P. Musco, Rahul Kumar Singh, Zhiyun Xue, Alexandros Karargyris, Sameer Kiran Antani, George R. Thoma, and Clement J. McDonald. Lung segmentation in chest radiographs using anatomical atlases with nonrigid registration. *IEEE Transactions on Medical Imaging*, 33:577–590, 2014. URL <https://api.semanticscholar.org/CorpusID:5232411>.
- [40] Noel C. F. Codella, Veronica M. Rotemberg, Philipp Tschandl, M. E. Celebi, Stephen W. Dusza, David Gutman, Brian Helba, Aadi Kallou, Konstantinos Liopyris, Michael Armando Marchetti, Harald Kittler, and Allan C. Halpern. Skin lesion analysis toward melanoma detection 2018: A challenge hosted by the international skin imaging collaboration (isic). *ArXiv*, abs/1902.03368, 2019. URL <https://api.semanticscholar.org/CorpusID:60440592>.
- [41] Philipp Tschandl, Cliff Rosendahl, and Harald Kittler. The ham10000 dataset, a large collection of multi-source dermatoscopic images of common pigmented skin lesions. *Scientific Data*, 5, 2018. URL <https://api.semanticscholar.org/CorpusID:263789934>.
- [42] Tsung-Yi Lin, Michael Maire, Serge J. Belongie, James Hays, Pietro Perona, Deva Ramanan, Piotr Dollár, and C. Lawrence Zitnick. Microsoft coco: Common objects in context. In *European Conference on Computer Vision*, 2014. URL <https://api.semanticscholar.org/CorpusID:14113767>.
- [43] Qianqian Shen, Yanan Li, Jiyong Jin, and B. Liu. Q-net: Query-informed few-shot medical image segmentation. In *Intelligent Systems with Applications*, 2022. URL <https://api.semanticscholar.org/CorpusID:251765311>.

A Bin Map Construction Details

Motivation. The Ordinal Shape Branch (OSB) requires a per-pixel geometric label that captures each foreground pixel lies within the organ interior. A natural choice is the Euclidean distance-to-boundary transform (EDT), which assigns to each foreground pixel its shortest distance to the nearest background pixel. The EDT encodes the organ’s interior topology in a continuous, geometry-faithful manner, which provides an ideal supervision signal for learning ordinal geometric representations.

Why discretise into bins? Directly regressing the continuous EDT value is known to be unstable in deep networks, prone to outlier-driven gradient spikes and sensitive to organ scale. Instead, we reframe the problem as ordinal classification: the continuous EDT range is uniformly partitioned into K discrete bins, and the network is trained to predict which bin each foreground pixel belongs to. This formulation is more tractable, allows standard cross-entropy supervision, and naturally supports the ordinal penalty term $\mathcal{L}_{\text{dist}}$ (Eq. 3 in the main paper) because adjacent bins have a well-defined ordinal relationship.

Formal construction. Given the binary support mask M^s , the EDT is computed over all foreground pixels $\Omega = \{\mathbf{x} \mid M^s(\mathbf{x}) = 1\}$:

$$\text{EDT}(\mathbf{x}) = \min_{\mathbf{x}' \notin \Omega} \|\mathbf{x} - \mathbf{x}'\|_2, \quad \mathbf{x} \in \Omega, \quad (12)$$

The transform is then uniformly quantised into K discrete bins to yield the ground-truth bin map $\mathbf{Z} \in \mathbb{G}^{h \times w}$, where $\mathbb{G} = \{0, 1, \dots, K-1\}$:

$$z(\mathbf{x}) = \min \left(K-1, \left\lfloor \frac{\text{EDT}(\mathbf{x})}{\max_{\mathbf{x}' \in \Omega} \text{EDT}(\mathbf{x}')} \cdot (K-1) \right\rfloor \right), \quad \mathbf{x} \in \Omega. \quad (13)$$

Dividing by the per-image maximum EDT value normalises the field to $[0, 1]$ before scaling, making the bin assignment invariant to absolute organ size. This is important because the same organ can appear at different physical scales across individuals and imaging resolutions.

B Liver Performance Analysis

GeoProto’s geometric enrichment relies on the boundary-to-centroid ordinal structure as a domain-transferable prior. As shown in Figure 3, the discriminability of this prior is inherently coupled to organ morphology. When geometric embeddings vary smoothly across strata, local prototypes from distinct anatomical regions are well-separated in the feature space. For organs with weak interior EDT gradients, whose large homogeneous parenchyma produces densely clustered high-bin values, adjacent cells yield similar offsets $\mathbf{e}_i$, reducing GAPE’s ability to discriminate boundary-concentrated from centroid-concentrated prototypes.

This analysis is directly consistent with the quantitative results in Table 1: Liver is the only organ where GeoProto underperforms FAMNet[7] under CT→MRI transfer (62.31% vs. 73.01%), while GeoProto achieves its largest gains precisely on the compact kidney structures (RK: 74.85%, LK: 72.97%). These results suggest that the boundary-to-centroid geometric prior is most effective for organs with compact, convex morphology, and that future work should explore adaptive geometric representations, such as medial-axis-based encodings for elongated structures or scale-normalised EDT variants for large homogeneous organs, which extend GeoProto’s robustness to a broader range of anatomical morphologies.

C Additional Ablation Studies

C.1 Effect of Prototype Grid Size G

The prototype grid size G controls the spatial granularity of local prototype pooling: a larger G yields finer-grained prototypes but increases the risk of pooling too few foreground pixels per cell, while a smaller G sacrifices spatial resolution. Table 9 reports mean DSC across the three evaluation settings for $G \in \{4, 8, 16, 32\}$. All other hyperparameters are fixed to their defaults.

The results reveal a consistent optimum at $G = 8$ across most evaluation settings. At $G = 4$, the coarser partition merges anatomically distinct regions into the same prototype cell, reducing the geometric discriminability that GAPE relies on to differentiate boundary-concentrated from centroid-concentrated prototypes. At $G = 16$ and beyond, smaller cells increasingly fall outside the foreground mask and are discarded by the threshold τ , leaving too few active prototypes to cover the organ interior reliably.

Table 9: Effect of prototype grid size G on segmentation performance (mean DSC %). Best result per column in **bold**.

G	Cross-modality		Cross-sequence		Cross-context		
	CT→MRI	MRI→CT	LGE→bSSFP	bSSFP→LGE	CXR	Cardiac bSSFP	MI-PMR
4	69.58	68.19	69.88	65.99	85.14	60.35	56.69
8	69.45	69.65	74.23	67.10	84.50	61.03	61.24
16	66.29	64.43	65.40	66.73	82.00	55.62	55.85
32	64.11	61.62	65.34	65.21	84.66	56.65	56.29

C.2 Analysis: Whether to use background?

By design, GAPE enriches foreground prototypes only, as the EDT is defined exclusively on foreground pixels. A natural question is whether enriching background prototypes, using the distance to the nearest foreground boundary as a spatial cue for each background cell, provides additional benefit. We implement this variant (BG-Enrich) and compare it against the default in Table 10. This is an *analytical* experiment intended to justify a design choice rather than to improve performance; we therefore report results on representative settings only.

Table 10: Analysis of background prototype geometric enrichment (mean DSC %). The default (None) is our proposed design. Best result per column in **bold**.

+BG-Enrich	Cross-modality	Cross-sequence	Cross-context		
	CT→MRI	bssFP → LGE	Chest X-ray	ISIC	Cardiac bSSFP
None (ours)	69.45	67.10	84.50	47.45	61.03
Dist-to-FG embed	64.40	56.47	71.88	44.18	34.80

We hypothesise that background enrichment provides no consistent gain because background regions are heterogeneous across episodes: they encompass non-organ tissue whose spatial relationship to the foreground varies widely, so a single distance-to-boundary signal does not constitute a reliable structural prior for the background. The experimental results in Table 10 confirm this: background enrichment yields huge degradation across settings, justifying the design choice of leaving background prototypes unenriched.

C.3 Analysis: Query-Side Geometric Re-weighting

Our default design applies geometric enrichment exclusively on the support side. A plausible extension is to exploit the query’s own predicted EDT bin map to re-weight prototype matching at inference: query pixels predicted to lie near the organ boundary should preferentially match boundary-region prototypes, and conversely for centroid-region pixels. We implement this as a soft affinity gate on each prototype’s cosine similarity prior to the softmax normalisation in Eq. 9:

$$w_i(\mathbf{x}) = \text{softmax}_i \left(\cos(F^q(\mathbf{x}), \mathbf{p}'_i) \cdot \exp \left(-\frac{|\hat{g}(\mathbf{x}) - \bar{d}_i/(K-1)|}{\tau} \right) \right), \quad (14)$$

where $\hat{g}(\mathbf{x}) \in [0, 1]$ is the normalised expected bin value predicted by the OSB for query pixel $\mathbf{x}$, $\bar{d}_i/(K-1)$ is the normalised mean bin level of prototype i , and τ is a temperature hyperparameter controlling gate sharpness. Prototypes whose geometric stratum is inconsistent with the query pixel are thus down-weighted during attention competition.

Table 11 reports results for $\tau \in \{0.1, 0.3, 0.5\}$ against the default (no query re-weighting). This is an *analytical* experiment: we seek to understand whether query-side geometry provides complementary information to the support-side enrichment already captured by GAPE.

Table 11: Analysis of query-side geometric re-weighting (mean DSC %). The default (None) is our proposed design. Best result per column in **bold**.

Query re-weighting	Cross-modality	Cross-sequence	Cross-context		
	CT→MRI	bssFP → LGE	Chest X-ray	ISIC	Cardiac bSSFP
None (ours)	69.45	67.10	84.50	47.45	61.03
$\tau = 0.1$	69.45	69.61	82.55	42.84	56.56
$\tau = 0.3$	70.48	69.43	81.30	39.50	60.91
$\tau = 0.5$	69.54	67.76	86.89	50.20	57.52

As shown in the table above, no single temperature achieves consistent gains across all evaluation settings, revealing a sensitivity to τ that varies with domain and anatomy. We attribute this instability to the following: the OSB is trained exclusively on source-domain features, so the query bin map predicted on novel-domain features carries higher uncertainty than the support’s supervised prediction. Enriching only the well-supervised support side is therefore the more robust design.

D Limitation

2D slice-based processing. GeoProto operates on 2D image slices and does not exploit the volumetric continuity inherent in 3D medical imaging. The EDT structure of an organ is geometrically more stable in 3D space than on any individual 2D slice, and boundary-to-centroid strata computed from a single slice may be unreliable when the support image is sampled near the organ boundary where the foreground region is small and geometrically atypical. Extending OSB and GAPE to volumetric 3D processing, where geometric supervision is derived from 3D EDT computed over the full organ volume, represents a natural direction for future work that could improve both the stability of geometric embeddings and their cross-domain transferability.

Fixed uniform bin quantisation. The current OSB discretises the continuous EDT range into K uniformly spaced bins, which implicitly assumes that geometric information is distributed evenly from boundary to centroid. In practice, this assumption is violated for structurally complex or irregularly shaped targets such as skin lesions, where the interior topology does not conform to a simple concentric stratum pattern. Furthermore, the optimal K is sensitive to organ scale: as shown in Table 6, performance degrades for small structures at large K due to label sparsity, limiting the method’s robustness in more diverse clinical deployment scenarios. Future work may explore adaptive bin quantisation or dynamic topological encoding that adjusts the geometric representation to the shape complexity of each target.

E Qualitative Results

Fig. 5 presents qualitative results across cross-modality and cross-sequence evaluation settings. For each episode, we show the support image, support mask, ground-truth bin map, predicted bin map, predicted mask, query mask, and query image. The predicted bin maps closely reproduce the concentric stratum structure of the ground-truth EDT, confirming that OSB accurately captures the interior ordinal structure of each organ regardless of imaging domain. The final segmentation predictions demonstrate accurate boundary delineation even under significant appearance shift.

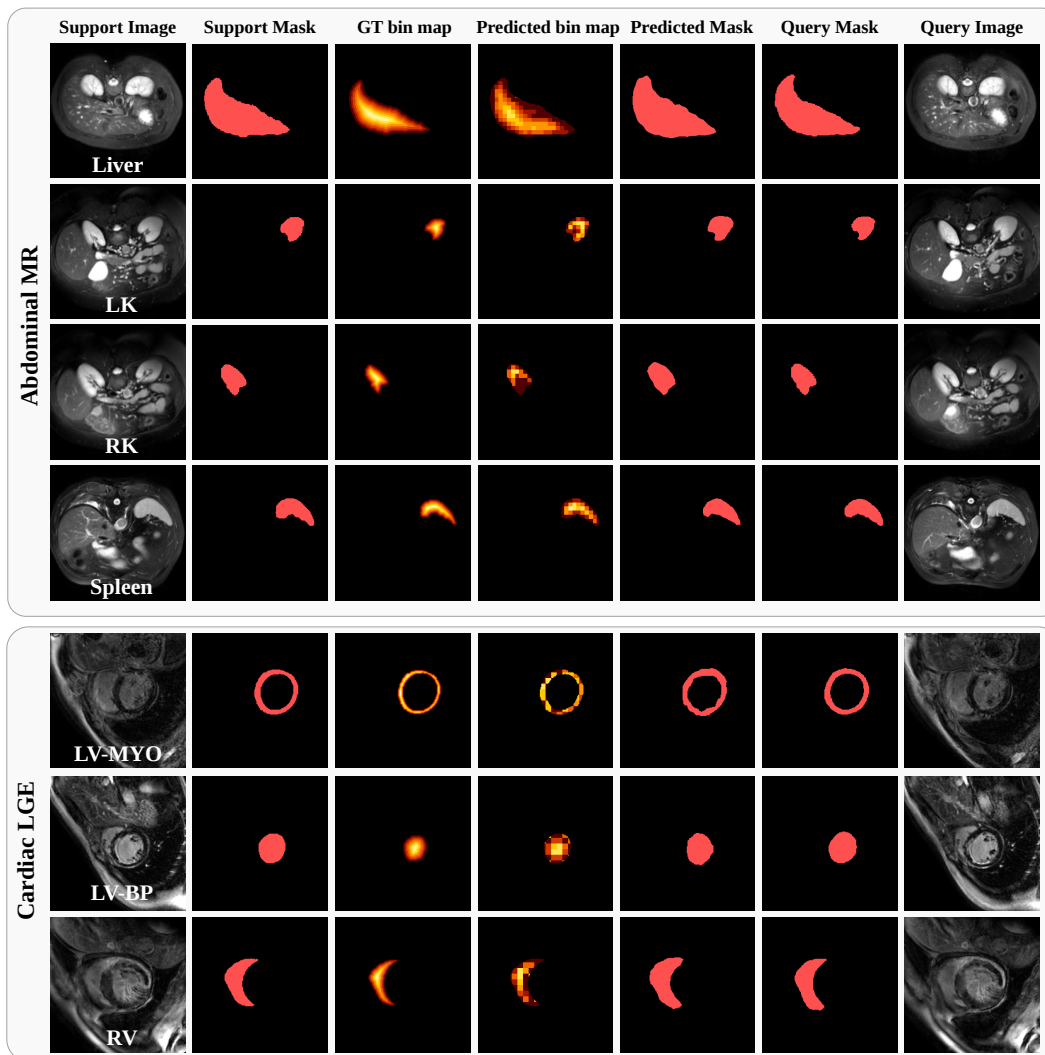


Figure 5: Qualitative results. From left to right: support image, support mask, GT bin map, predicted bin map, predicted mask, query mask, query image.