
Ontology-Grounded World Models for Failure Diagnosis and Closed-Loop Repair in Physical AI Systems

Kailin Wang¹ Haoxiang Jie¹ Yaoyuan Yan¹ Jiacheng Zhou^{2,3} Zhiyou Heng¹

¹AI Lab, Country Garden Services Group ²Fudan University ³Omni AI

ABSTRACT

EV-WM represents candidate quality with feature and event scores, but these scores do not explicitly record an unmet task predicate, a route label for an available correction mechanism, or a post-correction acceptance result. We present **Onto-EV-WM**, an ontology-grounded diagnosis and verification-gated correction interface layered above EV-WM rather than a replacement world-model architecture. The implemented task-local TBox defines entity types, predicate signatures, and constraints; source-specific grounding maps predicted or simulator-observed states to task ABoxes; and deterministic rules retain each missing predicate and its arguments when assigning a route label. Learned or heuristic proposers remain separate from this symbolic interface; native task predicates determine acceptance, and the bounded protocol determines whether a failed verification is retried. In the aligned PointMaze evaluation, EV-WM and Onto-EV-WM both report 94% success, with mean final-state distances of 0.90573 and 0.61177, respectively; the separately budgeted search reaches 100% success. On LIBERO-Goal, the ontology represents failed task conditions as typed records, retains their predicate arguments, and associates them with the declared source/joint correction route and predicate-gated acceptance; the complete configuration reports 93.8% corrected-window success on seed 0 and $94.05 \pm 0.30\%$ across four evaluation-sampling seeds. On the fixed 10,030-task LIBERO-Plus registry, Onto-EV-WM succeeds on 8,526 tasks (85.00%), with suite-level success rates of 65.98% for LIBERO-10, 91.39% for LIBERO-Goal, and 91.38% for both LIBERO-Object and LIBERO-Spatial. These numbers report the performance of the complete ontology-grounded configurations under the tested simulator protocols; an ontology-only causal share is not measured separately, and real-robot recovery is not evaluated.

Keywords: Operational Robot Task Ontology; Physical AI Systems; World Models; Typed Failure Diagnosis; Verification-Gated Correction; Predicate Verification

1 Introduction

We consider embodied systems that predict candidate futures, apply actions through a controller, and evaluate task success under physical and task constraints. In the systems studied here, a world model supplies and scores candidate rollouts (Ha and Schmidhuber, 2018; Hafner et al., 2019, 2020, 2025; Oquab et al., 2024; NVIDIA et al., 2025), while separate components perform predicate diagnosis and post-application verification.

In predicate-based manipulation benchmarks, visual or feature-space proximity is not equivalent to task success. For example, an imagined state may place a plate near the stove without satisfying `in_region(plate, stove_front)`. A scalar candidate score does not specify which required predicate is unsatisfied; the unmet condition may instead be a spatial relation, joint state, or contact constraint. In our formulation, the correction interface therefore records the failed condition, assigns a declared route label, and queries the task predicate after application.

The Event-Verified World Models (EV-WM) framework decodes imagined futures into task-event scores and uses them to rank candidate windows (Wang et al., 2026). Its event vector does not explicitly retain a failed predicate with typed arguments or define post-correction retry. Onto-EV-WM adds a task-local record for grounding, diagnosis, route assignment, application mode, and verification.

Our aim is not to replace the underlying world model or visuomotor controller with a new policy class. Instead, ontology grounding provides an explicit interface between prediction, correction mechanisms, and verification. It records the task predicate, typed arguments, threshold margin, diagnosed predicate failure, selected correction family, application mode, and verification outcome. Throughout the paper, a *route* is a dispatch label for a compatible mechanism rather than a robot action. Direct simulator-state application and controller-mediated execution are therefore described separately. We use the term *Physical AI system* in this system-level sense; all experiments are simulation-based and do not constitute real-robot or sim-to-real validation.

We introduce **Onto-EV-WM**, which maps predicted outputs or simulator states to typed, task-specific assertions in an operational robot task ontology. Its TBox defines the entity and relation vocabulary, predicate signatures, and type constraints. A separate deterministic rule base diagnoses missing assertions and maps typed failures to task-specific correction routes. At run time, the task specification and a predicted or simulator-observed state instantiate source-specific ABoxes of required and observed facts. A missing required assertion becomes a typed failure instance without discarding the original predicate arguments. In LIBERO-Goal, the quantitative protocol uses one fixed source/joint **qpos**-delta mechanism after replay failure. In this paper, the ontology is implemented as a task-local schema and deterministic rule set, not as a large external knowledge base, an open-world knowledge graph, or a replacement world model.

This paper makes three contributions:

- We design an operational robot task ontology and an explicit grounding interface that represent predicted and simulator-observed states as distinct, task-specific ABoxes under a shared vocabulary and type constraints.
- We define deterministic diagnosis rules and task-specific route mappings that preserve a violated predicate, its typed arguments, and a threshold margin when defined, and assign route labels associated with the mechanisms available in each protocol.
- We define a verification-gated correction contract that records diagnosis, route selection, proposal generation, application mode, and native-predicate acceptance or retry.

We report three benchmark settings with distinct units: an aligned 50-trial PointMaze comparison, sampled-window LIBERO-Goal correction, and the fixed LIBERO-Plus registry. The four LIBERO-Goal seeds vary evaluation sampling; they are not independent training runs, a held-out split, or full-episode policy evaluation.

2 Related Work

2.1 World Models for Physical AI

World-model systems learn compact dynamics for control from high-dimensional observations (Ha and Schmidhuber, 2018). PlaNet plans with latent dynamics (Hafner et al., 2019), while Dreamer-style agents learn through latent imagination (Hafner et al., 2020, 2021, 2025); Day-Dreamer extends this direction toward physical robots (Wu et al., 2022). World foundation models

have also been positioned as predictive infrastructure for Physical AI systems (NVIDIA et al., 2025). Feature- and video-prediction methods model future images, video, or learned representations rather than relying exclusively on pixel-level reconstruction (Assran et al., 2023; Bardes et al., 2024; Bruce et al., 2024; Wu et al., 2024). EV-WM is the direct predecessor: it predicts candidate futures in visual-feature space, decodes event states, and evaluates progress, consistency, feasibility, and uncertainty (Wang et al., 2026). Onto-EV-WM retains that substrate and adds ontology-grounded diagnosis and correction routing.

These systems differ in how predicted futures become control decisions. Latent-control agents typically optimize value or imagined return, while feature-prediction planners can select futures by representation distance. EV-WM augments this selection process with task-event scores. In the aligned PointMaze configuration, the predictive backbone remains fixed while the typed-fact head and task-local interface are added; the analysis focuses on the record produced when a candidate violates a task condition.

2.2 Predicate Grounding and Robot Knowledge

Manipulation success is often defined by symbolic task predicates: an object must be on a target, inside a container, or aligned with a region, and an articulated joint must reach a target state. SayCan grounds instructions in affordance scores (Ahn et al., 2022), while RT-1, Diffusion Policy, OpenVLA, and π_0 generate robot actions from learned visuomotor models (Brohan et al., 2023; Chi et al., 2023; Kim et al., 2024; Black et al., 2024). Onto-EV-WM does not replace these policies; the present experiments evaluate predicate diagnosis and simulator-state correction.

Direct policies and diagnostic interfaces answer different questions. A policy must produce an action sequence under environment dynamics. The diagnostic interface studied here records why a candidate state does not satisfy the task. Its state-correction results should not be interpreted as action execution.

Although *ontology* originates as a philosophical account of entities and their categories, knowledge engineering gave the term an operational computational meaning. Gruber defined an ontology as an explicit specification of a conceptualization (Gruber, 1993). In this computational sense, an ontology supplies not only labels, but also machine-interpretable classes, typed relations, admissible arguments, and explicit constraints.

Robotics adapted these ideas to robots, objects, actions, capabilities, environments, and task constraints. CORA defines a core vocabulary for robotics and automation (Prestes et al., 2013); KnowRob provides knowledge processing for cognition-enabled robots (Tenorth and Beetz, 2013; Beetz et al., 2018); and related surveys and systems describe symbolic structures for task execution and knowledge-enabled perception (Paulius and Sun, 2019; Bálint-Benczédi et al., 2019). Onto-EV-WM uses a narrower, task-local operational ontology instantiated from task specifications and simulator state. It neither claims a universal robot ontology nor performs general open-world reasoning. In the implemented mapping, the shared vocabulary retains the task predicate and typed arguments from diagnosis through route assignment and verification rather than storing rejection only as an unstructured score.

2.3 Task and Motion Planning

Task and motion planning (TAMP) combines discrete task structure with continuous geometric and motion feasibility (Garrett et al., 2021). Onto-EV-WM instead grounds an imagined future or simulator state, records a missing task predicate, and assigns a route label defined by the current protocol. Its formal interface permits a TAMP solver, policy, or controller as a route back end, but

the experiments instantiate only the mechanisms stated in their protocols and do not evaluate a new TAMP solver.

2.4 Neuro-Symbolic Robotics Interfaces

Neuro-symbolic systems combine learned representations with explicit symbolic structure and reasoning (d’Avila Garcez and Lamb, 2023). Onto-EV-WM adopts a limited form of this separation: neural components predict event or fact scores and may propose corrections, while task-local grounding, diagnosis, routing, and acceptance use explicit predicates and deterministic rules. The resulting ABox records the failed predicate, typed arguments, selected route, and verification outcome between prediction and correction. This record depends on a predefined vocabulary and source-specific grounding. We therefore describe the method as a task-local neuro-symbolic interface, not as a general ontology reasoner or differentiable logic system.

2.5 Verification and Iterative Correction

Verifiers and rerankers are used to select among generated candidates. Language-agent systems study iterative feedback, self-refinement, critique, search, and tool use (Shinn et al., 2023; Madaan et al., 2023; Gou et al., 2023; Yao et al., 2023; Yang et al., 2024). Onto-EV-WM uses a generate-check-correct organization in which feedback is represented by typed task facts. In the LIBERO correction protocol, post-application acceptance is determined by the native simulator predicate.

A binary success verifier separates accepted and rejected candidates but does not necessarily identify the failed task condition. Onto-EV-WM places typed diagnosis between event prediction and verification. The resulting route label is therefore an interface for organizing corrections rather than evidence that any particular correction can be executed by a robot policy.

2.6 Robot Failure Recovery and Execution Interfaces

Robot failure-recovery systems combine monitoring, supervision, replanning, and corrective behavior. RACER uses a language-based supervisor to guide a visuomotor recovery policy (Dai et al., 2024), while recent VLM-behavior-tree systems combine structured scene representations with pre-execution checks and reactive failure handling (Ahmad et al., 2025). These systems combine online failure detection with corrective action under their respective evaluation protocols.

Onto-EV-WM defines a common record structure for predicted or simulator-grounded task facts, diagnosis metadata, correction metadata, and verifier outcomes. Quantitative LIBERO-Goal uses a fixed route rather than online route selection; controller-mediated use appears only in the selected qualitative trace.

3 Problem Formulation

Let t denote the current time step, k the number of preceding steps retained as history, and H the number of future action steps considered by the model. The slice $x_{i:j}$ denotes the inclusive sequence $(x_i, x_{i+1}, \dots, x_j)$. We consider an observation history $o_{t-k:t}$, a proprioceptive-state history $p_{t-k:t}$, a structured task specification g , and a candidate action window $a_{t:t+H-1}$. Thus, o contains camera observations, p contains robot-internal measurements such as joint state or end-effector pose, and a contains H proposed control commands. The present experiments do not encode free-form natural language; g is the task identifier or BDDL-style specification from which required task

facts are constructed. A visual encoder E and an action-conditioned world model F_θ produce

$$z_t = E(o_t), \quad \hat{z}_{t+H} = F_\theta(z_{t-k:t}, p_{t-k:t}, a_{t:t+H-1}).$$

Here, z_t is the encoded visual feature at time t ; $z_{t-k:t}$ is its history; the hat in $\hat{z}_{t+H}$ marks a prediction rather than an observation; and θ denotes the learned parameters of F . EV-WM adds the learned event predictor

$$\hat{e}_{t+H} = G_\psi(\hat{z}_{t+H}, z_{t-k:t}, g, a_{t:t+H-1}),$$

where G_ψ has the single formal role of predicting the task-event state $\hat{e}_{t+H}$ at the end of the horizon. A benchmark-specific typed-fact head may additionally produce fact scores,

$$\hat{y}_{t+H}^{\text{fact}} = H_\omega(\hat{z}_{t+H}, z_{t-k:t}, g, \hat{e}_{t+H}),$$

where H_ω is distinct from the EV-WM event predictor. Deterministic, task-local grounding then constructs three provenance-specific ABoxes:

$$\begin{aligned} \mathcal{A}_g^\star &= \phi_{\text{req}}(g), & \hat{\mathcal{A}}_{g,t+H}^{\text{pred}} &= \phi_{\mathcal{T}}^{\text{pred}}(g, \hat{e}_{t+H}, \hat{y}_{t+H}^{\text{fact}}), \\ \mathcal{A}_{g,t}^{\text{sim}} &= \phi_{\mathcal{T}}^{\text{sim}}(g, s_t^{\text{sim}}). \end{aligned}$$

When a benchmark does not use H_ω , the typed-score argument of $\phi_{\mathcal{T}}^{\text{pred}}$ is omitted; simulator grounding always bypasses that learned head. Here, $\mathcal{A}_g^\star$ is the required ABox compiled from the structured task specification; $\hat{\mathcal{A}}^{\text{pred}}$ is grounded from learned predicted outputs; and $\mathcal{A}^{\text{sim}}$ is grounded directly from simulator state. The implementation looks up enumerated task bindings, checks required record fields, and applies task-specific thresholds; it does not perform general ontology-consistency checking or failure-to-route dispatch. In PointMaze, H_ω supplies learned typed-fact scores while the predictive backbone remains fixed. In the LIBERO correction analysis, simulator state supplies the observed ABox. These sources use the same declared vocabulary but retain different provenance tags.

Let $\mathcal{A}^{\text{src}} \in \{\hat{\mathcal{A}}^{\text{pred}}, \mathcal{A}^{\text{sim}}\}$ retain this provenance tag, and let $\text{Sat}_{\mathcal{T}}(f, \mathcal{A}^{\text{src}})$ evaluate a required assertion by its declared polarity, threshold, and source-specific evidence. The unsatisfied set is

$$\Delta\mathcal{F}^{\text{src}} = \{f \in \text{Facts}(\mathcal{A}_g^\star) \mid \text{Sat}_{\mathcal{T}}(f, \mathcal{A}^{\text{src}}) = 0\}.$$

This definition covers an absent assertion, an explicitly false predicate, or a violated continuous margin; ordinary set subtraction would not distinguish those cases. It uses a task-scoped closed-world convention only for predicates declared as required by g . Absence of an unrelated fact is not interpreted as false, and the method does not claim general open-world ontology reasoning.

Deterministic diagnosis rules Π_D create one record for each unsatisfied assertion,

$$\mathcal{D}^{\text{src}} = \{d_f = (f, c_f, m_f) \mid f \in \Delta\mathcal{F}^{\text{src}}, c_f = \Pi_D(f, \mathcal{A}^{\text{src}}), m_f = \text{Margin}_{\mathcal{T}}(f, \mathcal{A}^{\text{src}})\},$$

where c_f is the typed failure class and m_f is the threshold margin when the task defines one; otherwise $m_f = \perp$ marks that no continuous margin is defined. In the general interface, a task-specific ordering may select a record $d^\dagger$ when several predicates fail, after which the external mapping Π_R returns a declared dispatch label

$$r = \Pi_R(d^\dagger).$$

Diagnosis and route mappings are deterministic. A proposal generator P_r may be learned, heuristic, or planning-based, whereas application is either direct simulator-state mutation or controller-mediated execution. Quantitative LIBERO-Goal fixes the source/joint route and one learned head. A *predicate failure* is an unsatisfied assertion in $\mathcal{D}^{\text{src}}$, a *replay failure* is a negative native predicate before correction, and an *execution failure* is a negative native predicate after application.

For a proposed state correction q that produces state s' , where the prime denotes the post-correction state, the protocol records success only when the verifier confirms the corrected state:

$$\text{AcceptState}(s') = \mathbb{I}[\text{Verifier}(s') = 1].$$

Here, $\mathbb{I}[\cdot]$ is an indicator and $\text{Verifier}(s')$ is the task-success check. This indicator evaluates only the resulting simulator state; it does not test whether the proposed transition is dynamically realizable by a robot policy. In LIBERO, q directly changes simulator `qpos` rather than using `env.step(action)`; acceptance uses the native `env.check_success()` query.

More generally, the verification-gated correction interface maintains an attempt index $b = 0, 1, \dots, B - 1$, where B is the maximum attempt budget. In this general interface specification, a failed verification may trigger fresh grounding and diagnosis, permitting route selection to be recomputed on a later attempt:

$$\begin{aligned} \mathcal{D}^{(b)} &= \text{Diagnose}_{\Pi_D}(\mathcal{A}_g^*, \mathcal{A}_g^{\text{src},(b)}), & (d^{\dagger,(b)}, r^{(b)}) &= \text{SelectRoute}_{\Pi_R}(\mathcal{D}^{(b)}), \\ q^{(b)} &= P_{r^{(b)}}(s^{(b)}, \mathcal{A}_g^*, d^{\dagger,(b)}), & s^{(b+1)} &= \text{Apply}_{r^{(b)}}(s^{(b)}, q^{(b)}), \\ \text{LoopDecision}(s^{(b+1)}) &= \begin{cases} \text{accept}, & \text{Verifier}(s^{(b+1)}) = 1, \\ \text{retry or reroute}, & \text{Verifier}(s^{(b+1)}) = 0. \end{cases} \end{aligned}$$

The superscript (b) is an iteration label. In this general contract, *retry* requests another proposal under the current route, whereas *reroute* reapplies Π_R after regrounding. Neither reported protocol evaluates cross-route switching: quantitative LIBERO-Goal uses one fixed-route proposal per failed window, and Task 76 retries within one controller route. This bounded verify–retry contract is the meaning of “closed loop” here, not real-robot feedback-control validation.

For clarity, commas separate function arguments or record fields, braces $\{\cdot\}$ denote a set, square brackets in $\mathbb{I}[\cdot]$ enclose a truth condition, subscripts identify time, task, route, or semantic role, and a superscript star denotes a required target. These conventions apply to every expression in this section.

4 Method

4.1 Architecture and Relationship to EV-WM

Figure 1 uses G_ψ /“fact decoder” as a legacy aggregate-stage label, not as the formal ABox-grounding operator. In the formal notation, G_ψ only predicts events; the complete stage additionally contains the optional typed-fact head H_ω and deterministic grounding $\phi_{\mathcal{T}}$. Likewise, the diagram’s plan-, state-, and action-level labels denote possible external execution back ends; they are not assertions stored in the TBox and do not imply that every back end is quantitatively evaluated here.

The base EV-WM design is retained in Figure 1a: a frozen visual representation supports feature-space rollouts and an event predictor decodes imagined futures into task progress signals (Wang et al., 2026). Planning can combine a feature cost with event scores,

$$J(a_{t:t+H-1}) = w_f C_{\text{feature}} - S_{\text{event}}.$$

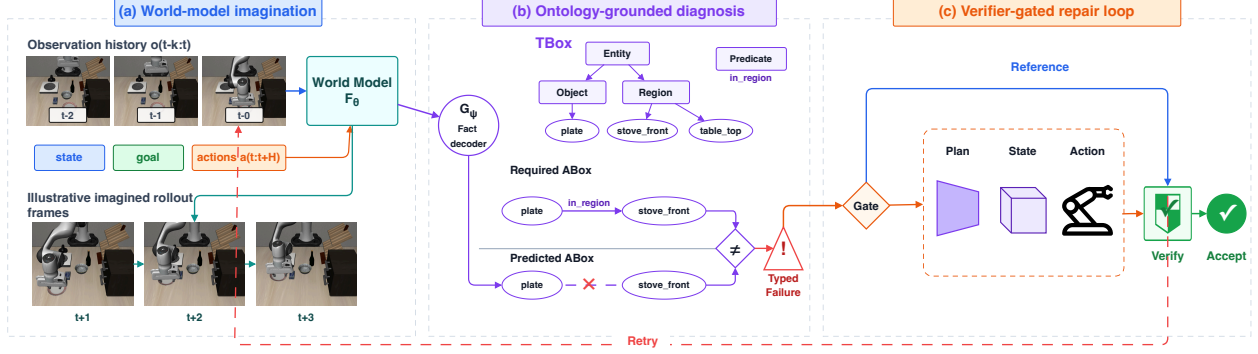


Figure 1: Ontology-grounded world-model architecture for failure diagnosis and closed-loop repair. **a**, Observation, goal, and candidate-action histories condition the world model F_θ , which produces illustrative imagined rollouts. **b**, The reusable TBox specifies entity types and predicate signatures, while the fact decoder G_ψ instantiates a predicted ABox. Comparing it with the task-required ABox exposes a missing `in_region` relation as a typed failure. **c**, The gate either preserves the reference path or invokes a compatible plan-, state-, or action-level execution mechanism. The verifier accepts a predicate-valid outcome; otherwise, feedback returns to the candidate action window for bounded retry.

For ontology-aware planning, the same candidate set can instead be scored by the task-local verifier,

$$S_{\text{onto}} = V_{\mathcal{T}}(\hat{\mathcal{A}}_{g,t+H}^{\text{pred}}, \mathcal{A}_g^*), \quad J_{\text{onto}} = w_f C_{\text{feature}} - S_{\text{onto}},$$

Here, $w_f \geq 0$, lower J_{onto} is preferred, and $V_{\mathcal{T}}$ denotes the benchmark-configured score computed from the verifier fields enabled in that run. Its active fields and weights are fixed by the benchmark configuration; the paper does not define a benchmark-independent ontology score. Onto-EV-WM adds the ontology-grounded diagnostic and verifier-gated correction interface summarized in Figure 1b–c and Table 1.

The interface separates prediction, grounding, diagnosis, application, and verification. Point-Maze uses predicted facts for candidate scoring; quantitative LIBERO-Goal uses simulator grounding, one fixed correction head, direct `qpos` application, and native verification; and Task 76 illustrates a within-route controller retry. These are separate instantiations, not one evaluated online system that switches among route types. A satisfied predicted ABox may retain a planning candidate, but only the native predicate records simulator or execution success.

Table 1: Relationship to EV-WM. “New” denotes a component introduced by the ontology-grounded interface, not evidence that the interface alone causes the measured gain.

Component	Status	Role
Visual encoder and feature rollout	Reused	Imagine candidate future features
Event prediction and scoring	Reused	Estimate task progress and event scores
TBox, ABox grounding, and diagnosis	New	Type task assertions and expose missing predicates
Failure gate and execution routing	New	Retain the reference or select a plan-, state-, or action-level mechanism
Native task predicate	Evaluation tool	Verify the resulting state before acceptance
Bounded accept/retry control	New	Terminate on success or update the next candidate window

Input: task specification g ; source tag $\sigma \in \{\text{pred}, \text{sim}\}$; predicted output and, when application is requested, state $s^{(0)}$; available route-specific proposers and application modes; native verifier V ; attempt budget B .

Output: retained planning candidate, accepted applied state, or unresolved typed failure trace.

1. Construct the required ABox $\mathcal{A}_g^* = \phi_{\text{req}}(g)$ and set $b \leftarrow 0$.
2. Ground $\mathcal{A}_g^{\sigma, (b)}$ with the source-specific $\phi_{\mathcal{T}}^{\sigma}$, retaining σ in the record.
3. Evaluate every required assertion with $\text{Sat}_{\mathcal{T}}$ and construct $\Delta\mathcal{F}^{(b)}$. If $\sigma = \text{pred}$ and $\Delta\mathcal{F}^{(b)} = \emptyset$, retain the reference candidate without reporting executed success. If $\sigma = \text{sim}$, query V ; return the verified state when $V = 1$, and return an unresolved grounding-verifier disagreement when $V = 0$ but $\Delta\mathcal{F}^{(b)} = \emptyset$.
4. Instantiate nonempty $\mathcal{D}^{(b)}$ from $\Delta\mathcal{F}^{(b)}$ using deterministic diagnosis rules Π_D . Select one current mismatch $d^{\dagger, (b)}$ by the declared priority and obtain $r^{(b)} = \Pi_R(d^{\dagger, (b)})$.
5. Generate $q^{(b)} = P_{r^{(b)}}(s^{(b)}, \mathcal{A}_g^*, d^{\dagger, (b)})$ and apply it using the route’s declared simulator-state or controller-mediated contract. After application, set $\sigma \leftarrow \text{sim}$ for observed-state regrouping.
6. Query V on the resulting simulator state. If $V = 1$, return the accepted state. Otherwise increment b , regroup with $\phi_{\mathcal{T}}^{\text{sim}}$, and retry or reroute from the updated diagnosis while $b < B$.
7. If the budget is exhausted, return the unresolved typed failure trace without asserting task success.

Algorithm 1: Interface-level pseudocode for source-aware grounding and verification-gated correction

4.2 Ontology-Grounded Diagnosis and Correction Loop

Algorithm 1 is an interface-level specification whose branches need not all be instantiated by a given experiment. Quantitative LIBERO-Goal exercises one fixed-route state proposal per failed replay window; the selected qualitative trace exercises only a within-route controller retry.

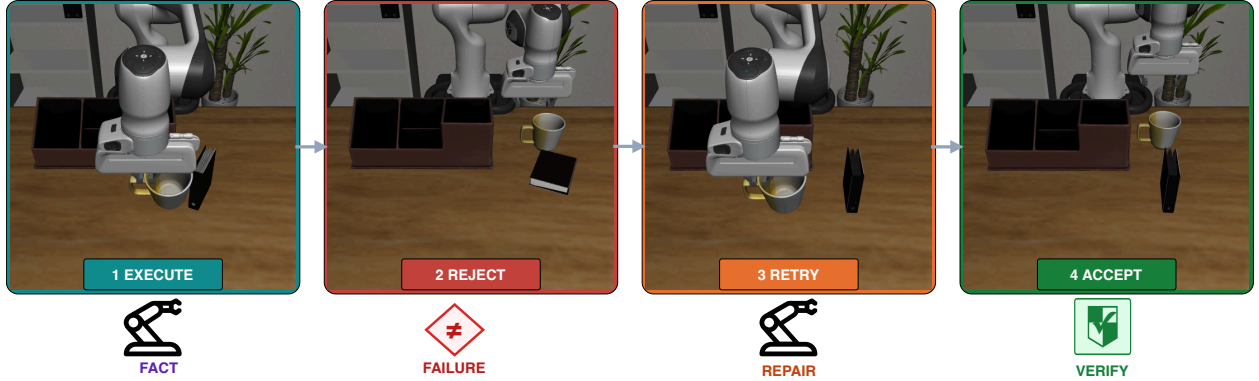


Figure 2: Verifier-gated action repair on LIBERO-90 Task 76. The upper sequence executes candidate 1, rejects it, retries with candidate 2, and accepts the verified outcome. The icon rail summarizes the corresponding typed control path: an unsatisfied required relation instantiates a typed failure, the failure invokes an action-level repair, and the native task verifier determines acceptance.

Four records expose the interface state: facts store typed arguments and optional margins; routes retain predicate arguments and a correction-family label; applications distinguish simulator mutation from controller execution; and verification stores its query and outcome. The experiments do not measure audit quality or component interchangeability.

The quantitative LIBERO-Goal study uses one fixed learned source/joint `qpos`-delta mechanism with direct simulator-state application. In the separate Task 76 trace, an OSC-Pose pick-and-place controller and finite offset grid supply another candidate after rejection. This trace is qualitative, is not the quantitative `qpos` protocol, and does not establish a learned general-purpose recovery policy.

4.3 Operational Robot Task Ontology

We denote the task-facing interface by

$$\mathcal{I}_g^{t,\sigma} = (\mathcal{T}, \mathcal{A}_g^{t,\sigma}, \Pi_D, \Pi_R), \quad \mathcal{T} = (\mathcal{C}, \mathcal{R}, \Sigma_{\text{type}}), \quad \mathcal{A}_g^{t,\sigma} = \phi_{\mathcal{T}}^{\sigma}(g, s_t^{\sigma}), \quad \sigma \in \{\text{pred}, \text{sim}\}.$$

Here, $(\mathcal{T}, \mathcal{A})$ is the ontological record layer, while Π_D and Π_R are external deterministic mappings. The class set $\mathcal{C}$ contains terms such as *Object*, *Region/Site*, *Articulated Joint*, *Relation*, *Constraint*, *Event/Margin*, *Failure*, and *Correction Route*. The relation vocabulary $\mathcal{R}$ contains typed predicates such as `right_of(Object, Landmark)`, `inside(Object, Container)`, `contact(Object, Site)`, and `joint_state(Joint, Threshold)`. The signature set Σ_{type} specifies declared arguments and type constraints. The source-specific grounding function $\phi_{\mathcal{T}}^{\sigma}$ compiles task specification g and a provenance-tagged predicted or simulator state s_t^{σ} into $\mathcal{A}_g^{t,\sigma}$. We omit σ only where the source is already explicit. Diagnosis rules Π_D and the route policy Π_R are outside the TBox.

The TBox/ABox distinction follows standard description-logic terminology (Baader et al., 2007), but is used here as a task-local interface: the TBox $\mathcal{T}$ is the reusable robot-task vocabulary, and the ABox is the current task instance. Required assertions are instantiated from BDDL-style task specifications (Liu et al., 2023), while observed assertions and margins are grounded from simulator state or world-model output. Failure and route identifiers may use vocabulary declared by $\mathcal{T}$, but the assertion that a particular failure selects a particular route is produced by Π_R , not by the TBox. The current implementation directly evaluates enumerated schema keys, task bindings, and task-specific mappings. Thus, the TBox/ABox terminology describes the organization of these records; it does not imply general domain-range inference, open-world reasoning, or use of an external OWL reasoner.

The following expressions specify intended record-validity requirements for the enumerated task bindings; they are not theorems proved by the method or properties validated over arbitrary ABoxes. Predicate consistency requires declared argument types,

$$r(x, y) \in \mathcal{A} \Rightarrow x: \text{dom}_{\mathcal{T}}(r) \wedge y: \text{range}_{\mathcal{T}}(r).$$

Argument preservation requires a diagnosis to retain the violated predicate and its bindings,

$$\text{Required}_g(r(x, y)) \wedge \neg \text{Sat}_{\mathcal{T}}(r(x, y), \mathcal{A}_g^t) \Rightarrow \text{Failure}_t(\text{relation_missing}, r, x, y, m).$$

Finally, compatible routing requires the external policy to preserve that record when it dispatches a mechanism,

$$\Pi_R(\text{Failure}(c, r, x, y, m)) = \rho \Rightarrow \text{Admits}(c, \rho) \wedge \text{Supports}(\rho, r) \wedge \text{DeclaredTypeMatch}_{\mathcal{T}}(x, y, r).$$

These requirements describe the intended structure of the enumerated bindings and mappings; the paper does not claim that a general runtime validator enforces them. The last implication concerns declared route compatibility only; it does not predict correction success.

The comparison is task-scoped: only assertions declared by g enter the required set. Each diagnostic record retains the predicate identifier, typed argument bindings, required polarity, observed truth value, and, when available, a continuous margin. Facts unrelated to g are therefore

not treated as failures merely because they are absent from the current ABox. The route label and verifier outcome are stored as separate fields. The reported protocol counts a correction as successful only when the native task predicate is positive; a route label is not itself counted as success.

Table 2 summarizes the declared vocabulary referenced by these record-format requirements. The route names in the table are external dispatch labels, not TBox axioms.

Table 2: Core vocabulary of the operational robot task ontology.

Class	Examples or signatures	Ontological role	Repair-loop use
Object/Entity	bowl, plate, drawer, mug	predicate argument	bind task entities
Region/Site	stove.front, caddy_right, rack_site	spatial landmark	ground target areas
Relation	on, inside, in_region, right_of	typed predicate	encode goal assertions
Action/Event	move, place, open, completed	transition/progress	describe proposed change
Constraint/Margin	contact, joint_limit, target_margin	condition/scalar	represent feasibility and threshold
Failure	predicate_mismatch, relation_missing, rack_contact	diagnostic class	name the unmet condition
Correction Route	source_joint_pose, object_relation_predicate, rack_contact_site	repair family	select proposer and executor

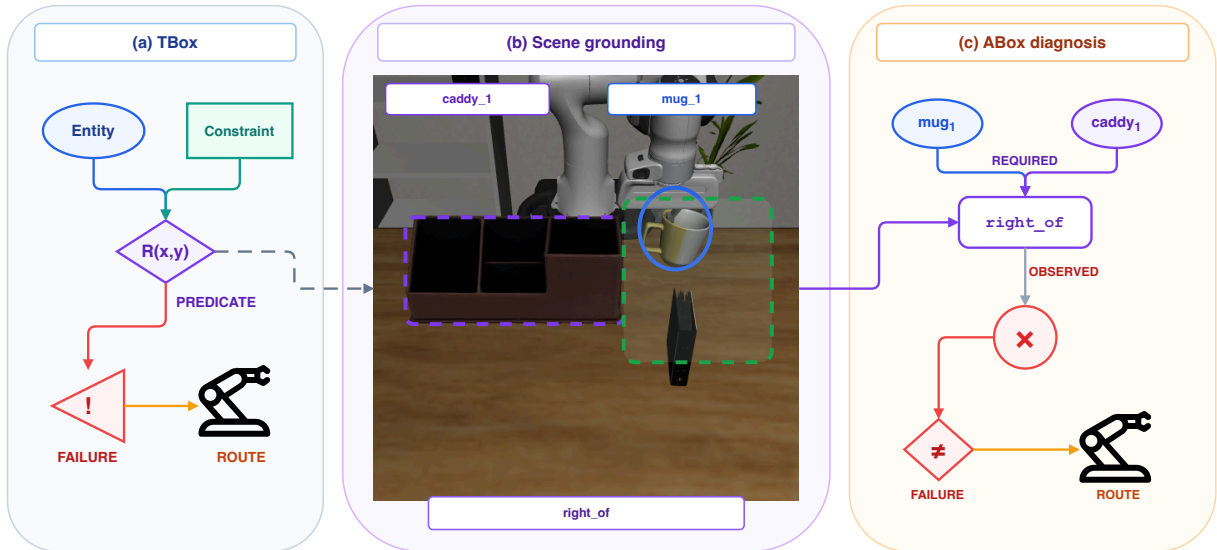


Figure 3: Operational robot task ontology grounded in LIBERO-90 Task 76. **a**, The TBox supplies a compact grammar from typed entities and constraints to predicates, failures, and compatible routes. **b**, Scene grounding binds the mug, caddy, and target region. **c**, The task ABox requires **right_of**; an absent observation instantiates a typed mismatch and selects an action route. Formal signatures and instance names are given in the text and Table 2; execution is shown in Figure 2.

Figure 3 uses symbols for the control structure and leaves the full record names here. In panel a, only the entity types, predicate signatures, and constraints belong to the TBox; the failure and route glyphs show downstream interface context. For LIBERO-90 Task 76, the ABox binds `mug_1:Object`, `caddy_1:Landmark`, and the required assertion `right_of(mug_1,caddy_1)`. A false

observation yields the argument-preserving record

`relation_missing(right_of, mug1, caddy1),`

and the task-specific external mapping assigns `object_relation_predicate` while retaining both bindings. In the selected Task 76 example, an OSC-Pose controller executes the corresponding placement candidate. The native verifier determines whether that candidate is accepted; rejection leads to another candidate within the same illustrated route.

4.4 Ontology Instantiation and Typed Diagnosis

Diagnosis compares predicted or simulator-grounded facts with required facts. In PointMaze, relevant failures include excessive target distance and missing entity-on-target facts. In LIBERO-Goal (10 tasks), schema families include source/joint pose, object relation, rack contact, and residual verification. Relative to a scalar rank, the typed record adds the missing-condition name and argument bindings.

The schema associates each enumerated fact key with a task role. Task bindings identify the manipulated and target entities, while relation, constraint, optional margin, and failure fields describe the represented condition and unmet requirement.

Diagnosis is a comparison operation rather than a free-form explanation. For a required relation such as `in_region(plate, stove_front)`, the system records whether the relation is present and whether the corresponding margin meets the task threshold. Missing relations and violated margins are mapped to named failure categories. The resulting record can index an enumerated route mapping; the quantitative LIBERO-Goal experiment, however, fixes the source/joint route and does not compare this mapping with scalar-only selection.

The schema distinguishes four task-state diagnosis families: predicate or relation mismatch, continuous margin or state mismatch, contact mismatch, and articulation or joint-state mismatch. An execution failure is different: it is the native verifier’s negative outcome after a proposed application. This taxonomy explains the semantics of existing fact records and qualitative traces; no category-frequency claim is made from it.

4.5 State-Correction Router

Table 3: Typed gates and state-correction families. Only the learned source/joint `qpos-delta` route contributes to the quantitative LIBERO Goal10 state-correction result; the other rows define schema and qualitative routing semantics.

Typed gate	State-correction family	Example tasks	Intended effect
<code>source_joint_pose</code>	learned source/joint delta	drawers, stove, placement	correct object or joint state
<code>object_relation_predicate</code>	object-relative correction	bowl on plate, containment	satisfy target relation
<code>rack_contact_site</code>	rack-local pose correction	bottle on rack	satisfy contact predicate
<code>source_joint_residual</code>	verifier-checked candidate	source/joint residuals	retain predicate-valid state

Table 3 summarizes the typed dispatch layer. In the schema, source/joint failures are associated with corrections parameterized in source or joint coordinates, object-relation failures with object-relative corrections, and rack-contact failures with a rack-local frame. These associations define route labels and coordinate families; they are not results from online selection among learned heads. Only the learned source/joint `qpos-delta` route contributes to the quantitative multi-seed result.

A route label that matches the declared schema does not establish that its proposal will satisfy the target predicate. The diagnostic record and verifier outcome are stored separately, and only the native predicate determines acceptance.

4.6 Failure-Gated State-Correction Protocol

The quantitative LIBERO-Goal protocol replays a 25-step demonstration window and queries the native success predicate. Only failed windows enter the correction gate. For this experiment, one fixed learned head consumes the recorded window features x_j and proposes a **qpos** delta:

$$q_j = P_{\text{fixed}}(x_j), \quad s'_j = \text{Apply}(s_j, q_j), \quad v_j = \mathbb{I}[\text{check_success}(s'_j) = 1].$$

Here, x_j contains the task and state features supplied to the fixed proposer, and **Apply** directly writes simulator **qpos**. The typed diagnostic record annotates the source/joint failure family, but the quantitative experiment does not dynamically choose among multiple route-specific heads. Direct **qpos** application is not a sequence of robot actions and does not test whether a policy can realize the transition under environment dynamics. The failure gate leaves every successful replay unchanged and evaluates corrections only on replay failures. Table 4 fixes the interpretation.

Table 4: LIBERO Goal10 evaluation protocol. Sampling seeds change the evaluated window sample while the learned checkpoint remains fixed.

Field	Setting
Evaluation unit / horizon	25-step demonstration window, $H = 25$
Windows	50 per task, 500 per sampling seed; seeds 0–3
Checkpoint	One fixed learned source/joint qpos -delta head
Proposal source	Learned delta on replay failures only
Verifier	Native LIBERO check_success
State application	Direct simulator qpos mutation
Independent training seeds	Not evaluated
Held-out demonstration split	Not used
Full-episode policy evaluation	Not evaluated

The reported corrected-window aggregate is constructed as follows. Replay-success windows retain their original outcome. For each replay failure, the fixed checkpoint proposes one source/joint correction and the protocol queries the native predicate after direct state application. Corrected success equals the retained replay successes plus replay-failure windows that satisfy the predicate after this application.

This construction evaluates the checkpoint on replay-failure windows and carries replay-success outcomes forward by definition. It remains a window-level diagnostic protocol because the correction is not rolled out as an action sequence and does not restart a complete task episode.

5 Experiments

We report an aligned PointMaze comparison, a sampled-window LIBERO-Goal evaluation of one fixed simulator-state correction checkpoint, selected qualitative route traces, and fixed-registry LIBERO-Plus results. These protocols are interpreted separately; the qualitative traces are not correction trials.

5.1 PointMaze

The PointMaze record contains distance to the goal, target margin, progress, success, state validity, and failure type.

The aligned comparison uses the same random-state setting and 50-trial evaluation for DINO-WM, EV-WM, and Onto-EV-WM. Success rate measures whether the final state satisfies the task, whereas mean state distance retains proximity information for both successful and unsuccessful trials. The final larger-budget row is reported separately because it changes the candidate budget and prioritizes success during selection.

Table 5: PointMaze random-state planning results, including the published EV-WM baseline (Wang et al., 2026). The first three rows use the same 50-trial setting. The final row changes both search budget and success-first selection and is not directly aligned.

Method	Setting	Success rate	Mean state distance
DINO-WM baseline	aligned	0.90	0.93568
EV-WM	aligned	0.94	0.90573
Onto-EV-WM	aligned	0.94	0.61177
Onto-EV-WM + diagnosis-guided search	larger budget, success-first	1.00	0.86504

Under the aligned setting, EV-WM and Onto-EV-WM both report a success rate of 0.94. Their mean final-state distances are 0.90573 and 0.61177, respectively, corresponding to a 32.5% lower observed value for Onto-EV-WM in these 50 trials. The two observed diagnostic categories are represented explicitly in the task record: target-distance failure denotes a violated continuous goal margin, while missing-entity-on-target denotes an unsatisfied discrete spatial assertion. Under the separately budgeted success-first configuration, 50/50 trials satisfy the task predicate and the mean final-state distance is 0.86504. Because the search budget and selection rule differ, neither quantity in this row is interpreted as a matched effect relative to the aligned rows.

The aligned 50-trial sample does not establish statistical reliability, and the separately budgeted row does not establish budget-matched superiority.

5.2 LIBERO-Goal (10 Tasks)

LIBERO-Goal contains 10 manipulation task specifications spanning articulation, placement, spatial regions, support relations, rack contact, and stove activation (Liu et al., 2023). For each evaluation-sampling seed, we sample fifty 25-step demonstration windows per task (500 in total). Demonstration replay provides the pre-correction reference rather than a separate baseline method. The corrected-window metric retains replay-success outcomes and queries `check_success` after direct state application on replay-failure windows.

Ontology contribution in LIBERO-Goal. The ontology compiles each structured goal into typed required assertions, grounds the sampled simulator state into an observed ABox, and records an unsatisfied predicate with its arguments, polarity, available margin, declared fixed route, and separate verifier outcome. The learned head supplies the `qpos` proposal; the ontology supplies the diagnosis and correction record that connects the failed condition to predicate-gated acceptance. The reported rate therefore measures the complete ontology-grounded correction configuration, not the learned head alone.

The evaluation unit is a sampled window, not a full episode. Each seed changes the sampled windows while preserving the checkpoint and protocol, so the four seeds describe evaluation-sample

variation rather than independent training. The overlapping label-construction and evaluation pools do not test unseen-demonstration generalization. Across the four samples, replay success is $86.95 \pm 1.00\%$ and corrected success is $94.05 \pm 0.30\%$; pooled over 2000 windows, 142 of 261 replay failures satisfy `check_success` after direct simulator-state application.

Replay success ranges from 428/500 to 440/500, corrected success from 469/500 to 472/500, and recovered failures from 32 to 43 per sample. These descriptive ranges are not confidence intervals over independently trained systems. Table 6 gives the per-seed and pooled counts.

Table 6: LIBERO Goal10 sampled-window results across four evaluation-sampling seeds. Event reports the event-score CEM result; “Rescued” counts replay failures converted to predicate-valid outcomes by direct simulator-state correction. Mean and sample standard deviation are calculated across evaluation-sampling seeds, not independently trained models.

Sampling seed	Event success	Replay success	Corrected success	Rescued / replay failures
0	392/500	436/500	469/500	33/64
1	379/500	428/500	471/500	43/72
2	398/500	435/500	469/500	34/65
3	401/500	440/500	472/500	32/60
Mean $\pm$ s.d.	$78.50 \pm 1.95\%$	$86.95 \pm 1.00\%$	$94.05 \pm 0.30\%$	—
Pooled	1570/2000	1739/2000	1881/2000	142/261 (54.4%)

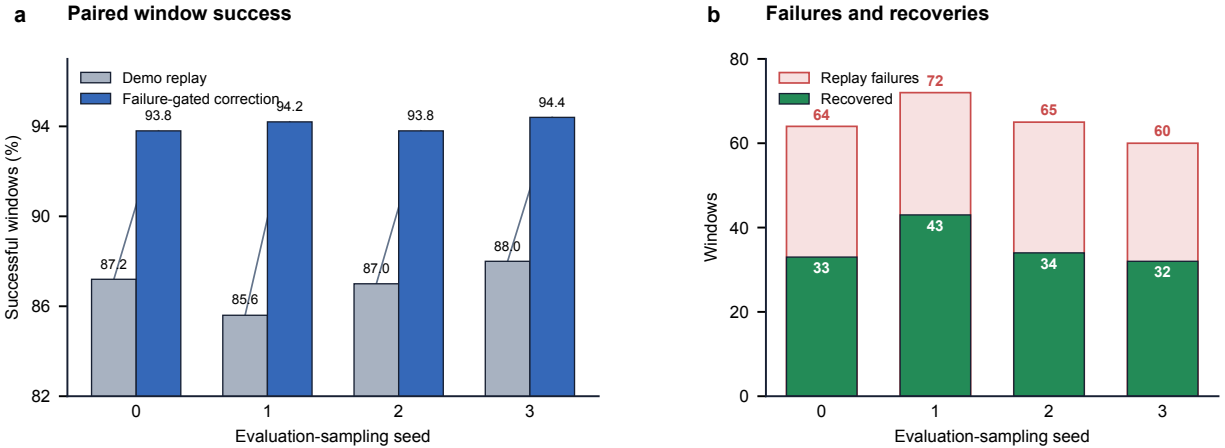


Figure 4: LIBERO Goal10 sampled-window evaluation. **a**, Paired replay and failure-gated corrected success for four evaluation-sampling seeds. **b**, Replay failures and the subset recovered by the same fixed learned correction checkpoint. Seeds vary the sampled evaluation windows rather than model training; the protocol uses neither held-out demonstrations nor full episodes.

Figure 4 reports paired replay/corrected success and the replay-failure denominators. The corrected rate is higher for every sample, but the typed schema and learned correction head are not isolated in this protocol. The values therefore characterize the complete ontology-grounded correction configuration rather than an ontology-only numerical effect.

Qualitative diagnosis traces. The traces illustrate the distinction between diagnosis and verification. A gate names a correction family but does not certify completion; only the task predicate determines the reported outcome.

Each row in Figure 5 follows the same gate–execute–verify reading order. The compact left-hand glyph names the route without repeating its implementation record; the gate image

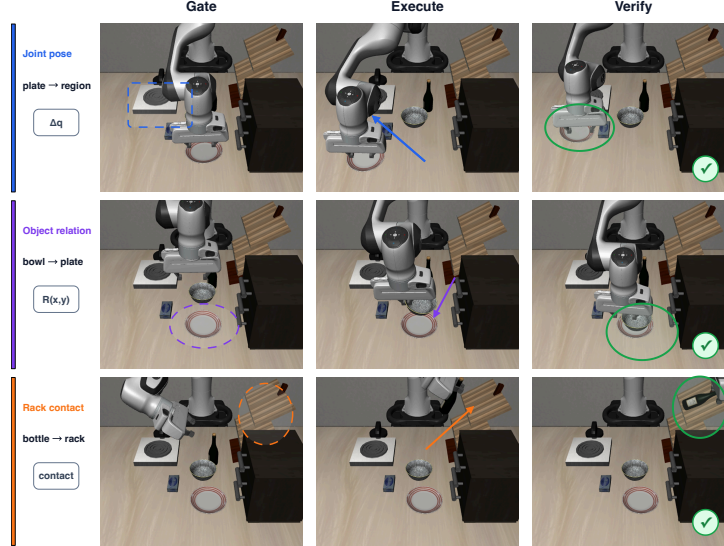


Figure 5: Three LIBERO Goal10 evidence chains. The row label and compact route glyph identify the admitted correction family; dashed outlines denote required regions, colored arrows illustrate execution direction, and green contours with check marks denote predicate-supporting evidence. The selected full-demonstration traces explain schema semantics; they are not additional learned state-correction trials.

marks the required predicate or region, the execution image illustrates the coordinate family associated with the diagnosis, and the final image marks predicate-supporting evidence. In full schema terms, the three chains are missing `in_region` $\rightarrow$ `source_joint_pose`, missing `on` $\rightarrow$ `object_relation_predicate`, and missing `contact` $\rightarrow$ `rack_contact_site`. These labels expand the compact glyphs without altering the qualitative evidence shown in the figure.

These traces are explanatory rather than quantitative. They are selected full-demonstration frames and do not add learned-correction trials to Table 6. Their role is to show how the same schema represents spatial regions, object relations, and local contact conditions without conflating a route label with a successful action sequence.

5.3 LIBERO-Plus

LIBERO-Plus expands the four standard LIBERO suites into a fixed registry of 10,030 perturbation tasks (Fei et al., 2026). The task set used here comprises 2,519 LIBERO-10 (`libero_10`) tasks, 2,591 LIBERO-Goal (`libero_goal`) tasks, 2,518 LIBERO-Object (`libero_object`) tasks, and 2,402 LIBERO-Spatial (`libero_spatial`) tasks. The suite definitions emphasize longer multi-stage tasks, goal variation, object variation, and spatial variation, respectively.

The reporting unit is a registered task, and the four suite totals define the fixed denominator. The aggregate Onto-EV-WM success rate is 8,526/10,030 (85.00%). The suite-level success rates are above 91% on LIBERO-Goal, LIBERO-Object, and LIBERO-Spatial, and 65.98% on LIBERO-10. The internal DINO-WM+CEM baseline (Rubinstein, 1999) disables ontology scoring and completes one seed-0 online trial for every registered task. Its comparison with the full Onto-EV-WM configuration is system-level and does not by itself isolate the causal contribution of ontology scoring.

Table 7 places the result alongside selected VLAs, world-action models, and geometry-enhanced policies. The literature values are reproduced from the LIBERO-Plus suite table reported by GAM, which combines re-evaluated available checkpoints with values imported from the corresponding

published benchmarks (Han et al., 2026). The rows share the reported suite breakdown but do not constitute controlled head-to-head runs with identical checkpoints, seeds, or execution protocols.

Table 7: LIBERO-Plus comparison with representative methods. Average is the reported aggregate benchmark success rate; because suite sizes differ, it is not the unweighted mean of the four suite percentages. The best and second-best results are shown in bold and underlined, respectively.

Model	Long	Goal	Object	Spatial	Average
$\pi_{0.5}$	77.9	79.3	89.9	<u>92.0</u>	84.6
OpenVLA-OFT	66.4	63.0	66.5	84.0	69.6
π_0	61.3	63.4	74.7	78.6	69.3
RIPT-VLA	67.5	58.0	64.3	85.8	68.4
π_0 -FAST	43.4	57.5	72.7	74.4	61.6
UniVLA	39.9	40.7	36.7	55.5	42.9
NORA	36.3	38.8	34.4	47.6	39.0
OpenVLA	14.3	15.1	14.0	19.4	15.6
Cosmos-Policy	81.0	73.5	88.3	87.3	82.4
Fast-WAM	41.1	39.2	71.2	54.4	50.0
WorldVLA	8.2	31.8	28.6	32.5	25.0
GAM	<u>78.0</u>	<u>80.4</u>	<u>90.6</u>	93.4	85.5
$\pi_{0.5}$ + ROCKET	36.7	39.7	53.9	31.5	47.5
DINO-WM + CEM (no ontology)	30.73	64.22	74.15	77.85	61.57
Onto-EV-WM (ours)	65.98	91.39	91.38	91.38	<u>85.00</u>

Of the 1,504 unsuccessful registered tasks, 857 (56.98%) belong to LIBERO-10, compared with 223 in LIBERO-Goal, 217 in LIBERO-Object, and 207 in LIBERO-Spatial. Thus, although LIBERO-10 accounts for roughly one quarter of the registry, it contains more than half of the unsuccessful tasks. The count distribution identifies only the suite with the largest residual count; without trace-level labels, it supports no finer causal attribution.

6 Discussion

6.1 Interface Roles and Observed System Results

The interface stores typed predicates, source-tagged ABoxes, diagnostic fields, route records, and verifier outcomes; a route label is not counted as success. The experiments evaluate complete Onto-EV-WM configurations rather than an ontology-only component.

The protocol-specific observations are as follows: the aligned PointMaze rows both report 0.94 success; the LIBERO-Goal ontology-grounded correction configuration represents each failed predicate, its arguments, fixed route, and verifier outcome around one checkpoint and reports 93.8% on seed 0 and $94.05 \pm 0.30\%$ across window samples; and the fixed LIBERO-Plus registry reports 85.00%, with 65.98% on LIBERO-10 and rates above 91% on the other suites. These values describe the complete configurations and are not combined into one causal estimate.

Compared with a scalar verifier output, the typed record additionally stores the missing predicate, arguments, margin, correction family, application mode, and acceptance decision. Audit quality and component-level causal shares are not measured.

6.2 Limitations and Scope

The aligned PointMaze comparison contains 50 trials, and its 100% row changes both search budget and selection. LIBERO-Goal uses sampled windows from a pool overlapping label con-

struction, one fixed checkpoint, and direct simulator-state changes; its four seeds are not independent training runs, and the protocol is not full-episode policy evaluation. LIBERO-Plus is a cross-architecture fixed-registry comparison, not a component-isolation study. All evidence is simulation-based. Held-out generalization, component-level causality, and real-robot recovery remain outside the claim.

7 Conclusion

Onto-EV-WM adds typed grounding, diagnosis, route records, and predicate-gated acceptance to EV-WM. In aligned PointMaze, EV-WM and Onto-EV-WM both report 0.94 success, with mean final-state distances of 0.90573 and 0.61177; the separate larger-budget run reaches 50/50 success (100%). In LIBERO-Goal, the ontology represents the failed condition and declared correction contract around one fixed `qpos`-delta checkpoint; this complete configuration reports 469/500 (93.8%) on seed 0 and $94.05 \pm 0.30\%$ across four evaluation-sampling seeds. On the fixed LIBERO-Plus registry, the Onto-EV-WM configuration reports 8,526/10,030 (85.00%).

These are integrated-system results under simulation protocols. The quantitative correction applies simulator state directly, while controller-mediated execution appears only in selected qualitative traces. The results do not establish held-out generalization, an ontology-only causal effect, real-robot transfer, or an end-to-end learned correction policy.

References

- F. Ahmad, H. Ismail, J. Styrud, M. Stenmark, and V. Krueger. A unified framework for real-time failure handling in robotics using vision-language models, reactive planner and behavior trees. *arXiv preprint arXiv:2503.15202*, 2025. doi: 10.48550/arXiv.2503.15202. URL <https://arxiv.org/abs/2503.15202>.
- M. Ahn, A. Brohan, N. Brown, Y. Chebotar, O. Cortes, et al. Do as I can, not as I say: Grounding language in robotic affordances. In *Conference on Robot Learning*, 2022.
- M. Assran, Q. Duval, I. Misra, P. Bojanowski, P. Vincent, M. Rabbat, Y. LeCun, and N. Ballas. Self-supervised learning from images with a joint-embedding predictive architecture. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2023.
- F. Baader, D. Calvanese, D. L. McGuinness, D. Nardi, and P. F. Patel-Schneider, editors. *The Description Logic Handbook: Theory, Implementation, and Applications*. Cambridge University Press, 2 edition, 2007. doi: 10.1017/CBO9780511711787.
- F. Bálint-Benczédi, J.-H. Worch, D. Nyga, N. Blodow, P. Mania, Z.-C. Márton, and M. Beetz. RoboSherlock: Cognition-enabled robot perception for everyday manipulation tasks. *arXiv preprint arXiv:1911.10079*, 2019.
- A. Bardes, Q. Garrido, J. Ponce, X. Chen, M. Rabbat, Y. LeCun, M. Assran, and N. Ballas. Revisiting feature prediction for learning visual representations from video. *arXiv preprint arXiv:2404.08471*, 2024.
- M. Beetz, D. Bessler, A. Haidu, M. Pomarlan, A. K. Bozcuoglu, and G. Bartels. KnowRob 2.0: A 2nd generation knowledge processing framework for cognition-enabled robotic agents. In *IEEE International Conference on Robotics and Automation*, 2018.
- K. Black, N. Brown, D. Driess, A. Esmail, M. Equi, C. Finn, et al. π_0 : A vision-language-action flow model for general robot control. *arXiv preprint arXiv:2410.24164*, 2024.
- A. Brohan, N. Brown, J. Carbajal, Y. Chebotar, J. Dabis, et al. RT-1: Robotics transformer for real-world control at scale. In *Robotics: Science and Systems*, 2023.
- J. Bruce, M. Dennis, A. Edwards, J. Parker-Holder, Y. Shi, E. Hughes, M. Lai, et al. Genie: Generative interactive environments. *arXiv preprint arXiv:2402.15391*, 2024.
- C. Chi, Z. Xu, S. Feng, E. Cousineau, Y. Du, B. Burchfiel, R. Tedrake, and S. Song. Diffusion policy: Visuomotor policy learning via action diffusion. In *Robotics: Science and Systems*, 2023.
- Y. Dai, J. Lee, N. Fazeli, and J. Chai. RACER: Rich language-guided failure recovery policies for imitation learning. *arXiv preprint arXiv:2409.14674*, 2024. doi: 10.48550/arXiv.2409.14674. URL <https://arxiv.org/abs/2409.14674>.
- A. d’Ávila Garcez and L. C. Lamb. Neurosymbolic AI: The 3rd wave. *Artificial Intelligence Review*, 56(11): 12387–12406, 2023. doi: 10.1007/s10462-023-10448-w.
- S. Fei, S. Wang, J. Shi, Z. Dai, J. Cai, P. Qian, L. Ji, X. He, S. Zhang, Z. Fei, J. Fu, J. Gong, and X. Qiu. LIBERO-Plus: A progressive robustness benchmark for visual-language-action models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 38574–38583, 2026.
- C. R. Garrett, R. Chitnis, R. Holladay, B. Kim, T. Silver, L. P. Kaelbling, and T. Lozano-Pérez. Integrated task and motion planning. *Annual Review of Control, Robotics, and Autonomous Systems*, 4:265–293, 2021. doi: 10.1146/annurev-control-091420-084139.

- Z. Gou, Z. Shao, Y. Gong, Y. Shen, Y. Yang, N. Duan, and W. Chen. CRITIC: Large language models can self-correct with tool-interactive critiquing. *arXiv preprint arXiv:2305.11738*, 2023.
- T. R. Gruber. A translation approach to portable ontology specifications. *Knowledge Acquisition*, 5(2):199–220, 1993. doi: 10.1006/knac.1993.1008.
- D. Ha and J. Schmidhuber. World models. In *Advances in Neural Information Processing Systems*, 2018.
- D. Hafner, T. Lillicrap, I. Fischer, R. Villegas, D. Ha, H. Lee, and J. Davidson. Learning latent dynamics for planning from pixels. In *International Conference on Machine Learning*, 2019.
- D. Hafner, T. Lillicrap, J. Ba, and M. Norouzi. Dream to control: Learning behaviors by latent imagination. In *International Conference on Learning Representations*, 2020.
- D. Hafner, T. Lillicrap, M. Norouzi, and J. Ba. Mastering Atari with discrete world models. In *International Conference on Learning Representations*, 2021.
- D. Hafner, J. Pasukonis, J. Ba, and T. Lillicrap. Mastering diverse control tasks through world models. *Nature*, 2025. doi: 10.1038/s41586-025-08744-2.
- J. Han, S. Jeon, J. Jung, R. Zurbrugg, H. An, T. Portela, M. Hutter, M. Pollefeys, S. Kim, and S. Hong. Geometric action model for robot policy learning. *arXiv preprint arXiv:2606.17046*, 2026.
- M. J. Kim, K. Pertsch, S. Karamcheti, T. Xiao, A. Balakrishna, S. Nair, et al. OpenVLA: An open-source vision-language-action model. *arXiv preprint arXiv:2406.09246*, 2024.
- B. Liu, Y. Zhu, C. Gao, Y. Feng, Q. Liu, Y. Zhu, and P. Stone. LIBERO: Benchmarking knowledge transfer for lifelong robot learning. In *Advances in Neural Information Processing Systems: Datasets and Benchmarks Track*, volume 36, 2023.
- A. Madaan, N. Tandon, P. Gupta, S. Hallinan, L. Gao, S. Wiegrefe, U. Alon, N. Dziri, S. Prabhunoye, Y. Yang, S. Gupta, B. P. Majumder, K. Hermann, S. Welleck, A. Yazdanbakhsh, and P. Clark. Self-refine: Iterative refinement with self-feedback. *arXiv preprint arXiv:2303.17651*, 2023.
- NVIDIA, N. Agarwal, A. Ali, M. Bala, Y. Balaji, E. Barker, T. Cai, et al. Cosmos world foundation model platform for physical AI. *arXiv preprint arXiv:2501.03575*, 2025.
- M. Oquab, T. Darcet, T. Moutakanni, H. V. Vo, M. Szafraniec, V. Khalidov, P. Fernandez, et al. DINOv2: Learning robust visual features without supervision. *Transactions on Machine Learning Research*, 2024.
- D. Paulius and Y. Sun. A survey of knowledge representation in service robotics. *Robotics and Autonomous Systems*, 118:13–30, 2019. doi: 10.1016/j.robot.2019.03.005.
- E. Prestes, J. L. Carbonera, S. Rama Fiorini, V. A. M. Jorge, M. Abel, R. Madhavan, A. Locoro, P. Goncalves, M. E. Barreto, M. K. Habib, A. Chibani, S. Gérard, Y. Amirat, and C. Schlenoff. Towards a core ontology for robotics and automation. *Robotics and Autonomous Systems*, 61(11):1193–1204, 2013. doi: 10.1016/j.robot.2013.04.005.
- R. Y. Rubinstein. The cross-entropy method for combinatorial and continuous optimization. *Methodology and Computing in Applied Probability*, 1:127–190, 1999. doi: 10.1023/A:1010091220143.
- N. Shinn, F. Cassano, E. Berman, A. Gopinath, K. Narasimhan, and S. Yao. Reflexion: Language agents with verbal reinforcement learning. *arXiv preprint arXiv:2303.11366*, 2023.
- M. Tenorth and M. Beetz. KnowRob: A knowledge processing infrastructure for cognition-enabled robots. *The International Journal of Robotics Research*, 32(5):566–590, 2013.
- K. Wang, H. Jie, Y. Yan, J. Zhou, and Z. Heng. EV-WM: Event-verified world models for long-horizon robotic manipulation. *arXiv preprint arXiv:2606.13053*, 2026. doi: 10.48550/arXiv.2606.13053. URL <https://arxiv.org/abs/2606.13053>.
- J. Wu, S. Yin, N. Feng, X. He, D. Li, J. Hao, and M. Long. iVideoGPT: Interactive VideoGPTs are scalable world models. In *Advances in Neural Information Processing Systems*, 2024.
- P. Wu, A. Escontrela, D. Hafner, K. Goldberg, and P. Abbeel. DayDreamer: World models for physical robot learning. In *Conference on Robot Learning*, 2022.
- J. Yang, C. E. Jimenez, A. Wettig, K. Lieret, S. Yao, K. Narasimhan, and O. Press. SWE-agent: Agent-computer interfaces enable automated software engineering. *arXiv preprint arXiv:2405.15793*, 2024.
- S. Yao, D. Yu, J. Zhao, I. Shafran, T. L. Griffiths, Y. Cao, and K. Narasimhan. Tree of thoughts: Deliberate problem solving with large language models. *arXiv preprint arXiv:2305.10601*, 2023.