

Persistent Object Narratives for Token-Efficient Video Language Models

Junzhe Chen^{*}, Siyuan Meng[†], Xiaojie Guo[‡]

Tianjin University

junzhec@tju.edu.cn, siyuan_meng@tju.edu.cn, xj.max.guo@gmail.com

Abstract

Video large language models (Video-LLMs) have made strong progress in open-ended video understanding. However, their visual interfaces remain token-intensive and provide limited explicit structure for linking recurring object evidence across time. We introduce **SLOTNARRATIVE**, a slot-based interface that organizes a video into persistent object narratives represented by compact object-state tokens. Rather than compressing frame-wise features before establishing temporal correspondence, **SLOTNARRATIVE** first groups visual features into object-like slots and then associates recurring observations with clip-level object entries through a lightweight, parameter-free memory that integrates multiple complementary matching cues. Each retained entry is serialized into two token types: an identity token that summarizes persistent object appearance and a set of state tokens that encode segment-level appearance, geometry, visibility, and trajectory information. This design yields an interface of only 144 allocated visual-token positions for a frozen Video-LLM, independent of the number of sampled frames. Across multiple datasets, **SLOTNARRATIVE** achieves a favorable accuracy-visual-token trade-off compared with prior compact Video-LLM interfaces. Experimental results establish persistent object narratives as a compact, structured, and temporally organized visual interface for Video-LLMs. Our code will be made publicly available.

1 Introduction

Video large language models (Video-LLMs) have advanced open-ended video understanding by extending pretrained image-language models to temporal inputs. Representative systems include Video-ChatGPT (Maaz et al. 2024), Video-LLaVA (Lin et al. 2024), VideoLLaMA 2 (Cheng et al. 2024), and LLaVA-OneVision (Li et al. 2024). Most Video-LLMs sample video frames, encode each frame with a visual backbone, and project the resulting features into visual tokens. This visual interface determines both the input length and how video content is structured for language-model reasoning.

This frame-wise construction has two related limitations. First, the number of visual tokens grows with temporal and spatial resolution; models such as LLaVA-OneVision and

LLaVA-Video (Li et al. 2024; Zhang et al. 2024) may retain thousands of tokens for one video. Second, these tokens provide little explicit object-level structure when the same objects recur across frames. LLaMA-VID (Li, Wang, and Jia 2024), MovieChat (Song et al. 2024), and LongVU (Shen et al. 2025b) reduce this cost through per-frame tokens, sparse memory, and adaptive spatiotemporal compression. However, their compression units are not explicitly organized around persistent objects. The issue is therefore not only how many tokens are retained, but also what they represent: without binding recurring observations to the same object, the language model must infer both object correspondence and state evolution from the compressed sequence.

Object-centric learning offers a natural basis for addressing this problem by grouping visual features into object-like slots (Locatello et al. 2020). Video slot models have improved object discovery and temporal consistency (Kipf et al. 2022; Zadaianchuk, Seitzer, and Martius 2023; Manasyan et al. 2025), while Slot-VLM (Xu et al. 2024) uses object and event slots as a compact input to a Video-LLM. However, slot assignments are typically local and exchangeable, so recurring observations are not explicitly associated with persistent object instances. VideoOrion (Feng et al. 2025), in contrast, obtains object tokens via external detection, segmentation, and tracking models. These limitations motivate a compact learned interface that discovers object-like units directly from visual features, associates recurring observations with persistent clip-level entries even across missing intervals, and retains both stable object information and time-varying state.

As shown in Figure 1, dense frame tokens in (a) repeat similar content while leaving object identity implicit. Per-frame object slots in (b) reduce redundancy but lack temporal correspondence. In contrast, **SLOTNARRATIVE** in (c) links recurring observations into persistent clip-level entries represented by identity and state tokens.

To this end, we propose **SLOTNARRATIVE**, a slot-based object-centric interface for Video-LLMs. Slot attention first groups frame features into object-like observations. A lightweight, parameter-free memory then links recurring observations to clip-level entries using complementary slot-feature, pooled-appearance, trajectory-state, recent-observation, and position cues. It retains entries through temporary absence and recovers them upon reappearance. The observations assigned to each entry form a persistent object

^{*}First author.

[†]Second author.

[‡]Corresponding author.

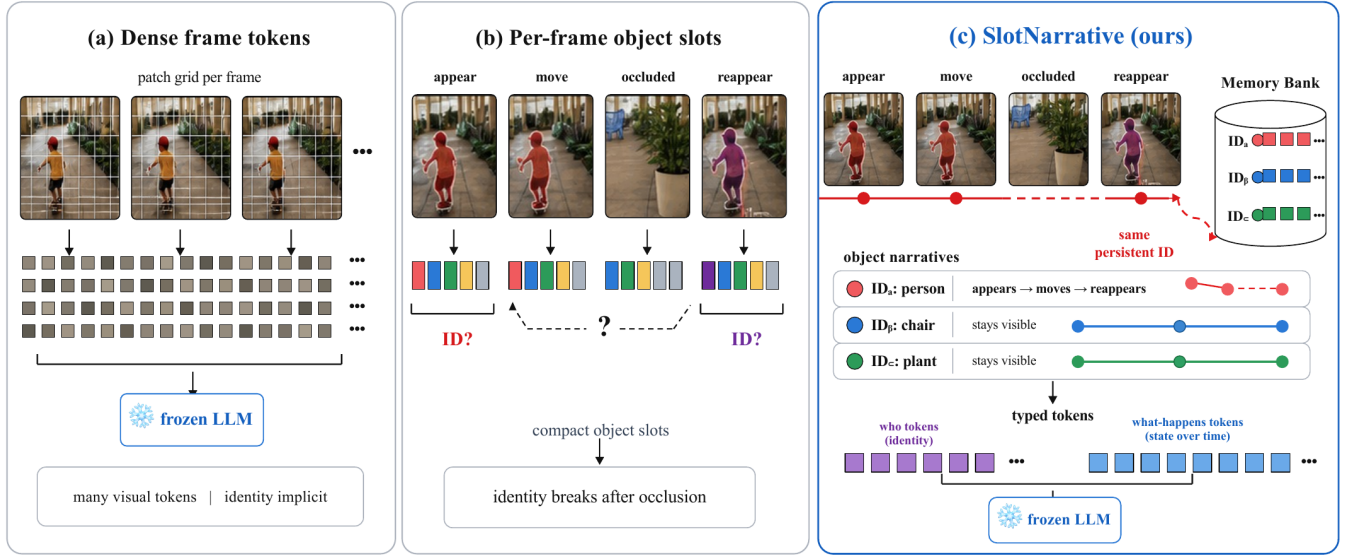


Figure 1: Visual interfaces for Video-LLMs. (a) Dense frame tokens are costly and leave object identity implicit. (b) Per-frame object slots reduce redundancy but lack temporal correspondence. (c) SLoTNaRRATIVE associates recurring observations and represents each object with identity and state tokens.

narrative. Each retained entry is serialized into an *identity token* that summarizes persistent appearance and *state tokens* that preserve segment-level appearance, geometry, visibility, and trajectory information. This separation avoids repeatedly encoding stable information while retaining evidence of how an object changes. The resulting interface allocates only 144 *visual-token positions* for an entire video. During VideoQA adaptation, the upstream visual modules and language model remain frozen; the memory has no trainable parameters. Only the identity and state projectors, their layer normalizations, and the typed embeddings are trained to map the object-state representation into the language-model embedding space. Across standard open-ended VideoQA benchmarks, SLoTNaRRATIVE provides a favorable reported accuracy–visual-token trade-off among compact Video-LLM interfaces.

Our contributions are summarized as follows:

- We introduce a slot-based and object-centric interface that organizes video evidence around persistent clip-level object entries rather than independent frames or exchangeable per-frame slots. A parameter-free memory associates recurring observations without relying on an external detect–segment–track pipeline.
- We propose a typed object-state representation that separates persistent object appearance from time-varying state. Each retained entry is serialized into one identity token and multiple segment-level state tokens, yielding a fixed interface of only 144 allocated visual-token positions for a frozen Video-LLM.
- We demonstrate a favorable reported accuracy–visual-token trade-off on three open-ended VideoQA benchmarks and analyze the effects of persistent association, identity and state token content, and visual-token budget.

2 Related Work

Video-LLMs and compact visual interfaces. Video-ChatGPT, Video-LLaMA, Video-LLaVA, and Chat-UniVi established general-purpose video instruction following (Maaz et al. 2024; Zhang, Li, and Bing 2023; Lin et al. 2024; Jin et al. 2024); VideoLLaMA 2, LLaVA-OneVision, LLaVA-Video, and Qwen2-VL later strengthened the underlying models (Cheng et al. 2024; Li et al. 2024; Zhang et al. 2024; Wang et al. 2024). Most build visual sequences from sampled-frame features, so their length grows with temporal and spatial resolution. Query bottlenecks (Li et al. 2023; Dai et al. 2023), token selection or merging (Ryoo et al. 2021; Bolya et al. 2023; Chen et al. 2024; Yang et al. 2025), and video-specific compression (Li, Wang, and Jia 2024; Xu et al. 2025; Song et al. 2024; He et al. 2024; Lan et al. 2024; Shen et al. 2025b; Jiang et al. 2025; Zhang and Fu 2025; Shen et al. 2025a; Shao et al. 2025; Du et al. 2026) reduce this cost, but generally leave recurring object evidence unlinked. SLoTNaRRATIVE instead organizes the video into persistent object entries before serialization.

Object-centric image and video learning. MONet, IO-DINE, and Slot Attention establish object-centric decomposition through iterative grouping (Burgess et al. 2019; Greff et al. 2019; Locatello et al. 2020); later work extends slots to compositional generation and real-image features (Singh, Deng, and Ahn 2022; Seitzer et al. 2023). Video methods propagate slots, model object dynamics, and improve temporal consistency (Kipf et al. 2022; Elsayed et al. 2022; Wu et al. 2023; Zadaianchuk, Seitzer, and Martius 2023; Manasyan et al. 2025; Grigore et al. 2025). Their main targets are discovery, segmentation, or prediction. Because slots are exchangeable, recurrent propagation supports local continuity but does not by itself restore identity after disappearance

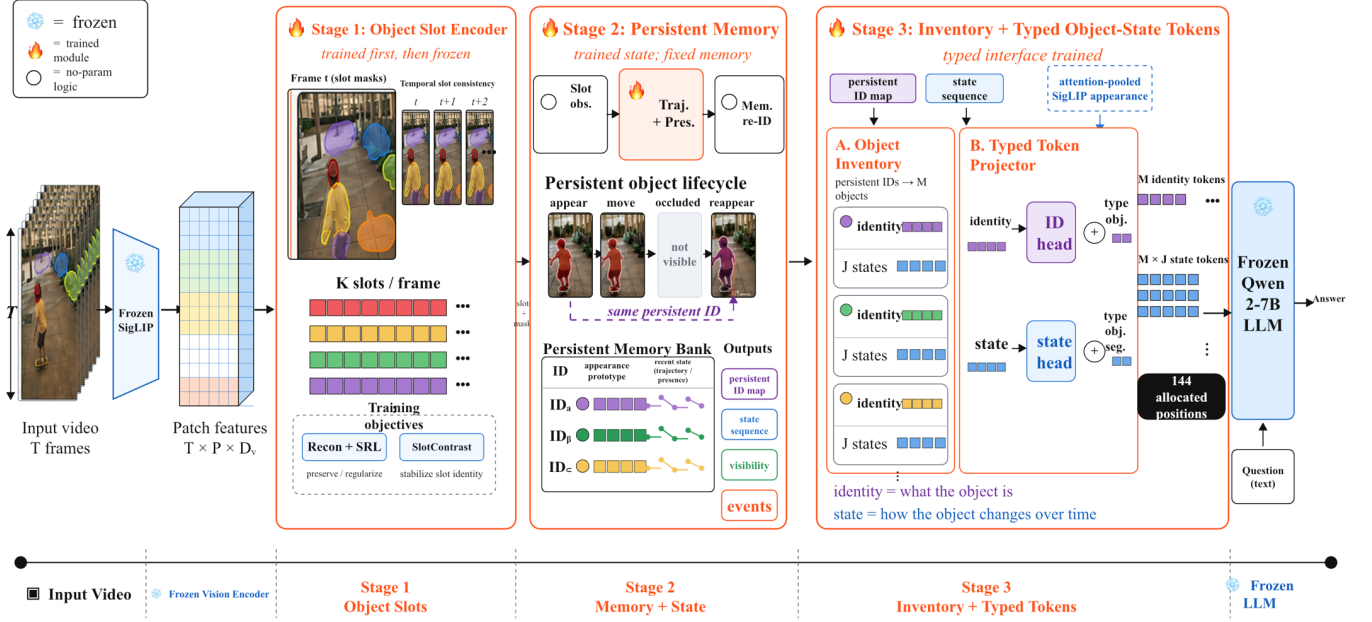


Figure 2: Overview of SLOTNARRATIVE. A slot encoder groups SigLIP features into temporally propagated observations. Parameter-free memory links observations across missing intervals, a fixed inventory retains clip-level entries, and trainable typed projectors represent each entry with one identity token and multiple segment-level state tokens.

or slot reassignment. Dual-State Slot Attention (Tran et al. 2026) separates appearance and identity, but does not build a compact VideoQA interface. We add clip-level association and language-model tokenization to learned slot grouping.

Object-aware video-language interfaces. Slot-VLM (Xu et al. 2024), the closest slot-based VideoQA method, aggregates object and event slots but does not explicitly re-link recurring slots through persistent memory. VideoOrion (Feng et al. 2025) obtains object tokens from detection, segmentation, and tracking outputs, while One Trajectory, One Token (Zheng et al. 2025) constructs panoptic sub-object trajectories and TrajTok (Zheng et al. 2026) learns trajectory tokens without an external tracker. SLOTNARRATIVE instead associates learned slots into clip-level entries without trainable memory and decomposes each entry into identity/state tokens for a frozen language model.

3 Method

3.1 Framework Overview

Given a video V and a question q , SLOTNARRATIVE converts the video into a compact visual sequence $\mathcal{Z}(V)$ organized around objects rather than frames. As shown in Figure 2, the framework has three functional modules. First, an object-centric encoder groups frame features into object-like slot observations and summarizes their local state. Second, persistent object memory associates recurring observations with clip-level object entries. Third, a typed tokenizer represents each retained entry with one identity token and multiple state tokens. Thus, slots group evidence, memory associates

observations, and typed tokens expose the resulting object narratives to the language model.

3.2 Object-Centric Video Representation

A frozen SigLIP encoder (Zhai et al. 2023) extracts patch features X_t from frame t . A feature adapter ϕ and recurrent slot encoder C produce $K = 11$ slot vectors S_t and patch-normalized attention maps A_t :

$$(S_t, A_t) = C(\phi(X_t); \tilde{S}_{t-1}), \quad \tilde{S}_t = \Psi(S_t).$$

Here, $\tilde{S}_{t-1}$ is the predicted initialization from the preceding frame, and Ψ provides short-range continuity within a shot. Each attention map pools appearance and provides geometry statistics, while mask-weighted patch matching estimates local motion without object annotations. A causal trajectory encoder summarizes recent descriptors, and a presence head predicts existence and visibility.

Recurrent initialization cannot guarantee clip-level identity: an object may disappear, return under another index, or encounter a scene boundary. At each detected cut, we reset slot recurrence and local trajectory history so that an edit is not treated as extreme object motion, while retaining the clip-level memory. Supplementary Sections A.1–A.2 give dimensions and signal definitions, Section A.4 gives cut/reset rules, and Supplementary Figure S1 shows the eight-frame, 11-slot decomposition.

3.3 Persistent Object Memory

The memory module converts frame-local slot observations into persistent object entries. A slot mask first pools raw

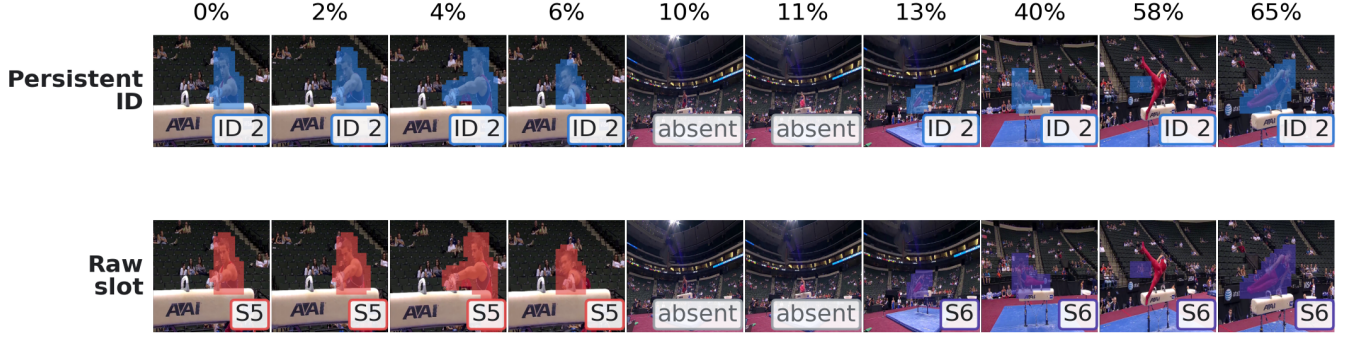


Figure 3: Persistent association across missing observations. The colored regions show SLoT_{NARRATIVE} slot-attention masks for the gymnast. The object is assigned to raw slot S5, becomes unobserved at 10–11% of the video, and returns under raw slot S6 while retaining persistent ID 2.

SigLIP features to obtain a semantic appearance observation. Each entry maintains running summaries of slot features, pooled appearance, trajectory state, recent observations, and position, and remains available while its object is not visible. For a reappearing slot (t, k) and an inactive entry u , let $\gamma_\ell(t, k, u)$ be cue ℓ and $w_\ell \geq 0$ its fixed weight. The parameter-free matching score is

$$\rho_{t,k,u} = \frac{\sum_{\ell \in \mathcal{C}} w_\ell \gamma_\ell(t, k, u)}{\max(\sum_{\ell \in \mathcal{C}} w_\ell, \varepsilon)},$$

where $\mathcal{C}$ contains slot-feature, pooled-appearance, trajectory-state, recent-observation, and position cues, and $\varepsilon > 0$ prevents division by zero. Re-identification is triggered by an invisible-to-visible transition. One setting is used throughout: the cue weights are $(0.3, 0.2, 0.2, 0.1, 0.2)$ in the order above and the threshold is 0.3. Greedy one-to-one matching prevents duplicate claims; a match restores its entry, an unmatched visible and existing slot starts a new entry, and a missing entry is retained without update.

Scene cuts require special handling because position and motion no longer provide meaningful continuity. SLoT_{NARRATIVE} resets local motion at a detected cut but keeps the clip-level memory; if re-identification is triggered at the boundary, matching relies on slot-feature and pooled-appearance cues. The resulting map $\pi_{t,k} = u$ associates slot k in frame t with persistent entry u and can recover an entry under a different slot index. These IDs are algorithmic associations rather than ground-truth tracks. Supplementary Sections A.3–A.4 specify entry transfer, update, invalidation, and exact cut behavior.

Figure 3 illustrates association across a missing interval using the model’s slot-attention masks. The gymnast maps from raw slot S5 to persistent ID 2, disappears at 10–11%, and returns under raw slot S6 with the same ID. The changing raw index shows that frame-local slots are not stable identities, while memory preserves the association across the missing interval. Section 4.3 tests the downstream effect of this stage under matched settings on all three benchmarks.

3.4 Typed Object-State Tokenization

As illustrated in Figure 4, the association map groups observations by object, but the language model needs a fixed-size input. We rank entries by visible duration, state change, and slot objectness, retaining at most M in a fixed inventory and masking unused entries.

For each retained entry u , r_u aggregates attention-pooled backbone features over its visible observations. We use this time-aggregated identity summary instead of the raw slot vector: slot masks group observations, while pooled backbone features provide semantics without per-frame repetition.

The video is divided into J temporal segments. For each object and segment, a state summary $\bar{g}_{u,j}$ aggregates appearance, geometry, visibility, trajectory state, and re-identification events, preserving when evidence occurs. Let $\hat{r}_u = \text{LN}_{\text{id}}(r_u)$ and $\hat{g}_{u,j} = \text{LN}_{\text{st}}(\bar{g}_{u,j})$ denote separately normalized features. Two projectors map them into the language-model space:

$$z_u^{\text{id}} = f_{\text{id}}(\hat{r}_u) + e_{\text{id}} + e_u, \quad z_{u,j}^{\text{st}} = f_{\text{st}}(\hat{g}_{u,j}) + e_{\text{st}} + e_u + e_j.$$

Here, e_{id} and e_{st} mark token type, e_u binds both types to one object, and e_j preserves segment order. Identity tokens summarize *what each object is*, while state tokens provide ordered evidence about *what happens to it*. With $M = 16$ and $J = 8$, the interface allocates $M(1 + J) = 144$ positions independent of sampled-frame count; unused positions are masked. Supplementary Sections B.1–B.3 give inventory ranking, exact features, pooling, masking, and serialization.

This decomposition balances stability and temporal detail. A single averaged object token can blur state changes; separate observation tokens preserve change but repeat appearance and weaken object binding. Separate projectors preserve the distinction between the two forms, while the shared object embedding binds them to the same entry.

3.5 Training Strategy

We train SLoT_{NARRATIVE} sequentially on the ActivityNet videos underlying VideoInstruct-100K (Maaz et al. 2024).

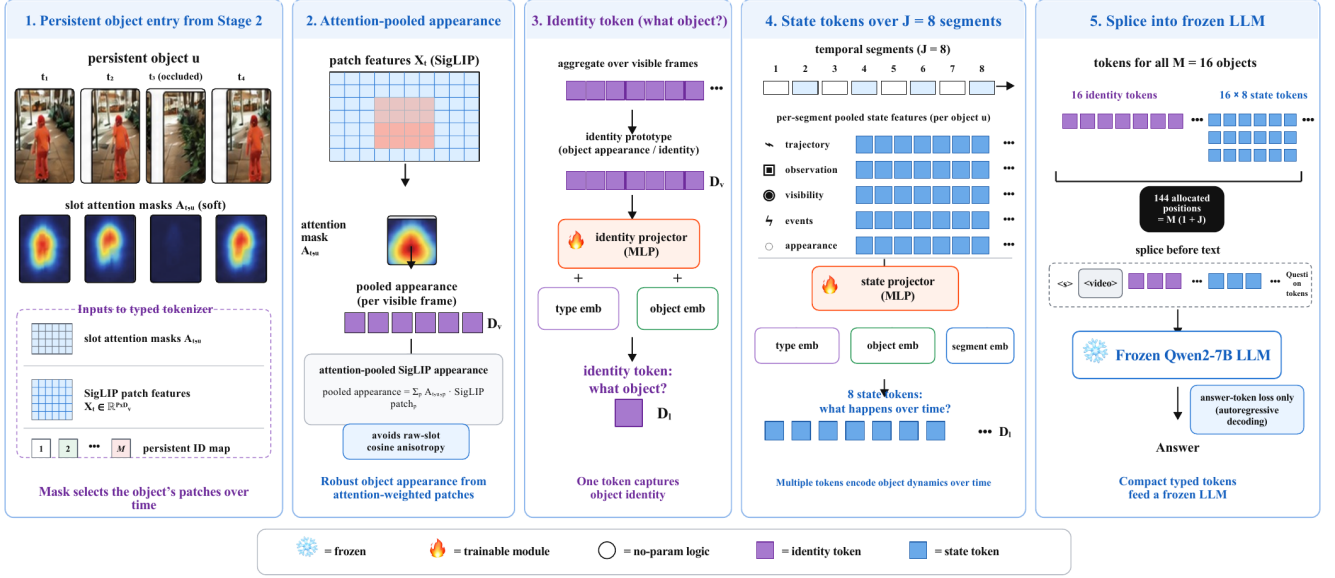


Figure 4: Typed object-state tokenization. Slot masks pool backbone appearance along observations linked by persistent memory. One identity token summarizes an object’s appearance, while J state tokens preserve segment-level appearance, geometry, visibility, trajectory state, and association events. The resulting $M(1 + J)$ allocated visual-token positions form the compact input to the frozen language model. Here, $A_{t,u}$ denotes the slot mask linked to entry u , while D_v and D_L denote the backbone and language-model feature dimensions.

Stage 1 learns object-like grouping and local consistency from unlabeled within-shot clips using feature reconstruction, SlotContrast, and Synergistic Representation Learning (Seitzer et al. 2023; Manasyan et al. 2025; Seong, Moon, and Heo 2026). **Stage 2** freezes the slot encoder and trains trajectory and presence modules by future-observation prediction and confidence-derived targets. **Stage 3** freezes the visual modules and Qwen2-7B-Instruct (Yang et al. 2024); memory and inventory remain fixed, and only typed projectors, layer normalizations, and embeddings learn from instruction conversations. Supplementary Section C tabulates stage data and optimized modules and gives the objectives, schedules, freezing, hardware, seed, and inference settings.

4 Experiments

4.1 Experimental Setup

Data and benchmarks. Stages 1–2 use the ActivityNet videos underlying VideoInstruct-100K without text, and Stage 3 uses its instruction conversations. We evaluate on MSVD-QA, MSRVT-QA (Xu et al. 2017), and ActivityNet-QA (Yu et al. 2019); their QA annotations are never used for training or model selection. After ID normalization, none of the 800 ActivityNet-QA test videos overlaps the training videos. Supplementary Section C.1 tabulates stage data and supervision. MSVD-QA and MSRVT-QA cover short and diverse web clips, whereas ActivityNet-QA emphasizes longer, untrimmed activities.

Evaluation metrics. Following Video-ChatGPT (Maaz et al. 2024), GPT-3.5-Turbo returns binary accuracy (Acc.) and answer quality from 0 to 5 (Score). Our variants share

videos, generation, prompts, and evaluator; baseline values come from their papers. Supplementary Section C.5 gives deterministic decoding, the judge prompt and settings, seed, and single-run status.

Model configuration. We sample 100 frames at 384×384 and use the 144-position layout in Section 3.4; the typed interface has 34.39M trainable parameters. Supplementary Sections A.3, B.3, and C give the memory lifecycle, masking, optimization, and hardware settings.

4.2 Main Results and Token Efficiency

We compare with earlier Video-LLMs (Maaz et al. 2024; Lin et al. 2024), the compact LLaMA-VID interface (Li, Wang, and Jia 2024), object-centric Slot-VLM and VideoOrion+ (Xu et al. 2024; Feng et al. 2025), the motion-aware EMA and ReMoRa models (Zhao et al. 2025; Yashima et al. 2026), and Qwen2-based LLaVA-ST, LLaVA-Video, and LLaVA-OneVision (Li et al. 2025; Zhang et al. 2024; Li et al. 2024).

Table 1 places accuracy beside the visual positions delivered to the LLM. With 144 allocated positions, SLOT-NARRATIVE obtains 75.6%, 69.8%, and 50.3% accuracy on MSVD-QA, MSRVT-QA, and ActivityNet-QA. Compared with the closest object-centric baseline, Slot-VLM, it uses 25% fewer positions while improving the reported accuracies by 0.7, 0.2, and 2.0 points; answer-quality scores are matched on the short-video datasets and improve from 3.4 to 3.5 on ActivityNet-QA.

This is an operating-point comparison rather than a controlled training study. Our language alignment uses VideoInstruct-100K and no benchmark QA annotations; several higher-accuracy systems report 200K to million-scale

Method	Year	Size	#Tok	MSVD-QA		MSRVTT-QA		ActivityNet-QA	
				Acc.	Score	Acc.	Score	Acc.	Score
ReMoRa [†]	2026	7B	729/GOP	73.1	4.0	–	–	60.5	3.7
LLaMA-VID	2024	7B	2/frame	69.7	3.7	57.7	3.2	47.4	3.3
LLaVA-OneVision	2024	7B	6,272	–	–	–	–	56.6	–
LLaVA-Video [†]	2024	7B	5,396	–	–	–	–	56.5	–
LLaVA-ST [‡]	2025	7B	2,520	75.9	4.1	59.0	3.5	–	–
Video-LLaVA	2024	7B	2,048	70.7	3.9	59.2	3.5	45.3	3.3
EMA	2025	7B	648	75.8	4.1	58.5	3.5	52.1	3.5
VideoOrion+	2025	7B	≤640	–	–	–	–	60.3	3.7
Video-ChatGPT	2024	7B	356	64.9	3.3	49.3	2.8	35.2	2.7
Slot-VLM	2024	7B	192	74.9	3.8	69.6	3.4	48.3	3.4
SLOTNARRATIVE (Ours)	2026	7B	144	75.6	3.8	69.8	3.4	50.3	3.5

Table 1: Open-ended VideoQA results. Year is the release year, Size is the model scale, and #Tok is the visual-token count supplied to the LLM; – is unreported. Rate-based methods are listed first, followed by fixed allocations in descending order. [†] marks benchmark-related training data and [‡] a derived count. Cross-paper settings differ; 144 denotes our pre-mask allocation.

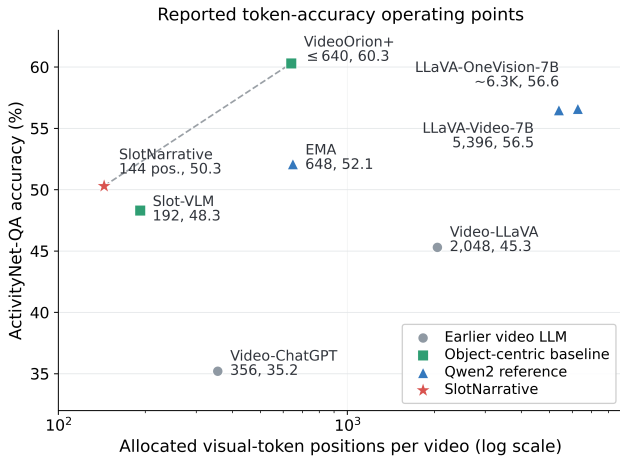


Figure 5: Reported ActivityNet-QA accuracy versus per-video visual-token positions. VideoOrion+ is shown at its upper bound; the dashed segment joins the two non-dominated plotted points. Cross-paper protocols differ.

adaptation sets. Slot-VLM is the closest data-scale reference, also using 100K video instructions. SLOTNARRATIVE comes within 0.3 points of LLaVA-ST and EMA on MSVD-QA and exceeds both on MSRVTT-QA with far fewer positions.

This pattern is consistent with the interface: shorter MSVD-QA and MSRVTT-QA clips often admit answers from localized object, attribute, and action evidence, whereas ActivityNet-QA contains longer untrimmed activities. There, eight-segment summaries and the weak linearly decodable temporal-order signal identified by our diagnostics leave a larger gap to dense, more heavily adapted models. The gap reflects a current temporal limitation, not token count alone.

Figure 5 places SLOTNARRATIVE above Slot-VLM at the lowest budget. EMA and VideoOrion+ are more accurate at roughly 4.5 $\times$ the budget. This comparison measures language-model context length rather than vision-side com-

Variant	Traj.	Mem.	MSVD	MSRVTT	ANet
Slot observations			71.0	65.0	45.4
Trajectory only	✓		72.8	65.6	47.5
Memory only		✓	74.2	67.1	47.9
Full SLOTNARRATIVE	✓	✓	75.6	69.8	50.3

Table 2: Trajectory and memory ablation in accuracy (%).

putation or end-to-end latency.

Supplementary Section D.2 compares compact 7B interfaces, our 80–216-position variants, and four compression methods evaluated within one LLaVA-OneVision setup near 125 positions. Because training recipes differ, this establishes near-budget context rather than a controlled gain.

4.3 Ablation Studies

We examine persistent association and typed tokenization with the language model, evaluator, frames, and adaptation data fixed. Supplementary Section D.3 also ablates Stage 1 and varies M and J : at nearby budgets, reducing object coverage is costlier than reducing temporal resolution, while larger settings yield modest gains.

Concretely, reducing M from 16 to 8 yields 46.3% accuracy with 72 positions, whereas reducing J from 8 to 4 retains 49.0% with 80 positions. Increasing M to 24 or J to 16 reaches 50.9% and 50.6%, respectively, indicating diminishing returns beyond the 144-position setting.

Effect of trajectory and memory. Table 2 shows that both components improve over slot observations on all three benchmarks. Across the datasets, trajectory alone adds 1.8, 0.6, and 2.1 points, while memory alone adds 3.2, 2.1, and 2.5. Their combination performs best, adding a further 1.4, 2.7, and 2.4 points over memory alone.

Effect of typed object-state tokens. Table 3 shows that neither an object summary nor segment-level state evidence is sufficient on its own. Their combination is substantially stronger, supporting the identity/state decomposition rather

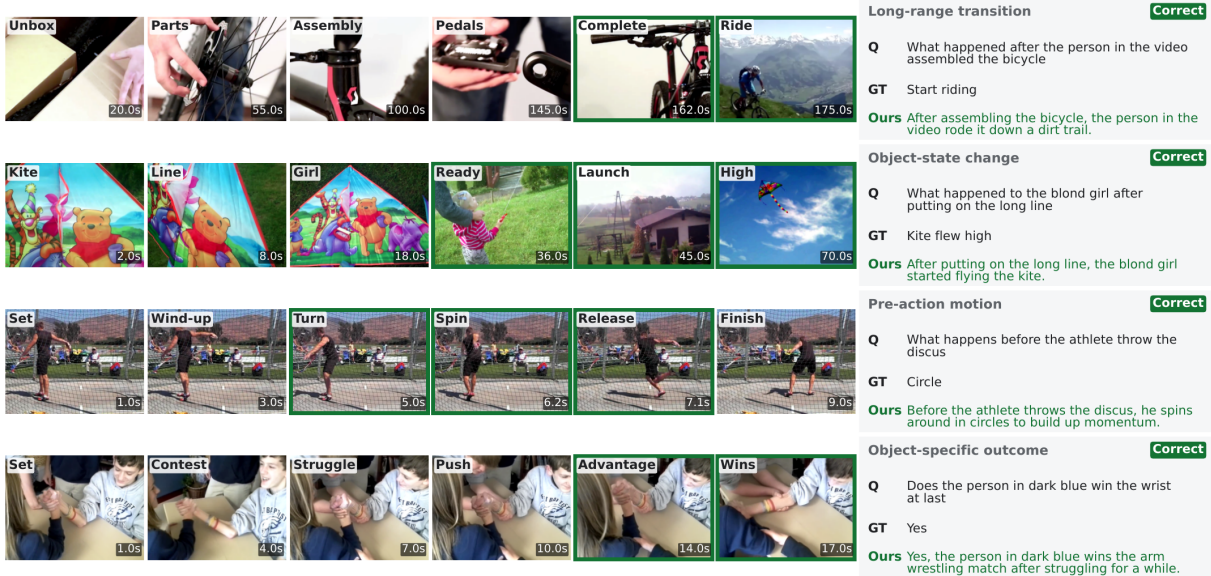


Figure 6: Successful ActivityNet-QA examples. Each row pairs six event-aligned frames with the question, reference, and SLOTNARRATIVE answer; green borders mark answer-relevant evidence. The rows cover long-range transition, object-state change, pre-action motion, and object-specific outcome.

Variant	#Tok	Acc.	Δ
Identity only	16	44.1	-6.2
State only	128	42.4	-7.9
Raw-slot identity	144	48.7	-1.6
No state appearance	144	49.1	-1.2
Full typed interface	144	50.3	—

Table 3: Typed-token ablation on ActivityNet-QA. Δ is measured from the full identity/state interface.

than a single homogeneous token set. At 144 positions, raw-slot identity loses 1.6 points and removing state appearance loses 1.2. The larger drops from identity-only and state-only variants show that persistent object organization and typed content provide complementary evidence.

Complementary roles. These components operate at different levels rather than acting as interchangeable compression modules. The trajectory encoder enriches each slot observation with local state, memory decides which separated observations form one persistent object narrative, and typed tokenization controls how stable identity and temporal change reach the language model. A later projector cannot recover a narrative lost upstream. The compact interface therefore depends on association before serialization, rather than token projection alone.

4.4 Qualitative Results

Figure 6 links activity stages, temporal order, and object-specific evidence but does not measure association accuracy. Supplementary Sections D.4–D.6 report fragmentation, appearance and temporal probes, question-type results, and four

failure modes. Together, these diagnostics separate two effects hidden by aggregate VideoQA accuracy. A correct answer alone cannot establish stable association throughout a clip.

Slot content retains appearance information after removing the shared clip direction, supporting attention-pooled backbone features as token content; weak linear velocity and frame-order readouts suggest that the temporal-state pathway remains a bottleneck under these probes.

The downstream ablation measures the QA value of association, while the fragmentation analysis tests grouping quality and the same-entry appearance probe measures consistency among model-assigned associations. Together they characterize the behavior of persistent association without implying detector-level tracking; similar objects or weak slot evidence can still merge or split entries.

5 Conclusion

SLOTNARRATIVE organizes a Video-LLM’s visual interface around persistent object narratives rather than repeated frame evidence. Slot attention extracts object-like observations, parameter-free memory associates them across missing intervals, and typed tokens expose identity and segment-level change. With 144 positions, this interface achieves a favorable reported accuracy–token trade-off across three VideoQA benchmarks. Component ablations support associating observations before serialization and separating identity from change. Slot fragmentation and weak temporal encoding on long videos remain open limitations. Addressing them with richer object discovery and motion cues, without restoring long frame-token sequences, is an important direction for object-centric Video-LLMs.

Supplementary Material

Persistent Object Narratives for Token-Efficient Video Language Models

This supplementary material follows the model and evaluation flow of the main paper. Appendix A specifies slot observations, trajectory state, persistent memory, and scene-cut handling. Appendix B defines object selection and identity/state tokenization. Appendix C gives the three-stage training and inference settings. Appendix D reports near-budget comparisons, controlled ablations, representation diagnostics, question-type results, and failure cases.

A Object Representation and Persistent Association

This section specifies the object representation and persistent memory used by the first two functional blocks in Figure 2 of the main paper.

The computation follows the temporal order of the video. Slot attention first produces object-like observations within each frame; the trajectory and presence modules describe their local evolution; persistent memory then assigns visible observations to clip-level object entries. The resulting identifiers are internal associations rather than semantic class labels. They determine which observations are pooled together by the typed tokenizer in Appendix B.

A.1 Feature Extraction and Slot Attention

For a sequence of T sampled frames, the frozen SigLIP encoder produces raw patch features $X_t \in \mathbb{R}^{P \times D_v}$ at each frame t , with $D_v = 1152$. Here, $\mathbb{R}$ denotes the real numbers and $P = 729$ at the 384×384 input resolution. A two-layer feature adapter maps these features to the input space of the recurrent slot encoder, which produces $K = 11$ slots of dimension $D_s = 256$. The adapted features are used for grouping, whereas the raw SigLIP features are retained for appearance pooling. This separation is important: slot attention determines *which* patches belong together, and the raw backbone features preserve *what* those patches depict.

We retain two normalizations of the slot-attention weights. For frame t , slot $k \in \{1, \dots, K\}$, and patch $p \in \{1, \dots, P\}$, we write $A_t, B_t \in [0, 1]^{K \times P}$ for the patch-normalized and slot-competitive forms, respectively:

$$\sum_{p=1}^P A_{t,k,p} = 1, \quad \sum_{k=1}^K B_{t,k,p} = 1.$$

A_t is used for centroids, moments, appearance pooling, and object-state descriptors. B_t estimates the fraction of the image assigned to a slot, $\mu_{t,k} = P^{-1} \sum_p B_{t,k,p}$. At a detected scene cut, recurrent slot initialization is reset to the learned initial slots.

Figure S1 visualizes the complete slot set rather than selecting only the most object-like masks. Each panel reveals the patches for which that slot has the largest competitive weight. The recurrent initialization encourages stable grouping within the shot, while the scattered background patches illustrate why downstream selection and persistent memory are still needed.

A.2 Observation, Trajectory, and Presence

The parameter-free observation extractor forms $o_{t,k} \in \mathbb{R}^{D_o}$ with $D_o = 25$ from three complementary groups:

- **Spatial statistics (12 dimensions):** centroid, slot-competitive area $\mu_{t,k}$, three second moments, peak response, normalized entropy, and the attention mass touching the four image borders.
- **Motion statistics (5 dimensions):** horizontal and vertical displacement, displacement variance, displacement magnitude, and feature change energy. Patch displacement is estimated by nearest-neighbor cosine matching between consecutive raw SigLIP feature grids and then pooled with the slot mask.
- **Shape statistics (8 dimensions):** horizontal and vertical skewness and kurtosis, aspect ratio, horizontal and vertical profile peaks, and the ratio between the horizontal and vertical profile entropies. The profile peaks are log-scaled relative to a uniform profile.

The trajectory encoder receives the current observation together with its one- and two-frame lag differences, $[o_{t,k}; o_{t,k} - o_{t-1,k}; o_{t,k} - o_{t-2,k}] \in \mathbb{R}^{75}$, and maps them to $h_{t,k} \in \mathbb{R}^{D_h}$ with $D_h = 64$ using a three-layer causal temporal convolution. Missing lag differences are set to zero. Each shot is encoded independently, so the differences and causal history restart at a scene boundary.

The presence estimator takes the slot vector and spatial statistics and predicts existence and visibility. Because the real-video training data have no object masks, we derive confidence labels from attention concentration. Let $m_{t,k} = \max_p A_{t,k,p}$ be peak attention. The normalized entropy is

$$H_{t,k} = -(\log P)^{-1} \sum_p A_{t,k,p} \log A_{t,k,p},$$

with the standard convention $0 \log 0 = 0$. We compute

$$c_{t,k} = (1 - H_{t,k})(P m_{t,k}),$$

and use $\mathbf{1}[c_{t,k} > 3]$ and $\mathbf{1}[c_{t,k} > 5]$ as existence and visibility labels, respectively, where $\mathbf{1}[\cdot]$ is the binary indicator function.

A.3 Parameter-Free Persistent Memory

Each memory entry stores an exponential moving average of the slot feature, the attention-pooled SigLIP appearance, and the trajectory state; a five-frame observation summary; the latest centroid and velocity; the last visible frame; and the model-assigned persistent object identifier. These quantities

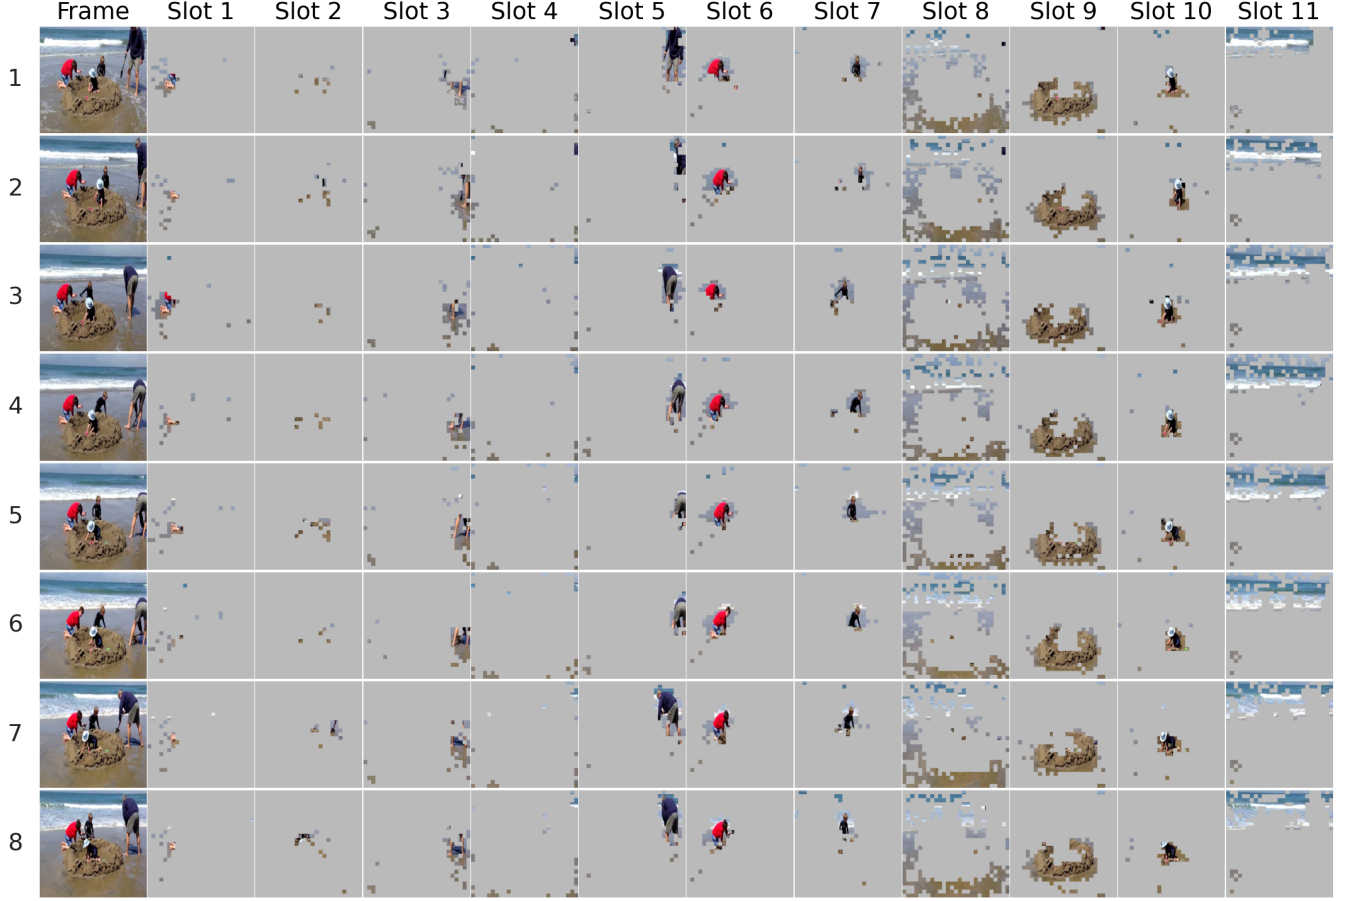


Figure S1: Spatial slot-attention masks over eight uniformly sampled frames from one shot. The first column shows the input frames; the remaining 11 columns reveal patches assigned to each slot by the competitive attention B_t . Different slots consistently capture individual people, the sandcastle, and complementary shoreline regions. These masks are learned grouping outputs rather than ground-truth segmentations, and slot indices are unordered across independent sequences.

are derived from the frozen representation and introduce no trainable parameters.

Re-identification is triggered when a slot changes from invisible to visible; a continuously visible slot keeps its current assignment. For such a reappearing slot, five matching signals compare the current observation with an inactive memory entry: slot-feature cosine similarity, pooled-appearance cosine similarity, trajectory-state cosine similarity, recent-observation cosine similarity, and Gaussian proximity to the velocity-predicted centroid. Let $\mathcal{C}$ index these five signals, $\gamma_\ell(t, k, u)$ denote the value of signal ℓ between current slot (t, k) and memory entry u , and $w_\ell \geq 0$ its weight. Cosine cues lie in $[-1, 1]$, while the Gaussian position cue lies in $[0, 1]$. The matching score is

$$\rho_{t,k,u} = \frac{\sum_{\ell \in \mathcal{C}} w_\ell \gamma_\ell(t, k, u)}{\max(\sum_{\ell \in \mathcal{C}} w_\ell, \varepsilon)}, \quad \varepsilon = 10^{-8}.$$

For ordinary frames, the weights for slot feature, pooled appearance, trajectory state, recent observation, and position are $(0.3, 0.2, 0.2, 0.1, 0.2)$. The score above normalizes these

raw weights by their sum. The position signal uses a Gaussian bandwidth of 0.1. If re-identification is triggered at a scene cut, motion cues are discarded and the score gives equal weight to slot-feature and pooled-appearance similarity. The acceptance threshold is 0.3.

Greedy one-to-one matching prevents one stored entry from being assigned to multiple reappearing slots in the same step. A matched entry transfers its persistent identifier and state to the current slot; the source entry is then invalidated when a cross-slot transfer occurs, preventing duplicate active IDs. An unmatched visible and existing slot starts a new identifier. Visible observations update memory with EMA momentum 0.9, while invisible states are held. The resulting map $\pi_{t,k} \in \{-1, 0, \dots, U-1\}$ is recorded only for visible observations, where U is the number of distinct persistent identifiers produced in the clip and -1 denotes no assignment. It is the sole source of object membership used by the typed tokenizer.

Existence and visibility play different roles in this life-cycle. Visibility gates memory updates, while existence de-

termines whether an unmatched visible observation starts a new identifier. When visibility drops, the stored entry is retained but does not absorb the uncertain observation; a later visible slot can recover it through the matching score. Thus a missing interval does not itself create another object token. A duplicate entry appears only when the returning observation fails the acceptance rule, and the fixed inventory ranking in Appendix B limits the effect of such failures on the language-model input.

A.4 Scene-Cut Handling

Scene cuts are detected with HSV-histogram Bhattacharyya distance using a threshold of 0.35. The same cut mask is used throughout the pipeline:

- recurrent slot initialization is reset at the first frame of each shot;
- cross-shot patch displacement is zeroed;
- trajectory differences and causal-convolution history restart;
- future-prediction targets crossing a cut are removed; and
- re-identification triggered at the cut uses only slot-feature and pooled-appearance cues and resets velocity.

The cut mask does not force every continuously visible slot to be rematched. It changes the matching cues only when a slot triggers re-identification and otherwise preserves its current memory assignment while resetting local motion.

This separation prevents a hard cut from being interpreted as extreme object motion. Appearance-only recovery is possible when the boundary also contains an invisible-to-visible transition, but the cut rule alone does not establish cross-edit identity. Videos without a detected cut follow the ordinary motion-aware matching rule throughout.

B Typed Object-State Tokenization

This section specifies the inventory selection and typed tokenization shown in Figure 4 of the main paper.

An inventory entry is a clip-level container for observations assigned the same persistent identifier. Its identity token summarizes evidence across all visible frames, whereas its state tokens retain segment-local evidence. Object-index embeddings bind these two token types to the same entry, and segment-index embeddings preserve coarse temporal order without repeating an identity summary at every frame.

B.1 Object Inventory Selection

The memory map may contain more persistent identifiers than the fixed object budget M . To reduce the effect of diffuse slot fragments, we define a soft objectness score from the slot-competitive area $\mu_{t,k}$ defined in Appendix A.1 and the normalized patch entropy $H_{t,k}$. Let $s_{t,k} = \mu_{t,k}(1 - H_{t,k})$, and let $s_{\min}$ and $s_{\max}$ be the minimum and maximum over all (t, k) in the same clip. We use

$$\eta_{t,k} = \frac{s_{t,k} - s_{\min}}{\max(s_{\max} - s_{\min}, \varepsilon)}, \quad \varepsilon = 10^{-6}.$$

Thus $\eta_{t,k} \in [0, 1]$ measures objectness relative to the other slots in the clip. During feature aggregation, we use

$\tilde{\eta}_{t,k} = \max(\eta_{t,k}, 0.1)$ and $\alpha_{t,k} = p_{t,k}^{\text{vis}} \tilde{\eta}_{t,k}$, where $p_{t,k}^{\text{vis}}$ is the visibility probability. For a candidate persistent identifier $v \in \{0, \dots, U-1\}$, where U is the number of distinct identifiers produced in the clip, let $\mathcal{O}_v = \{(t, k) : \pi_{t,k} = v\}$ be its visible observations and $\mathcal{F}_v = \{t : \exists k, (t, k) \in \mathcal{O}_v\}$ its distinct visible frames. We set $n_v^{\text{vis}} = |\mathcal{F}_v|$, where $|\cdot|$ denotes set cardinality. Let $\hat{h}_{t,v}$ be the visibility-objectness weighted trajectory state pooled over all slots assigned to v in frame t . The state-change term is averaged only over adjacent visible-frame pairs:

$$\overline{\Delta h}_v = \frac{\sum_{t=1}^{T-1} \mathbf{1}[\{t, t+1\} \subseteq \mathcal{F}_v] \|\hat{h}_{t+1,v} - \hat{h}_{t,v}\|_2}{\max(\sum_{t=1}^{T-1} \mathbf{1}[\{t, t+1\} \subseteq \mathcal{F}_v], 1)}.$$

We also define $\bar{\eta}_v$ as the mean $\eta_{t,k}$ over $\mathcal{O}_v$, floored at 0.1. Its inventory score is

$$\text{Imp}_v = (n_v^{\text{vis}} + 0.5 \overline{\Delta h}_v) \bar{\eta}_v.$$

If more than M identifiers are present, the M objects with largest Imp_v are retained and remapped to inventory indices $u \in \{1, \dots, M\}$; as in the main paper, we reuse π for the remapped association. The remaining positions are padded and masked. This ranking is a fixed rule on the model’s native feature scales rather than a learned detector; the coefficient is unchanged across datasets and variants. If no valid identifier remains, the most-visible slot forms a single entry.

B.2 Identity and State Construction

For slot k in frame t , its patch-normalized mask pools the raw SigLIP features into

$$x_{t,k} = \sum_{p=1}^P A_{t,k,p} X_{t,p} \in \mathbb{R}^{D_v}.$$

The identity prototype of retained entry u is the visibility- and objectness-weighted average

$$r_u = \frac{\sum_{t,k: \pi_{t,k}=u} \alpha_{t,k} x_{t,k}}{\max(\sum_{t,k: \pi_{t,k}=u} \alpha_{t,k}, \varepsilon)}, \quad \varepsilon = 10^{-8}.$$

For each visible observation, let $b_{t,k} \in \{0, 1\}^2$ mark re-identification and a change in binary visibility, where visibility is thresholded at $p_{t,k}^{\text{vis}} > 0.5$. The state feature is

$$g_{t,k} = [h_{t,k}; o_{t,k}; p_{t,k}^{\text{vis}}; b_{t,k}; x_{t,k}] \in \mathbb{R}^{D_g}.$$

Here, $D_g = D_h + D_o + 3 + D_v = 1244$, and $[\cdot; \cdot]$ denotes concatenation. Thus, the state includes trajectory, geometry and mask statistics, visibility, two event indicators, and pooled appearance.

The video is divided uniformly into J temporal segments, and $\mathcal{I}_j$ denotes the frame-index set of segment j . For segment j , define $\Omega_{t,u} = \{k : \pi_{t,k} = u\}$ as the slots assigned to object u in frame t . One-to-one matching makes $\Omega_{t,u}$ either empty or a singleton. For any per-slot feature $y_{t,k}$, if $\Omega_{t,u} = \{k(t, u)\}$, define $\hat{y}_{t,u} = y_{t,k(t,u)}$. For the state feature $g_{t,k}$ above, let $\mathcal{T}_{u,j} = \{t \in \mathcal{I}_j : \Omega_{t,u} \neq \emptyset\}$ be the valid frames of object u in segment j . Segment pooling is

$$\bar{g}_{u,j} = \frac{1}{|\mathcal{T}_{u,j}|} \sum_{t \in \mathcal{T}_{u,j}} \hat{g}_{t,u}.$$

An object absent from a segment receives a masked state position, so this average is evaluated only when $|\mathcal{T}_{u,j}| > 0$. Let $D_L = 3584$ be the Qwen2 embedding dimension. The exact typed projections are

$$\begin{aligned} z_u^{\text{id}} &= f_{\text{id}}(\text{LN}_{\text{id}}(r_u)) + e_{\text{id}} + e_u, \\ z_{u,j}^{\text{st}} &= f_{\text{st}}(\text{LN}_{\text{st}}(\bar{g}_{u,j})) + e_{\text{st}} + e_u + e_j. \end{aligned}$$

Here, $f_{\text{id}} : \mathbb{R}^{D_v} \rightarrow \mathbb{R}^{D_L}$ and $f_{\text{st}} : \mathbb{R}^{D_g} \rightarrow \mathbb{R}^{D_L}$ are separate two-layer MLPs with 3584-dimensional hidden layers and GELU activations. LN_{id} and LN_{st} are separate layer normalizations. The embeddings e_{id} , e_{st} , e_u , and e_j encode token type, object index, and segment index in $\mathbb{R}^{D_L}$. Together, the two projectors, layer normalizations, and typed embedding tables contain 34,389,688 trainable parameters, forming the complete Stage 3 trainable set.

The two projection paths are intentionally not shared. Identity inputs contain only pooled backbone appearance, while state inputs combine appearance with trajectory, geometry, visibility, and event indicators on a different scale. Separate normalization and projection let each type enter the LLM embedding space without requiring these heterogeneous inputs to share one feature distribution. The shared object-index embedding restores their common binding after projection.

B.3 Serialization and Attention Masking

With $M = 16$ objects and $J = 8$ segments, the interface allocates

$$M(1 + J) = 16 + 16 \times 8 = 144$$

token positions. They are serialized as 16 identity positions followed by eight segment-major blocks of 16 state positions. The attention mask disables unused objects and object-segment pairs, so the LLM attends only to valid positions; the fixed layout keeps token-type and segment roles structurally consistent across clips. The complete sequence replaces the visual input position before the question tokens.

The count of 144 therefore denotes the fixed interface capacity. A clip with fewer than 16 retained entries, or an entry absent from a temporal segment, uses fewer active positions because the corresponding padding positions are masked. We nevertheless report the allocated capacity so that token counts do not depend on video content.

C Training and Reproducibility

The first two stages use the ActivityNet videos underlying VideoInstruct-100K without segmentation or QA labels. Stage 3 uses the instruction conversations paired with the same video collection.

The staged design separates three learning problems. Stage 1 learns visual grouping, Stage 2 adds local dynamics and presence prediction without language supervision, and Stage 3 aligns the completed object-state interface with the language model. Freezing each completed stage prevents the answer loss from changing the object associations used to define the downstream token inventory.

No question-answer annotation from MSVD-QA, MSRVT-QA, or ActivityNet-QA is used for optimization or model selection. Their annotated splits are accessed

only when generating the reported answers. The ActivityNet videos used in the first two stages provide unlabeled visual sequences, while Stage 3 receives only the VideoInstruct conversations specified above. After normalizing the optional `v_` prefix in video identifiers, the 800 ActivityNet-QA test videos have zero overlap with the 13,303 unique VideoInstruct-100K training videos.

C.1 Training Overview

Table S1 summarizes the sequential recipe and the modules updated at each stage.

The table lists every trainable module in each stage. Components not named in a row are frozen, and the parameter-free memory has no optimizer state in any stage. Consequently, the VideoQA objective learns how to present the established persistent object narratives to the language model rather than relearning the visual backbone or the association rule.

C.2 Stage 1: Object Slot Representation

At optimization step n , the Stage 1 objective is

$$\mathcal{L}^{(1)}(n) = \mathcal{L}_{\text{rec}} + \lambda_{\text{SC}}(n)\mathcal{L}_{\text{SC}} + \lambda_{\text{SRL}}(n)\mathcal{L}_{\text{SRL}}.$$

$\mathcal{L}_{\text{rec}}$ is mean-squared reconstruction of frozen SigLIP patch features. $\mathcal{L}_{\text{SC}}$ is the SlotContrast objective over adjacent frames in the same shot. $\mathcal{L}_{\text{SRL}}$ denotes the scheduled SRL component: early redundancy regularization or later encoder/decoder consistency. The functions $\lambda_{\text{SC}}(n)$ and $\lambda_{\text{SRL}}(n)$ are their step-dependent weights and are zero when the corresponding component is inactive.

Feature reconstruction has unit weight throughout training. SlotContrast has target weight 0.05, starts at step 1,500, and uses a 1,500-step linear warm-up. Redundancy regularization is active during the first 5,000 steps with phase weight 0.3 and internal weight 0.05. Encoder/decoder consistency starts at step 10,000 with a 1,000-step warm-up and target weight 0.05. Temporal pairs crossing scene cuts are removed from all temporal objectives. The Stage 1 representation is then frozen for the downstream stages.

C.3 Stage 2: Trajectory and Presence

Let $f_\delta : \mathbb{R}^{D_h} \rightarrow \mathbb{R}^{D_o}$ be the prediction head for temporal offset $\delta \in \{1, 3\}$, and let $\mathcal{V}_\delta$ contain minibatch source-slot triples (b, t, k) for which $t + \delta \leq T$ and the interval from t to $t + \delta$ does not cross a scene cut. We use the same future slot index because recurrent initialization provides local slot-index continuity within a shot; persistent cross-slot association is introduced only after the trajectory encoder. We use the reliability $\xi_{b,t,k} = \mu_{b,t,k}(1 - H_{b,t,k})$ and optimize

$$\mathcal{L}_{\text{pred}}^\delta = \frac{\sum_{(b,t,k) \in \mathcal{V}_\delta} \xi_{b,t,k} \|f_\delta(h_{b,t,k}) - \text{sg}(o_{b,t+\delta,k})\|_2^2}{D_o \max\left(\sum_{(b,t,k) \in \mathcal{V}_\delta} \xi_{b,t,k}, \varepsilon\right)},$$

where $D_o = 25$, $\varepsilon = 10^{-8}$ prevents division by zero, $\|\cdot\|_2$ is the Euclidean norm, and sg stops gradients through the target observation. For presence supervision, the confidence $c_{t,k}$ from Appendix A.2 gives $y_{t,k}^c = \mathbf{1}[c_{t,k} > 3]$ and $y_{t,k}^v =$

Stage	Data and sampling	Trainable modules	Optimization and objectives
1	ActivityNet videos; 100 sampled frames; preferentially within-shot 8-frame clips; 384×384 input	Feature adapter, recurrent slot encoder, slot predictor, feature decoder	50K steps; AdamW, 1.5×10^{-4} ; feature reconstruction, scheduled SlotContrast, and scheduled SRL
2	Same unlabeled videos; full sampled sequence	Trajectory encoder, two future-prediction heads, presence estimator	20 epochs; Adam, 2×10^{-4} ; trajectory-prediction weight 0.5 and presence weight 0.2
3	VideoInstruct-100K conversations; same video sampling	Identity and state projectors, layer normalizations, and typed embeddings	3 epochs; projector learning rate 2×10^{-5} ; answer-only autoregressive cross-entropy

Table S1: Training configuration. Modules learned in an earlier stage are frozen before the next stage.

$\mathbf{1}[c_{t,k} > 5]$. With binary cross-entropy losses $\mathcal{L}_{\text{exist}}$ and $\mathcal{L}_{\text{visible}}$, the complete Stage 2 objective is

$$\mathcal{L}^{(2)} = 0.5 \left(\frac{1}{2} \sum_{\delta \in \{1,3\}} \mathcal{L}_{\text{pred}}^{\delta} \right) + 0.2(\mathcal{L}_{\text{exist}} + 0.5\mathcal{L}_{\text{visible}}).$$

Persistent object memory is applied after these modules and has no optimization objective or learnable parameters.

Accordingly, Stage 2 learns cues that memory can compare, but it is not trained through a discrete matching decision. The future-prediction terms encourage the trajectory state to summarize short-range change, and the confidence-derived presence targets determine when an observation is reliable enough to update an entry. Persistent association is then applied as the fixed downstream rule in Appendix A.3.

C.4 Stage 3: Language Alignment

Stage 3 uses the VideoInstruct-100K instruction conversations and the freeze policy summarized in Table S1. Training uses batch size 8, four-step gradient accumulation, cosine decay, and a 3% warm-up ratio. The standard Qwen2 chat template places the serialized object-state sequence before the question, and the loss is applied only to assistant-answer tokens. Let $\mathcal{Y}$ denote the set of answer-token positions, a_{ℓ} the answer token at position ℓ , $a_{<\ell}$ its preceding answer prefix, q the question, $\mathcal{Z}(V)$ the visual-token sequence, and p_{LLM} the next-token distribution. The objective is

$$\mathcal{L}^{(3)} = -\frac{1}{|\mathcal{Y}|} \sum_{\ell \in \mathcal{Y}} \log p_{\text{LLM}}(a_{\ell} \mid \mathcal{Z}(V), q, a_{<\ell}).$$

Gradients in this stage do not propagate beyond the typed interface into the upstream visual modules. They update the identity and state projectors, their layer normalizations, and the type/object/segment embeddings, but not SigLIP, slot attention, the trajectory and presence modules, memory, or Qwen2. This freeze policy makes language alignment attributable to how the established persistent object narratives are serialized.

C.5 Inference and Reproducibility

We use random seed 42 for training and data loading. The reported values are single training runs. All model training

and testing use two NVIDIA A800 GPUs, and the trainable stages use bfloat16 mixed precision. For Stage 3, batch size 8 is per GPU and four-step accumulation gives an effective global batch size of 64.

Open-ended answers are decoded deterministically with sampling disabled, the tokenizer end-of-sequence token as the stopping condition, and at most 64 new tokens. Following Video-ChatGPT, the final judge uses the API model identifier `gpt-3.5-turbo`, temperature zero, and a 64-token response limit. The prompt asks the judge to compare the prediction with the reference, accept synonymous or paraphrased answers, and return binary correctness together with an integer quality score from 0 to 5. Malformed responses are retried up to three times. Evaluator versions may differ across published reports, so cross-paper GPT-judged values are treated as reference points rather than strictly controlled comparisons; all within-model ablations use this same evaluator.

D Additional Experiments and Analysis

This section reports comparisons, controlled ablations, diagnostics, and qualitative evidence that support the main-paper conclusions. All ActivityNet-QA variants follow the common evaluation protocol in Appendix C.5 and report point estimates from the corresponding trained variant.

The evidence is organized from system-level comparisons to representation-level analysis. Near-budget results locate the operating point of the complete model; ablations vary individual design choices; offline probes test what information survives the object bottleneck; and question types and failure cases connect those measurements to observable answer errors.

D.1 Evaluation and Ablation Protocol

The main paper reports the trajectory/memory and typed-token ablations. The studies below complement them by varying the Stage 1 representation objective and the object/segment budget. Unless stated otherwise, each variant uses the full interface defined in Appendix B and changes only the component named in its row.

Representation diagnostics

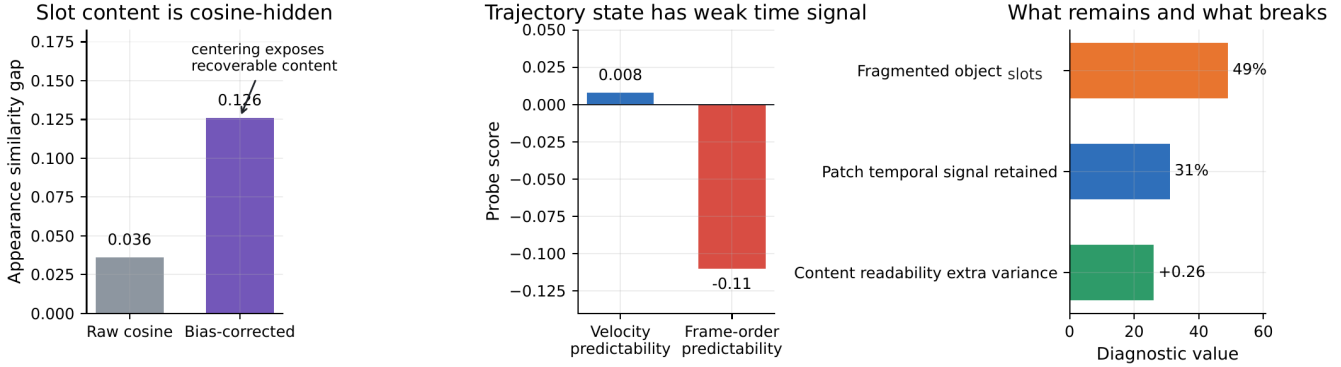


Figure S2: Representation diagnostics. Left: removing the shared clip direction exposes appearance information that is weak under raw slot cosine similarity. Middle: the trajectory state contains little linearly decodable velocity or frame-order information under these probes. Right: the remaining object fragmentation and the temporal signal retained by the patch grid summarize the current bottleneck.

D.2 Near-Budget Token Efficiency

Table S2 collects reported ActivityNet-QA results around the 144-position regime. Video-LLaMA, LLaMA-VID, Chat-UniVi, VISTA-LLaMA, Slot-VLM, Matryoshka Multimodal Models, and Video-ChatGPT use Vicuna-7B (Zhang, Li, and Bing 2023; Li, Wang, and Jia 2024; Jin et al. 2024; Ma et al. 2024; Xu et al. 2024; Cai et al. 2025; Maaz et al. 2024). LLaVA-OneVision, its four compressed variants, and SLOT-NARRATIVE use Qwen2-7B (Li et al. 2024; Yang et al. 2025; Shen et al. 2025a; Shao et al. 2025; Du et al. 2026). The compression rows share one 32-frame setup and are controlled with one another; the remaining rows differ in backbone, training data, frame sampling, or evaluation implementation.

Across our own budgets, 80, 144, and 216 positions yield 49.0%, 50.3%, and 50.9%, respectively. The default setting is also close to the two strongest 2%-retention Qwen2 rows at about 125 positions (49.9% and 50.2%) and exceeds the reported VISTA-LLaMA and Slot-VLM results. Thus, the object-state interface remains competitive without a dense visual sequence, while its modest gain beyond 144 positions supports the selected operating point. Because our model uses a different interface and training recipe, these rows establish near-budget context rather than a controlled gain over every method.

D.3 Additional Ablations

Representation learning. Table S3 shows that removing SlotContrast reduces ActivityNet-QA accuracy by 4.5 points and raises the fragmented-slot rate from 49% to 74%. The appearance gap also decreases. The temporal consistency objective therefore improves both the object representation and its downstream usefulness, even though the full model still contains substantial fragmentation.

Token budget. We additionally vary the object capacity M and temporal resolution J while keeping the remaining interface unchanged. Table S4 shows that reducing object

coverage is more costly than reducing temporal resolution at nearby budgets. Increasing either dimension beyond the 144-position setting yields only modest accuracy gains and does not improve the answer-quality score.

Taken together, the two ablations separate representation quality from interface capacity. SlotContrast improves the observations available to every later module, while the budget study changes only how many persistent object narratives and temporal segments can reach the language model. The larger drop from reducing M indicates that preserving object coverage is especially important in this regime; once 16 entries and eight segments are available, additional positions show diminishing returns.

D.4 Representation Diagnostics

The following probes are not alternative VideoQA training objectives. They are offline measurements on frozen representations, designed to localize whether a failure originates in object grouping, appearance readout, or temporal state. This distinction matters because the final QA score alone cannot reveal which part of the compact interface discarded the relevant evidence.

Figure S2 summarizes where the compact object representation preserves useful content and where information is lost, while Table S5 reports the corresponding diagnostic values. For all linear probes, videos rather than observations define the train/test split, with one third held out. Features are standardized using training-split statistics, ridge regularization is 10^{-2} , and the split seed is 0. Cosine comparisons are computed within each clip; the probes use all valid observations from the selected videos and no QA labels.

Object binding. For each slot mask, we measure the fraction of attention mass in the top 3% of patches and its spatial second moment. A slot is marked fragmented when its mass concentration is below 0.40 and its dispersion is above 0.06. The trained object representation has a 49% fragmented-slot

Method	Year	Size	#Tok	Acc.	Score
LLaVA-OneVision	2024	7B	6,272	54.5	3.55
Video-ChatGPT	2024	7B	356	35.2	2.7
SLOTNARRATIVE ($M=24, J=8$)	2026	7B	216	50.9	3.38
Slot-VLM	2024	7B	192	48.3	3.4
LLaVA-NeXT-M ³	2025	7B	180	55.0	—
SLOTNARRATIVE (default)	2026	7B	144	50.3	3.47
VISTA-LLaMA	2024	7B	128	48.3	3.3
+ VisionZip (2%)	2025	7B	~125	41.7	3.13
+ FastVID (2%)	2025	7B	~125	49.6	3.35
+ HoliTom (2%)	2025	7B	~125	49.9	3.31
+ Unified (2%)	2026	7B	~125	50.2	3.37
Chat-UniVi	2024	7B	112	46.1	3.3
SLOTNARRATIVE ($M=16, J=4$)	2026	7B	80	49.0	3.41
LLaVA-NeXT-M ³	2025	7B	45	53.2	—
Video-LLaMA	2023	7B	32	12.4	1.1
LLaMA-VID	2024	7B	2/frame	47.4	3.3

Table S2: Reported ActivityNet-QA results for compact visual interfaces. Year is the model or method release year, Size is the language-model scale, and fixed per-video allocations are sorted from largest to smallest; LLaMA-VID is listed separately because its total varies with frame count. VisionZip, FastVID, HoliTom, and Unified at 2% retention use LLaVA-OneVision-7B as their common base and are evaluated under the same setup. Its 54.5% dense result is reproduced by that study; the original report gives 56.6% under a different setup. Bold marks our default setting.

Stage 1 variant	Acc.	Frag. (%)	Gap
Full	50.3	49	0.126
Without SlotContrast	45.8	74	0.100

Table S3: Stage 1 representation ablation on ActivityNet-QA. Frag. is the fragmented-slot rate, and Gap is the bias-corrected same-entry appearance-similarity gap.

M	J	#Tok	Acc.	Score	Δ
8	8	72	46.3	3.21	-4.0
16	4	80	49.0	3.41	-1.3
16	8	144	50.3	3.47	—
24	8	216	50.9	3.38	+0.6
16	16	272	50.6	3.35	+0.3

Table S4: Visual-token budget ablation on ActivityNet-QA. The allocation is $M(1 + J)$, Score uses the 0–5 GPT scale, and Δ is the accuracy difference from 144 positions. Bold marks the default setting.

rate. This criterion captures scattered texture regions that a centroid-only statistic would miss.

Appearance and content. We compare observations assigned to the same memory entry but appearing at different slot indices with pairs assigned to different entries. The raw cosine gap is 0.036 and increases to 0.126 after subtracting the per-clip mean direction. A ridge probe predicting attention-pooled SigLIP appearance from the slot vector raises held-out R^2 by 0.26 over a slot-index baseline. Slot vectors contain object content, but raw cosine geometry is a weak semantic readout. This motivates pooled appearance


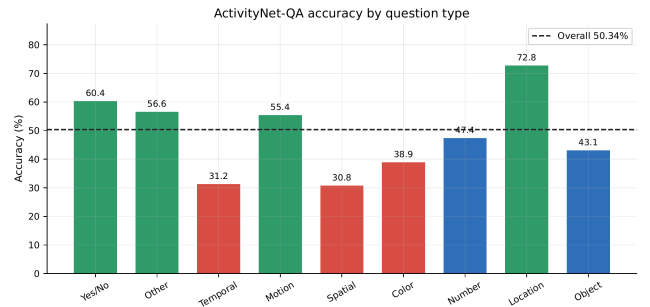


Figure S3: ActivityNet-QA accuracy by question type. The dashed line marks the overall 50.34% accuracy.

for token content while retaining slots for grouping. Because entry membership is model-assigned, this measures model consistency rather than ground-truth re-identification accuracy.

Temporal signal. Linear probes predict next-frame centroid velocity and normalized frame position from the 64-dimensional trajectory state. Their R^2 values, 0.008 and -0.11, show little linearly readable motion or order under these probes. In contrast, the raw SigLIP patch grid covers 31% of the change from one-frame similarity toward the cross-video similarity floor by lag 20. If c_d is the mean same-cell cosine similarity at lag d and $c_\times$ is the cross-video cosine floor, the percentage is $100(c_1 - c_{20}) / (c_1 - c_\times)$ when $c_1 - c_\times > 10^{-6}$; otherwise, the diagnostic is undefined. The result identifies object pooling and state construction as a bottleneck for fine temporal order without ruling out nonlinear information or later losses in the language model.

The probes support two different design conclusions. Ap-

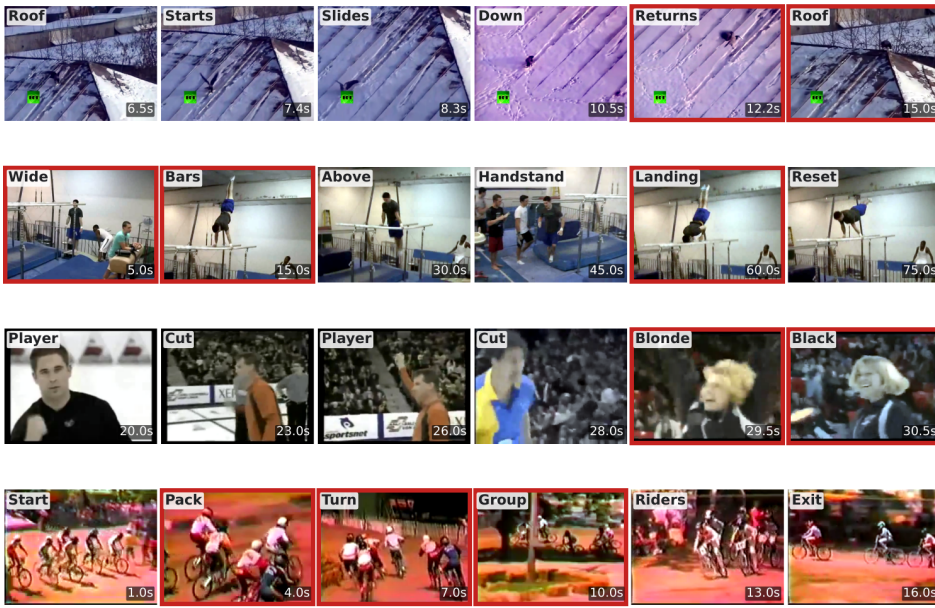

Temporal outcome		Incorrect
Q	What happens after the bird first slid off the roof	
GT	Fly back to roof	
Ours	After the bird first slides off the roof, it lands on the snow-covered ground.	
Spatial support relation		Incorrect
Q	What's under the parallel bars	
GT	Gymnastic mat	
Ours	The video does not provide any information about what is under the parallel bars.	
Identity across cuts		Incorrect
Q	What color is the blond woman's clothes at the end of the video	
GT	Black	
Ours	The blond woman is wearing red and white clothes at the end of the video.	
Counting in a crowd		Incorrect
Q	How many athletes are there in the first match	
GT	7	
Ours	The video shows that there are 12 athletes in the first match.	

Figure S4: Representative ActivityNet-QA failures. Each row contains six event-aligned source-video frames. Red borders mark evidence that conflicts with the prediction. From top to bottom, the cases expose errors in temporal outcome, spatial support, association across cuts, and counting in a crowded scene.

Diagnostic metric	Result
Fragmented object-slot rate (%)	49
Appearance gap, raw / bias-corrected	0.036 / 0.126
Additional explained appearance variance	0.26
State velocity / frame-order R^2	0.008 / -0.11
Long-range patch feature change (%)	31

Table S5: Offline representation diagnostics. R^2 denotes the coefficient of determination. Higher is better for appearance and temporal-signal measures; lower is better for fragmentation.

pearance remains present but is poorly exposed by raw slot cosine geometry, which supports using attention-pooled backbone features as token content. By contrast, the weak velocity and frame-order readouts indicate a genuine limitation of the current state pathway. These measurements diagnose the learned representation; they do not substitute for ground-truth tracking or persistence evaluation.

D.5 Question-Type Analysis

Motion and location questions exceed the overall accuracy, whereas temporal and spatial questions remain substantially lower. The gap between motion (55.38%) and temporal questions (31.25%) suggests that recognizing an action is easier than reasoning about event order. The lower color and object accuracies may reflect the loss of fine appearance details when evidence is pooled through imperfect slot masks.

The categories use the answer-type labels released with

Type	#Q	Share	Correct	Acc.	Score
Overall	8000	100.00	4027	50.34	3.468
Yes/No	2094	26.18	1264	60.36	4.554
Other	1499	18.74	848	56.57	3.372
Temporal	800	10.00	250	31.25	2.818
Motion	800	10.00	443	55.38	3.730
Spatial	800	10.00	246	30.75	2.776
Color	697	8.71	271	38.88	2.944
Number	606	7.58	287	47.36	3.449
Location	386	4.83	281	72.80	3.906
Object	318	3.98	137	43.08	2.941

Table S6: ActivityNet-QA question-type results. Share and accuracy are percentages; Score uses the 0–5 GPT scale.

ActivityNet-QA: Motion, Spatial, Temporal, Yes/No, Color, Object, Location, Number, and Other. They form a disjoint partition of all 8,000 evaluation questions. Table S6 includes counts and shares because the category sizes differ substantially, while Figure S3 shows the corresponding accuracy pattern. The breakdown is descriptive rather than a separate benchmark: it localizes the aggregate result without changing the evaluator or selecting a category-specific model.

D.6 Failure Cases

Figure S4 complements the successful gallery with four distinct errors. The model misses the bird's final return, overlooks the mat below the parallel bars, confuses the target person after several cuts, and over-counts athletes in a crowded race. The first error is consistent with the weak trajectory

probes in Appendix D.4; the remaining cases show how spatial context, object association, and crowded scenes can be lost in the compact object inventory.

These examples were chosen to cover different failure mechanisms, not to estimate their frequency. Together with the quantitative diagnostics, they show that a compact object inventory can preserve answer-relevant evidence while still losing event order, contextual support, or a stable assignment in crowded and edited scenes.

References

- Bolya, D.; Fu, C.-Y.; Dai, X.; Zhang, P.; Feichtenhofer, C.; and Hoffman, J. 2023. Token Merging: Your ViT but Faster. In *International Conference on Learning Representations*.
- Burgess, C. P.; Matthey, L.; Watters, N.; Kabra, R.; Higgins, I.; Botvinick, M.; and Lerchner, A. 2019. MONet: Unsupervised Scene Decomposition and Representation. *arXiv preprint arXiv:1901.11390*.
- Cai, M.; Yang, J.; Gao, J.; and Lee, Y. J. 2025. Matryoshka Multimodal Models. In *International Conference on Learning Representations*.
- Chen, L.; Zhao, H.; Liu, T.; Bai, S.; Lin, J.; Zhou, C.; and Chang, B. 2024. An Image is Worth 1/2 Tokens After Layer 2: Plug-and-Play Inference Acceleration for Large Vision-Language Models. In *European Conference on Computer Vision*, 19–35. Springer.
- Cheng, Z.; Leng, S.; Zhang, H.; Xin, Y.; Li, X.; Chen, G.; Zhu, Y.; Zhang, W.; Luo, Z.; Zhao, D.; et al. 2024. VideoLLaMA 2: Advancing Spatial-Temporal Modeling and Audio Understanding in Video-LLMs. *arXiv preprint arXiv:2406.07476*.
- Dai, W.; Li, J.; Li, D.; Tiong, A.; Zhao, J.; Wang, W.; Li, B.; Fung, P. N.; and Hoi, S. 2023. InstructBLIP: Towards General-Purpose Vision-Language Models with Instruction Tuning. In *Advances in Neural Information Processing Systems*, volume 36, 49250–49267.
- Du, J.; Xue, J.; Li, A.; Dai, J.; and Lu, G. 2026. Unified Spatiotemporal Token Compression for Video-LLMs at Ultra-Low Retention. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 17661–17671.
- Elsayed, G. F.; Mahendran, A.; van Steenkiste, S.; Greff, K.; Mozer, M. C.; and Kipf, T. 2022. SAVi++: Towards End-to-End Object-Centric Learning from Real-World Videos. In *Advances in Neural Information Processing Systems*, volume 35.
- Feng, Y.; Li, Y.; Zhang, W.; Zheng, S.; Luo, H.; Yue, Z.; and Lu, Z. 2025. VideoOrion: Tokenizing Object Dynamics in Videos. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 20401–20412.
- Greff, K.; Kaufman, R. L.; Kabra, R.; Watters, N.; Burgess, C.; Zoran, D.; Matthey, L.; Botvinick, M.; and Lerchner, A. 2019. Multi-Object Representation Learning with Iterative Variational Inference. In *Proceedings of the 36th International Conference on Machine Learning*, volume 97 of *Proceedings of Machine Learning Research*, 2424–2433. PMLR.
- Grigore, D.-N.; Madan, N.; Mogelmose, A.; Moeslund, T. B.; and Ionescu, R. T. 2025. SlotMatch: Distilling Temporally Consistent Object-Centric Representations for Unsupervised Video Segmentation. *arXiv preprint arXiv:2508.03411*.
- He, B.; Li, H.; Jang, Y. K.; Jia, M.; Cao, X.; Shah, A.; Shrivastava, A.; and Lim, S.-N. 2024. MA-LMM: Memory-Augmented Large Multimodal Model for Long-Term Video Understanding. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 13504–13514.
- Jiang, J.; Li, X.; Liu, Z.; Li, M.; Chen, G.; Li, Z.; Huang, D.-A.; Liu, G.; Yu, Z.; Keutzer, K.; Ahn, S.; Kautz, J.; Yin, H.; Lu, Y.; Han, S.; and Byeon, W. 2025. STORM: Token-Efficient Long Video Understanding for Multimodal LLMs. In *Proceedings of the IEEE/CVF International Conference on Computer Vision Workshops*, 5889–5900.
- Jin, P.; Takanobu, R.; Zhang, W.; Cao, X.; and Yuan, L. 2024. Chat-UniVi: Unified Visual Representation Empowers Large Language Models with Image and Video Understanding. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 13700–13710.
- Kipf, T.; Elsayed, G. F.; Mahendran, A.; Stone, A.; Sabour, S.; Heigold, G.; Jonschkowski, R.; Dosovitskiy, A.; and Greff, K. 2022. Conditional Object-Centric Learning from Video. In *International Conference on Learning Representations*.
- Lan, X.; Yuan, Y.; Jie, Z.; and Ma, L. 2024. VidCompress: Memory-Enhanced Temporal Compression for Video Understanding in Large Language Models. *arXiv preprint arXiv:2410.11417*.
- Li, B.; Zhang, Y.; Guo, D.; Zhang, R.; Li, F.; Zhang, H.; Zhang, K.; Zhang, P.; Li, Y.; Liu, Z.; et al. 2024. LLaVA-OneVision: Easy Visual Task Transfer. *arXiv preprint arXiv:2408.03326*.
- Li, H.; Chen, J.; Wei, Z.; Huang, S.; Hui, T.; Gao, J.; Wei, X.; and Liu, S. 2025. LLaVA-ST: A Multimodal Large Language Model for Fine-Grained Spatial-Temporal Understanding. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 8592–8603.
- Li, J.; Li, D.; Savarese, S.; and Hoi, S. 2023. BLIP-2: Bootstrapping Language-Image Pre-Training with Frozen Image Encoders and Large Language Models. In *International Conference on Machine Learning*, 19730–19742. PMLR.
- Li, Y.; Wang, C.; and Jia, J. 2024. LLaMA-VID: An Image is Worth 2 Tokens in Large Language Models. In *European Conference on Computer Vision*, 323–340. Springer.
- Lin, B.; Ye, Y.; Zhu, B.; Cui, J.; Ning, M.; Jin, P.; and Yuan, L. 2024. Video-LLaVA: Learning United Visual Representation by Alignment Before Projection. In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, 5971–5984.
- Locatello, F.; Weissenborn, D.; Unterthiner, T.; Mahendran, A.; Heigold, G.; Uszkoreit, J.; Dosovitskiy, A.; and Kipf, T. 2020. Object-Centric Learning with Slot Attention. In *Advances in Neural Information Processing Systems*, volume 33, 11525–11538.
- Ma, F.; Jin, X.; Wang, H.; Xian, Y.; Feng, J.; and Yang, Y. 2024. VISTA-LLAMA: Reducing Hallucination in Video

- Language Models via Equal Distance to Visual Tokens. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 13151–13160.
- Maaz, M.; Rasheed, H.; Khan, S.; and Khan, F. 2024. Video-ChatGPT: Towards Detailed Video Understanding via Large Vision and Language Models. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, 12585–12602.
- Manasyan, A.; Seitzer, M.; Radovic, F.; Martius, G.; and Zadaianchuk, A. 2025. Temporally Consistent Object-Centric Learning by Contrasting Slots. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, 5401–5411.
- Ryoo, M. S.; Piergiovanni, A.; Arnab, A.; Dehghani, M.; and Angelova, A. 2021. TokenLearner: Adaptive Space-Time Tokenization for Videos. In *Advances in Neural Information Processing Systems*, volume 34, 12786–12797. Curran Associates, Inc.
- Seitzer, M.; Horn, M.; Zadaianchuk, A.; Zietlow, D.; Xiao, T.; Simon-Gabriel, C.-J.; He, T.; Zhang, Z.; Schölkopf, B.; Brox, T.; et al. 2023. Bridging the Gap to Real-World Object-Centric Learning. In *International Conference on Learning Representations*.
- Seong, H. S.; Moon, W.; and Heo, J.-P. 2026. From Vicious to Virtuous Cycles: Synergistic Representation Learning for Unsupervised Video Object-Centric Learning. In *International Conference on Learning Representations*.
- Shao, K.; Tao, K.; Qin, C.; You, H.; Sui, Y.; and Wang, H. 2025. HoliTom: Holistic Token Merging for Fast Video Large Language Models. In *Advances in Neural Information Processing Systems*, volume 38, 135547–135570.
- Shen, L.; Gong, G.; He, T.; Zhang, Y.; Liu, P.; Zhao, S.; and Ding, G. 2025a. FastVID: Dynamic Density Pruning for Fast Video Large Language Models. In *Advances in Neural Information Processing Systems*, volume 38, 123553–123581.
- Shen, X.; Xiong, Y.; Zhao, C.; Wu, L.; Chen, J.; Zhu, C.; Liu, Z.; Xiao, F.; Varadarajan, B.; Bordes, F.; Liu, Z.; Xu, H.; Kim, H. J.; Soran, B.; Krishnamoorthi, R.; Elhoseiny, M.; and Chandra, V. 2025b. LongVU: Spatiotemporal Adaptive Compression for Long Video-Language Understanding. In *Proceedings of the 42nd International Conference on Machine Learning*, volume 267 of *Proceedings of Machine Learning Research*, 54582–54599. PMLR.
- Singh, G.; Deng, F.; and Ahn, S. 2022. Illiterate DALL-E Learns to Compose. In *International Conference on Learning Representations*.
- Song, E.; Chai, W.; Wang, G.; Zhang, Y.; Zhou, H.; Wu, F.; Chi, H.; Guo, X.; Ye, T.; Zhang, Y.; et al. 2024. MovieChat: From Dense Token to Sparse Memory for Long Video Understanding. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 18221–18232.
- Tran, S.; Nguyen, D.; Vo, H.; Vo, K.; and Le, N. 2026. Dual-State Slot Attention: Decoupling Appearance and Identity for Video Object-Centric Learning. *arXiv preprint arXiv:2606.12601*.
- Wang, P.; Bai, S.; Tan, S.; Wang, S.; Fan, Z.; Bai, J.; Chen, K.; Liu, X.; Wang, J.; Ge, W.; et al. 2024. Qwen2-VL: Enhancing Vision-Language Model’s Perception of the World at Any Resolution. *arXiv preprint arXiv:2409.12191*.
- Wu, Z.; Dvornik, N.; Greff, K.; Kipf, T.; and Garg, A. 2023. SlotFormer: Unsupervised Visual Dynamics Simulation with Object-Centric Models. In *International Conference on Learning Representations*.
- Xu, D.; Zhao, Z.; Xiao, J.; Wu, F.; Zhang, H.; He, X.; and Zhuang, Y. 2017. Video Question Answering via Gradually Refined Attention over Appearance and Motion. In *Proceedings of the 25th ACM International Conference on Multimedia*, 1645–1653.
- Xu, J.; Lan, C.; Xie, W.; Chen, X.; and Lu, Y. 2024. Slot-VLM: Object-Event Slots for Video-Language Modeling. In *Advances in Neural Information Processing Systems*, volume 37.
- Xu, M.; Gao, M.; Gan, Z.; Chen, H.-Y.; Lai, Z.; Gang, H.; Kang, K.; and Dehghan, A. 2025. SlowFast-LLaVA: A Strong Training-Free Baseline for Video Large Language Models. In *International Conference on Learning Representations*.
- Yang, A.; Yang, B.; Hui, B.; Zheng, B.; Yu, B.; Zhou, C.; Li, C.; Li, C.; Liu, D.; Huang, F.; et al. 2024. Qwen2 Technical Report. *arXiv preprint arXiv:2407.10671*.
- Yang, S.; Chen, Y.; Tian, Z.; Wang, C.; Li, J.; Yu, B.; and Jia, J. 2025. VisionZip: Longer is Better but Not Necessary in Vision Language Models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 19792–19802.
- Yashima, D.; Kurita, S.; Oda, Y.; and Sugiura, K. 2026. ReMoRa: Multimodal Large Language Model Based on Refined Motion Representation for Long-Video Understanding. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 31845–31855.
- Yu, Z.; Xu, D.; Yu, J.; Yu, T.; Zhao, Z.; Zhuang, Y.; and Tao, D. 2019. ActivityNet-QA: A Dataset for Understanding Complex Web Videos via Question Answering. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 33, 9127–9134.
- Zadaianchuk, A.; Seitzer, M.; and Martius, G. 2023. Object-Centric Learning for Real-World Videos by Predicting Temporal Feature Similarities. In *Advances in Neural Information Processing Systems*, volume 36, 61514–61545.
- Zhai, X.; Mustafa, B.; Kolesnikov, A.; and Beyer, L. 2023. Sigmoid Loss for Language Image Pre-Training. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 11975–11986.
- Zhang, H.; and Fu, Y. 2025. VQToken: Neural Discrete Token Representation Learning for Extreme Token Reduction in Video Large Language Models. In *Advances in Neural Information Processing Systems*, volume 38, 32851–32869.
- Zhang, H.; Li, X.; and Bing, L. 2023. Video-LLaMA: An Instruction-Tuned Audio-Visual Language Model for Video Understanding. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, 543–553.

Zhang, Y.; Wu, J.; Li, W.; Li, B.; Ma, Z.; Liu, Z.; and Li, C. 2024. LLaVA-Video: Video Instruction Tuning with Synthetic Data. *arXiv preprint arXiv:2410.02713*.

Zhao, Z.; Huo, Y.; Yue, T.; Guo, L.; Lu, H.; Wang, B.; Chen, W.; and Liu, J. 2025. Efficient Motion-Aware Video MLLM. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 24159–24168.

Zheng, C.; Zhang, J.; Salehi, M.; Gao, Z.; Iyengar, V.; Kobori, N.; Kong, Q.; and Krishna, R. 2025. One Trajectory, One Token: Grounded Video Tokenization via Panoptic Sub-object Trajectory. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 23156–23166.

Zheng, C.; Zhang, J.; Zhang, J.; Huang, W.; Kumar, A.; Kong, Q.; Tuzel, O.; Li, C.-L.; and Krishna, R. 2026. TrajTok: Learning Trajectory Tokens Enhances Video Understanding. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 31207–31218.