

Track4Action: Distilling World-Centric 3D Tracker into Vision-Language-Action Policies

Chenyi Wang,^{1,3*} Xinkai Wang,^{3*} Bokai Lin,^{2,3} Jialin Tian,^{2,3} Fucheng Zhang,³
Cewu Lu,^{2,3,4} Lixin Yang,^{2,3,†}

¹Zhejiang University, China; ²Shanghai Jiao Tong University, China
³Shanghai Innovation Institute, China; ⁴Noematrix, China
chenyiwang@sii.edu.cn; siriusyang@sjtu.edu.cn

Abstract

Action labels tell a vision-language-action (VLA) policy which robot commands to imitate, but not how those commands change the 3D world. The aligned demonstration clip contains this missing supervision because its K frame transitions record the geometry, motion, visibility, and camera change produced during the corresponding K actions. We introduce Track4Action, a framework that distills this realized transition from a frozen world-centric 3D tracker into a current-observation VLA policy. During training, Track4World encodes the clip $V_{t:t+K}$ into a pooled tracker feature. Learnable track queries infer this feature from current VLA hidden states, match it in a shared space, and condition a flow-matching action head through a feature-wise gate. The tracker feature only defines the alignment target, so neither the clip nor the tracker is used at deployment. Track4Action reaches 82.3% on zero-shot LIBERO-Plus, improving the alignment-free variant by 7.6 points and LaMP by 3.0 points. It obtains 80.44% and 81.48% on the clean and randomized RoboTwin 2.0 splits, and 67.5% average success across four physical bimanual tasks, 25.0 points above the alignment-free variant. The gains across simulation and physical tasks support action-aligned 3D tracker features as privileged supervision for tracker-free VLA deployment. Our project page is available at wing0night.github.io/track4action-project-page/.

1 Introduction

Vision-language-action (VLA) policies map visual observations and language instructions directly to robot commands, enabling one policy to learn across tasks, datasets, and embodiments [4, 5, 17]. This interface provides precise supervision in motor space but leaves the corresponding world transition implicit. An action chunk specifies how the robot should move, not which scene points move with it, whether contact occurs, or how visibility changes during execution. The same end-effector displacement can traverse free space, transport an object, or alter the camera view depending on the surrounding 3D structure. These distinctions determine task success, yet action labels do not encode them.

Existing work brings future and geometric information into action learning through complementary routes. World-model policies predict future images, geometry, or visual

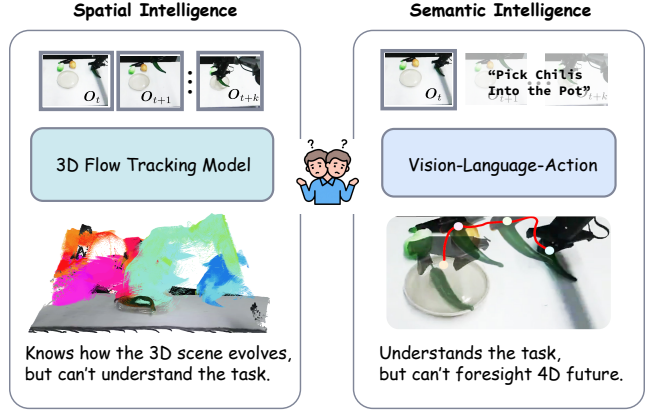


Figure 1: **Track4Action: Unifying 4D Scene Dynamics with Task Understanding.** Flow-tracking models capture how a scene evolves in 4D but lack task awareness, whereas conventional VLA policies understand what to accomplish but do not explicitly model future 4D dynamics. Track4Action bridges these complementary strengths, learning task-conditioned actions with awareness of scene flow.

features [28, 33, 36], while geometry-aware policies encode 3D structure or motion priors for action generation [32, 35]. Other methods align policy features with frozen spatial representations or supervise explicit geometric predictions [19, 31]. These approaches establish that action prediction benefits from structure beyond current image-language semantics. Their targets, however, are typically future content, explicit geometric variables, or spatial features extracted from a single state. They do not exploit a motion-specialized representation of the exact segment realized by a demonstrated action chunk. This gap raises a central question: *Can an action-aligned 3D tracker supervise a VLA during training, then disappear when the robot acts?*

The demonstration video already contains the required physical evidence. For an action chunk with K commands, the aligned $K+1$ frames record the scene before and throughout the corresponding K transitions. A world-centric 3D tracker organizes these changes into scene geometry, 3D motion, visibility, and camera cues. Our key insight is to use the resulting action-aligned tracker feature as privileged su-

*Equal contribution.

†Corresponding author.

pervision. The tracker observes the realized transition only while constructing the training target, whereas the deployed policy must infer the relevant representation from its current observation and task.

We instantiate this idea in Track4Action. A frozen Track4World model processes the primary-view clip $V_{t:t+K}$, where the K frame transitions align with the K actions in the supervised chunk [23]. Its scene, motion, and camera tokens are pooled into a world-centric 3D tracker feature. Learnable track queries extract a compact representation from the current VLA hidden states and match the tracker feature in a shared alignment space. A feature-wise gate then fuses the same queries with the VLA sequence to condition a flow-matching action head. The teacher feature only defines the alignment target and never enters the action head. Neither the action-aligned clip nor Track4World is required at deployment.

Two design choices connect privileged supervision to control. First, temporal alignment ties the tracker target to the same K transitions supervised by the action chunk, so the target describes an action-specific world change rather than generic video content. Second, the track queries act both as the student representation and as an input to the action head. The alignment loss therefore shapes an action-facing representation rather than a detached auxiliary decoder. This separation supplies world-transition supervision without making the realized clip or tracker a deployment dependency.

Across LIBERO-Plus, RoboTwin 2.0, and physical bimanual manipulation, the same distillation interface supports different observations, embodiments, and action spaces. On zero-shot LIBERO-Plus, Track4Action reaches 82.3%, improves all seven perturbation categories over the alignment-free variant, and exceeds LaMP by 3.0 points in the benchmark-provided average. It achieves 80.44% and 81.48% on the clean and randomized splits of the 50-task RoboTwin 2.0 benchmark. On four physical tasks, Track4Action reaches 67.5% average success, outperforming the alignment-free variant by 25.0 points while remaining tracker-free at execution.

Our contributions are summarized as follows:

- We formulate world-centric 3D tracker feature distillation for VLA policies, turning the realized action segment into privileged supervision for a current-observation policy.
- We introduce an action-facing track-query pathway whose features both match the tracker target and condition the action head through gated fusion, while retaining tracker-free deployment.
- We evaluate the same interface under zero-shot visual shifts, 50-task bimanual simulation, and physical manipulation, reaching 82.3% on LIBERO-Plus and 67.5% average success on four real-world tasks.

2 Related Work

Vision-language-action policies. VLA policies couple pretrained vision-language representations with robot action decoders and learn generalist control from heterogeneous demonstrations [5, 6, 13, 26]. Representative designs include

autoregressive action tokenization in OpenVLA and continuous flow matching in π_0 [4, 17]. Although these policies differ in backbone and action representation, their primary learning signal is an expert-action likelihood or denoising objective. This signal specifies an executable command but not the scene geometry and motion produced by its execution. Track4Action preserves the current-observation VLA interface and instead supervises the action-facing representation, making the approach compatible with different VLA backbones and action decoders.

Future and geometric supervision for action learning.

Prior work enriches action learning through two complementary forms of supervision. Future-prediction methods model upcoming images, geometry, visual features, or motion to guide action generation [20, 28, 33, 34, 36]. Geometry-aware methods encode 3D structure, learn scene flow, align policy features with frozen spatial representations, or predict explicit geometric variables [19, 31, 32, 35]. Track4Action shares their goal of strengthening action representations but uses a different supervisory object. A frozen world-centric tracker reads the exact multi-frame segment realized by the demonstrated action chunk, and the current-observation student predicts its pooled feature. The resulting target is neither a deployment input nor an output that the robot must reconstruct at test time.

3D tracking and motion representations. Point tracking provides long-range motion representations with less dependence on appearance [11, 15]. Robot-learning methods consequently use tracks or flow as an intermediate between video and control. Track2Act converts predicted 2D tracks into end-effector plans, TraceGen models future motion in a cross-embodiment 3D trace space, and 3DFlowAction generates object flow for action planning [1, 18, 39]. JOPAT jointly denoises visual latents, 2D tracks, visibility, and actions [14]. These approaches expose trajectories or flow as a prediction, plan, or action-generation objective. In contrast, Track4World provides a pretrained representation of dense world-centric 3D trajectories, visibility, scene motion, and camera parameters [23]. Track4Action pools this representation over the realized action segment and distills it into current-context track queries. The policy neither reconstructs individual tracks nor executes the tracker at deployment, preserving the original VLA control interface.

3 Method

Track4Action uses the realized world transition in a demonstration to supervise the representation that predicts the corresponding action chunk. Figure 2 separates the training-only tracker branch from the current-observation policy retained at deployment. We first define the action-aligned training sample, then construct a world-centric tracker target, distill it into track queries, and connect the queries to flow-matching action generation.

3.1 Problem Formulation

At time t , the policy receives a language instruction l , current RGB observations I_t , and optional robot state s_t . It predicts

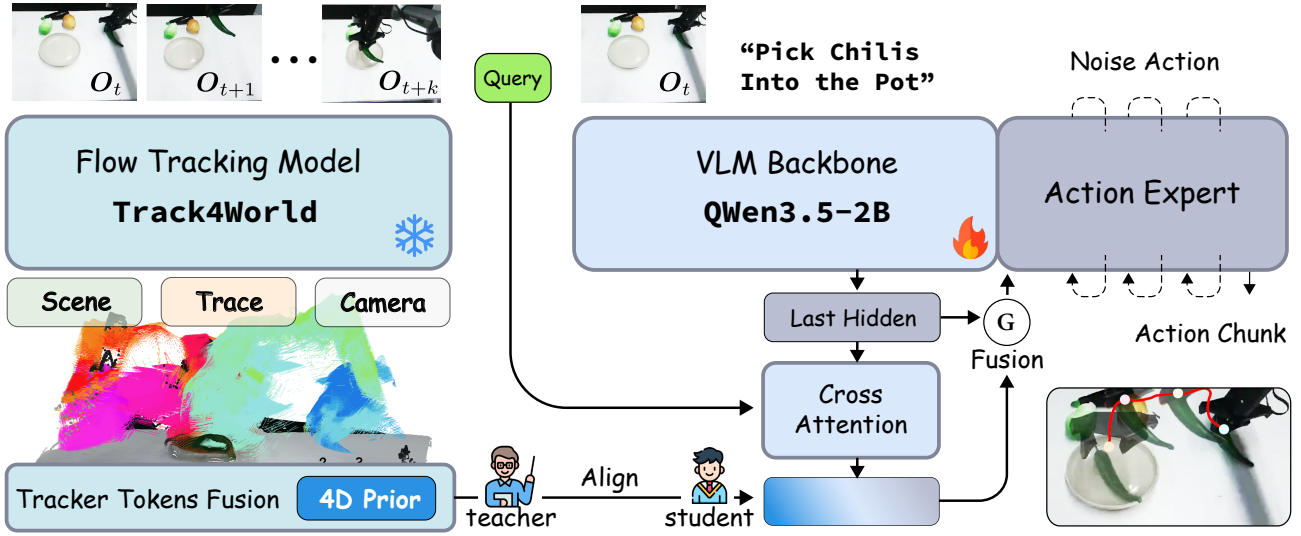


Figure 2: **World-centric 3D tracker feature distillation in Track4Action.** During training, frozen Track4World encodes the action-aligned clip $V_{t:t+K}$ into a pooled target built from scene, motion, and camera tokens. Track queries extracted from current VLA hidden states match this target and are fused back into the VLA sequence through a feature-wise gate to condition the flow-matching action head. The K actions correspond to the K transitions between the $K + 1$ teacher frames. Only the current-observation policy path is retained at deployment.

the normalized action chunk

$$A_t^* = (a_t, \dots, a_{t+K-1}) \in \mathbf{R}^{K \times d_a}. \quad (1)$$

During training, the same sample also provides a primary-view clip $V_{t:t+K} = (o_t, \dots, o_{t+K})$. The K actions span the K transitions between these $K + 1$ frames. We use this temporal correspondence to attach a world-transition target to the same segment supervised by A_t^* . The deployed policy predicts

$$\hat{A}_t = \pi_\theta(l, I_t, s_t). \quad (2)$$

The clip $V_{t:t+K}$ is absent from the policy inputs. It only constructs privileged supervision during training and is unavailable at deployment.

3.2 World-Centric Tracker Supervision

Action coordinates specify a robot command but not its world-space effect. The same end-effector displacement can move through free space, establish contact, or transport an object depending on scene geometry. We therefore construct the missing target from the realized transition that accompanies the action chunk.

Let $\mathcal{T}$ denote the frozen Track4World model. Given the action-aligned clip, it estimates world-centric 3D trajectories together with scene, motion, visibility, and camera cues. We pool these outputs into a compact tracker feature:

$$f_t^{\text{trk}} = \text{sg}[\text{Pool}(\mathcal{T}(V_{t:t+K}))], \quad (3)$$

where sg stops gradients into Track4World. Unlike pixel reconstruction, f_t^{trk} summarizes the 3D structure and motion recovered from the realized action segment. Because the clip covers exactly the transitions induced during A_t^* , the target describes the world change associated with that action chunk rather than an unrelated future event.

3.3 Distilling Tracker Features into the VLA

The student must infer the tracker feature without observing the realized transition. The VLA backbone first encodes the current images and instruction as

$$H_t = \mathcal{E}_\theta(l, I_t). \quad (4)$$

We introduce learnable track queries Q that read H_t through cross-attention:

$$Z_t = \mathcal{D}_\theta(Q, H_t). \quad (5)$$

The resulting sequence forms an action-facing bottleneck between the multimodal backbone and the action head. We pool Z_t and compare it with f_t^{trk} in a shared feature space:

$$\mathcal{L}_{\text{align}} = \|\bar{z}_t - \bar{f}_t^{\text{trk}}\|_2^2, \quad (6)$$

where $\bar{z}_t$ and $\bar{f}_t^{\text{trk}}$ denote the two representations mapped to the shared alignment space. The alignment objective trains the queries to infer the likely 3D transition from the current scene and task context. The same queries also condition action generation. Tracker supervision therefore shapes a representation consumed by the policy instead of an isolated auxiliary decoder.

3.4 Action Generation and Tracker-Free Deployment

Tracker alignment can affect control only if the action decoder uses the aligned representation. We therefore fuse Z_t with the VLA sequence through a learned feature-wise gate to form the action condition H_t^{cond} . The gate preserves the semantic context in H_t while exposing the distilled tracker cues to the action head. The teacher feature f_t^{trk} never enters H_t^{cond} .

We use a flow-matching action head [21] and optimize its standard conditional velocity objective $\mathcal{L}_{\text{act}}$. The full objective is

$$\mathcal{L} = \lambda_{\text{act}}\mathcal{L}_{\text{act}} + \lambda_{\text{align}}\mathcal{L}_{\text{align}}. \quad (7)$$

The action loss teaches the policy what to execute. The alignment loss teaches its action-facing representation which world transition accompanies that execution.

At deployment, the policy computes H_t , Z_t , and H_t^{cond} from (l, I_t, s_t) and generates an action chunk from noise. We discard the action-aligned clip, frozen tracker, tracker target, and alignment branch. The deployed policy retains the track-query and gated-fusion pathway without running Track4World.

4 Experiments

We organize the evaluation around three questions:

- **Comparison:** Does Track4Action outperform competitive general, video-based, trace-guided, and 3D-aware VLA policies (Sections 4.2–4.4)?
- **Tracker distillation:** Does the complete tracker-distillation pathway improve control over its alignment-free counterpart (Section 4.5)?
- **Challenging settings:** Where do its gains persist across long-horizon tasks, seven zero-shot shifts, 50-task bimanual simulation, and physical manipulation (Sections 4.2–5)?

We answer these questions with in-distribution LIBERO, zero-shot LIBERO-Plus, RoboTwin 2.0, and tracker-free execution on a physical bimanual platform.

4.1 Experimental Setup

Our simulation evaluation covers LIBERO [22], LIBERO-Plus [12], and RoboTwin 2.0 [9]. LIBERO measures in-distribution performance across Spatial, Object, Goal, and Long suites. LIBERO-Plus evaluates the same training regime without adaptation under seven perturbation dimensions. For both benchmarks, we train one policy across the four original LIBERO suites. We report the benchmark-provided Avg for LIBERO-Plus rather than recomputing an unweighted mean of its columns. RoboTwin 2.0 tests 50 bimanual tasks under clean and randomized conditions.

Track4Action uses a Qwen3.5-2B VLA backbone and a DiT-B flow-matching action head [29], for 3.3B parameters in total. On LIBERO, the policy receives agent-view and wrist-view RGB images plus an 8-D robot state and predicts 7-D delta end-effector actions with $K = 8$. On RoboTwin, it receives one external and two wrist views without robot state and predicts 14-D bimanual joint and gripper commands with $K = 16$. The alignment-free variant retains the VLA backbone, action head, model scale, and rollout interface but trains without the tracker-distillation pathway. We also keep the data, optimizer, and training schedule fixed. This controlled comparison directly tests our central hypothesis: whether the complete tracker-distillation pathway improves control under matched data, optimization, model scale, and rollout settings. We report online task success rate for every benchmark.

Table 1: **LIBERO success rate (%)**. We train a single policy across all four suites and report the mean over the four suite scores. Bold marks the best result in each column, and underlining marks the second best.

Method	LIBERO				
	Spatial	Object	Goal	Long	Avg
General VLA					
OpenVLA [17]	84.7	88.4	79.2	53.7	76.5
π_0 [4]	96.8	98.8	95.8	85.2	94.2
$\pi_{0.5}$ [3]	98.8	98.2	98.0	<u>92.4</u>	<u>96.9</u>
GR00T N1 [25]	94.4	97.6	93.0	90.6	93.9
Latent-Action VLA					
UniVLA [7]	96.5	96.8	95.6	92.0	95.2
villa-X [10]	97.5	97.0	91.5	74.5	90.1
Video-Based VLA					
mimic-video [27]	94.2	96.8	90.6	–	93.9
WorldVLA [8]	87.6	96.2	83.4	60.0	81.8
$\mathcal{F}_1$ [24]	<u>98.2</u>	97.8	95.4	91.3	95.7
Flow/Trace-Guided VLA					
FlowVLA [40]	93.2	95.0	91.6	72.6	88.1
TraceVLA [38]	84.6	85.2	75.1	54.1	74.8
3D-Aware VLA					
SpatialVLA [32]	88.2	89.9	78.6	55.5	78.1
Track4Action w/o Align.	94.0	<u>99.2</u>	97.4	86.2	94.2
Track4Action	95.0	99.6	<u>97.6</u>	95.8	97.0

4.2 LIBERO Results

Overall comparison. Table 1 shows that Track4Action reaches 97.0% average success, 0.1 points above $\pi_{0.5}$ and 1.3 points above $\mathcal{F}_1$. It obtains the highest scores on Object and Long while remaining within one point of the best result on Goal.

Where does tracker supervision help? Removing tracker alignment lowers the average from 97.0% to 94.2%. The 2.8-point average gap is concentrated on LIBERO-Long, where success drops from 95.8% to 86.2%. In contrast, Spatial, Object, and Goal change by only 1.0, 0.4, and 0.2 points. The 9.6-point Long gain suggests that tracker supervision is most useful when the policy must preserve task-relevant state across multiple stages, rather than uniformly increasing already saturated short-horizon scores. Because standard LIBERO leaves little headroom, we next test whether this gain survives fully zero-shot distribution shifts.

4.3 Zero-Shot Robustness on LIBERO-Plus

Overall comparison. All policies in Table 2 train only on original LIBERO demonstrations and receive no adaptation to LIBERO-Plus. Track4Action reaches 82.3% average success, 3.0 points above LaMP at 79.3%. It ranks first on Camera, Light, Noise, and Layout and second on Robot, Language, and Background. The model therefore places within the top two on every perturbation dimension instead of trading robustness in one category for another.

Consistency across zero-shot shifts. Tracker alignment improves all seven dimensions over the alignment-free variant and raises the official average from 74.7% to 82.3%. The

Table 2: **LIBERO-Plus zero-shot OOD success rate (%)**. All models train on original LIBERO demonstrations and receive no additional training for the seven perturbation dimensions. Avg follows the official benchmark aggregation. Bold marks the best result in each column, and underlining marks the second best.

Method	Camera	Robot	Language	Light	Background	Noise	Layout	Avg
UniVLA [7]	1.8	46.2	69.6	69.0	81.0	21.2	31.9	42.9
OpenVLA [17]	0.8	3.5	23.0	8.1	34.8	15.2	28.5	15.6
OpenVLA-OFT [16]	56.4	31.9	79.5	88.7	93.3	75.8	74.2	69.6
π_0 [4]	13.8	6.0	58.8	85.0	81.4	79.0	68.9	53.6
π_0 -FAST [30]	<u>65.1</u>	21.6	61.0	73.2	73.2	74.4	68.8	61.6
WorldVLA [8]	0.1	27.9	41.6	43.7	17.1	10.9	38.0	25.0
LaMP [35]	64.5	69.6	88.2	<u>95.3</u>	97.4	76.9	73.8	<u>79.3</u>
Track4Action w/o Align.	58.3	52.0	84.3	92.7	90.2	<u>79.4</u>	<u>76.1</u>	74.7
Track4Action	76.6	<u>60.7</u>	<u>87.1</u>	96.3	<u>96.1</u>	88.4	78.7	82.3

largest gains occur on Camera at 18.3 points, Noise at 9.0 points, and Robot at 8.7 points. The absence of a category-level regression shows that the 7.6-point average gain is not driven by a single favorable perturbation. LaMP remains stronger on Robot, Language, and Background, which identifies three settings where additional robustness is still available.

4.4 Bimanual Evaluation on RoboTwin 2.0

Overall comparison. As shown in Table 3, Track4Action reaches 80.44% under clean conditions and 81.48% under domain randomization. It exceeds the strongest reported baseline, Motus w/o Pretrain, by 2.88 and 4.48 points. The margins over X-VLA are 7.64 and 8.64 points. The RoboTwin results extend the comparison from single-arm Cartesian control to three-view observations and 14-D bimanual actions.

Behavior under randomization. The success rate of Track4Action increases by 1.04 points from clean to randomized conditions. Over the same change, Motus decreases by 0.56 points and X-VLA changes by only 0.04 points. Consequently, the margin over Motus grows from 2.88 to 4.48 points under domain randomization. The 1.04-point increase shows that the clean-setting advantage is retained when RoboTwin randomizes the scene.

4.5 Cross-Benchmark Effect of Tracker Distillation

The alignment-free controls answer the second question through a system-level ablation of the complete tracker-distillation pathway. Under matched data, optimization, model scale, and rollout settings, the pathway raises average success by 2.8 points on LIBERO and 7.6 points on LIBERO-Plus. On RoboTwin 2.0, the gains are 39.12 points under clean conditions and 41.58 points under randomization. The smallest margin appears on saturated in-distribution LIBERO, while the larger margins appear under zero-shot shifts and a different bimanual action space. Together with the 9.6-point gain on LIBERO-Long, the largest improvements occur in settings that place greater demands on world state and motion. The consistent gains across observation shifts, task horizons, and action spaces support the complete

tracker-distillation pathway as effective privileged supervision for control.

5 Real-World Experiments

The final question asks whether tracker supervision remains useful when the policy leaves simulation and executes without Track4World. We evaluate Track4Action on physical bimanual manipulation under the same training-only teacher and tracker-free deployment protocol. Figure 3 summarizes the platform, task families, and out-of-distribution settings.

Setup. We conduct physical experiments on the AgileX ALOHA-style platform, which comprises two 6-DoF Piper arms with parallel-jaw grippers. One front-facing camera and two wrist-mounted cameras provide the RGB observations. The policy predicts a 14-D bimanual action composed of six joint commands and one gripper command for each arm. As in simulation, deployment runs only the VLA policy and does not execute Track4World.

Tasks and metrics. We train Track4Action on 50 demonstrations for each of four tasks and evaluate every compared policy for 10 trials per task. The suite contains two rigid-object tasks, *place two chilies on a plate* and *place a cabbage in a pot and close the lid*; one deformable task, *fold a towel*; and one long-horizon task, *place two pens in a drawer and close it*. We report *success rate*, the fraction of trials that complete the full instruction, and *process score*, which awards 25 points for each of four ordered task milestones and reaches 100 when all stages are completed. The milestone definitions are in Figure 3. We compare with $\pi_{0.5}$ [3] and the alignment-free variant.

Robustness protocol. We evaluate three held-out physical changes: a new object layout with distractors for chili transfer, an unseen towel color, and a textured desk background.

In-Domain Tasks and Process Score Details. We select four tasks: *pick up the chilies and put them into the plate*, *fold the towel*, *put two pens into the drawer and close it*, and *pick up the cabbage, put it into the pot, and close the lid*. These tasks cover rigid pick-and-place, deformable manipulation, coordinated bimanual control, and multi-stage interaction.

Table 3: **RoboTwin 2.0 success rate (%) under clean and randomized settings.** The Motus w/o Pretrain results are from [2]. Averages are computed over all 50 tasks. Bold and underline denote the best and second-best results within each setting.

Simulation Task	$\pi_{0.5}$ [3]		X-VLA [37]		Motus w/o Pretrain [2]		Track4Action w/o Align.		Track4Action	
	Clean	Rand.	Clean	Rand.	Clean	Rand.	Clean	Rand.	Clean	Rand.
Model Size	3.3B		0.9B		8B		3.3B		3.3B	
<i>Place Dual Shoes</i>	12%	7%	79%	88%	<u>78%</u>	<u>80%</u>	28%	28%	79%	79%
<i>Move Stapler Pad</i>	16%	18%	<u>78%</u>	73%	<u>49%</u>	<u>37%</u>	17%	17%	79%	68%
<i>Stack Blocks Two</i>	48%	56%	92%	87%	96%	94%	74%	77%	<u>94%</u>	<u>93%</u>
<i>Scan Object</i>	42%	38%	14%	36%	42%	50%	55%	<u>57%</u>	88%	86%
<i>Place Object Stand</i>	74%	65%	86%	88%	<u>91%</u>	<u>93%</u>	70%	65%	96%	96%
<i>Place Fan</i>	25%	36%	<u>80%</u>	75%	77%	<u>85%</u>	37%	35%	89%	94%
<i>Move Pillbottle Pad</i>	33%	29%	73%	71%	83%	<u>83%</u>	36%	32%	99%	93%
<i>Pick Dual Bottles</i>	10%	6%	47%	36%	<u>58%</u>	<u>68%</u>	7%	6%	84%	92%
<i>Blocks Ranking Rgb</i>	43%	35%	<u>83%</u>	83%	92%	<u>88%</u>	10%	8%	79%	91%
... (50 tasks)										
<i>Turn Switch</i>	5%	6%	40%	<u>61%</u>	69%	60%	18%	13%	<u>59%</u>	72%
<i>Pick Diverse Bottles</i>	5%	3%	<u>58%</u>	36%	53%	<u>62%</u>	10%	13%	73%	81%
<i>Place Bread Basket</i>	48%	56%	<u>81%</u>	71%	73%	<u>83%</u>	23%	21%	89%	89%
<i>Stack Blocks Three</i>	15%	16%	6%	10%	71%	76%	31%	27%	<u>68%</u>	<u>63%</u>
<i>Put Bottles Dustbin</i>	12%	9%	74%	<u>77%</u>	36%	33%	3%	3%	<u>47%</u>	81%
<i>Place Can Basket</i>	19%	25%	49%	52%	46%	<u>62%</u>	39%	31%	69%	66%
<i>Stamp Seal</i>	36%	23%	<u>76%</u>	<u>82%</u>	80%	88%	12%	9%	74%	73%
<i>Hanging Mug</i>	3%	3%	<u>23%</u>	27%	14%	<u>10%</u>	12%	7%	26%	27%
<i>Handover Block</i>	18%	19%	<u>73%</u>	37%	34%	15%	16%	21%	75%	77%
<i>Stack Bowls Three</i>	33%	35%	76%	86%	90%	<u>74%</u>	14%	14%	<u>88%</u>	86%
<i>Place Object Basket</i>	43%	36%	44%	39%	<u>74%</u>	75%	37%	27%	89%	<u>73%</u>
Average (%)	42.98	43.84	72.80	72.84	<u>77.56</u>	<u>77.00</u>	41.32	39.90	80.44	81.48

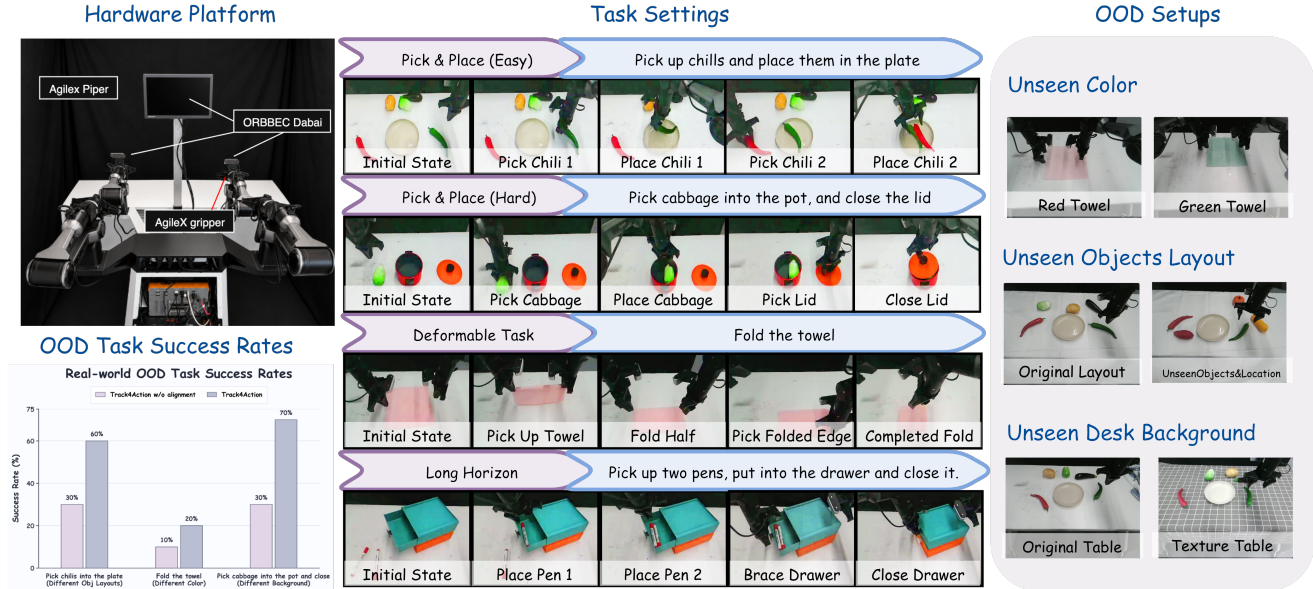


Figure 3: **Illustration of Real-world evaluation.** Upper left: the AgileX ALOHA-style hardware platform, built with two Piper arms and equipped with three cameras: one front-facing camera and one wrist-mounted camera on each arm. Center: four real-world manipulation tasks covering rigid-object transfer, deformable-object manipulation, and long-horizon interaction. Right: the OOD settings, including unseen towel color, object layout, and desk background. Lower left: OOD experimental results comparing alignment-free variant (w/o alignment) with Track4Action under the three settings.

Pick up the chilies and put them into the plate. This task requires the robot to pick up the green and red chilies and place them into the plate, ignoring other vegetables. The task is separated into 2 steps: first, the robot needs to approach the first chilies and pick them up, then the robot needs to find the plate and place the chilies right there. This task is relatively simple, it shows the robot’s ability to understand the instruction and perform the correct action. For each chilies, pick and put respectively value 25 points, total score is 100 points.

Fold the towel. This task requires the robot to pick up the towel and fold it into a neat rectangle. The task is separated into 3 steps: first, the robot needs to approach the right towel edge, grasp, and pick it up simultaneously with both of its 2 arms; then the robot needs to find a suitable surface to fold it on, and lay the towel down on it; finally, the robot needs to fold the towel properly while avoiding collisions. Simultaneous grasping values 25 points, lay down values 25 points, another folding values 25 points, and the last 25 lays on the towel’s final state being flat and regular. This task tests the robot’s ability to handle deformable objects and perform precise manipulation tasks.

Pick up the two pens, put them into the drawer, and close it. This task requires the robot to pick up the two pens on table and put them into the drawer one by one, then close the drawer with 2 arms. The task is separated into 3 steps: first, the robot needs to figure out the positions of the pens, decides the order, and pick them up; then the robot needs to find the drawer’s open layer and put the pens into it; finally, the right arm should hold the suitable place on the drawer, and then the left arm close the drawer properly. Both of the 2 pens’ pick and place task value 25 points, the right arm hold the drawer values 25 points, and the left arm last closing the drawer values 25 points. This task tests the robot’s ability to perform coordinated bimanual manipulation.

pick cabbage into the pot and close the lid. This is also a Pick&Place task, requires the robot to pick up the cabbage, put it into the pot, then close the lid properly. The task is separated into 3 steps: first, the robot needs to find the cabbage and pick it up; then the robot needs to locate the pot and put the cabbage into it; finally, the robot should grasp the lid’s handle and close the pot properly. First pick and put tasks respectively values 25 points, second pick task values 25 points, and robot closing the lid without collision or dropping values 25 points.

Out-of-Domain Tasks We set 3 conditions for OOD test.

Unseen Colors. We change the color of the objects in the scene, for example we use a green towel instead of a red one as in the training dataset, This tests the robot’s ability to generalize to unseen object colors.

Unseen Objects Layout. We change the layout of the objects in the scene, as well as the location and rotation of the target operating object, and let the robot predict the appropriate actions for each scenario, testing the robot’s ability to generalize to unseen object layouts.

Unseen Background. We change the background of the operating scene, by covering the desk with tablecloth of different color and texture. Testing the robot’s ability to generalize

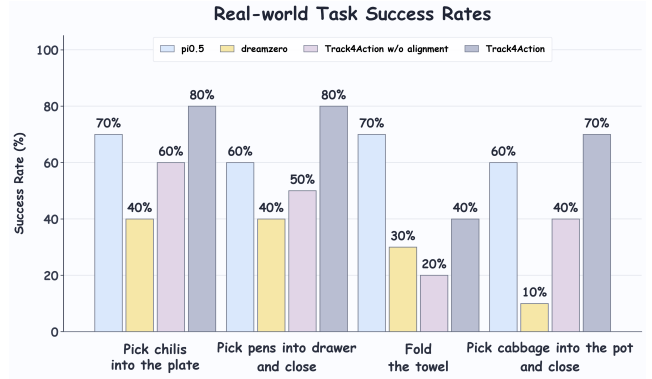


Figure 4: **Real-world task success rates.** Success rate measures full task completion over 10 trials per task. Across the four tasks, Track4Action averages 67.5% success. The “w/o alignment” legend denotes the variant trained without tracker supervision.

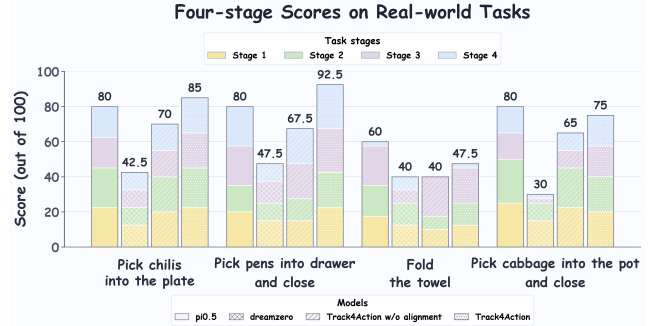


Figure 5: **Four-stage process scores on the real-world tasks.** Each stacked bar decomposes the process score into four ordered, equally weighted milestones; its total height is the resulting score out of 100. Across the four tasks, Track4Action averages 75.0.

to unseen background conditions.

In-distribution results. Figure 4 shows that Track4Action reaches 67.5% average success, compared with 65.0% for $\pi_{0.5}$ and 42.5% for the alignment-free variant. Tracker supervision improves success on every task by at least 20 points over the alignment-free control. The largest 30-point gains occur on the drawer and cabbage tasks, both of which require completing several ordered stages.

Figure 5 shows that the average process score of Track4Action is 75.0, equal to $\pi_{0.5}$ and 14.4 points above the 60.6 score of the alignment-free variant. Relative to the alignment-free control, the process score increases on all four tasks, with gains ranging from 7.5 to 25.0 points. The comparison with $\pi_{0.5}$ is less uniform. Track4Action improves drawer success from 60% to 80%, but reaches only 40% on towel folding compared with 70% for $\pi_{0.5}$. This failure identifies deformable manipulation as a remaining physical challenge despite the higher average completion rate.

Out-of-distribution results. The left panel of Figure 3 reports tracker-free execution under the three held-out changes. Tracker supervision raises chili-transfer success from 30% to 60% under the new object layout, towel-folding success from 10% to 20% for the unseen color, and cabbage-task success from 30% to 70% on the textured desk. The average across these settings increases from 23.3% to 50.0%. The 20% result on the unseen-color towel also shows that physical out-of-distribution deformable manipulation remains difficult.

6 Limitations

Track4Action requires temporally ordered demonstrations because its training target reads the realized clip $V_{t:t+K}$. Isolated image-action pairs cannot provide this supervision, and independently moving objects can weaken the association between a robot command and the observed scene transition. The pooled target emphasizes segment-level world motion and may discard local contact correspondence. It also inherits errors from Track4World under occlusion or fast motion and uses only the primary camera view. These choices add offline preprocessing but no deployment cost. Our physical evaluation covers one bimanual platform, four tasks, and three visual shifts. Evaluating broader embodiments, camera configurations, and physical disturbances remains an important next step.

7 Conclusion

We asked whether the realized 3D transition in a demonstration can supervise a VLA without becoming a deployment input. Track4Action answers this question by distilling an action-aligned Track4World feature into track queries that also condition the action head through gated fusion. The teacher feature only defines the training target, and the deployed policy remains tracker-free. Track4Action reaches 82.3% on zero-shot LIBERO-Plus, 80.44% and 81.48% on the clean and randomized RoboTwin 2.0 splits, and 67.5% average success across four physical bimanual tasks. The cross-domain results show that demonstration video can supervise both the command a policy executes and an action-facing representation of the world transition associated with that command.

References

- [1] Bharadhwaj, H.; Mottaghi, R.; Gupta, A.; and Tulsiani, S. 2024. Track2Act: Predicting Point Tracks from Internet Videos Enables Generalizable Robot Manipulation. arXiv:2405.01527.
- [2] Bi, H.; Tan, H.; Xie, S.; Wang, Z.; Huang, S.; Liu, H.; Zhao, R.; Feng, Y.; Xiang, C.; Rong, Y.; Zhao, H.; Liu, H.; Su, Z.; Ma, L.; Su, H.; and Zhu, J. 2026. Motus: A Unified Latent Action World Model. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 35101–35113.
- [3] Black, K.; Brown, N.; Darpinian, J.; Dhabalia, K.; Driess, D.; Esmail, A.; Equi, M. R.; Finn, C.; Fusai, N.; Galliker, M. Y.; Ghosh, D.; Groom, L.; Hausman, K.; Ichter, B.; Jakubczak, S.; Jones, T.; Ke, L.; LeBlanc, D.; Levine, S.; Li-Bell, A.; Mothukuri, M.; Nair, S.; Pertsch, K.; Ren, A. Z.; Shi, L. X.; Smith, L.; Springenberg, J. T.; Stachowicz, K.; Tanner, J.; Vuong, Q.; Walke, H. R.; Walling, A.; Wang, H.; Yu, L.; and Zhilinsky, U. 2025. $\pi_{0.5}$: A Vision-Language-Action Model with Open-World Generalization. In *Proceedings of the 9th Conference on Robot Learning*, 17–40.
- [4] Black, K.; Brown, N.; Driess, D.; Esmail, A.; Equi, M.; Finn, C.; Fusai, N.; Groom, L.; Hausman, K.; Ichter, B.; Jakubczak, S.; Jones, T.; Ke, L.; Levine, S.; Li-Bell, A.; Mothukuri, M.; Nair, S.; Pertsch, K.; Shi, L.; Smith, L.; Tanner, J.; Vuong, Q.; Walling, A.; Wang, H.; and Zhilinsky, U. 2025. π_0 : A Vision-Language-Action Flow Model for General Robot Control. In *Robotics: Science and Systems XXI*.
- [5] Brohan, A.; Brown, N.; Carbajal, J.; Chebotar, Y.; Chen, X.; Choromanski, K.; Ding, T.; Driess, D.; Dubey, A.; Finn, C.; Florence, P.; Fu, C.; Arenas, M. G.; Gopalakrishnan, K.; Han, K.; Hausman, K.; Herzog, A.; Hsu, J.; Ichter, B.; Irpan, A.; Joshi, N.; Julian, R.; Kalashnikov, D.; Kuang, Y.; Leal, I.; Lee, L.; Lee, T.-W. E.; Levine, S.; Lu, Y.; Michalewski, H.; Mordatch, I.; Pertsch, K.; Rao, K.; Reymann, K.; Ryoo, M.; Salazar, G.; Sanketi, P.; Sermanet, P.; Singh, J.; Singh, A.; Soricut, R.; Tran, H.; Vanhoucke, V.; Vuong, Q.; Wahid, A.; Welker, S.; Wohlhart, P.; Wu, J.; Xia, F.; Xiao, T.; Xu, P.; Xu, S.; Yu, T.; and Zitkovich, B. 2023. RT-2: Vision-Language-Action Models Transfer Web Knowledge to Robotic Control. In *Proceedings of the 7th Conference on Robot Learning*.
- [6] Brohan, A.; Brown, N.; Carbajal, J.; Chebotar, Y.; Dabis, J.; Finn, C.; Gopalakrishnan, K.; Hausman, K.; Herzog, A.; Hsu, J.; Ibarz, J.; Ichter, B.; Irpan, A.; Jackson, T.; Jesmonth, S.; Joshi, N.; Julian, R.; Kalashnikov, D.; Kuang, Y.; Leal, I.; Lee, K.-H.; Levine, S.; Lu, Y.; Malla, U.; Manjunath, D.; Mordatch, I.; Nachum, O.; Parada, C.; Peralta, J.; Perez, E.; Pertsch, K.; Quiambao, J.; Rao, K.; Ryoo, M.; Salazar, G.; Sanketi, P.; Sayed, K.; Singh, J.; Sontakke, S.; Stone, A.; Tan, C.; Tran, H.; Vanhoucke, V.; Vega, S.; Vuong, Q.; Xia, F.; Xiao, T.; Xu, P.; Xu, S.; Yu, T.; and Zitkovich, B. 2023. RT-1: Robotics Transformer for Real-World Control at Scale. In *Robotics: Science and Systems XIX*.
- [7] Bu, Q.; Yang, Y.; Cai, J.; Gao, S.; Ren, G.; Yao, M.; Luo, P.; and Li, H. 2025. Learning to Act Anywhere with Task-Centric Latent Actions. In *Robotics: Science and Systems*.
- [8] Cen, J.; Yu, C.; Yuan, H.; Jiang, Y.; Huang, S.; Guo, J.; Li, X.; Song, Y.; Luo, H.; Wang, F.; et al. 2025. World-VLA: Towards Autoregressive Action World Model. arXiv:2506.21539.
- [9] Chen, T.; Chen, Z.; Chen, B.; Cai, Z.; Liu, Y.; Li, Z.; Liang, Q.; Lin, X.; Ge, Y.; Gu, Z.; Deng, W.; Guo, Y.; Nian, T.; Xie, X.; Chen, Q.; Su, K.; Xu, T.; Liu, G.; Hu, M.; Gao, H.-a.; Wang, K.; Liang, Z.; Qin, Y.; Yang, X.; Luo, P.; and Mu, Y. 2025. RoboTwin 2.0: A Scalable Data Generator and Benchmark with Strong

- Domain Randomization for Robust Bimanual Robotic Manipulation. arXiv:2506.18088.
- [10] Chen, X.; Wei, H.; Zhang, P.; Zhang, C.; Wang, K.; Guo, Y.; Yang, R.; Wang, Y.; Xiao, X.; Zhao, L.; Chen, J.; and Bian, J. 2025. villa-X: Enhancing Latent Action Modeling in Vision-Language-Action Models. arXiv:2507.23682.
 - [11] Doersch, C.; Yang, Y.; Vecerik, M.; Gokay, D.; Gupta, A.; Aytar, Y.; Carreira, J.; and Zisserman, A. 2023. TAPIR: Tracking Any Point with per-frame Initialization and temporal Refinement. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 10027–10038.
 - [12] Fei, S.; Wang, S.; Shi, J.; Dai, Z.; Cai, J.; Qian, P.; Ji, L.; He, X.; Zhang, S.; Fei, Z.; et al. 2025. LIBERO-Plus: In-Depth Robustness Analysis of Vision-Language-Action Models. *arXiv preprint arXiv:2510.13626*.
 - [13] Ghosh, D.; Walke, H.; Pertsch, K.; Black, K.; Mees, O.; Dasari, S.; Hejna, J.; Kreiman, T.; Xu, C.; Luo, J.; Tan, Y.; Chen, L.; Vuong, Q.; Xiao, T.; Sanketi, P.; Sadigh, D.; Finn, C.; and Levine, S. 2024. Octo: An Open-Source Generalist Robot Policy. In *Robotics: Science and Systems XX*.
 - [14] Guan, J.; Zhao, W.; Pei, Y.; Chen, Z.; Solin, A.; and Kannala, J. 2026. Point Tracking Improves World Action Models. arXiv:2605.23856.
 - [15] Karaev, N.; Rocco, I.; Graham, B.; Neverova, N.; Vedaldi, A.; and Rupprecht, C. 2024. CoTracker: It Is Better to Track Together. In *Computer Vision – ECCV 2024*, 18–35.
 - [16] Kim, M. J.; Finn, C.; and Liang, P. 2025. Fine-Tuning Vision-Language-Action Models: Optimizing Speed and Success. arXiv:2502.19645.
 - [17] Kim, M. J.; Pertsch, K.; Karamcheti, S.; Xiao, T.; Balakrishna, A.; Nair, S.; Rafailov, R.; Foster, E.; Lam, G.; Sanketi, P.; Vuong, Q.; Kollar, T.; Burchfiel, B.; Tedrake, R.; Sadigh, D.; Levine, S.; Liang, P.; and Finn, C. 2024. OpenVLA: An Open-Source Vision-Language-Action Model. In *Proceedings of the 8th Conference on Robot Learning*.
 - [18] Lee, S.; Jung, Y.; Chun, I.; Lee, Y.-C.; Cai, Z.; Huang, H.; Talreja, A.; Dao, T. D.; Liang, Y.; Huang, J.-B.; and Huang, F. 2025. TraceGen: World Modeling in 3D Trace Space Enables Learning from Cross-Embodiment Videos. arXiv:2511.21690.
 - [19] Li, F.; Song, W.; Zhao, H.; Wang, J.; Ding, P.; Wang, D.; Zeng, L.; and Li, H. 2025. Spatial Forcing: Implicit Spatial Representation Alignment for Vision-Language-Action Model. arXiv:2510.12276.
 - [20] Lin, M.; Ding, P.; Wang, S.; Zhuang, Z.; Liu, Y.; Tong, X.; Song, W.; Lyu, S.; Huang, S.; and Wang, D. 2026. HiF-VLA: Hindsight, Insight and Foresight through Motion Representation for Vision-Language-Action Models. arXiv:2512.09928.
 - [21] Lipman, Y.; Chen, R. T. Q.; Ben-Hamu, H.; Nickel, M.; and Le, M. 2023. Flow Matching for Generative Modeling. In *The Eleventh International Conference on Learning Representations*.
 - [22] Liu, B.; Zhu, Y.; Gao, C.; Feng, Y.; Liu, Q.; Zhu, Y.; and Stone, P. 2023. LIBERO: Benchmarking Knowledge Transfer for Lifelong Robot Learning. In *Advances in Neural Information Processing Systems 36*, 44776–44791.
 - [23] Lu, J.; Xu, J.; Hu, W.; Zhu, R.; Zhao, C.; Yeung, S.-K.; Shan, Y.; and Liu, Y. 2026. Track4World: Feedforward World-Centric Dense 3D Tracking of All Pixels. arXiv:2603.02573.
 - [24] Lv, Q.; Kong, W.; Li, H.; Zeng, J.; Qiu, Z.; Qu, D.; Song, H.; Chen, Q.; Deng, X.; and Pang, J. 2025. F1: A Vision-Language-Action Model Bridging Understanding and Generation to Actions. arXiv:2509.06951.
 - [25] NVIDIA; Bjorck, J.; et al. 2025. GR00T N1: An Open Foundation Model for Generalist Humanoid Robots. arXiv:2503.14734.
 - [26] Open X-Embodiment Collaboration; O’Neill, A.; et al. 2024. Open X-Embodiment: Robotic Learning Datasets and RT-X Models. In *2024 IEEE International Conference on Robotics and Automation*, 6892–6903.
 - [27] Pai, J.; Achenbach, L.; Montesinos, V.; Forrai, B.; Mees, O.; and Nava, E. 2025. mimic-video: Video-Action Models for Generalizable Robot Control Beyond VLAs. arXiv:2512.15692.
 - [28] Pan, S.; Xu, Y.; Xu, R.; Zhou, Z.; Wu, S.; and Yu, Z. 2025. Self-Correcting Robot Manipulation via Gaussian-Splatted Foresight. *Proceedings of the AAAI Conference on Artificial Intelligence*, 39(25): 26642–26650.
 - [29] Peebles, W.; and Xie, S. 2023. Scalable Diffusion Models with Transformers. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*.
 - [30] Pertsch, K.; Stachowicz, K.; Ichter, B.; Driess, D.; Nair, S.; Vuong, Q.; Mees, O.; Finn, C.; and Levine, S. 2025. FAST: Efficient Action Tokenization for Vision-Language-Action Models. arXiv:2501.09747.
 - [31] Qian, J.; Han, B.; Shi, C.; Xiao, L.; Yang, L.; Shi, S.; and Jiang, L. 2026. GeoPredict: Leveraging Predictive Kinematics and 3D Gaussian Geometry for Precise VLA Manipulation. arXiv:2512.16811.
 - [32] Qu, D.; Song, H.; Chen, Q.; Yao, Y.; Ye, X.; Gu, J.; Wang, Z.; Ding, Y.; Zhao, B.; Wang, D.; and Li, X. 2025. SpatialVLA: Exploring Spatial Representations for Visual-Language-Action Models. In *Robotics: Science and Systems XXI*.
 - [33] Su, Y.; Chen, S.; Shi, H.; Liu, M.; Zhang, Z.; Huang, N.; Zhong, W.; Zhu, Z.; Liu, Y.; and Liu, X. 2026. World Guidance: World Modeling in Condition Space for Action Generation. arXiv:2602.22010.
 - [34] Sun, J.; Zhang, W.; Qi, Z.; Ren, S.; Liu, Z.; Zhu, H.; Sun, G.; Jin, X.; and Chen, Z. 2026. VLA-JEPA: Enhancing Vision-Language-Action Model with Latent World Model. arXiv:2602.10098.

- [35] Wang, X.; Wang, C.; Xu, Y.; Ye, M.; Zhang, F.; Tian, J.; Zhan, X.; Zhu, L.; Lu, C.; and Yang, L. 2026. LaMP: Learning Vision-Language-Action Policy with 3D Scene Flow as Latent Motion Prior. arXiv:2603.25399.
- [36] Zhen, H.; Qiu, X.; Chen, P.; Yang, J.; Yan, X.; Du, Y.; Hong, Y.; and Gan, C. 2024. 3D-VLA: A 3D Vision-Language-Action Generative World Model. In *Proceedings of the 41st International Conference on Machine Learning*.
- [37] Zheng, J.; Li, J.; Wang, Z.; Liu, D.; Kang, X.; Feng, Y.; Zheng, Y.; Zou, J.; Chen, Y.; Zeng, J.; Zhang, Y.-Q.; Pang, J.; Liu, J.; Wang, T.; and Zhan, X. 2025. X-VLA: Soft-Prompted Transformer as Scalable Cross-Embodiment Vision-Language-Action Model. arXiv:2510.10274.
- [38] Zheng, R.; Liang, Y.; Huang, S.; Gao, J.; Daumé III, H.; Kolobov, A.; Huang, F.; and Yang, J. 2024. TraceVLA: Visual Trace Prompting Enhances Spatial-Temporal Awareness for Generalist Robotic Policies. arXiv:2412.10345.
- [39] Zhi, H.; Chen, P.; Zhou, S.; Dong, Y.; Wu, Q.; Han, L.; and Tan, M. 2025. 3DFlowAction: Learning Cross-Embodiment Manipulation from 3D Flow World Model. arXiv:2506.06199.
- [40] Zhong, Z.; Yan, H.; Li, J.; Liu, X.; Gong, X.; Zhang, T.; Song, W.; Chen, J.; Zheng, X.; Wang, H.; and Li, H. 2025. FlowVLA: Visual Chain of Thought-based Motion Reasoning for Vision-Language-Action Models. arXiv:2508.18269.