

Agentic Auto-Research is Fuzz Testing

Yifeng He^{1,3} Jicheng Wang¹ Yinzhe Zhao^{2†} Jiachen Liu³ Hao Chen⁴

¹University of California, Davis ²Zhejiang University, ³ARA Lab ⁴The University of Hong Kong

[†]Work completed while interning at UC Davis.

Autonomous research agents can generate experiments faster than researchers can validate them. Researchers have responded by scaling the proposer and ranking more samples with a learned judge or human reviewers. We argue that this *generate-and-rank* paradigm misses the problem of sparse feedback. Within a declared research problem, an agent follows the control loop of a greybox fuzzer: it proposes a candidate, executes it, observes feedback, and chooses what to try next. A fuzzer rarely finds a bug, but coverage makes partial progress observable on every execution. Fuzzers then use that signal to mutate inputs and allocate effort, rather than only to rank completed runs. Auto-research needs the same two capabilities. First, each experiment should expose a cheap, dense signal of epistemic progress before final scientific validation is available. Second, that signal should determine the next intervention so that the agent searches rather than repeatedly samples. Because the optimized progress signal is guidance rather than a verdict, final validation must still decide what counts as a discovery using evidence protected from adaptive reuse. We propose controlled tests of whether candidate signals predict validated progress, whether feedback-directed search yields more validated discoveries per unit cost than repeated sampling, and whether protected validation reduces false discoveries. Feedback architecture, not only generation, is a central bottleneck in auto-research.

Correspondence: yfhe.cs@gmail.com; amber@ara-commons.com; chenho@hku.hk



1. Introduction

Automated research agents now propose hypotheses, write and run code, interpret results, and revise their work. Selected outputs have survived physical assays or workshop review [20, 29, 52]. Automation has created an imbalance: agents can generate candidates faster than researchers can validate them, and most candidates do not merit validation. Human readers, for example, rate machine-proposed ideas as more novel than human ideas but markedly less feasible [43]. We preview our position in Figure 1: auto-research should use intermediate signals to retain promising states and schedule new experiments, while reserving scientific claims for protected validation.

Researchers have responded with what we call the *generate-and-rank paradigm*: ask a stronger proposer for more candidates, score them with a learned judge, and retain the winner. Test-time compute then shifts from tokens to experiments: “more inference can mean more experiments” [2, 45]. Repeated sampling improves pass-at- k , but the fraction of problems solved grows approximately log-linearly with sample count across the tasks studied by Brown et al. [8]. Without automatic verification, majority voting and reward-model selection plateau after a few hundred samples [8]. These benchmark results do not establish a universal law of discovery, but they reveal diminishing returns from gener-

ating independent candidates and judging them afterward. Scientific evaluations can also require long computations, expert labor, replication, or physical experiments. Auto-research therefore needs to extract more information from each evaluation, not only generate more candidates.

Fuzzing reveals the missing design choice. An autonomous research agent generates a candidate experiment, executes it, observes feedback, and chooses what to try next. Coverage-guided greybox fuzzing runs the same control loop [31, 57]: it mutates a seed, executes the program under lightweight instrumentation, observes the behavior that the input reached, and uses that history to choose future inputs. Bugs remain rare, but branch or edge coverage makes intermediate progress observable on each execution. Modern fuzzers use this feedback through adaptive scheduling, structured mutators, and targeted analyses [15]. Research does not literally crash like software. The transferable principle is that *an expensive search needs observable progress and a policy that acts on it*. We use *instrumented* in this role sense throughout: fuzzing instruments a program by inserting probes at branches; science instruments an experiment with apparatus built to observe it. In both, instrumentation arranges in advance to observe more than the final outcome.

Lesson one: make research progress observable. Final validation usually gives sparse feedback: most experiments

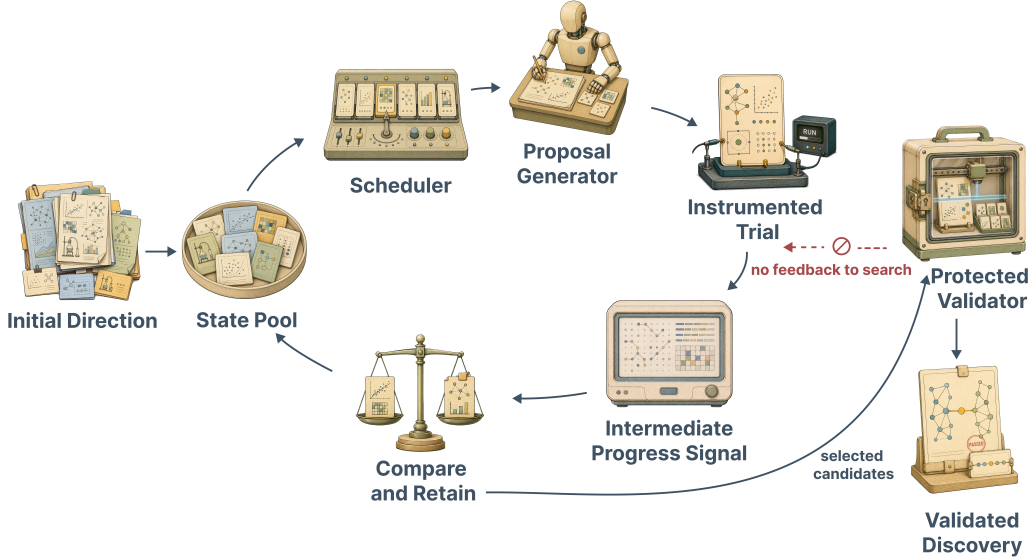


Figure 1. Auto-research as feedback-directed search. Initial directions enter a state pool. A scheduler selects a state, the proposer generates candidates, and experiments expose intermediate signals. Comparison retains promising results as new states and closes the loop. A protected validator separately certifies discoveries without steering the search.

do not establish a finding. Auto-research therefore needs an intermediate signal that reports partial progress on each candidate before final validation is available. The research analogue of coverage should track epistemic progress, such as whether an experiment rules out an explanation, locates a boundary, sharpens a prediction, or changes which experiment should run next. This signal is not an early verdict that the current candidate is correct. It exposes how the campaign’s state changed and whether that change may help future search.

Lesson two: use feedback to search. Once useful guidance exists, the next experiment should depend on what previous experiments revealed. Fuzzers use execution feedback to mutate promising seeds, target unsolved constraints, and allocate energy across regions. A research agent should likewise use feedback to choose its next intervention, rather than only rank completed samples. This distinction becomes more important when each evaluation is expensive, noisy, or slow.

Final validation: guidance is not a verdict. A progress signal helps the agent decide where to search, but it does not determine whether the search succeeded. In fuzzing, coverage identifies inputs that reach new program behavior, while a crash or sanitizer oracle determines whether an input exposes a failure [3, 15, 31]. Auto-research needs the same division of roles: the progress signal guides experiment selection, and final validation determines whether the selected candidate counts as a discovery. Because the search adaptively optimizes the progress signal, that verdict must

rely on evidence protected from repeated use during search.

Our position. Auto-research should operate as instrumented, feedback-directed search. Within a declared research problem, each experiment should expose a cheap, dense measure of epistemic progress; the search policy should use that measure to choose its next intervention; and final validation, protected from adaptive reuse of the progress signal, should determine what counts as a discovery. This position makes three separable predictions. First, candidate progress signals should predict protected scientific outcomes and improve how a fixed validation budget is allocated. Second, with the proposer, task, validator, and budget fixed, feedback-directed search should yield more validated discoveries per unit cost than repeated sampling. Third, with the search trace fixed, protected validation should reduce false discoveries relative to reporting the optimized proxy. These predictions specify how feedback should work, rather than merely observing that discovery involves search.

2. The research loop is the fuzzing loop

Science and engineering share one iterative cycle: propose an experiment, implement and run it, evaluate the outcome, and let that outcome shape the next proposal. Auto-research systems race to automate this cycle end to end, and automation does drive down iteration time. Most systems, however, draw evaluation as a single box whose one score both steers the search and certifies the result (Figure 2). Fuzzing matured by splitting that box: cheap coverage steers, and a protected oracle certifies. The rest of this section maps the

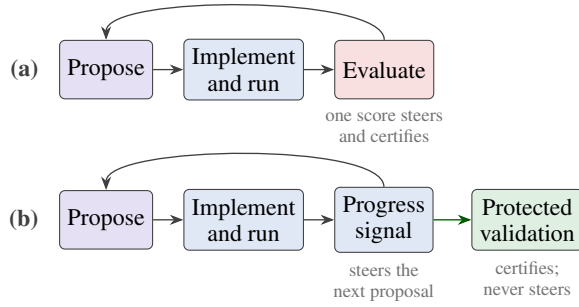


Figure 2. Splitting the evaluate box. (a) The common research cycle scores each experiment with a single evaluation that both steers the search and certifies the result. (b) Fuzzing separates the two roles: a cheap progress signal steers the next proposal, while protected validation certifies discoveries and never feeds the search.

two loops component by component.

The correspondence concerns control structure, not literal equivalence. Each fuzzing component exposes a design decision that automated research systems also make (Table 1, drawn as a loop in Figure 1). Prior work and data supply seeds; the LLM proposes mutations; experiments provide instrumented executions; and a scheduling policy allocates compute and validation budget across directions [4, 5]. The central mapping first asks what an execution can reveal before a rare success occurs, then asks how that observation changes the next candidate. A protected validator remains outside this guidance path and determines which candidates count as discoveries.

Research differs from a fixed program because it can revise its hypotheses and representations while it runs. Our analogy therefore covers search within a declared research problem, even when the search space is too large to enumerate. It does not cover the abductive act of changing what counts as the problem, a candidate, or a discovery. We return to this boundary in section 7.

3. Lesson one: make research progress observable

Final outcomes provide too little feedback to direct an expensive search. Most fuzzing executions do not expose a bug, yet branch and edge coverage reveal which program behavior each input reached. This intermediate signal lets the campaign observe progress before it finds a failure. Auto-research needs an analogous signal because most experiments do not establish a scientific finding, and stronger validation may arrive only after replication, expert review, or a physical assay. The signal should measure how an experiment changes the state of the search, not estimate whether the current candidate is already a discovery. We depict this distinction in Figure 3: instruments reveal structure

Table 1. The analogy, component by component. The boldfaced rows identify the two central design choices: make intermediate progress observable and use it to direct search.

Fuzzing	Automated research	Transferable lesson
Seed corpus	Prior results and literature	Seed quality bounds what search can reach
Mutation operator	LLM proposer of experiments	Strict operators keep validity; many broaden reach
Coverage (guidance)	Intermediate progress signal (open)	Expose useful progress on each experiment
Crash / sanitizer (oracle)	A validated discovery	Check each relevant operation; positive verdicts are rare
Blind vs. targeted mutation	Repeated vs. directed search	Let observations choose transformations and allocations
Power schedule	Compute across directions	Prioritize under-explored, high-yield regions

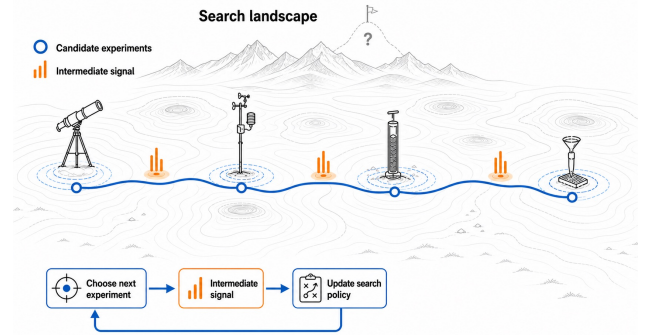


Figure 3. Intermediate signals make partial research progress observable before final validation. Each instrument reveals a different kind of structure in the search landscape, even though the distant objective remains unresolved.

in the search landscape while the distant finding remains uncertified.

Coverage gives fuzzers one answer to the resulting design question: what intermediate metric can expose useful progress before the final outcome is known? Research needs its own answer. A program and its instrumentation define a fixed but usually unenumerated set of observable features, and a campaign records which features it has reached. A research problem is less stable because its hypotheses and representations can change. The analogy therefore supplies three requirements for a useful progress signal, rather than a ready-made metric:

C1. Cheap and informative on each candidate. A fuzzer evaluates coverage and sanitizer checks during the same execution, but the oracle usually returns only “no detected failure.” That result provides little direction for the next input. Guidance must instead report partial progress on every candidate. In research, replication,

an assay, or expert review may be purchased separately, so this reading should also cost substantially less than the final validation that it helps allocate.

C2. Correlated with genuine progress. Following the signal should lead toward real discoveries rather than toward larger values of the signal alone.

C3. Robust under optimization. A search can game any signal that it maximizes [17, 44].

These requirements respond to known failures. Curiosity driven by prediction error can fixate on a “noisy television” and violate C3 [9, 36]. Coverage can also overcount progress: many coverage-unique crashes may collapse to a small number of distinct bugs [24].

For research, the analogue of coverage should represent *epistemic progress*: whether an experiment reduces uncertainty about which hypothesis holds. Such an experiment may rule out a competing explanation, locate a boundary, sharpen a held-out prediction, or change which experiment the agent runs next. C2 asks a proxy to track this progress. A narrow experiment that separates two hypotheses should score highly, while a surprising result that resolves nothing should score poorly. The signal should also remain cheaper and less model intensive than full Bayesian information gain, which requires an explicit likelihood, prior, design domain, and utility. Candidate proxies include *surprise against a model*, *novelty against prior work*, *verifier confidence* and *cross-replicate disagreement*, and *distance to a stated target*. Each balances C1 through C3 differently.

Researchers must test whether any proxy tracks real discovery. Fuzzing provides a suitable evaluation pattern. Across many programs, coverage correlated with bug finding, but the fuzzer with the most coverage did not necessarily find the most bugs [6]. A research evaluation can instrument a fixed loop with competing proxies, run repeated trials, and measure how well each proxy predicts protected outcomes and allocates a fixed validation budget. It can then compare the number of validated discoveries per unit cost. A useful proxy must survive both tests.

This capability claim makes a falsifiable prediction. **Signal prediction:** with the proposer, task, and candidate pool fixed, a useful intermediate metric should predict protected outcomes and select more validator-confirmed discoveries under a fixed validation budget than an uninformative or terminal-only signal. Whether a selected candidate counts as a discovery is a distinct final-validation question addressed in section 5. If no candidate signal predicts protected progress, this claim is wrong.

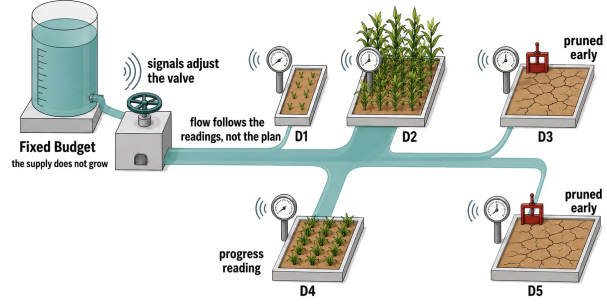


Figure 4. A scheduler concentrates a fixed budget on the directions whose progress readings improve, and prunes the rest early. Because the supply does not grow, pruning D3 and D5 frees flow for D2. Directed greybox fuzzers schedule energy the same way, by distance to a target [4, 5].

4. Lesson two: use feedback to search

An intermediate signal creates value only when the search policy acts on it. A common generate-and-rank baseline prompts a proposer for k candidates, scores each terminal output, and keeps the best. A tree or tournament may organize the candidates. Yet the procedure remains close to repeated sampling when experimental feedback determines only which complete sample survives, rather than which intervention the agent attempts next. Observations should instead control how the search policy routes a fixed resource budget among research directions (Figure 4).

Fuzzers use feedback more directly. AFL and AFL++ retain random mutation but allocate future mutations according to execution history [15, 57]. Angora adds targeted constraint solving: taint analysis identifies relevant input bytes, a branch predicate becomes a black-box function $f(x)$, and a numerical approximation to ∇f guides the input until the branch flips [11]. In the relevant ablation, gradient descent solved more branch constraints than random mutation on every tested program when the input corpus was fixed. On `xmlwf`, for example, gradient descent solved 97.0% of branch constraints, compared with 77.4% for random mutation. Directed greybox fuzzing applies the same idea to scheduling by concentrating energy according to distance from a target [4].

The lesson is to let observations determine the next transformation or allocation, not to use gradients for every scientific hypothesis. A research agent could use sensitivity analysis to identify the premise that drives an outcome, schedule compute toward under-explored directions, or generate an experiment that distinguishes the surviving explanations. AlphaEvolve and ALE-Agent already exploit executable scores in iterative search [23, 33]. Language models also act as coverage-guided mutators inside software fuzzing loops [30, 58]. We need to determine which operators improve

protected, cost-normalized scientific outcomes rather than only the steering proxy.

Research agents will not inherit Angora’s gains automatically. **Search prediction:** with the proposer, task, protected validator, and total budget fixed, a policy that uses intermediate experimental feedback to choose its next intervention should yield more validator-confirmed discoveries per unit cost than repeated sampling. This comparison defines *principled search* operationally: the next action depends on the observed campaign history, and success is measured under a common cost and validation rule.

5. Final validation: decide what counts as a discovery

The progress signal tells the agent where to search next. Final validation decides whether the selected candidate counts as a discovery. Because the search adaptively optimizes the progress signal, that final verdict must rely on evidence protected from repeated use during search. The two roles differ in what they answer, not in when they run or what they cost.

Standard fuzzing terminology already separates access levels: black-box fuzzers observe external behavior, white-box fuzzers use detailed program analysis, and greybox fuzzers collect lightweight execution feedback [31]. We extend this access-based spectrum rather than redefine it. Coverage counters and sanitizer checks may run during the same instrumented execution, but their outputs answer different questions: guidance asks “where should the campaign search next?”, while the research analogue of an oracle asks “does this candidate count as a discovery?”

The AI co-scientist makes this distinction concrete [20]. Its store of literature and hypotheses supplies seeds. Debate and evolution generate variants. An LLM tournament assigns Elo ratings that determine which hypotheses receive further development. Selected biomedical hypotheses eventually undergo experimental validation. In the fuzzing analogy, Elo provides the dense guidance proxy, while the physical experiment provides the final verdict. Elo can organize the search only when it predicts later correctness and experimental value. An Elo gain does not establish that the hypothesis is true.

This example shows why guidance is not a verdict. Ranking hypotheses by Elo guides search. Treating Elo as proof of scientific validity would certify a result. Search can use Elo despite its exposure to adaptive optimization, but certification requires evidence protected from that optimization, such as a hidden test, replication, physical assay, or independent review. The two signals need not run at different frequencies or have inherently different costs. The requirement is that gains in the steering proxy remain claims

awaiting final validation.

Where final validation enters. Other systems place the boundary elsewhere. FunSearch rejects invalid programs and scores valid ones with a deterministic evaluator [40]; AlphaEvolve combines machine-executable validity checks with machine-executable objectives [33]. Both operate in domains where systems can compute correctness and progress comparatively easily. The AI Scientist-v2 uses learned evaluators to select experimental nodes. Humans choose its initial ideas and completed manuscripts for submission, and workshop reviewers provide the eventual acceptance judgment [52]. These systems fall at different points on a spectrum. The relevant distinction is how much adaptive search occurs before evidence independent of the search proxy enters the loop.

The MLE-bench analysis provides a quantitative warning. Agents search with cross-validation scores and return the validation-best solution. Counterfactually choosing the test-best node would raise the medal rate by 9 to 13 percentage points [48]. Researchers cannot turn the hidden test into another repeatedly queried steering score, but the gap shows that adaptive progress on the proxy does not guarantee progress under protected evaluation.

The three roles also make failures diagnosable. A failed campaign can reflect uninformative guidance, a search policy that missed the relevant region, or a final validator that miscertified the result. A conflated score obscures these explanations and leaves retraining the judge as the only apparent remedy. Fuzzing’s reliability studies illustrate the alternative [6, 24]: each component has its own instrumentation and track record, so practitioners can identify which one failed.

What final validation buys. Final validation limits adaptive self-deception. A search that optimizes and reports one learned score can exploit misspecification in that score [17, 34, 44]. A final validator cannot repair a poor proxy, and the campaign may still waste its budget. It can, however, prevent proxy gains from automatically becoming claims of discovery. We therefore predict an epistemic benefit: fewer false discoveries among reported results. Operationally, with the candidates and search trace fixed, evidence protected from adaptive reuse should reduce the false-discovery rate relative to reporting the optimized guidance score. This is a reliability claim about the final verdict, not another search capability.

6. Related work

Many systems now automate parts of research, and recent surveys identify evaluation as a weak point [14, 38]. Researchers debate whether static benchmarks, deployment

evidence, or verification inside the loop should measure progress [2]. Jerry Tworek argues that “the era of evals is done”: as agents improve at generating research outputs, the bottleneck moves from generation to verification, and sustained improvement in deployed workflows replaces static benchmarks as the meaningful test [1]. This shift names the same gap we formalize: a learned judge cannot substitute for independent validation. We add three questions to that debate: what intermediate signal makes progress observable, how does the search policy act on it, and what independent evidence validates the output? Existing systems occupy intermediate positions along these dimensions.

Ninety years of work on mechanized verification and self-improving systems rehearse the same failure points. Hilbert asked for a mechanical procedure that decides whether a first-order formula is valid; Gödel [18] showed that strong formal systems cannot prove all truths about themselves, Church [12] and Turing [49] answered the Entscheidungsproblem in the negative, and Rice [39] extended the verdict to every nontrivial property of program behavior. Because verification resists full mechanization, software practice retreated to empirical search that pairs cheap guidance with partial oracles. Self-improving programs kept rediscovering this boundary. Good [19] speculated that an ultraintelligent machine could redesign itself; Friedberg [16] mutated machine code at random and found that unguided sampling learned no faster than exhaustive random search. The Gödel machine of Schmidhuber [42] accepted only provably beneficial self-modifications, and the cost of proof kept it from taking a single step: a protected verdict without a cheap signal. Neural architecture search steered and certified with one static benchmark [60], and the search overfit the benchmark it optimized [53]. Learned research judges now repeat that conflation at the scale of papers. Each wave stalled where the fuzzing loop predicts: guidance was missing, the oracle was unaffordable, or one score played both roles. Science likewise has no procedure that decides whether a hypothesis is true, so auto-research should inherit the working answer rather than await a perfect verifier.

The AI Scientist family and AI co-scientist use the learned evaluation mechanisms analyzed in [section 5](#), but external review or experiments ultimately judge selected outputs [20, 29, 52]. Agent Laboratory likewise ranks code with a generated reward and grades manuscripts with an emulated reviewer [41]. These signals can organize search, but their scores do not provide independent scientific validation. MLR-Bench illustrates the risk under its coding-agent conditions: roughly 80% of cases contain fabricated or invalidated experimental results [10].

Systems with executable objectives face an easier validation problem. FunSearch and AlphaEvolve reject invalid programs and score valid ones with machine-executable

evaluators [33, 40]. ALE-Agent iteratively optimizes an executable contest score and placed 21st among more than 1000 participants in a live AtCoder contest [23]. In the wet lab, Coscientist can execute selected chemistry procedures [7], and the Virtual Lab sent its final nanobody designs to physical assays [47]. These examples are consistent with the value of grounded evaluation, but they span incomparable tasks and cannot isolate the effect of observability, search, or validation design.

Two lines of work support this framing. AIGS adds a dedicated falsification agent that separates verification from generation [28]; Dolphin filters ideas with cheap LLM signals but advances only those that improve an executed task metric [55]. Separately, LLM judges favor their own generations, change rankings under reordering, and respond to injected content in scholarly review [35, 50, 54, 59]. Results on reward overoptimization and adaptive validity explain how repeated optimization can amplify these weaknesses [13, 17, 34, 44]. Evaluation harnesses such as RE-Bench and MLAGentBench already separate a running signal from a final executable score [22, 51]. We frame these choices as observability, search, and validation design, then use fuzzing to derive controlled comparisons among them. Content fuzzing already demonstrates that the architecture transfers beyond software testing, though in a narrow domain [21]; open-ended science still needs progress signals that satisfy the criteria in [section 3](#).

Agent-native research artifacts supply the surface this framing requires. Liu et al. [27] propose that research outputs ship as machine-executable artifacts rather than prose papers, so agents can parse, run, and extend them directly. Such artifacts open research to analysis the way instrumented binaries open programs: dynamic analysis, such as the fuzzing loop we describe, executes them and observes feedback, while static analysis, such as verification and interpretation, inspects their claims without execution. Our proposals for dense progress signals and protected validation presuppose this surface; artifact-native outputs make it available.

7. Alternative views

Six objections define the limits of our position.

“LLMs cannot make the abductive jump that discovery requires.” Zahavy [56] argues that current LLMs cannot move from sensory experience to genuinely new axioms through induction or deduction alone. Our claim begins after a research problem and candidate representation exist. It asks how an agent should observe progress, search, and validate within them. Interactive world models may expand what an agent can propose; fuzzing-style feedback can then make the downstream search more efficient and its discover-

ies more trustworthy. Our analogy does not explain how an agent changes what counts as the problem, a candidate, or a discovery.

“This is Bayesian optimal experimental design renamed.”

BOED occupies the model-rich end of our proposed research spectrum [26, 37]. It requires an explicit probabilistic model, design domain, and utility. The design domain may be continuous, and modern estimators can reduce the cost of expected information gain. Our proposal addresses settings in which researchers cannot yet specify these ingredients reliably. In such settings, a cheaper empirical proxy can guide exploration while replication, held-out prediction, or expert review provides stronger validation. BOED offers a principled solution when its model is credible; fuzzing is a general feedback-guided, mutation-based paradigm that generalizes beyond software to other objects of analysis [21].

“This is novelty search or quality-diversity with extra steps.”

The approaches are related [25, 32], but they differ from fuzzing in what the guidance signal measures. A quality-diversity behavior descriptor is hand-designed to describe progress toward the goal; coverage is read automatically off the candidate’s own execution and describes what it did, not how close it came. The signal is a property of the process, not an estimate of the outcome, so it needs no model of what counts as a discovery. That property is what open research requires, because the outcome is exactly what cannot yet be modeled. Novelty search and Bayesian acquisition, by contrast, both score a candidate through a model or descriptor of the goal. Quality-diversity also folds steering and acceptance into one descriptor, whereas we keep a protected verdict separate.

“The bitter lesson says scale the generator, not engineer the feedback.”

The bitter lesson argues for search methods that can exploit computation, rather than for any particular generator [46]. Fuzzing follows that principle when it uses general execution feedback instead of hand-coded domain rules. Repeated sampling also uses computation and can work well, so the available evidence does not justify rejecting it universally. Across the benchmarks studied by Brown et al. [8], however, the fraction of problems solved grew approximately log-linearly over the measured range and produced diminishing marginal returns. We claim that adaptive feedback can improve this exchange rate without replacing scalable computation with hand-tuned heuristics.

“Open-ended research has no stable search space, so coverage is undefined.”

Coverage does not require an enumeration of every reachable behavior, but a fixed target and its instrumentation still define what the fuzzer can observe. Research is harder because its hypotheses and representations may change during a campaign. Our pro-

posal therefore assumes a declared problem and an explicit progress representation that can grow as observations accumulate. It does not cover an agent that redefines what counts as a candidate or discovery. Within this boundary, guidance can compare each new experiment with the accumulated record rather than with an enumerated whole.

“Research has no oracle, so the analogy breaks.”

Fuzzing has its own oracle problem [3], and real campaigns use imperfect, deferred, differential, or human-assisted checks. A typical campaign does not separate oracle and guidance by invocation schedule or assume that sanitizer checks inherently cost more. The same instrumented execution updates coverage and checks relevant operations for violations. The signals differ in role: the oracle judges the current input, while guidance identifies behavior absent from the campaign history. Guidance cannot certify a bug, and the oracle cannot efficiently explore the input space. Scientific validation may also be expensive or partial, so this semantic separation helps allocate validation to selected candidates.

8. Conclusion

Auto-research should operate as instrumented, feedback-directed search: expose a cheap measure of epistemic progress; let the search policy use that measure to choose the next intervention; and let protected validation decide what counts as a discovery, since an optimized progress signal can no more certify a finding than coverage can certify a bug. The position stands or falls on the three controlled comparisons stated above: candidate signals must predict protected outcomes, feedback-directed search must beat repeated sampling per validated discovery, and protected validation must reduce false discoveries relative to the optimized proxy. This division also locates the durable human role: researchers declare the problem at the front and ground the verdict at the back, while the agent runs the loop between them. Beneath these three lessons, observable progress, principled search, and protected validation, sits one belief: a scientific experiment, like a program, can offer intermediate guidance that exposes progress before its outcome is known. Whether it can is the open question we hand the field.

References

- [1] AGI House. *Jerry Tworek & Core Automation: Auto-research is Moving from Benchmarks to Real-World Loops*. AGI House community newsletter, July 23, 2026. 2026. URL: <https://agihousecommunity.beehiiv.com/p/jerry-tworek-core-automation-auto-research-is-moving-from->

- benchmarks-to-real-world-loops (visited on 08/06/2026).
- [2] AGI House. *More Inference, More Experiments: What We Learned Hosting the Auto-Research Summit*. X article, July 31, 2026. 2026. URL: https://x.com/agihouse_org/status/2083323121713733661 (visited on 08/02/2026).
- [3] E. T. Barr, M. Harman, P. McMinn, M. Shahbaz, and S. Yoo. “The Oracle Problem in Software Testing: A Survey”. In: *IEEE Transactions on Software Engineering* 41.5 (2015), pp. 507–525. DOI: [10.1109/TSE.2014.2372785](https://doi.org/10.1109/TSE.2014.2372785).
- [4] M. Böhme, V.-T. Pham, M.-D. Nguyen, and A. Roychoudhury. “Directed Greybox Fuzzing”. In: *Proceedings of the 2017 ACM SIGSAC Conference on Computer and Communications Security (CCS)*. 2017, pp. 2329–2344. DOI: [10.1145/3133956.3134020](https://doi.org/10.1145/3133956.3134020).
- [5] M. Böhme, V.-T. Pham, and A. Roychoudhury. “Coverage-based Greybox Fuzzing as Markov Chain”. In: *Proceedings of the 2016 ACM SIGSAC Conference on Computer and Communications Security (CCS)*. 2016, pp. 1032–1043. DOI: [10.1145/2976749.2978428](https://doi.org/10.1145/2976749.2978428).
- [6] M. Böhme, L. Szekeres, and J. Metzman. “On the Reliability of Coverage-Based Fuzzer Benchmarking”. In: *Proceedings of the 44th International Conference on Software Engineering (ICSE)*. 2022, pp. 1621–1633. DOI: [10.1145/3510003.3510230](https://doi.org/10.1145/3510003.3510230).
- [7] D. A. Boiko, R. MacKnight, B. Kline, and G. Gomes. “Autonomous chemical research with large language models”. In: *Nature* 624.7992 (2023), pp. 570–578. DOI: [10.1038/s41586-023-06792-0](https://doi.org/10.1038/s41586-023-06792-0).
- [8] B. Brown, J. Juravsky, R. Ehrlich, R. Clark, Q. V. Le, C. Ré, and A. Mirhoseini. “Large Language Monkeys: Scaling Inference Compute with Repeated Sampling”. In: *arXiv preprint arXiv:2407.21787* (2024). URL: <https://arxiv.org/abs/2407.21787>.
- [9] Y. Burda, H. Edwards, A. Storkey, and O. Klimov. “Exploration by Random Network Distillation”. In: *International Conference on Learning Representations (ICLR)*. 2019. URL: <https://openreview.net/forum?id=H1lJJnR5Ym>.
- [10] H. Chen et al. “MLR-Bench: Evaluating AI Agents on Open-Ended Machine Learning Research”. In: *Advances in Neural Information Processing Systems 38: Datasets and Benchmarks Track*. 2025. URL: <https://openreview.net/forum?id=JX9DE6colf>.
- [11] P. Chen and H. Chen. “Angora: Efficient Fuzzing by Principled Search”. In: *2018 IEEE Symposium on Security and Privacy (SP)*. IEEE, 2018, pp. 711–725. DOI: [10.1109/SP.2018.00046](https://doi.org/10.1109/SP.2018.00046).
- [12] A. Church. “An Unsolvable Problem of Elementary Number Theory”. In: *American Journal of Mathematics* 58.2 (1936), pp. 345–363.
- [13] C. Dwork, V. Feldman, M. Hardt, T. Pitassi, O. Reingold, and A. Roth. “The reusable holdout: Preserving validity in adaptive data analysis”. In: *Science* 349.6248 (2015), pp. 636–638. DOI: [10.1126/science.aaa9375](https://doi.org/10.1126/science.aaa9375).
- [14] S. Eger et al. “Transforming Science with Large Language Models: A Survey on AI-Assisted Scientific Discovery, Experimentation, Content Generation, and Evaluation”. In: *arXiv preprint arXiv:2502.05151* (2025). URL: <https://arxiv.org/abs/2502.05151>.
- [15] A. Fioraldi, D. Maier, H. Eißfeldt, and M. Heuse. “AFL++: Combining Incremental Steps of Fuzzing Research”. In: *14th USENIX Workshop on Offensive Technologies (WOOT 20)*. USENIX Association, 2020.
- [16] R. M. Friedberg. “A Learning Machine: Part I”. In: *IBM Journal of Research and Development* 2.1 (1958), pp. 2–13.
- [17] L. Gao, J. Schulman, and J. Hilton. “Scaling Laws for Reward Model Overoptimization”. In: *Proceedings of the 40th International Conference on Machine Learning (ICML)*. Vol. 202. Proceedings of Machine Learning Research. PMLR, 2023, pp. 10835–10866. URL: <https://proceedings.mlr.press/v202/gao23h.html>.
- [18] K. Gödel. “Über formal unentscheidbare Sätze der Principia Mathematica und verwandter Systeme I”. In: *Monatshefte für Mathematik und Physik* 38 (1931), pp. 173–198.
- [19] I. J. Good. “Speculations Concerning the First Ultrainelligent Machine”. In: *Advances in Computers*. Vol. 6. Academic Press, 1966, pp. 31–88.
- [20] J. Gottweis et al. “Accelerating Scientific Discovery with Co-Scientist”. In: *Nature* 655.8122 (2026), pp. 487–496. DOI: [10.1038/s41586-026-10644-y](https://doi.org/10.1038/s41586-026-10644-y).
- [21] Y. He, Z. Tang, and H. Chen. “Content Fuzzing for Escaping Information Cocoons on Digital Social Media”. In: *Findings of the Association for Computational Linguistics: ACL 2026*. San Diego, California, USA: Association for Computational Linguistics, 2026, pp. 11253–11271. DOI: [10.18653/v1/2026.findings-acl.547](https://doi.org/10.18653/v1/2026.findings-acl.547). URL: <https://aclanthology.org/2026.findings-acl.547/>.

- [22] Q. Huang, J. Vora, P. Liang, and J. Leskovec. “MLA-gentBench: Evaluating Language Agents on Machine Learning Experimentation”. In: *Proceedings of the 41st International Conference on Machine Learning (ICML)*. Vol. 235. Proceedings of Machine Learning Research. PMLR, 2024, pp. 20271–20309. URL: <https://proceedings.mlr.press/v235/huang24y.html>.
- [23] Y. Imajuku, K. Horie, Y. Iwata, K. Aoki, N. Takahashi, and T. Akiba. “ALE-Bench: A Benchmark for Long-Horizon Objective-Driven Algorithm Engineering”. In: *Advances in Neural Information Processing Systems 38: Datasets and Benchmarks Track*. 2025. URL: <https://openreview.net/forum?id=JCjGvbsOmQ>.
- [24] G. Klees, A. Ruef, B. Cooper, S. Wei, and M. Hicks. “Evaluating Fuzz Testing”. In: *Proceedings of the 2018 ACM SIGSAC Conference on Computer and Communications Security (CCS)*. 2018, pp. 2123–2138. DOI: 10.1145/3243734.3243804.
- [25] J. Lehman and K. O. Stanley. “Abandoning Objectives: Evolution through the Search for Novelty Alone”. In: *Evolutionary Computation* 19.2 (2011), pp. 189–223. DOI: 10.1162/EVCO_a_00025.
- [26] D. V. Lindley. “On a Measure of the Information Provided by an Experiment”. In: *The Annals of Mathematical Statistics* 27.4 (1956), pp. 986–1005. DOI: 10.1214/aoms/1177728069.
- [27] J. Liu et al. *The Last Human-Written Paper: Agent-Native Research Artifacts*. 2026. arXiv: 2604.24658 [cs.LG]. URL: <https://arxiv.org/abs/2604.24658>.
- [28] Z. Liu, K. Liu, Y. Zhu, X. Lei, Z. Yang, Z. Zhang, P. Li, and Y. Liu. “AIGS: Generating Science from AI-Powered Automated Falsification”. In: *arXiv preprint arXiv:2411.11910* (2024). URL: <https://arxiv.org/abs/2411.11910>.
- [29] C. Lu, C. Lu, R. T. Lange, J. Foerster, J. Clune, and D. Ha. “The AI Scientist: Towards Fully Automated Open-Ended Scientific Discovery”. In: *arXiv preprint arXiv:2408.06292* (2024). URL: <https://arxiv.org/abs/2408.06292>.
- [30] Y. Lyu, Y. Xie, P. Chen, and H. Chen. “Prompt Fuzzing for Fuzz Driver Generation”. In: *Proceedings of the 2024 ACM SIGSAC Conference on Computer and Communications Security (CCS)*. Salt Lake City, UT, USA: ACM, 2024, pp. 3793–3807. DOI: 10.1145/3658644.3670396.
- [31] V. J. M. Manès, H. Han, C. Han, S. K. Cha, M. Egele, E. J. Schwartz, and M. Woo. “The Art, Science, and Engineering of Fuzzing: A Survey”. In: *IEEE Transactions on Software Engineering* 47.11 (2021), pp. 2312–2331. DOI: 10.1109/TSE.2019.2946563.
- [32] J.-B. Mouret and J. Clune. “Illuminating Search Spaces by Mapping Elites”. In: *arXiv preprint arXiv:1504.04909* (2015). URL: <https://arxiv.org/abs/1504.04909>.
- [33] A. Novikov et al. “AlphaEvolve: A Coding Agent for Scientific and Algorithmic Discovery”. In: *arXiv preprint arXiv:2506.13131* (2025). URL: <https://arxiv.org/abs/2506.13131>.
- [34] A. Pan, K. Bhatia, and J. Steinhardt. “The Effects of Reward Misspecification: Mapping and Mitigating Misaligned Models”. In: *International Conference on Learning Representations (ICLR)*. 2022. URL: <https://openreview.net/forum?id=JYtwGwIL7ye>.
- [35] A. Panickssery, S. R. Bowman, and S. Feng. “LLM Evaluators Recognize and Favor Their Own Generations”. In: *Advances in Neural Information Processing Systems 37 (NeurIPS)*. 2024. URL: https://proceedings.neurips.cc/paper_files/paper/2024/hash/7f1f0218e45f5414c79c0679633e47bc-Abstract-Conference.html.
- [36] D. Pathak, P. Agrawal, A. A. Efros, and T. Darrell. “Curiosity-driven Exploration by Self-supervised Prediction”. In: *Proceedings of the 34th International Conference on Machine Learning (ICML)*. PMLR, 2017, pp. 2778–2787. URL: <https://arxiv.org/abs/1705.05363>.
- [37] T. Rainforth, A. Foster, D. R. Ivanova, and F. Bickford Smith. “Modern Bayesian Experimental Design”. In: *Statistical Science* 39.1 (2024), pp. 100–114. DOI: 10.1214/23-STS915.
- [38] C. K. Reddy and P. Shojaei. “Towards Scientific Discovery with Generative AI: Progress, Opportunities, and Challenges”. In: *Proceedings of the AAAI Conference on Artificial Intelligence (AAAI)*. Vol. 39. 27. 2025, pp. 28601–28609. DOI: 10.1609/aaai.v39i27.35084.
- [39] H. G. Rice. “Classes of Recursively Enumerable Sets and Their Decision Problems”. In: *Transactions of the American Mathematical Society* 74.2 (1953), pp. 358–366.
- [40] B. Romera-Paredes et al. “Mathematical Discoveries from Program Search with Large Language Models”. In: *Nature* 625.7995 (2024), pp. 468–475. DOI: 10.1038/s41586-023-06924-6.
- [41] S. Schmidgall et al. “Agent Laboratory: Using LLM Agents as Research Assistants”. In: *Findings of the Association for Computational Linguistics: EMNLP 2025*. Suzhou, China: Association for Computational Linguistics, 2025, pp. 5977–6043. DOI: 10.

- 18653/v1/2025.findings-emnlp.320. URL: <https://aclanthology.org/2025.findings-emnlp.320/>.
- [42] J. Schmidhuber. "Ultimate Cognition à la Gödel". In: *Cognitive Computation* 1.2 (2009), pp. 177–193.
- [43] C. Si, D. Yang, and T. Hashimoto. "Can LLMs Generate Novel Research Ideas? A Large-Scale Human Study with 100+ NLP Researchers". In: *International Conference on Learning Representations (ICLR)*. 2025. URL: <https://openreview.net/forum?id=M23dTGWCZy>.
- [44] J. Skalse, N. H. R. Howe, D. Krashennikov, and D. Krueger. "Defining and Characterizing Reward Gaming". In: *Advances in Neural Information Processing Systems 35 (NeurIPS)*. 2022. URL: https://proceedings.neurips.cc/paper_files/paper/2022/hash/3d719fee332caa23d5038b8a90e81796-Abstract-Conference.html.
- [45] C. Snell, J. Lee, K. Xu, and A. Kumar. "Scaling LLM Test-Time Compute Optimally Can Be More Effective than Scaling Parameters for Reasoning". In: *International Conference on Learning Representations (ICLR)*. 2025. URL: <https://openreview.net/forum?id=4FWAwZtd2n>.
- [46] R. S. Sutton. *The Bitter Lesson*. Blog post, incompleteideas.net. 2019. URL: <http://www.incompleteideas.net/IncIdeas/BitterLesson.html> (visited on 07/19/2026).
- [47] K. Swanson, W. Wu, N. L. Bulaong, J. E. Pak, and J. Zou. "The Virtual Lab of AI agents designs new SARS-CoV-2 nanobodies". In: *Nature* 646.8085 (2025), pp. 716–723. DOI: 10.1038/s41586-025-09442-9.
- [48] E. Toledo et al. "AI Research Agents for Machine Learning: Search, Exploration, and Generalization in MLE-bench". In: *Advances in Neural Information Processing Systems (NeurIPS)*. 2025. URL: <https://openreview.net/forum?id=RwfrdKSgCE>.
- [49] A. M. Turing. "On Computable Numbers, with an Application to the Entscheidungsproblem". In: *Proceedings of the London Mathematical Society* s2-42.1 (1936), pp. 230–265.
- [50] P. Wang et al. "Large Language Models are not Fair Evaluators". In: *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*. 2024, pp. 9440–9450. URL: <https://aclanthology.org/2024.acl-long.511/>.
- [51] H. Wijk et al. "RE-Bench: Evaluating Frontier AI R&D Capabilities of Language Model Agents against Human Experts". In: *Proceedings of the 42nd International Conference on Machine Learning*. Vol. 267. Proceedings of Machine Learning Research. PMLR, 2025, pp. 66772–66832. URL: <https://proceedings.mlr.press/v267/wijk25a.html>.
- [52] Y. Yamada, R. T. Lange, C. Lu, S. Hu, C. Lu, J. Foerster, J. Clune, and D. Ha. "The AI Scientist-v2: Workshop-Level Automated Scientific Discovery via Agentic Tree Search". In: *arXiv preprint arXiv:2504.08066* (2025). URL: <https://arxiv.org/abs/2504.08066>.
- [53] A. Yang, P. M. Esperança, and F. M. Carlucci. "NAS Evaluation Is Frustratingly Hard". In: *International Conference on Learning Representations (ICLR)*. 2020. URL: <https://arxiv.org/abs/1912.12522>.
- [54] R. Ye et al. "Are We There Yet? Revealing the Risks of Utilizing Large Language Models in Scholarly Peer Review". In: *arXiv preprint arXiv:2412.01708* (2024). URL: <https://arxiv.org/abs/2412.01708>.
- [55] J. Yuan et al. "Dolphin: Moving Towards Closed-loop Auto-research through Thinking, Practice, and Feedback". In: *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*. Vienna, Austria: Association for Computational Linguistics, 2025, pp. 21768–21789. DOI: 10.18653/v1/2025.acl-long.1056. URL: <https://aclanthology.org/2025.acl-long.1056/>.
- [56] T. Zahavy. "Position: LLMs Can't Jump". In: *Proceedings of the 43rd International Conference on Machine Learning (ICML)*. 2026. URL: <https://openreview.net/forum?id=klU4737opt>.
- [57] M. Zalewski. *American Fuzzy Lop (AFL)*. 2013. URL: <https://lcamtuf.coredump.cx/afl/> (visited on 07/19/2026).
- [58] H. Zhang, Y. Rong, Y. He, and H. Chen. "LLAMA-FUZZ: Large Language Model Enhanced Greybox Fuzzing". In: *Proceedings of the 7th ACM/IEEE International Conference on Automation of Software Test (AST)*. Rio de Janeiro, Brazil: ACM, 2026, pp. 34–45. DOI: 10.1145/3793654.3793756.
- [59] L. Zheng et al. "Judging LLM-as-a-Judge with MT-Bench and Chatbot Arena". In: *Advances in Neural Information Processing Systems 36 (NeurIPS), Datasets and Benchmarks Track*. 2023. URL: https://proceedings.neurips.cc/paper_files/paper/2023/hash/91f18a1287b398d378ef22505bf41832-Abstract-Datasets_and_Benchmarks.html.

- [60] B. Zoph and Q. V. Le. “Neural Architecture Search with Reinforcement Learning”. In: *International Conference on Learning Representations (ICLR)*. 2017. URL: <https://arxiv.org/abs/1611.01578>.