

Space-Creating versus Dead Possession: An Off-Ball Possession-Quality Index for Broadcast Football

Seongjin Choi*

Abstract

Ball possession is the most-cited and most-misleading number in football: sixty percent of the ball spent recycling in one’s own half is not the same as sixty percent spent pinning the opponent back. Existing event-based possession-value frameworks — expected threat, VAEP, on-ball value — refine the count by pricing *on-ball* actions, but from event data alone they are blind to the off-ball question a sterile possession actually poses: did holding the ball *create space*, or was the circulation genuinely dead? We answer this in two layers. First, an event-side *junk-possession index* decomposes possession into sequences, prices each by its peak threat gain (credited even without a shot) under an expected-threat grid, and — after reconstructing the live scoreline to exclude lead-protecting circulation — flags low-threat sequences in tied-or-losing game states. On the 2026 FIFA World Cup (103 matches, 206 team-matches) this flag correlates negatively with points ($r = -0.37$) and expected-goal difference ($r = -0.51$; the latter partly mechanically coupled, as the index embeds a shot-xG term); team-matches above 55% possession with below the corpus-wide median efficiency average 0.62 goals and 1.00 points versus 2.24 and 2.24 for efficient dominators. Crucially, the flag is not a repackaging of on-ball value: with team offensive VAEP and field tilt held fixed in the same regression, the junk flag remains strongly negatively associated with points ($p < 10^{-4}$, and under match-clustered errors) while VAEP itself is not significant — in this same-match (descriptive) regression the index adds outcome-relevant information beyond this on-ball action-value model. Second, for a flagged window we resolve whether it was spatially dead or space-creating by projecting broadcast video to pitch coordinates and measuring a *Space-Creation Index* (SCI): a net pitch-control change capturing whether the possession seized dangerous space or pushed the opponent’s block back. Across 31 analysable flagged windows (of 35) from nine purposively selected World Cup matches, 74% are spatially classified as non-space-creating, 19% weak progression, and 6% space-creating windows that the event flag alone would score as failure — including a possessing team that dominated 73% of the ball and went out on penalties (two windows, both spatially non-creating) set against a space-creating window that produced no shot. The two layers together separate “space-creating but unconverted” from “sterile” possession, a distinction event-only on-ball possession value cannot make from its inputs alone.

1 Introduction

Possession percentage is quoted after every match and understood by almost no-one. It conflates three different things a team can do with the ball — where it holds the ball, whether that holding threatens the goal, and in what game state it happens — into a single number that is frequently uncorrelated with, and sometimes inversely related to, winning. The analytics response has been to *value* what happens on the ball: expected threat (xT) [11] grids the pitch by scoring potential;

*Independent researcher. ORCID: <https://orcid.org/0009-0001-3193-7424>. Code: <https://github.com/nowayfootball/junk-possession>. Contact: nowayfootball@gmail.com.

VAEP [3] and EPV [6] estimate the change in scoring/conceding probability around each action; on-ball value [15] and pass-risk models [8, 10] price individual touches. These are real advances, and they are all fundamentally *on-ball*: they evaluate the decision of the player in possession.

But the question a sterile possession poses is off-ball. When a team holds 65% of the ball, finishes level at 0–0, and loses the penalty shootout, we want to know whether the possession was *unlucky* — it dragged the opponent’s block out of shape and manufactured dangerous space that went unconverted — or *dead* — the block never moved and the ball simply circulated. On-ball action value cannot tell these apart, because the distinguishing evidence is the position of the twenty-one players *without* the ball: whether the defensive block was compressed and displaced. That evidence is spatial, and for the vast majority of matches — outside the handful of leagues with commercial tracking — the only available source of it is the broadcast video.

This paper contributes an off-ball possession-quality framework in two layers:

1. **An event-side junk-possession index** (Section 3) that flags low-threat possession in decision-relevant game states, and a validation battery (Section 4) showing it is associated with outcomes, holds up in held-out splits, and — our central claim — is *not reducible* to on-ball possession value: controlling for VAEP does not remove its predictive content.
2. **A spatial Space-Creation Index** (Section 5) computed from broadcast video via a game-state-reconstruction (GSR) pipeline, which adjudicates whether an event-flagged low-threat possession was spatially dead or space-creating — and a multi-match spatial study of 31 flagged windows from nine World Cup matches (Section 6).

The event layer scans whole matches cheaply and plants time-stamped flags; the spatial layer answers “why” on the short broadcast windows the flags point to. Neither layer alone suffices: event data cannot see the block, and processing 90 minutes of broadcast video per match to pitch coordinates is neither necessary nor, on commodity hardware, cheap. Our position is that the macro/micro split is the practical way to bring off-ball spatial evidence to possession analysis at the scale of a whole tournament.

2 Related Work

Possession value. Expected threat [11] assigns each pitch location a scoring potential and values ball progression between locations. VAEP [3] and its EPV predecessors [6] learn, from event or tracking data, the change in scoring and conceding probability that each action induces, thereby valuing defensive actions, failed actions, and risk. On-ball value [15] is a commercial analogue. All price the action of the player on the ball; the event-only variants (xT, OBV, event-fed VAEP) carry no off-ball player positions at all, while tracking-fed EPV can encode defensive shape but needs full tracking, which broadcast does not provide. Our index is complementary: Section 4.4 shows empirically that, against an event-fed VAEP, it captures outcome-relevant variance VAEP does not.

Sterile possession and territory. “Sterile domination” and “field tilt” (here a proxy: a team’s share of its own touches in the final third, rather than the canonical share of both teams’ final-third touches) are established descriptive concepts in the analytics community. We show (Section 4.3) that field tilt explains expected goals but is not a significant predictor of points, and that the junk flag carries points-relevant information beyond tilt — possession quality and territory are different axes.

Pitch control and space. Pitch-control models [13, 14] estimate, from player positions, which team controls each point of the pitch; they require the positions of all players. The Space-Creation Index is a differential pitch-control statistic. Because broadcast video shows only a subset of players, computing it from video invokes the off-screen-imputation problem studied in our companion work; here we use the same CPU-only GSR pipeline and flag imputation sensitivity as a limitation (Section 7).

Broadcast GSR. Turning broadcast footage into pitch coordinates combines camera calibration [5, 7], multi-object tracking [1], and team assignment, evaluated by GS-HOTA [12]. Trajectory-imputation methods for the players a camera or sensor misses [2, 4, 9] are learned and typically bidirectional; our pipeline is training-free and online. We consume GSR output as a metric substrate rather than advancing GSR itself.

3 The Junk-Possession Index

Sequences and sequence value. We segment each match into possession sequences: maximal runs of consecutive events by one team; let n_s be the number of on-ball events in sequence s . Throughout, “possession” denotes a team’s share of on-ball events — the standard event-data proxy — so “held 73% of the ball” is to be read as a 73% on-ball-event share. Each sequence s is priced by

$$\text{value}(s) = \underbrace{\max(0, \text{xT}_{\max}(s) - \text{xT}_{\text{start}}(s))}_{\text{(i) peak threat gain (no shot needed)}} + 0.7 \underbrace{\text{xG}(s)}_{\text{(ii) realised shot}} + 0.10 \underbrace{\mathbb{I}[\text{box touch}]}_{\text{(iii) any touch in the 18-yd box}}, \quad (1)$$

where xT is a Karun-Singh-style expected-threat grid evaluated at each touch location. Term (i) is the design core: a sequence is credited for the *peak* threat location it reached even if no shot resulted, so a possession that worked the ball into a dangerous position but did not finish is not scored as worthless. Term (ii) is the quality of the shot the sequence produced, if any — the *maximum* shot xG among the shots in s ; because the event feed’s shot- xG field is a constant placeholder, we substitute our own gradient-boosted xG model (trained on our event corpus, distance/angle features measured and body part/phase approximated; specification and fitted model released in the repository) evaluated on shot location. Term (iii) rewards a penalty-box touch — a binary credit for any on-ball event inside the 18-yard box during the sequence. Sequence values are divided by the corpus-wide 90th percentile and clipped to $q(s) \in [0, 1]$; a sequence with $q < 0.15$ is a *junk sequence* — a possession of negligible threat.

Game-state normalisation. Circulating in one’s own half to protect a lead is sound tactics, not junk. We reconstruct the live scoreline from goal events and tag each sequence with the possessing team’s goal difference at its start. The headline metric JUNK-OPEN is the on-ball-event share of junk sequences ($q < 0.15$) among a team’s possessions in *tied-or-losing* states ($\text{state} \leq 0$) — circulation with no excuse — i.e. $\text{JUNK-OPEN} = 100 \sum_{s \in T: \text{state}(s) \leq 0, q_s < 0.15} n_s / \sum_{s \in T: \text{state}(s) \leq 0} n_s$. Team-level aggregates (Table 1) follow: raw possession, threat-weighted *effective* possession, efficiency $\text{EFF} = \sum_{s \in T} n_s q_s / \sum_{s \in T} n_s$, JUNK-OPEN, field tilt, and a sterile index.

4 Validation

We validate on 206 team-match rows drawn from 103 of the 104 matches of the 2026 FIFA World Cup group and knockout stages (one match is absent from our event feed). Knockout ties decided on penalties are scored by their shootout result (advance = win), not as draws.

Metric	Definition
Raw%	Share of on-ball events
Effective%	Threat-weighted event share, $100 \frac{\sum_{s \in T} n_s q_s}{\sum_s n_s q_s}$
Efficiency (EFF)	$\sum_{s \in T} n_s q_s / \sum_{s \in T} n_s \in [0, 1]$
JUNK-OPEN	Junk ($q < 0.15$) event share among tied-or-losing possessions
Field tilt	Share of a team’s on-ball events in its final third ($x \geq 80$ on the 0–120 feed, coordinates oriented so the team attacks toward $x = 120$); a field-tilt proxy
Sterile index	$(\text{Raw} - 50) \times (1 - \text{EFF})$

Table 1: Team-level possession-quality metrics.

Metric	Team xG	Goals	Points	xG diff
Raw%	+0.50	+0.33	+0.40	+0.63
Effective%	+0.56	+0.37	+0.42	+0.70
Efficiency	+0.59	+0.42	+0.33	+0.63
JUNK-OPEN	−0.38	−0.38	−0.37	−0.51
Field tilt	+0.58	+0.27	+0.18	+0.60

Table 2: Pearson correlation of possession metrics with match outcomes (206 team-matches). JUNK-OPEN and efficiency measure possession *quality*; field tilt measures territory.

4.1 Does junk possession relate to outcomes?

Table 2 gives Pearson correlations of each possession metric with match outcomes. JUNK-OPEN is negatively associated with expected goals (−0.38), goals (−0.38), points (−0.37), and xG difference (−0.51): the more a team circulates without threat in a tied-or-losing state, the less it scores and wins. (The xG and xG-difference columns are partly mechanically coupled to the index, which embeds a shot-xG term — Section 7; goals and points are the cleaner columns.) Threat-weighting helps in this sample — effective possession tracks xG slightly better than raw possession (0.56 vs 0.50) — and efficiency is the strongest single threat signal in this sample (0.59). Field tilt correlates with xG (0.58) but weakly with points (0.18): camping in the final third without winning is precisely what junk captures and tilt does not (Section 4.3).

Splitting the 71 team-match observations above 55% possession by efficiency sharpens the point: the 8 that fell below the *corpus-wide* median efficiency (junk dominators) averaged 1.07 xG, 0.62 goals, and 1.00 points; the 63 above it (efficient dominators) averaged 2.05 xG, 2.24 goals, and 2.24 points. In this sample the eight averaged 28% of the efficient group’s goals and draw-level points (Figure 1; eight observations, so descriptive only).

4.2 Learned sequence weights

A logistic model predicting whether a possession sequence ends in a shot, from its peak threat gain, box touch, final-third share and touch count, reaches 5-fold AUC 0.907 ± 0.004 (mean $\pm$ cross-fold standard deviation; folds are not match-grouped, so this is an upper-bound estimate). All threat features load positively; the fitted standardised box-touch coefficient (+0.60) is large relative to peak-threat gain (+0.39), which motivated raising the box weight from the initial 0.03 to 0.10 in Eq. 1 — a data-informed but not formally calibrated choice (we did not grid-search the value). Final-third share is deliberately *excluded* from Eq. 1: including it collapses the index toward field tilt, a territory measure we deliberately keep distinct from possession quality (Section 4.3).

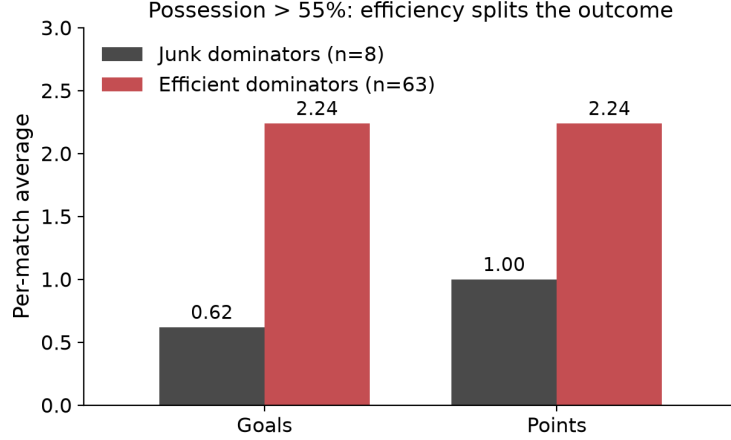


Figure 1: Among the 71 team-match observations over 55% possession, splitting by corpus-wide median efficiency separates outcomes sharply: the 8 low-efficiency “junk” dominators average 0.62 goals and 1.00 points, versus 2.24 and 2.24 for the 63 efficient dominators (eight observations, so descriptive only).

4.3 Not a repackaging of territory

Regressing points on raw possession, field tilt, and JUNK-OPEN jointly, JUNK-OPEN remains significantly negatively associated with points ($\beta = -0.020$, $p = 0.017$) while field tilt is not ($p = 0.14$); regressing xG difference, the significance pattern reverses — tilt is strongly significant ($p < 10^{-4}$) and JUNK-OPEN is absorbed ($p = 0.77$). (Both are OLS; p -values here are iid — the JUNK-OPEN-on-points result also holds under match-clustered CR1 errors, $p = 0.014$.) In these two models, chance-creation (xG difference) tracks territory while points track possession quality — consistent with the two being different axes, not a relabelling.

4.4 Not reducible to on-ball possession value

The sharpest objection is that the junk index merely repackages on-ball possession value (EPV, VAEP, OBV). We test this directly with our own VAEP implementation [3] (learned on the same WhoScored event schema; specification and code released in the repository). A weak comparator could spuriously favour our index, so we note that this is an event-fed VAEP — the appropriate baseline for the event-only regime this paper targets. At the surface, team offensive VAEP is *correlated* with the possession-quality metrics ($r = -0.49$ with JUNK-OPEN, $+0.58$ with efficiency, $+0.52$ with effective possession) — so the metrics are not orthogonal by construction; VAEP is a genuine competitor. Yet when VAEP and field tilt are entered as controls, the possession-quality metrics remain the significant predictors while VAEP does not (Table 3): JUNK-OPEN is associated with points at $p < 10^{-4}$ with VAEP not significant ($p = 0.34$), and efficiency with xG difference at $p < 10^{-4}$ with VAEP not significant ($p = 0.46$). Despite a surface correlation of ≈ 0.5 , conditional on the possession-quality metric VAEP is not a significant predictor of the outcome, so the junk index carries outcome-relevant variance that this on-ball action-value model does not capture on its own. This is the paper’s central quantitative claim. (We report conditional significance — not a zero VAEP effect, nor a formal test that the two coefficients differ; confidence intervals and a match-clustered re-estimation are in the repository. And because JUNK-OPEN is constructed from live score state, this same-match regression is descriptive (Section 7); the cross-fitted splits below

Outcome $\sim$ controls + quality	term	β	p
Points $\sim$ VAEP + tilt + JUNK-OPEN	VAEP	+0.29	0.34
	JUNK-OPEN	-0.034	$< 10^{-4}$
xG diff $\sim$ VAEP + tilt + efficiency	VAEP	+0.17	0.46
	efficiency	+6.14	$< 10^{-4}$

Table 3: Possession-quality metrics survive controlling for on-ball VAEP; VAEP does not survive controlling for them. (206 team-matches; full coefficient table in the repository.)

carry the predictive weight.)

4.5 Out-of-sample

In-sample correlations risk tautology (describing games already lost). Two splits that do not use the target game’s or period’s own possession–outcome relationship (up to the corpus-wide normalisation constants noted in Section 7): (a) *first-to-second half* — a team’s first-half efficiency predicts its second-half xG ($r = +0.32$) and first-half JUNK-OPEN predicts lower second-half xG ($r = -0.24$), a within-team comparison across the two halves (this does not adjust for latent team strength — the leave-one-match-out test below is a separate, complementary probe, not a strength control); (b) *leave-one-match-out team trait* — a team’s mean efficiency in its *other* matches predicts this match’s points ($r = +0.31$) and its mean JUNK-OPEN predicts lower points ($r = -0.30$) and xG difference (-0.32). Junk possession behaves like a team trait: its value in a team’s *other* matches carries information about this match — a cross-fitted association (using both earlier and later matches), not merely a post-hoc description, though not a strict time-respecting forecast.

4.6 Dead versus set-up junk

Extending the label across possession boundaries, a junk sequence is *redeemed* if the same team regains the ball within 25s and reaches threat (a peak-xT gain ≥ 0.04 or a box touch on that next possession) — a build-up, not dead circulation. Only 9% of tied-or-losing junk (event-weighted, the same denominator as JUNK-OPEN) is redeemed under this rule; the remaining 91% is not. The dead-only variant improves in-sample prediction slightly (points r : $-0.37 \rightarrow -0.41$) but is essentially identical out-of-sample — an honest null: most flagged junk is not redeemed, so the refinement adds interpretation, not power.

5 The Spatial Layer: Space-Creation Index

The event index sees only the ball; it flags *that* a possession failed to threaten, not *why*. To adjudicate whether a flagged possession created space, we project broadcast video to pitch coordinates and measure the change in pitch control.

GSR pipeline. We use a CPU-only broadcast pipeline of open components: PnLCalib camera calibration [7] with a temporal anchor bridge, BoT-SORT tracking [1], colour-based team assignment (per-match Lab chroma comparators, robust to daylight), and shot-change gating to drop replays and close-ups. Off-screen players are imputed with a training-free ghosting layer (companion work). The 31 analysed windows are those surviving kit- and clip-quality screening; we did not additionally filter on imputation sensitivity, which we flag as a limitation rather than a selection criterion.

Layer	Input	Role
Event junk index	Full-match events (instant)	Time-stamp <i>flags</i> junk
Spatial SCI	10–60 s broadcast window	<i>Why</i> (was the block moved?)

Table 4: The macro (event) and micro (spatial) layers.

Space-Creation Index. For a flagged window with possessing team P and opponent O , let $\bar{C}^{\text{first}}$ and $\bar{C}^{\text{last}}$ denote a control share averaged over the first and last thirds of the window’s frames. With A the attacking third (the third of the pitch nearest O ’s goal) and Z the opponent’s own attacking third (the mirror third, nearest P ’s goal), and pitch-control share aggregated over each zone,

$$\text{SCI} = \Delta_{\text{own}} + \Delta_{\text{opp}}, \quad \Delta_{\text{own}} = \bar{C}_{P,A}^{\text{last}} - \bar{C}_{P,A}^{\text{first}}, \quad \Delta_{\text{opp}} = \bar{C}_{O,Z}^{\text{first}} - \bar{C}_{O,Z}^{\text{last}}, \quad (2)$$

so $\Delta_{\text{opp}} > 0$ means O ’s presence in Z *receded* — its shape was pushed back (both terms in percentage points, from the pitch-control model of Spearman et al. [14]). SCI is a *net* two-zone change: large positive SCI = the possession seized the attacking third and/or pushed the opponent’s block back (space-creating); SCI ≈ 0 = the block held its shape; strongly negative SCI = the possessing team *lost* attacking-third control while the opponent’s block advanced — circulation that went nowhere or backwards. We use the prespecified operational bins from earlier internal work: *space creation* (SCI $\geq +12$), *weak progression* ($+4 \leq \text{SCI} < +12$), and *non-space-creating* (SCI $< +4$, spanning static and regressive possession). All analysed windows already satisfy the event-side low-threat definition ($q < 0.15$); SCI does not revise that event-side classification — it determines whether each event-flagged low-threat sequence was nevertheless spatially dead, weakly progressing, or space-creating. Throughout, “junk” names the event-side candidate flag, not a final verdict.

Macro/micro roles. The two layers divide labour (Table 4): the event index scans whole matches instantly and plants time-stamped flags; the spatial layer processes the short broadcast window each flag points to and answers why.

6 Multi-Match Spatial Results

The nine matches here are a *purposive*, not random, sample: they were chosen for a high sterile index (so that flagged junk windows exist), adequate kit contrast, and late-round narrative interest, with a bias toward candidate space-creation cases to stress-test the spatial layer. The proportions below therefore describe this selected sample, not the tournament. Each event flag carries the timestamp of its junk sequence; we map it to a broadcast window by scoreboard-clock kickoff alignment and clip the surrounding 10–60 s of continuous wide-angle play (full clipping rule in the repository; extra time excluded). We processed every such event-flagged junk window for nine 2026 World Cup matches: of 35 flagged windows, 31 survived the pipeline (Table 5). Across the nine analysed matches, **74% of flagged junk is spatially classified non-space-creating**, 19% weak progression, and **6% space-creating** windows that the event flag alone would score as failure (proportions from 31 windows; a small-sample estimate, not a tournament-wide prevalence). The proportions shifted only modestly as this sample grew from six matches (21 windows; 71/24/5) to nine (31; 74/19/6): most flagged junk in this purposively selected sample is non-space-creating, and the spatial layer earns its keep on the minority that receive a different spatial verdict.

Case: sterile domination that went out. Germany held 73% of the ball against Paraguay in the Round of 32, were held level at 1–1, and lost the penalty shootout to go out. Both flagged

Match	Windows	Non-creat.	Weak	Space
NED–MAR (R32)	3	3	0	0
ENG–GHA (grp)	4	3	1	0
NED–JPN (grp)	4	3	1	0
FRA–SWE (R32)	4	4	0	0
PAR–FRA (R16)	2	1	1	0
FRA–MAR (QF)	4	1	2	1
GER–PAR (R32)	3	2	0	1
NOR–BRA (R16)	4	4	0	0
MEX–ENG (R16)	3	2	1	0
Total	31	23	6	2

Table 5: Spatial verdicts on event-flagged junk windows, nine World Cup matches. Of 35 flagged windows, four were excluded (three for low kit contrast, one for poor clip quality), leaving 31 analysed.

Germany windows are strongly negative (SCI -24.4 and -14.2): the ball moved, but Germany *lost* attacking-third control while the Paraguayan block, far from being pushed back, advanced. This is the textbook the index is built to catch — a scoreline (elimination) that possession percentage alone would never predict from a dominant side, evident off-ball. The outcome coding matters here: for our advancement-based outcome definition, scoring the shootout elimination as a Germany loss preserves the advancement information, whereas coding the match as a regulation draw — a legitimate alternative convention — would attenuate this particular association.

Case: space-creating, not sterile. In the same match, a Paraguay window at 76:01 scores SCI $+18.0$ — space-creating. The event index flagged it as junk (no shot), but Paraguay seized the attacking third ($\Delta_{\text{own}} = +28$ pp); the net SCI is positive even though the opponent term worked against it — Germany’s presence in the mirror zone near Paraguay’s goal actually *grew* ($\Delta_{\text{opp}} = -10$ pp) — so the space was won in Germany’s defensive third, not by pushing Germany’s shape back. Paraguay did not convert it (whether through poor execution or chance, the spatial layer does not adjudicate). This is the 6% the two-layer design exists for: the event flag reads low threat (failure) while the spatial verdict reads space creation, and the spatial layer supplies the off-ball evidence the event flag cannot. Figure 2 contrasts this window with a non-creating Germany window from the same match: the possessing team’s control of the attacking third surges ($+28$ pp) when it creates space, and falls (-11 pp) while the opponent’s block advances ($+13$ pp) when the possession is non-creating.

Case: junk flags on a winning side. Norway beat Brazil despite a high junk-flag rate; all four flagged Norway windows are spatially non-creating, and Norway still won. High junk share and a win are not a contradiction: the flags mark possessions that SCI likewise classifies as non-creating, and the index does not claim those were the only possessions — a team can waste much of the ball and still convert elsewhere.

Event-side contrast. The event layer already separates cases that share a scoreline. South Africa lost 0–1 to Canada holding 57% (efficiency 0.27, JUNK-OPEN 57%, tied until the 91st minute): textbook junk, no excuse. South Korea also held 57% and lost 1–0 to Mexico, but at efficiency 0.41 — their possession was less sterile by this index — whatever cost them the match, this index does

Same match, opposite verdicts: the block moves, or it does not

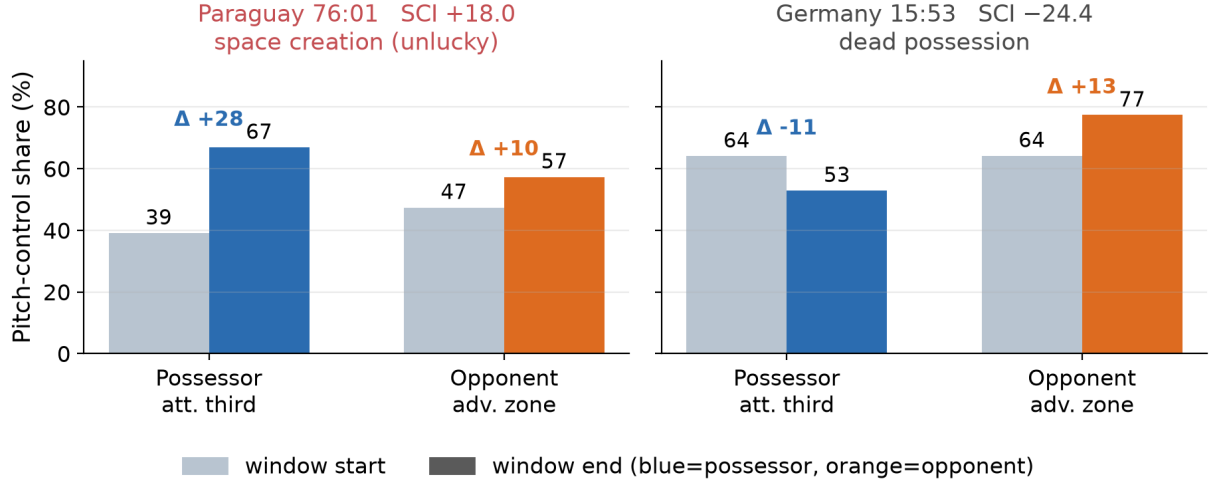


Figure 2: Two flagged junk windows from the same match (Germany–Paraguay), opposite verdicts. Pitch-control share averaged over the first versus last third of the window. Left: Paraguay creates space — its control of the attacking third jumps 39→67 (SCI +18.0). Right: Germany’s possession is non-creating — its attacking-third control falls 64→53 while Paraguay’s block advances 64→77 (SCI −24.4). $SCI = \Delta_{own} + \Delta_{opp}$; the event flag alone cannot tell the two apart.

not locate it in circulation without threat. Same possession, same result, opposite diagnosis.

7 Limitations and Future Work

Sequences are segmented by possession change (a change in the on-ball team) only; period boundaries, stoppages, and restarts are not special-cased, and provider-coded opponent touches that do not transfer control can split a possession — a coarse segmentation that our aggregate metrics tolerate but that a per-sequence study would need to refine. The event index is a ball-only approximation of an off-ball question; the spatial layer supplies the off-ball evidence only on short flagged windows, not whole matches — a macro/micro hybrid, which we argue is the realistic optimum for broadcast footage but is not full-match tracking. The xG term uses shot location only (body part and phase approximated), and the sequence weights (0.7, 0.10) and thresholds ($q < 0.15$; SCI +12/ + 4) are round operational values, partly justified by the learned weights (Section 4) but not externally optimised. Two further construct caveats: sequence value includes a shot-xG term (Eq. 1), so the xG-based associations (Table 2, the efficiency–xG-difference regression) are partly mechanically coupled — the *goals* and *points* outcomes are not built into the index’s formula, though they are not fully independent of it: shot xG predicts goals, goals move the score state that gates JUNK-OPEN, and the xG model itself is fit in-sample on this corpus’s shot–goal labels (no out-of-fold protocol), so goal information enters the index weakly through that fit — but they remain the cleaner endpoints; and the q -normalising 90th percentile, the $q < 0.15$ threshold, and the learned box weight are all corpus-wide quantities, so the out-of-sample splits are cross-fitted only up to these global constants. On inference: JUNK-OPEN is built from contemporaneous score state, so the in-sample outcome associations (Section 4.1) are descriptive and susceptible to score-state feedback; the out-of-sample and leave-one-match-out splits (Section 4) are the genuinely predictive evidence.

The 206 team-match rows form 103 paired matches (xG difference is antisymmetric within a pair); we therefore re-estimated the headline regressions with match-clustered (CR1) standard errors over the 103 clusters, and the central results are unchanged — JUNK-OPEN stays significant in the VAEP-controlled points regression ($p < 10^{-4}$) and efficiency in the xG-difference regression ($p < 10^{-4}$), with VAEP non-significant in both. Repeated-team dependence is not further modelled. On the spatial side, team assignment degrades for low-contrast kits (white and striped kits, night matches): three windows were excluded on this ground and one on clip quality, and per-match kit comparators were set by inspection. Extra-time windows are excluded because regulation kickoff offsets do not transfer. The SCI depends on pitch control computed over imputed off-screen players; we did not filter windows on imputation sensitivity, and a systematic sensitivity study across the full corpus is future work, as is velocity-aware space *value* (weighting controlled space by threat) and a learned replacement for the operational thresholds.

8 Reproducibility

The event corpus is collected from public WhoScored match-event feeds for the 2026 FIFA World Cup; the spatial layer consumes the corresponding tournament broadcasts. The event-side index, validation battery (including the VAEP non-reducibility regression), and tournament aggregation run on CPU over this event corpus and are released with code at <https://github.com/nowayfootball/junk-possession>. The spatial case-study pipeline consumes World Cup broadcast footage we cannot redistribute; the pipeline code is described but the footage and per-clip artifacts are not included. No GPU or cloud expenditure was used.

References

- [1] Nir Aharon, Roy Orfaig, and Ben-Zion Bobrovsky. BoT-SORT: Robust associations multi-pedestrian tracking. *arXiv preprint arXiv:2206.14651*, 2022.
- [2] Guillem Capellera, Luis Ferraz, Antonio Rubio, Antonio Agudo, and Francesc Moreno-Noguer. TranSPORTmer: A holistic approach to trajectory understanding in multi-agent sports. In *Asian Conference on Computer Vision (ACCV)*, 2024. arXiv:2410.17785.
- [3] Tom Decroos, Lotte Bransen, Jan Van Haaren, and Jesse Davis. Actions speak louder than goals: Valuing player actions in soccer. In *Proceedings of the 25th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*, pages 1851–1861, 2019.
- [4] Gregory Everett, Ryan J. Beal, Tim Matthews, Joseph Early, Timothy J. Norman, and Sarvapali D. Ramchurn. Inferring player location in sports matches: Multi-agent spatial imputation from limited observations. In *Proceedings of the 22nd International Conference on Autonomous Agents and Multiagent Systems (AAMAS)*, pages 1643–1651, 2023. arXiv:2302.06569.
- [5] Nikolay S. Falaleev and Ruilong Chen. Enhancing soccer camera calibration through keypoint exploitation. In *7th ACM International Workshop on Multimedia Content Analysis in Sports (MMSports)*, 2024.
- [6] Javier Fernández, Luke Bornn, and Daniel Cervone. A framework for the fine-grained evaluation of the instantaneous expected value of soccer possessions. *Machine Learning*, 110(6):1389–1427, 2021.

- [7] Marc Gutiérrez-Pérez and Antonio Agudo. PnLCalib: Sports field registration via points and lines optimization. *arXiv preprint arXiv:2404.08401*, 2024.
- [8] Daniel Link, Steffen Lang, and Philipp Seidenschwarz. Real time quantification of dangerousity in football using spatiotemporal tracking data. *PloS one*, 11(12):e0168768, 2016.
- [9] Shayegan Omidshafiei, Daniel Hennes, Marta Garnelo, Zhe Wang, Adria Recasens, Eugene Tarassov, Yi Yang, Romuald Elie, Jerome T. Connor, Paul Muller, Natalie Mackraz, Kris Cao, Pol Moreno, Pablo Sprechmann, Demis Hassabis, Ian Graham, William Spearman, Nicolas Heess, and Karl Tuyls. Multiagent off-screen behavior prediction in football. *Scientific Reports*, 12:8638, 2022. doi: 10.1038/s41598-022-12547-0.
- [10] Paul Power, Hector Ruiz, Xinyu Wei, and Patrick Lucey. Not all passes are created equal: Objectively measuring the risk and reward of passes in soccer from tracking data. In *Proceedings of the 23rd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, pages 1605–1613, 2017.
- [11] Karun Singh. Introducing expected threat (xt). 2019. <https://karun.in/blog/expected-threat.html>.
- [12] Vladimir Somers, Victor Joos, Anthony Cioppa, Silvio Giancola, Seyed Abolfazl Ghasemzadeh, Floriane Magera, Baptiste Standaert, Amir Mohammad Mansourian, Xin Zhou, Shohreh Kasaei, Bernard Ghanem, Alexandre Alahi, Marc Van Droogenbroeck, and Christophe De Vleeschouwer. SoccerNet game state reconstruction: End-to-end athlete tracking and identification on a minimap. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition Workshops (CVPRW)*, 2024. arXiv:2404.11335.
- [13] William Spearman. Beyond expected goals. In *MIT Sloan Sports Analytics Conference*, 2018.
- [14] William Spearman, Austin Basye, Greg Dick, Ryan Hotovy, and Paul Pop. Physics-based modeling of pass probabilities in soccer. In *MIT Sloan Sports Analytics Conference*, 2017.
- [15] StatsBomb. On-ball value (obv), 2021. <https://statsbomb.com/articles/soccer/introducing-on-ball-value-obv/>.