

Evo-Depth: A Lightweight Depth-Enhanced Vision-Language-Action Model

Tao Lin^{1,*} Yuxin Du^{1,*} Jiting Liu^{1,*} Nuobei Zhu¹ Yunhe Li¹ Yuqian Fu²
 Yinxinyu Chen¹ Hongyi Cai¹ Zewei Ye¹ Bing Cheng^{1,4} Kai Ye¹
 Yiran Mao¹ Yilei Zhong¹ MingKang Dong¹ Junchi Yan¹ Gen Li^{3,†} Bo Zhao^{1,4,†}

¹School of AI, Shanghai Jiao Tong University

²King Abdullah University of Science and Technology

³Nanyang Technological University ⁴SJTU-Quic Robot Joint Lab

taolin200108@gmail.com, bo.zhao@sjtu.edu.cn

<https://github.com/MINT-SJTU/Evo-Depth>

*Equal contribution †Corresponding authors

Abstract

Vision-Language-Action (VLA) models have emerged as a promising paradigm for robotic manipulation by unifying perception, language grounding, and action generation. However, they often struggle in scenarios requiring precise spatial understanding, as current VLA models primarily rely on 2D visual representations that lack depth information and detailed spatial relationships. While recent approaches incorporate explicit 3D inputs such as depth maps or point clouds to address this issue, they often increase system complexity, require additional sensors, and remain vulnerable to sensing noise and reconstruction errors. Another line of work explores implicit 3D-aware spatial modeling directly from RGB observations without extra sensors, but it often relies on large geometry foundation models, resulting in higher training and deployment costs. To address these challenges, we propose **Evo-Depth**, a lightweight depth-enhanced VLA framework that enhances spatially grounded manipulation without relying on additional sensing hardware or compromising deployment efficiency. Evo-Depth employs a lightweight *Implicit Depth Encoding Module* (IDEM) to extract compact depth features from multi-view RGB images. These features are incorporated into vision-language representations through a *Spatial Enhancement Module* (SEM) via depth-aware modulation, enabling efficient spatial-semantic enhancement. A *Progressive Alignment Training* strategy is further introduced to align the resulting depth-enhanced representations with downstream action learning. Extensive experiments in simulation and real-world settings demonstrate the effectiveness of Evo-Depth. With only **0.9B** parameters, Evo-Depth achieves superior performance across four simulation benchmarks. In real-world experiments, Evo-Depth attains the highest average success rate while also exhibiting the smallest model size, lowest GPU memory usage, and highest inference frequency among compared methods. These results demonstrate that lightweight implicit depth enhancement is an effective and practical solution for spatially grounded robotic manipulation. We will release code and models to facilitate future research on lightweight depth-enhanced VLA models.

1 Introduction

Recent advances in embodied intelligence have increasingly emphasized the importance of unifying perception, language, and control for general-purpose robotic manipulation, giving rise to Vision-Language-Action (VLA) models [2, 21, 28, 40, 46, 51]. By grounding natural language instructions

Preprint.

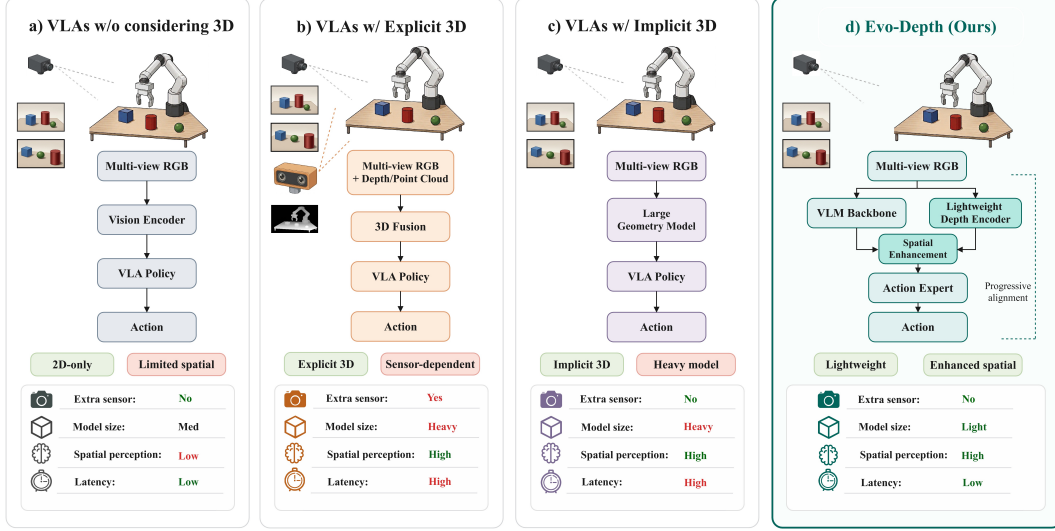


Figure 1: **Comparison of Evo-Depth with three representative VLA paradigms.** (a) 2D-only VLAs are efficient but lack spatial perception. (b) Explicit 3D VLAs offer strong spatial understanding at the cost of extra sensors and high latency. (c) Implicit 3D VLAs remove sensor dependency but rely on heavy geometry models. (d) Evo-Depth improves spatial perception with low latency by using the lightweight IDEM module to extract depth-aware features and the SEM module for efficient spatial enhancement.

in visual observations and directly generating actions, VLA models provide a promising framework for scalable robotic learning. Despite this progress, their performance still degrades noticeably in manipulation scenarios that require precise spatial understanding.

A major limitation of current VLA models [14, 16, 24] is that they rely primarily on 2D visual representations, which provide limited depth information and spatial relationships for precise manipulation. As a result, their performance often drops on tasks requiring accurate localization, fine-grained placement, and spatially consistent manipulation. To address this issue, recent studies have introduced explicit 3D information, such as depth maps or point clouds, into robotic policy learning [18, 35, 57]. However, reliance on additional sensing hardware or explicit geometry-processing pipelines often increases system complexity, making these methods sensitive to sensing noise and reconstruction errors, which in turn limits their practicality and scalability in real-world deployment. Another line of work explores implicit 3D-aware spatial modeling from RGB observations alone [1, 19, 23, 34, 50], avoiding explicit 3D sensing and providing a more scalable alternative. Nevertheless, these methods often introduce large-scale geometry foundation models, such as VGGT [42]. This increases model size and raises training and deployment costs, making them less suitable for real-time robotic deployment. At the same time, many existing fusion designs remain relatively heavy, leaving lightweight yet effective spatial-semantic fusion underexplored. In addition, how to effectively align such spatial enhancement with downstream action learning during training also remains an open challenge.

To address these challenges, we propose **Evo-Depth**, a lightweight depth-enhanced VLA framework for improving spatially grounded manipulation while preserving deployment efficiency, as illustrated in Fig. 1. Evo-Depth adopts a lightweight implicit depth enhancement strategy to strengthen spatial perception without relying on explicit 3D inputs or additional sensing hardware. It first extracts spatial information from multi-view RGB observations through a lightweight *Implicit Depth Encoding Module* (IDEM), which produces compact latent depth features that capture relative spatial relationships and object layout without constructing heavy geometry-rich scene representations. However, such information alone is insufficient to support downstream decision making, as it needs to be effectively incorporated into vision-language representations. To this end, we introduce a *Spatial Enhancement Module* (SEM), which uses implicit depth features as lightweight modulation signals to enhance visual features, rather than relying on heavy feature fusion, thereby preserving the original vision-language representations while injecting complementary spatial cues. In addition, to better support end-to-end optimization for depth-enhanced policy learning, we propose a *Progressive Alignment Training* strategy that gradually aligns spatial representations with downstream action learning. Together, these designs enable Evo-Depth to improve spatial understanding and manipulation performance without

relying on explicit 3D inputs or additional sensing hardware, while maintaining a lightweight and deployable VLA framework for effective cross-modal fusion and end-to-end policy learning.

Extensive experiments in both simulation and real-world settings demonstrate that Evo-Depth achieves superior performance while maintaining low memory usage and high inference frequency. Notably, with only 0.9B parameters, Evo-Depth achieves 84.4% on Meta-World, 41.1% on VLA-Arena, 95.4% on LIBERO, and 69.6% on LIBERO-Plus on simulation benchmarks. In real-world experiments, Evo-Depth achieves the highest average success rate of 90%, with the smallest model size, lowest GPU memory usage (3.2 GB), and highest inference frequency (12.3 Hz) among all compared methods. Moreover, under four disturbance settings in real-world generalization experiments, Evo-Depth consistently outperforms the baseline model, demonstrating improved robustness to unseen visual and spatial variations.

Our contributions are summarized as follows:

1. We propose **Evo-Depth**, a lightweight and deployment-efficient depth-enhanced VLA framework that incorporates implicit depth information to improve spatially grounded manipulation without relying on explicit 3D inputs or additional sensing hardware.
2. We introduce a *Spatial Enhancement Module* to support lightweight spatial-semantic fusion, together with a *Progressive Alignment Training* strategy that progressively aligns depth-enhanced representations with downstream action learning.
3. Extensive experiments in both simulation and real-world settings demonstrate the effectiveness of Evo-Depth. With only 0.9B parameters, Evo-Depth achieves strong performance across simulation benchmarks and attains the highest average success rate in real-world experiments, while maintaining low GPU memory usage and high inference frequency, making it well suited for real-time robotic deployment.

2 Related Work

2.1 Vision-Language-Action Models

Vision-Language-Action (VLA) models [4, 5, 27, 29, 37, 43, 58, 60] provide a unified framework that grounds language instructions in visual observations and directly generates robot actions. Recent progress has shown that large-scale multimodal pretraining combined with end-to-end policy learning can substantially improve manipulation performance [3, 45, 49]. Representative generalist VLA models include OpenVLA [16], an open-source model pretrained on large-scale real-world robot demonstrations [30]; GR00T [2], which combines a vision-language module with a diffusion transformer for real-time action generation; and $\pi_{0.6}^*$ [14], which further improves VLA performance through real-world reinforcement learning. To improve deployment efficiency, recent work has also explored lightweight VLA models. TinyVLA [44] improves inference speed and data efficiency with a compact architecture, SmolVLA [38] combines a lightweight vision-language backbone with a flow-matching action expert, and Evo-1 [24] further reduces computation while preserving semantic alignment. Despite these advances, most VLA models still rely on 2D visual observations, which limits their effectiveness in tasks requiring precise spatial understanding and highlights the need for 3D-aware or depth-informed representations.

2.2 Vision-Language-Action Models with 3D Perception

To overcome the spatial limitations of 2D-based policies, recent studies have incorporated explicit 3D information into robotic policy learning [1, 8, 9, 20, 39, 48]. Representative examples include 3D-VLA [57], which unifies 3D perception, reasoning, and action in a generative model; SpatialVLA [35], which introduces 3D spatial context through Ego3D Position Encoding and structured actions; and PointVLA [18], which injects point cloud features into pretrained VLA models. These methods improve spatial understanding through richer geometric representations, but their reliance on explicit 3D inputs often requires additional sensing hardware and complex processing pipelines, increasing system complexity and sensitivity to sensing noise and reconstruction errors. Recent studies have also explored implicit 3D-aware spatial modeling from RGB observations alone [19, 23, 32, 36]. Although these methods avoid explicit 3D sensing pipelines, they are generally built upon large-scale geometry foundation models [42], resulting in larger model size and higher training and deployment costs. Together, these limitations motivate a lightweight implicit depth approach that enhances VLA models with depth-aware spatial information from RGB observations while preserving efficiency.

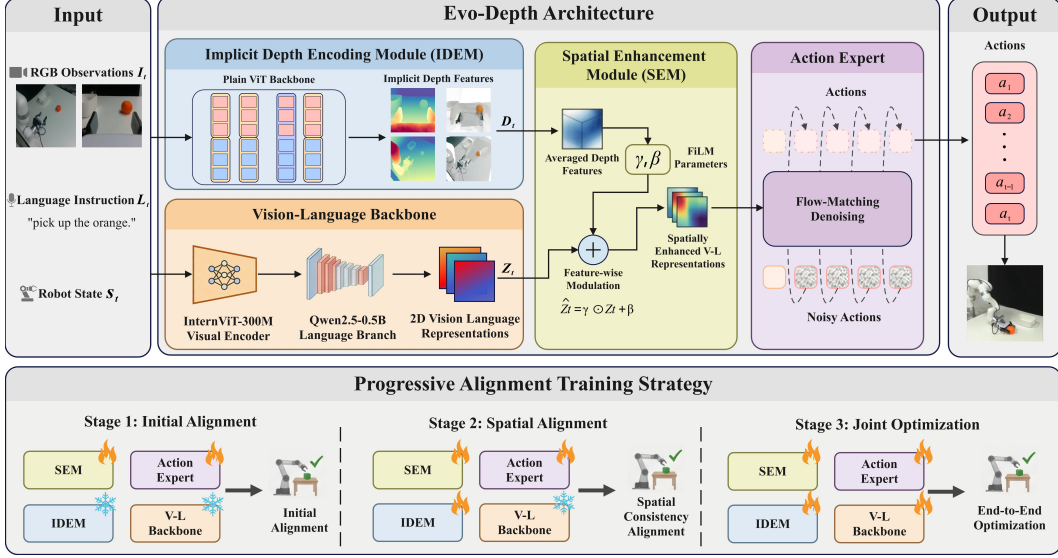


Figure 2: **Overview of Evo-Depth.** Given multi-view RGB observations, language instructions, and robot states, Evo-Depth first extracts implicit depth cues with the IDEM, then enhances vision-language representations through the SEM, and finally predicts actions with a flow-matching action expert. The bottom panel shows the progressive alignment training strategy, which improves cross-module coordination and facilitates effective fusion between implicit depth features and vision-language representations through staged optimization.

3 Method

3.1 Overview of Evo-Depth Architecture

Evo-Depth is a lightweight spatially enhanced Vision-Language-Action model that improves spatially grounded manipulation by incorporating implicit depth cues into policy learning, without requiring additional 3D sensors or explicit 3D inputs. As shown in Fig. 2, Evo-Depth consists of four components: (1) *Implicit Depth Encoding Module* (IDEM), (2) *Vision-Language Backbone*, (3) *Spatial Enhancement Module* (SEM), and (4) *Action Expert*.

Given multi-view RGB observations $\{I_t^i\}_{i=1}^N$, a language instruction L_t , and robot state s_t , Evo-Depth predicts the target action trajectory as

$$a_t = f_{\text{Evo-Depth}}(\{I_t^i\}_{i=1}^N, L_t, s_t; \theta), \quad (1)$$

where θ denotes all learnable parameters. Specifically, IDEM takes $\{I_t^i\}_{i=1}^N$ as input and produces implicit depth features D_t . In parallel, the vision-language backbone encodes $\{I_t^i\}_{i=1}^N$ and L_t into 2D vision-language representations Z_t . SEM then takes D_t and Z_t as input and outputs spatially enhanced representations $\hat{Z}_t$. Finally, the action expert predicts the target action trajectory a_t conditioned on $\hat{Z}_t$ and s_t .

3.2 Model Design

Implicit Depth Encoding Module. The Implicit Depth Encoding Module (IDEM) aims to extract implicit depth features directly from multi-view RGB observations, without requiring additional 3D perception sensors or explicit 3D inputs. Formally, given multi-view RGB observations $\{I_t^i\}_{i=1}^N$, IDEM produces implicit depth features

$$D_t = f_{\text{IDEM}}(\{I_t^i\}_{i=1}^N), \quad (2)$$

where D_t denotes the latent depth-aware representation used for subsequent spatial enhancement. Concretely, IDEM is built upon a single plain Vision Transformer backbone with only 0.13B parameters. Its weights are initialized from a multi-view depth encoder [22] pretrained for joint any-view depth estimation. The pretrained encoder is learned with a minimal yet sufficient training objective for any-view depth estimation under large-scale, high-quality supervision, providing a strong initialization without relying on heavier architectural specialization. To capture spatial relationships across

different observations, IDEM is designed to progressively enable information exchange across views. Let $H^{(l)}$ denote the token representations at layer l . The attention pattern is defined as

$$H^{(l+1)} = \begin{cases} \text{Attn}_{\text{within}}(H^{(l)}), & l < l_0, \\ \text{Attn}_{\text{cross/within}}(H^{(l)}), & l \geq l_0, \end{cases} \quad (3)$$

where the first l_0 layers apply self-attention independently within each view to preserve local image structure and establish stable view-specific representations, while the remaining layers alternate between within-view and cross-view attention to progressively enable information exchange across observations. Through this design, the encoder aggregates spatial cues from different views into a unified latent feature space. The latent transformer embeddings are taken as the output of IDEM and serve as the implicit depth features for subsequent processing. These features encode object layout, relative positional relationships, and cross-view spatial consistency, and are later used by the Spatial Enhancement Module to modulate the 2D vision-language representations.

Vision-Language Backbone. The Vision-Language Backbone encodes RGB observations together with the language instruction to produce 2D vision-language representations. Formally, given multi-view RGB observations $\{I_t^i\}_{i=1}^N$ and the language instruction L_t , the backbone produces

$$Z_t = f_{\text{VLB}}(\{I_t^i\}_{i=1}^N, L_t). \quad (4)$$

We instantiate this backbone with a pretrained InternVL3-1B model [61]. It is pretrained under a native multimodal paradigm, in which text corpora and diverse multimodal data are jointly optimized within a single pretraining stage, enabling strong cross-modal alignment between visual observations and task instructions. Its visual encoder adopts InternViT-300M [7], while the language branch leverages Qwen2.5-0.5B [12]. We retain only the first 14 layers of the language branch, as intermediate layers tend to exhibit stronger cross-modal alignment between visual and linguistic features, making them more suitable for downstream visuomotor control [38]. The hidden representations produced by this backbone are taken as the 2D vision-language representations Z_t of the current observation for subsequent spatial enhancement.

Spatial Enhancement Module. The Spatial Enhancement Module (SEM) is designed to inject the implicit depth features extracted by the IDEM into the 2D vision-language representations, so that the resulting representations are enriched with spatial information for downstream action prediction. Given the 2D vision-language representations Z_t and the implicit depth features D_t , the SEM first transforms the implicit depth features into a representation aligned with the hidden space of the 2D vision-language representations for feature-wise modulation. The transformed depth features are then averaged across tokens to obtain a compact global descriptor g_t . Based on this descriptor, a lightweight modulation head $f_{\text{mod}}(\cdot)$ predicts a pair of feature-wise modulation parameters, γ and β :

$$\gamma, \beta = f_{\text{mod}}(g_t), \quad (5)$$

where γ and β are used as channel-wise scaling and shifting factors, respectively. These parameters are then applied to the 2D vision-language representations in a FiLM-style manner:

$$\hat{Z}_t = \gamma \odot Z_t + \beta, \quad (6)$$

where $\odot$ denotes element-wise multiplication. The resulting outputs form the spatially enhanced vision-language representations, which are subsequently passed to the Action Expert for action generation.

Action Expert. The Action Expert is instantiated as a conditional denoising policy based on the flow-matching paradigm [25], and is implemented with a Diffusion Transformer [31] to generate the future action sequence from the spatially enhanced vision-language representations and the current robot state. Specifically, under the joint conditioning of the spatially enhanced vision-language representations $\hat{Z}_t$ and the robot state s_t , the module learns a time-dependent vector field that progressively transforms noisy actions toward the target action sequence. Given the ground-truth action sequence A_t and a randomly sampled noise vector ϵ , the noisy action is constructed by linear interpolation:

$$A_t^\tau = \tau A_t + (1 - \tau)\epsilon, \quad (7)$$

where $\tau \in [0, 1]$ denotes the interpolation coefficient. The training objective then follows the flow-matching formulation:

$$\mathcal{L}^\tau(\theta) = \mathbb{E}_{p(A_t | \hat{Z}_t, s_t), q(A_t^\tau | A_t)} \left[\left\| v_\theta(A_t^\tau, \hat{Z}_t, s_t) - u(A_t^\tau | A_t) \right\|^2 \right], \quad (8)$$

Table 1: **Simulation Results.** Comparison across Meta-World, VLA-Arena, and LIBERO. “Params” denotes model parameters, and “Robo- Pretrain” indicates robotic-data pretraining. **Bold** and underline denote the best and second-best values within each benchmark; for “Params”, they denote the smallest and second-smallest values. In VLA-Arena, “Extrap.” and “Long” denote Extrapolation and Long Horizon, respectively.

Benchmark	Models	Params	Robo-Pretrain	Success Rate (%)				
Meta-World				Easy	Medium	Hard	Very Hard	Avg.
	TinyVLA [44]	1.3B	No	77.6	21.5	11.4	15.8	31.6
	π_0 [3]	3.5B	Yes	71.8	48.2	41.7	30.0	47.9
	SmolVLA [38]	2.3B	No	<u>87.1</u>	51.8	70.0	64.0	68.2
	RoboTron Mani [47]	4B	No	<u>85.5</u>	67.7	76.7	81.0	77.7
	Evo-1 [24]	0.8B	No	89.2	76.8	77.2	79.2	80.6
	Evo-Depth (Ours)	<u>0.9B</u>	No	83.1	84.7	87.3	82.4	84.4
VLA-Arena				Safety	Distractor	Extrap.	Long	Total
	SmolVLA [38]	2.3B	No	16.5	21.0	10.4	24.7	16.4
	π_0 -FAST [33]	3.5B	Yes	34.1	39.0	4.2	20.7	25.6
	UniVLA [4]	7B	Yes	<u>45.5</u>	41.3	<u>31.1</u>	22.0	38.7
	OpenVLA [16]	7B	Yes	41.9	43.0	37.8	<u>26.7</u>	39.6
	OpenVLA-OFT [17]	7B	Yes	43.2	52.3	30.4	<u>26.7</u>	39.9
	Evo-Depth (Ours)	0.9B	No	47.3	52.7	25.8	46.5	41.1
LIBERO				Spatial	Object	Goal	Long	Avg.
	TraceVLA [59]	7B	Yes	84.6	85.2	75.1	54.1	74.8
	SpatialVLA [35]	4B	Yes	88.2	89.9	78.6	55.5	78.1
	4D-VLA [56]	4B	Yes	88.9	95.2	90.9	79.1	88.6
	SmolVLA [38]	2.3B	No	93.0	94.0	91.0	77.0	88.8
	GR00T-N1 [2]	2B	Yes	94.4	97.6	93.0	90.6	93.9
	DM0 [52]	2.4B	Yes	98.2	98.8	96.6	82.6	94.1
	π_0 [3]	3.5B	Yes	96.8	98.8	95.8	85.2	94.2
	$\pi_{0.5}$ [15]	3.5B	Yes	98.0	97.8	95.6	85.8	94.3
	VLA-0 [11]	3B	No	97.0	97.8	96.2	87.6	94.7
	BitVLA [41]	3B	Yes	97.4	99.6	94.4	87.7	94.8
	Evo-1 [24]	0.8B	No	92.7	97.7	<u>96.3</u>	92.3	94.8
	DepthVLA [54]	4.1B	No	96.4	98.0	95.8	89.2	94.9
	NORA-1.5 [13]	3B	Yes	<u>98.0</u>	96.0	95.4	90.5	95.0
	UniVLA [4]	7B	Yes	<u>96.5</u>	96.8	95.6	<u>92.0</u>	<u>95.2</u>
	Evo-Depth (Ours)	<u>0.9B</u>	No	95.6	<u>99.2</u>	95.6	91.3	95.4

where $u(A_t^\tau | A_t)$ denotes the target flow direction toward the ground-truth action sequence. During inference, the policy starts from a random action initialization and iteratively refines it through multiple denoising steps, ultimately producing the final executable robot actions.

3.3 Progressive Alignment Training

To better align implicit depth-enhanced spatial representations with downstream action learning, Evo-Depth adopts a progressive alignment training strategy. This strategy is motivated by two considerations: first, to gradually align newly initialized modules with pretrained components before full end-to-end optimization; second, to encourage more effective integration between implicit depth features and 2D vision-language representations.

Specifically, training is divided into three stages. In Stage 1 (Initial Alignment), we optimize the SEM and Action Expert while freezing the IDEM and the Vision-Language Backbone, establishing an initial alignment between the newly introduced modules and the pretrained representation space. In Stage 2 (Spatial Alignment), we unfreeze the IDEM while keeping the Vision-Language Backbone frozen, enabling implicit depth representations to align more effectively with 2D vision-language features and improving spatial consistency across modules. In Stage 3 (Joint Optimization), all modules are jointly optimized end-to-end, allowing the entire model to achieve full feature coordination and task-specific adaptation. By progressively establishing alignment across modules, this strategy improves representation compatibility and facilitates deeper fusion between depth-aware and vision-language features, ultimately benefiting the overall action modeling capability. Its effectiveness is further examined through an ablation study in Section 7.2, and qualitative visualization in Appendix B.3 further suggests that progressive alignment training encourages more task-focused IDEM spatial attention.

Table 2: **LIBERO-Plus Results.** Results in LIBERO-Plus benchmark. “Bkgd.” denotes Background. **Bold** indicates the best result in each column, and underlined indicates the second-best result.

Model	Camera	Robot	Language	Light	Bkgd.	Noise	Layout	Avg.
WorldVLA [6]	0.1	27.9	41.6	43.7	17.1	10.9	38.0	25.0
NORA [13]	2.2	37.0	65.1	45.7	58.6	12.8	62.1	39.0
UniVLA [4]	1.8	46.2	69.6	69.0	<u>81.0</u>	21.2	31.9	43.9
π_0 -Fast [15]	13.8	6.0	58.8	85.0	81.4	79.0	68.9	53.6
Evo-Depth (Ours)	47.2	49.2	78.9	88.1	76.4	<u>77.6</u>	69.6	69.6

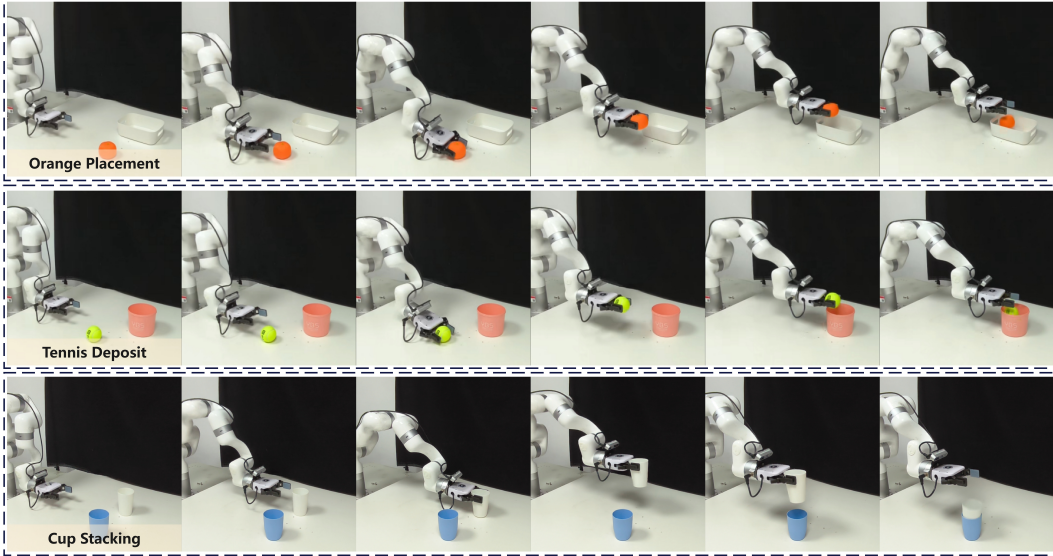


Figure 3: **Real-World Setup.** Real-world experiment process for three tasks, *Orange Placement*, *Tennis Deposit*, and *Cup Stacking*, with increasing manipulation difficulty.

4 Simulation Experiments

Setup. We evaluate Evo-Depth on four representative simulation benchmarks, including Meta-World [53], VLA-Arena [55], LIBERO [26], and LIBERO-Plus [10], to assess manipulation performance under varying task difficulty, long-horizon execution, and distribution shifts. Detailed benchmark settings and evaluation protocols are provided in Appendix A.1.

Results. As shown in Table 1, Evo-Depth achieves state-of-the-art overall performance on Meta-World, obtaining the highest average success rate of 84.4 and the best results on the *medium*, *hard*, and *very hard* splits. On VLA-Arena, Evo-Depth delivers strong overall performance, with particularly good results in the *distractor* and *long horizon* settings. On LIBERO, Evo-Depth also performs strongly, achieving a high average success rate of 95.4 with balanced performance across different task suites. As shown in Table 2, Evo-Depth further demonstrates strong robustness on LIBERO-Plus, achieving impressive overall average and performing well across diverse perturbation dimensions. Overall, these results demonstrate that the implicit depth perception strategy effectively improves VLA performance across diverse simulation benchmarks, especially in challenging scenarios that require robust spatial perception, long-horizon execution, and generalisation under distribution shifts.

5 Real-World Experiments

Setup. We evaluate Evo-Depth on a physical robot across three real-world manipulation tasks of increasing difficulty, as illustrated in Fig. 3: *Orange Placement*, *Tennis Deposit*, and *Cup Stacking*. These tasks impose progressively stronger requirements on spatial perception and fine-grained manipulation. Notably, the third-view camera is partially occluded during critical manipulation stages, making the setup particularly challenging for accurate grasping and placement. For each task, we conduct 20 trials, and the success rate is computed as the ratio of successful trials to the total number of trials. Detailed task definitions and real-world evaluation protocols are provided in Appendix B.1.

Table 3: **Real-Robot Comparison.** Inference efficiency and task-wise success rate comparison of different VLA models in real-robot experiments. **Bold** and underline denote the best and second-best values, respectively, except for “Params” and “GPU Mem.”, where they denote the smallest and second-smallest values. All task-wise success rates and average success are reported in percent.

Model	Params (B)	GPU Mem. (GB)	Infer. Freq. (Hz)	Orange Placement	Tennis Deposit	Cup Stacking	Avg. Success (%)
OpenVLA-OFT [17]	7.0	<u>15.1</u>	7.8	50.0	40.0	25.0	38.3
π_0 [3]	<u>3.5</u>	17.9	<u>10.2</u>	<u>75.0</u>	<u>70.0</u>	<u>55.0</u>	<u>66.7</u>
Evo-Depth (Ours)	0.9	3.2	12.3	95.0	90.0	85.0	90.0

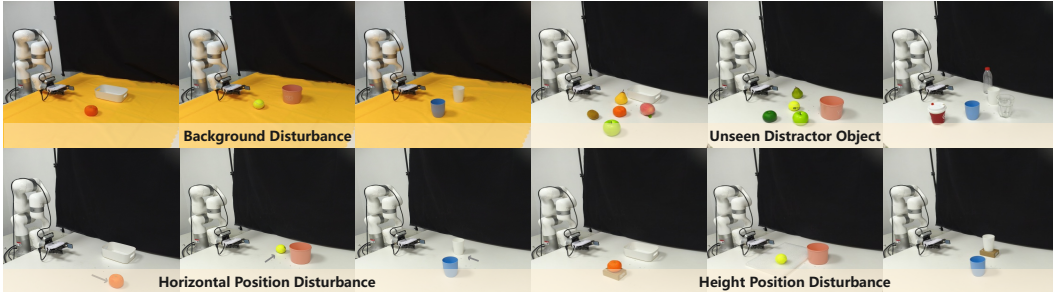


Figure 4: **Generalization Setup.** Generalization experiments under four disturbance settings: background disturbance, unseen distractors, horizontal and height position disturbance.

Results. Evo-Depth achieves the strongest overall performance across all three real-world tasks. As shown in Table 3, the performance gap among the three methods becomes more evident on tasks with higher spatial complexity. In particular, tasks involving target motion and precise object-object interaction are more sensitive to the model’s spatial perception quality. This trend suggests that real-world manipulation performance is strongly related to how well a model can capture object layout and relative positions from visual observations. The results further indicate that introducing implicit depth cues into VLA learning can provide more informative spatial representations, which is beneficial for more accurate action generation in challenging real-world settings. We also conduct a detailed failure case analysis for the three real-world tasks, which is provided in the Appendix B.2.

Inference Efficiency Analysis. We further compare baseline VLA models in terms of parameter size, GPU memory usage, inference frequency, and average success rate in real-robot experiments. As shown in Table 3, Evo-Depth achieves the best overall trade-off between efficiency and performance. Despite using only 0.9B parameters and 3.2 GB GPU memory, Evo-Depth runs at 12.3 Hz and attains an average success rate of 90.0%, significantly outperforming OpenVLA-OFT and π_0 in real-world manipulation tasks.

6 Generalization Experiments

Setup. To evaluate the real-world generalization ability of Evo-Depth, we further test it under four types of distribution shifts and environmental disturbances using the same three tasks as in the real-world experiments: *Orange Placement*, *Tennis Deposit*, and *Cup Stacking*. As illustrated in Fig. 4, these settings cover appearance changes, distractor interference, and spatial perturbations in both horizontal and vertical dimensions. For each task under each disturbance setting, we conduct 20 trials, and the success rate is computed as the ratio of successful trials to the total number of trials. Detailed disturbance settings are provided in Appendix C.1.

Results. As shown in Fig. 5a, Evo-Depth consistently achieves higher success rates than the baseline under all four disturbance settings across the three real-world tasks. These results demonstrate that Evo-Depth generalizes more effectively to unseen visual and spatial variations. In particular, its advantage becomes more significant in challenging settings that require accurate spatial reasoning, such as position perturbations and precise object-object interaction. This suggests that implicit depth-aware representations enhance spatial perception and improve the robustness of VLA policies under real-world distribution shifts.

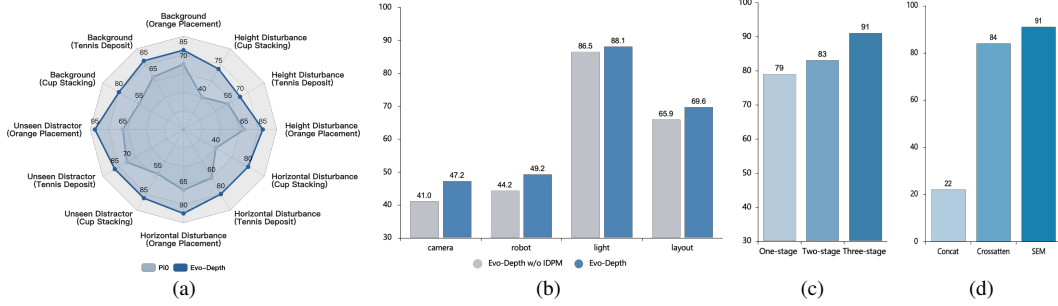


Figure 5: **Generalization and Ablation Studies on Evo-Depth.** (a) Generalization performance of Pi0 and Evo-Depth across multiple perturbations. (b) Effect of the implicit depth perception module on LIBERO-Plus under four evaluation dimensions. (c) Effect of different alignment training stages on LIBERO Long benchmark. (d) Effect of different fusion strategies on LIBERO Long benchmark.

7 Ablation Studies

7.1 Implicit Depth Perception Analysis

Ablation Setup. To evaluate the contribution of implicit depth perception, we remove the implicit depth perception module from Evo-Depth while keeping the remaining architecture and training pipeline unchanged. We conduct this ablation on LIBERO-Plus, and detailed evaluation settings are provided in Appendix D.1.

Results Analysis. As shown in Fig. 5b, Evo-Depth consistently outperforms the variant without the implicit depth perception module across all four evaluation dimensions. The gains are particularly clear on *camera*, *robot*, and *layout*, indicating that implicit depth cues are especially helpful for handling viewpoint changes, embodiment variation, and object arrangement. Overall, these results verify the effectiveness of implicit depth perception in improving spatial perception and manipulation robustness.

7.2 Multi-Stage Fusion Training

Ablation Setup. To evaluate the proposed Progressive Alignment Training strategy, we compare one-stage, two-stage, and three-stage training variants on the LIBERO Long benchmark. Detailed stage definitions are provided in Appendix D.1.

Results Analysis. The results consistently verify the effectiveness of the proposed Progressive Alignment Training strategy. As shown in Fig. 5c, the three-stage variant achieves the best performance, outperforming both the one-stage and two-stage variants. This result suggests that implicit depth cues are more effectively incorporated into the vision-language-action framework when cross-module alignment is introduced progressively rather than through abrupt joint optimization. In particular, while the two-stage variant already improves over one-stage training, the additional intermediate alignment stage in the three-stage variant further strengthens multimodal integration and leads to the best overall performance.

7.3 Fusion Strategy Analysis

Ablation Setup. To investigate the impact of different fusion strategies, we compare concatenation, cross-attention, and SEM-based modulation for integrating implicit depth features into the 2D vision-language representations on the LIBERO Long benchmark. Detailed variant definitions are provided in Appendix D.1.

Results Analysis. As shown in Fig. 5d, different fusion strategies lead to markedly different performance. The *Concat* variant performs substantially worse than the other two variants, suggesting that treating implicit depth features and 2D vision-language representations in a symmetric manner is not effective for downstream action prediction. In contrast, both *Crossatten* and *SEM* achieve much stronger results, indicating that implicit depth cues are more useful when they are incorporated as complementary spatial signals conditioned on the 2D vision-language representations. Among them, *SEM* achieves the best performance, suggesting that FiLM-style feature-wise modulation provides a more effective way to inject spatial information while preserving the dominant role of the original 2D vision-language representations.

8 Conclusion

We introduced Evo-Depth, a lightweight depth-enhanced VLA framework that improves spatially grounded robotic manipulation while preserving deployment efficiency without relying on additional sensing hardware. Evo-Depth integrates an Implicit Depth Encoding Module, a Spatial Enhancement Module, and Progressive Alignment Training to enhance depth-aware spatial understanding for downstream action learning. Experiments in simulation and real-world settings demonstrate its effectiveness, robustness, and deployment efficiency. These results suggest that lightweight implicit depth enhancement is an effective direction for practical VLA systems.

References

- [1] Ali Abouzeid, Malak Mansour, Qinbo Sun, Zezhou Sun, and Dezhen Song. Geoaware-vla: Implicit geometry aware vision-language-action model. *arXiv preprint arXiv:2509.14117*, 2025.
- [2] Johan Bjorck, Fernando Castañeda, Nikita Cherniadev, Xingye Da, Runyu Ding, Linxi Fan, Yu Fang, Dieter Fox, Fengyuan Hu, Spencer Huang, et al. Gr00t n1: An open foundation model for generalist humanoid robots. *arXiv preprint arXiv:2503.14734*, 2025.
- [3] Kevin Black, Noah Brown, Danny Driess, Adnan Esmail, Michael Equi, Chelsea Finn, Niccolo Fusai, Lachy Groom, Karol Hausman, Brian Ichter, et al. $\pi 0$: A vision-language-action flow model for general robot control. corr, abs/2410.24164, 2024. doi: 10.48550. *arXiv preprint ARXIV.2410.24164*.
- [4] Qingwen Bu, Yanting Yang, Jisong Cai, Shenyuan Gao, Guanghui Ren, Maoqing Yao, Ping Luo, and Hongyang Li. Univla: Learning to act anywhere with task-centric latent actions. *arXiv preprint arXiv:2505.06111*, 2025.
- [5] Rui Cai, Jun Guo, Xinze He, Piaopiao Jin, Jie Li, Bingxuan Lin, Futeng Liu, Wei Liu, Fei Ma, Kun Ma, et al. Xiaomi-robotics-0: An open-sourced vision-language-action model with real-time execution. *arXiv preprint arXiv:2602.12684*, 2026.
- [6] Jun Cen, Chaohui Yu, Hangjie Yuan, Yuming Jiang, Siteng Huang, Jiayan Guo, Xin Li, Yibing Song, Hao Luo, Fan Wang, et al. Worldvla: Towards autoregressive action world model. *arXiv preprint arXiv:2506.21539*, 2025.
- [7] Zhe Chen, Jiannan Wu, Wenhai Wang, Weijie Su, Guo Chen, Sen Xing, Muyan Zhong, Qinglong Zhang, Xizhou Zhu, Lewei Lu, et al. Internvl: Scaling up vision foundation models and aligning for generic visual-linguistic tasks. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 24185–24198, 2024.
- [8] Shengliang Deng, Mi Yan, Yixin Zheng, Jiayi Su, Wenhao Zhang, Xiaoguang Zhao, Heming Cui, Zhizheng Zhang, and He Wang. Stereovla: Enhancing vision-language-action models with stereo vision. *arXiv preprint arXiv:2512.21970*, 2025.
- [9] Xianzhe Fan, Shengliang Deng, Xiaoyang Wu, Yuxiang Lu, Zhuoling Li, Mi Yan, Yujia Zhang, Zhizheng Zhang, He Wang, and Hengshuang Zhao. Any3d-vla: Enhancing vla robustness via diverse point clouds. *arXiv preprint arXiv:2602.00807*, 2026.
- [10] Senyu Fei, Siyin Wang, Junhao Shi, Zihao Dai, Jikun Cai, Pengfang Qian, Li Ji, Xinzhe He, Shiduo Zhang, Zhaoye Fei, et al. Libero-plus: In-depth robustness analysis of vision-language-action models. *arXiv preprint arXiv:2510.13626*, 2025.
- [11] Ankit Goyal, Hugo Hadfield, Xuning Yang, Valts Blukis, and Fabio Ramos. Vla-0: Building state-of-the-art vlases with zero modification. *arXiv preprint arXiv:2510.13054*, 2025.
- [12] Binyuan Hui, Jian Yang, Zeyu Cui, Jiayi Yang, Dayiheng Liu, Lei Zhang, Tianyu Liu, Jiajun Zhang, Bowen Yu, Keming Lu, et al. Qwen2. 5-coder technical report. *arXiv preprint arXiv:2409.12186*, 2024.
- [13] Chia-Yu Hung, Qi Sun, Pengfei Hong, Amir Zadeh, Chuan Li, U Tan, Navonil Majumder, Soujanya Poria, et al. Nora: A small open-sourced generalist vision language action model for embodied tasks. *arXiv preprint arXiv:2504.19854*, 2025.
- [14] Physical Intelligence, Ali Amin, Raichelle Aniceto, Ashwin Balakrishna, Kevin Black, Ken Conley, Grace Connors, James Darpinian, Karan Dhabalia, Jared DiCarlo, et al. $\pi_{0.6}^*$: A vla that learns from experience. *arXiv preprint arXiv:2511.14759*, 2025.
- [15] Physical Intelligence, Kevin Black, Noah Brown, James Darpinian, Karan Dhabalia, Danny Driess, Adnan Esmail, Michael Equi, Chelsea Finn, Niccolo Fusai, et al. $\pi_{0.5}$: a vision-language-action model with open-world generalization. *arXiv preprint arXiv:2504.16054*, 2025.

- [16] Moo Jin Kim, Karl Pertsch, Siddharth Karamcheti, Ted Xiao, Ashwin Balakrishna, Suraj Nair, Rafael Rafailov, Ethan Foster, Grace Lam, Pannag Sanketi, et al. Openvla: An open-source vision-language-action model. *arXiv preprint arXiv:2406.09246*, 2024.
- [17] Moo Jin Kim, Chelsea Finn, and Percy Liang. Fine-tuning vision-language-action models: Optimizing speed and success. *arXiv preprint arXiv:2502.19645*, 2025.
- [18] Chengmeng Li, Junjie Wen, Yaxin Peng, Yan Peng, and Yichen Zhu. Pointvla: Injecting the 3d world into vision-language-action models. *IEEE Robotics and Automation Letters*, 11(3): 2506–2513, 2026.
- [19] Fuhao Li, Wenxuan Song, Han Zhao, Jingbo Wang, Pengxiang Ding, Donglin Wang, Long Zeng, and Haoang Li. Spatial forcing: Implicit spatial representation alignment for vision-language-action model. *arXiv preprint arXiv:2510.12276*, 2025.
- [20] Yixuan Li, Yuhui Chen, Mingcai Zhou, Haoran Li, Zhengtao Zhang, and Dongbin Zhao. Qdepth-vla: quantized depth prediction as auxiliary supervision for vision-language-action models. *arXiv preprint arXiv:2510.14836*, 2025.
- [21] Shijie Lian, Bin Yu, Xiaopeng Lin, Laurence T Yang, Zhaolong Shen, Changti Wu, Yuzhuo Miao, Cong Huang, and Kai Chen. Langforce: Bayesian decomposition of vision language action models via latent action queries. *arXiv e-prints*, pages arXiv–2601, 2026.
- [22] Haotong Lin, Sili Chen, Junhao Liew, Donny Y Chen, Zhenyu Li, Guang Shi, Jiashi Feng, and Bingyi Kang. Depth anything 3: Recovering the visual space from any views. *arXiv preprint arXiv:2511.10647*, 2025.
- [23] Tao Lin, Gen Li, Yilei Zhong, Yanwen Zou, Yuxin Du, Jiting Liu, Encheng Gu, and Bo Zhao. Evo-0: Vision-language-action model with implicit spatial understanding. *arXiv preprint arXiv:2507.00416*, 2025.
- [24] Tao Lin, Yilei Zhong, Yuxin Du, Jingjing Zhang, Jiting Liu, Yinxinyu Chen, Encheng Gu, Ziyang Liu, Hongyi Cai, Yanwen Zou, et al. Evo-1: Lightweight vision-language-action model with preserved semantic alignment. *arXiv preprint arXiv:2511.04555*, 2025.
- [25] Yaron Lipman, Ricky TQ Chen, Heli Ben-Hamu, Maximilian Nickel, and Matt Le. Flow matching for generative modeling. *arXiv preprint arXiv:2210.02747*, 2022.
- [26] Bo Liu, Yifeng Zhu, Chongkai Gao, Yihao Feng, Qiang Liu, Yuke Zhu, and Peter Stone. Libero: Benchmarking knowledge transfer for lifelong robot learning. *Advances in Neural Information Processing Systems*, 36:44776–44791, 2023.
- [27] Hao Luo, Ye Wang, Wanpeng Zhang, Sipeng Zheng, Ziheng Xi, Chaoyi Xu, Haiweng Xu, Haoqi Yuan, Chi Zhang, Yiqing Wang, et al. Being-h0. 5: Scaling human-centric robot learning for cross-embodiment generalization. *arXiv preprint arXiv:2601.12993*, 2026.
- [28] Yuankai Luo, Woping Chen, Tong Liang, and Zhenguo Li. Coral: Scalable multi-task robot learning via lora experts. *arXiv preprint arXiv:2603.09298*, 2026.
- [29] Yuankai Luo, Woping Chen, Tong Liang, Baiqiao Wang, and Zhenguo Li. Simvla: A simple vla baseline for robotic manipulation. *arXiv preprint arXiv:2602.18224*, 2026.
- [30] Abby O’Neill, Abdul Rehman, Abhiram Maddukuri, Abhishek Gupta, Abhishek Padalkar, Abraham Lee, Acorn Pooley, Agrim Gupta, Ajay Mandlekar, Ajinkya Jain, et al. Open x-embodiment: Robotic learning datasets and rt-x models: Open x-embodiment collaboration 0. In *2024 IEEE International Conference on Robotics and Automation (ICRA)*, pages 6892–6903. IEEE, 2024.
- [31] William Peebles and Saining Xie. Scalable diffusion models with transformers. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 4195–4205, 2023.
- [32] Haosong Peng, Hao Li, Yalun Dai, Yushi Lan, Yihang Luo, Tianyu Qi, Zhengshen Zhang, Yufeng Zhan, Junfei Zhang, Wenchao Xu, et al. Omnivgt: Omni-modality driven visual geometry grounded transformer. *arXiv preprint arXiv:2511.10560*, 2025.

- [33] Karl Pertsch, Kyle Stachowicz, Brian Ichter, Danny Driess, Suraj Nair, Quan Vuong, Oier Mees, Chelsea Finn, and Sergey Levine. Fast: Efficient action tokenization for vision-language-action models. *arXiv preprint arXiv:2501.09747*, 2025.
- [34] Quanhao Qian, Guoyang Zhao, Gongjie Zhang, Jiuniu Wang, Ran Xu, Junlong Gao, and Deli Zhao. Gp3: A 3d geometry-aware policy with multi-view images for robotic manipulation. *arXiv preprint arXiv:2509.15733*, 2025.
- [35] Delin Qu, Haoming Song, Qizhi Chen, Yuanqi Yao, Xinyi Ye, Yan Ding, Zhigang Wang, JiaYuan Gu, Bin Zhao, Dong Wang, et al. Spatialvla: Exploring spatial representations for visual-language-action model. *arXiv preprint arXiv:2501.15830*, 2025.
- [36] Zhifeng Rao, Wenlong Chen, Lei Xie, Xia Hua, Dongfu Yin, Zhen Tian, and F Richard Yu. Augvla-3d: Depth-driven feature augmentation for vision-language-action models. *arXiv preprint arXiv:2602.10698*, 2026.
- [37] Xiang Shi, Wenlong Huang, Menglin Zou, and Xinhai Sun. Saivla-0: Cerebrum–pons–cerebellum tripartite architecture for compute-aware vision-language-action. *arXiv preprint arXiv:2603.08124*, 2026.
- [38] Mustafa Shukor, Dana Aubakirova, Francesco Capuano, Pepijn Kooijmans, Steven Palma, Adil Zouitine, Michel Aractingi, Caroline Pascal, Martino Russi, Andres Marafioti, et al. Smolvla: A vision-language-action model for affordable and efficient robotics. *arXiv preprint arXiv:2506.01844*, 2025.
- [39] Bin Tan, Changjiang Sun, Xiage Qin, Hanat Adai, Zelin Fu, Tianxiang Zhou, Han Zhang, Yinghao Xu, Xing Zhu, Yujun Shen, et al. Masked depth modeling for spatial perception. *arXiv preprint arXiv:2601.17895*, 2026.
- [40] GigaBrain Team, Angen Ye, Boyuan Wang, Chaojun Ni, Guan Huang, Guosheng Zhao, Haoyun Li, Jie Li, Jiagang Zhu, Lv Feng, et al. Gigabrain-0: A world model-powered vision-language-action model. *arXiv preprint arXiv:2510.19430*, 2025.
- [41] Hongyu Wang, Chuyan Xiong, Ruiping Wang, and Xilin Chen. Bitvla: 1-bit vision-language-action models for robotics manipulation. *arXiv preprint arXiv:2506.07530*, 2025.
- [42] Jianyuan Wang, Minghao Chen, Nikita Karaev, Andrea Vedaldi, Christian Rupprecht, and David Novotny. Vggt: Visual geometry grounded transformer. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pages 5294–5306, 2025.
- [43] Yihao Wang, Pengxiang Ding, Lingxiao Li, Can Cui, Zirui Ge, Xinyang Tong, Wenxuan Song, Han Zhao, Wei Zhao, Pengxu Hou, et al. Vla-adapter: An effective paradigm for tiny-scale vision-language-action model. In *Proceedings of the AAAI conference on artificial intelligence*, volume 40, pages 18638–18646, 2026.
- [44] Junjie Wen, Yichen Zhu, Jinming Li, Minjie Zhu, Zhibin Tang, Kun Wu, Zhiyuan Xu, Ning Liu, Ran Cheng, Chaomin Shen, et al. Tinyvla: Towards fast, data-efficient vision-language-action models for robotic manipulation. *IEEE Robotics and Automation Letters*, 2025.
- [45] Wei Wu, Fan Lu, Yunnan Wang, Shuai Yang, Shi Liu, Fangjing Wang, Qian Zhu, He Sun, Yong Wang, Shuailei Ma, et al. A pragmatic vla foundation model. *arXiv preprint arXiv:2601.18692*, 2026.
- [46] Bin Xie, Erjin Zhou, Fan Jia, Hao Shi, Haoqiang Fan, Haowei Zhang, Hebei Li, Jianjian Sun, Jie Bin, Junwen Huang, et al. Dexbotic: Open-source vision-language-action toolbox. *arXiv preprint arXiv:2510.23511*, 2025.
- [47] Feng Yan, Fanfan Liu, Liming Zheng, Yufeng Zhong, Yiyang Huang, Zechao Guan, Chengjian Feng, and Lin Ma. Robotron-mani: All-in-one multimodal large model for robotic manipulation. *arXiv preprint arXiv:2412.07215*, 2024.
- [48] Sizhe Yang, Linning Xu, Hao Li, Juncheng Mu, Jia Zeng, Dahua Lin, and Jiangmiao Pang. Robo3r: Enhancing robotic manipulation with accurate feed-forward 3d reconstruction. *arXiv preprint arXiv:2602.10101*, 2026.

- [49] Yandan Yang, Shuang Zeng, Tong Lin, Xinyuan Chang, Dekang Qi, Junjin Xiao, Haoyun Liu, Ronghan Chen, Yuzhi Chen, Dongjie Huo, et al. Abot-m0: Vla foundation model for robotic manipulation with action manifold learning. *arXiv preprint arXiv:2602.11236*, 2026.
- [50] Bin Yu, Shijie Lian, Xiaopeng Lin, Zhaolong Shen, Yuliang Wei, Haishan Liu, Changti Wu, Hang Yuan, Bailing Wang, Cong Huang, et al. 3d-mix for vla: A plug-and-play module for integrating vgg-based 3d information into vision-language-action models. *arXiv preprint arXiv:2603.24393*, 2026.
- [51] Bin Yu, Shijie Lian, Xiaopeng Lin, Yuliang Wei, Zhaolong Shen, Changti Wu, Yuzhuo Miao, Xinming Wang, Bailing Wang, Cong Huang, et al. Twinbrainvla: Unleashing the potential of generalist vlms for embodied tasks via asymmetric mixture-of-transformers. *arXiv preprint arXiv:2601.14133*, 2026.
- [52] En Yu, Haoran Lv, Jianjian Sun, Kangheng Lin, Ruitao Zhang, Yukang Shi, Yuyang Chen, Ze Chen, Ziheng Zhang, Fan Jia, et al. Dm0: An embodied-native vision-language-action model towards physical ai. *arXiv preprint arXiv:2602.14974*, 2026.
- [53] Tianhe Yu, Deirdre Quillen, Zhanpeng He, Ryan Julian, Karol Hausman, Chelsea Finn, and Sergey Levine. Meta-world: A benchmark and evaluation for multi-task and meta reinforcement learning. In *Conference on robot learning*, pages 1094–1100. PMLR, 2020.
- [54] Tianyuan Yuan, Yicheng Liu, Chenhao Lu, Zhuoguang Chen, Tao Jiang, and Hang Zhao. Depthvla: Enhancing vision-language-action models with depth-aware spatial reasoning. *arXiv preprint arXiv:2510.13375*, 2025.
- [55] Borong Zhang, Jiahao Li, Jiachen Shen, Yishuai Cai, Yuhao Zhang, Yuanpei Chen, Juntao Dai, Jiaming Ji, and Yaodong Yang. Vla-arena: An open-source framework for benchmarking vision-language-action models. *arXiv preprint arXiv:2512.22539*, 2025.
- [56] Jiahui Zhang, Yurui Chen, Yueming Xu, Ze Huang, Yanpeng Zhou, Yu-Jie Yuan, Xinyue Cai, Guowei Huang, Xingyue Quan, Hang Xu, et al. 4d-vla: Spatiotemporal vision-language-action pretraining with cross-scene calibration. *arXiv preprint arXiv:2506.22242*, 2025.
- [57] Haoyu Zhen, Xiaowen Qiu, Peihao Chen, Jincheng Yang, Xin Yan, Yilun Du, Yining Hong, and Chuang Gan. 3d-vla: A 3d vision-language-action generative world model. *arXiv preprint arXiv:2403.09631*, 2024.
- [58] Jinliang Zheng, Jianxiong Li, Zhihao Wang, Dongxiu Liu, Xirui Kang, Yuchun Feng, Yinan Zheng, Jiayin Zou, Yilun Chen, Jia Zeng, et al. X-vla: Soft-prompted transformer as scalable cross-embodiment vision-language-action model. *arXiv preprint arXiv:2510.10274*, 2025.
- [59] Ruijie Zheng, Yongyuan Liang, Shuaiyi Huang, Jianfeng Gao, Hal Daumé III, Andrey Kolobov, Furong Huang, and Jianwei Yang. Tracevla: Visual trace prompting enhances spatial-temporal awareness for generalist robotic policies. *arXiv preprint arXiv:2412.10345*, 2024.
- [60] Linqing Zhong, Yi Liu, Yifei Wei, Ziyu Xiong, Maoqing Yao, Si Liu, and Guanghui Ren. Acot-vla: Action chain-of-thought for vision-language-action models. *arXiv preprint arXiv:2601.11404*, 2026.
- [61] Jinguo Zhu, Weiyun Wang, Zhe Chen, Zhaoyang Liu, Shenglong Ye, Lixin Gu, Hao Tian, Yuchen Duan, Weijie Su, Jie Shao, et al. Internvl3: Exploring advanced training and test-time recipes for open-source multimodal models. *arXiv preprint arXiv:2504.10479*, 2025.

A Simulation Experiment Details

A.1 Simulation Benchmark Setup

We evaluate Evo-Depth on four complementary simulation benchmarks to assess its effectiveness from different perspectives, including base manipulation competence, VLA-oriented generalization, cross-task transfer, and robustness under perturbations. For all benchmarks, we report success rates and compare Evo-Depth with representative VLA baselines under aligned evaluation settings. All baseline results are derived from the original paper or official implementation. Representative task trajectories from Meta-World and LIBERO are shown in Figs. 6 and 7, respectively, to illustrate the diversity of manipulation scenes considered in these benchmarks.

Meta-World. Meta-World is a widely used multi-task robotic manipulation benchmark that contains 50 distinct manipulation environments. Its task set is intentionally diverse yet structured, covering a broad range of fundamental manipulation skills with shared underlying object-interaction patterns. We include Meta-World because it provides a broad evaluation of whether Evo-Depth improves core manipulation ability beyond narrow single-task settings. In our evaluation, we group the benchmark into four difficulty splits (*easy*, *medium*, *hard*, and *very hard*) to analyze how performance changes as tasks demand more accurate localization, spatial coordination, and fine-grained object placement. This benchmark is particularly relevant to our study because it tests whether lightweight implicit depth cues remain beneficial as manipulation difficulty increases.

VLA-Arena. VLA-Arena is a benchmark designed specifically for evaluating Vision-Language-Action models. Its original design quantifies VLA difficulty along three orthogonal axes, namely task structure, language command, and visual observation, and organizes 170 tasks into four task-structure dimensions: *safety*, *distractor*, *extrapolation*, and *long horizon*. In particular, the *distractor* and *long horizon* dimensions are closely related to the ability to maintain stable spatial grounding over cluttered observations and multi-stage action sequences, while *extrapolation* probes generalization beyond seen conditions. This benchmark is particularly relevant to our study because it directly tests whether the proposed implicit-depth enhancement improves robustness and spatial reasoning in challenging VLA settings without sacrificing the lightweight nature of the policy.

LIBERO. LIBERO is used in our evaluation through four categories, *spatial*, *object*, *goal*, and *long*, which respectively cover manipulation settings with different emphases on spatial reasoning, object understanding, goal-conditioned execution, and long-horizon task composition. We include LIBERO because it provides a balanced evaluation across multiple types of language-conditioned manipulation settings, rather than emphasizing only a single source of difficulty. This benchmark is particularly relevant to our study because it allows us to examine model behavior under different task demands using a unified evaluation setup. In particular, the *spatial* and *long* categories are useful for analyzing settings that place relatively higher demands on spatial grounding and sustained action coordination over time.

LIBERO-Plus. LIBERO-Plus extends LIBERO with a dedicated robustness benchmark for VLA models. It systematically introduces perturbations along seven dimensions, including *objects layout*, *camera viewpoints*, *robot initial states*, *language instructions*, *light conditions*, *background textures*, and *sensor noise*, in order to expose failure modes that may be hidden by standard benchmark scores. We include LIBERO-Plus because one of the main motivations of Evo-Depth is to strengthen spatial perception from RGB alone in a lightweight manner, and such an improvement should be reflected not only in in-distribution success rates but also in robustness to visual and spatial perturbations. In our evaluation, we report results on *camera*, *robot*, *language*, *light*, *background*, *noise*, and *layout*. This benchmark is particularly relevant to our study because perturbations in viewpoint, embodiment, and scene arrangement directly test whether the implicit-depth features extracted by IDEM provide more stable spatial grounding than a purely 2D visual representation.

B Real-World Experiment Details

B.1 Real-World Experiment Setup

Task Definitions. We evaluate Evo-Depth on three real-world manipulation tasks with increasing difficulty. *Orange Placement* requires grasping an orange and placing it into a white box. *Tennis Deposit* involves picking up a tennis ball and depositing it into a small orange bucket, which is more challenging because the ball is easily disturbed and may roll away during contact. *Cup Stacking*

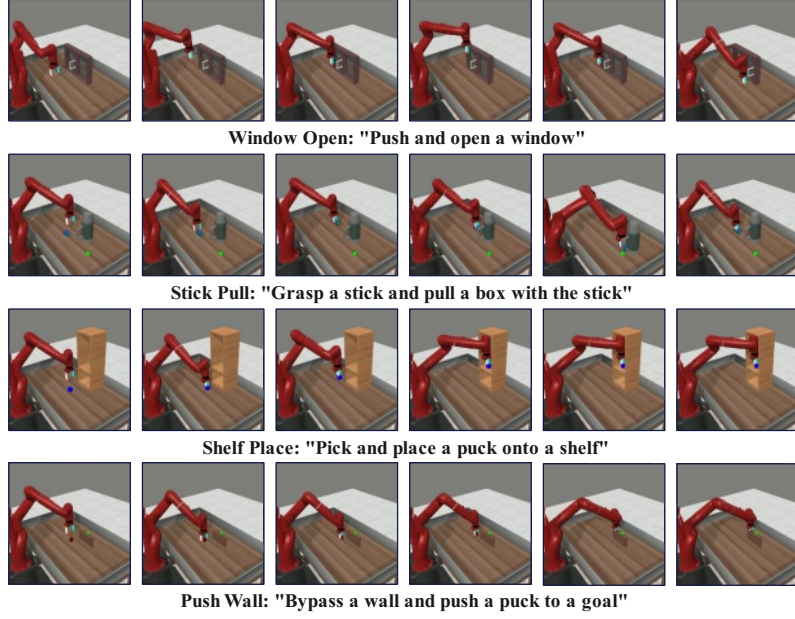


Figure 6: **Representative task trajectories from Meta-World.** We show example multi-step manipulation sequences from several Meta-World tasks to illustrate the benchmark’s diversity in object interaction and spatial control.

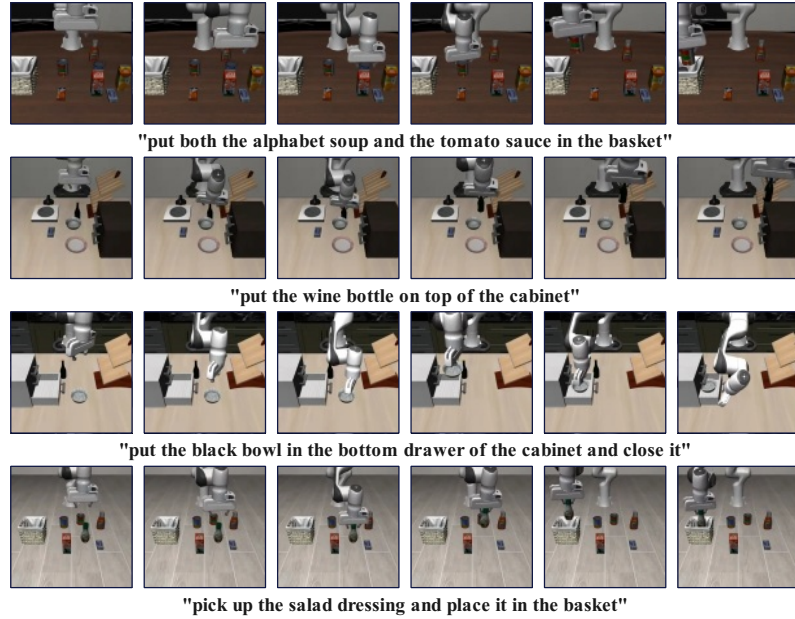


Figure 7: **Representative task trajectories from LIBERO.** We show example task sequences from LIBERO to illustrate the benchmark’s language-conditioned manipulation settings and varied object arrangements.

requires stacking a white cup onto a blue cup and demands the most precise spatial understanding and fine-grained control due to the small geometric tolerance during insertion. Together, these tasks impose progressively stronger requirements on spatial perception and manipulation.

Hardware Setup. The real-world experiments are conducted on a fixed-base UFACTORY xArm6 platform. For visual observation, we use two Intel RealSense D435i RGB cameras, including one external camera mounted on a stand and one wrist-mounted camera attached near the end effector, as shown in Fig. 8. This setup provides complementary views of the workspace and the manipulation area.



Figure 8: **Real-world hardware setup.** The real-world platform uses a fixed-base UFACTORY xArm6 robot with two Intel RealSense D435i RGB cameras, including one external camera and one wrist-mounted camera.

Camera Configuration. The real-world setup uses two RGB views for observation, including one external scene camera and one wrist-mounted camera. During critical manipulation stages, the external scene camera is partially occluded, resulting in incomplete visual observations when accurate grasping and placement are most needed. This setting increases the difficulty of real-world manipulation and provides a challenging testbed for evaluating the spatial perception and reasoning capability of VLA models.

Evaluation Protocol. For each task, we execute the policy under the same observation and control setting and report task success rates. All compared methods are evaluated under aligned real-world conditions to ensure fair comparison. Success is determined by whether the robot completes the corresponding manipulation goal for each task.

Efficiency Measurement. We additionally compare parameter size, GPU memory usage, and inference frequency in the real-robot setting. GPU memory usage and inference frequency are measured on an NVIDIA RTX 4090D platform. These metrics are used together with task success rate to evaluate the deployment efficiency of different VLA models in real-world manipulation.

B.2 Failure Case Analysis

We further analyze the typical failure cases in the three real-world tasks. In *Orange Placement*, failures mainly occur during grasping under partial camera occlusion, where the gripper may collide with the orange and trigger collision protection. In *Tennis Deposit*, failures are primarily caused by the tennis ball being easily disturbed and rolling away when the gripper fails to enclose it securely. In *Cup Stacking*, failures mainly result from the small tolerance between the two cups, where slight misalignment can lead to collision and tipping during insertion. These cases suggest that, although Evo-Depth improves spatial perception and manipulation capability, highly precise contact-rich interactions under occlusion, target motion, and tight geometric constraints remain challenging in real-world settings.

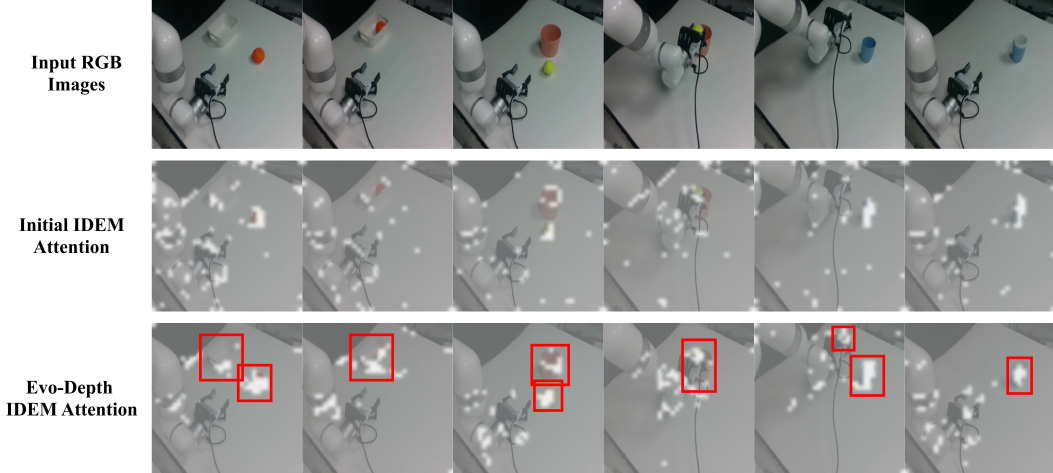


Figure 9: **Visualization of IDEM spatial attention.** The first row shows input RGB observations from representative stages of real-world manipulation. The second row shows attention maps from the initial IDEM initialized from the depth encoder. The third row shows attention maps from the IDEM in Evo-Depth after progressive alignment training. Compared with the initial IDEM, the trained IDEM exhibits more focused responses on the gripper-object interaction region and the target placement area, suggesting improved alignment between implicit depth features and task-relevant spatial cues.

B.3 Visualization of IDEM Spatial Attention

To provide qualitative evidence on how the proposed training strategy affects spatial perception, we visualize the spatial attention patterns of IDEM on representative real-world manipulation frames. As shown in Fig. 9, the initial IDEM already captures coarse object-level structure, while the IDEM in Evo-Depth exhibits more concentrated responses around manipulation-relevant regions after progressive alignment training. In particular, the attention becomes more focused on the gripper-object interaction area and the target placement region. These visualizations provide qualitative support that Evo-Depth encourages implicit depth features to better align with downstream manipulation needs.

C Generalization Experiment Details

C.1 Generalization Experiment Setup

We evaluate real-world generalization under four disturbance settings using the same three tasks as in the main real-world experiments: *Orange Placement*, *Tennis Deposit*, and *Cup Stacking*. These disturbances are designed to cover appearance changes, clutter interference, and spatial perturbations in both horizontal and vertical directions. For each disturbance setting, the task objective and evaluation criterion remain the same as in the standard real-world setup, while only the corresponding environmental factor is changed. Fig. 4 illustrates representative examples of the four disturbance settings across the three tasks.

Background Disturbance. To introduce an appearance change without altering the task itself, we place a yellow tablecloth on the work surface while keeping the task objects and goal configuration unchanged. This setting changes the visual appearance of the scene and tests whether the policy relies too strongly on the original scene color and background cues.

Unseen Distractor Object. We add several task-irrelevant objects into the workspace, making the scene more cluttered and increasing visual interference around the target objects. This setting tests whether the policy can maintain stable attention to the task-relevant objects and preserve correct action generation when additional objects are present in the scene.

Horizontal Position Disturbance. We perturb the horizontal position of the target object or related task object within the workspace, so that the relative left-right or front-back spatial relationship differs from the standard setup. This setting tests whether the policy can adapt to horizontal spatial changes and still produce accurate grasping and placement behaviors when the object arrangement is shifted.

Height Position Disturbance. We vary the height of the target object or related task object, resulting in a different vertical spatial relationship from the standard setup. This setting is intended to test whether the policy can handle changes in object height during grasping, alignment, and placement, which require more precise spatial judgment in the vertical direction.

D Ablation Study Details

D.1 Ablation Setup

Implicit Depth Perception Ablation. To evaluate the contribution of implicit depth perception, we remove the implicit depth perception module from Evo-Depth while keeping the remaining architecture and training pipeline unchanged. We conduct this ablation on LIBERO-Plus and report results on four representative dimensions: *camera*, *robot*, *light*, and *layout*. These dimensions are chosen because they are closely related to spatial perception and provide a suitable test suite for assessing how implicit depth cues affect robustness under viewpoint, embodiment, illumination, and scene arrangement variations.

Progressive Alignment Training Ablation. To evaluate the proposed Progressive Alignment Training strategy, we compare one-stage, two-stage, and three-stage training variants on the LIBERO Long benchmark. In the one-stage variant, all modules are jointly optimized from the beginning. In the two-stage variant, Stage 1 trains only SEM and the Action Expert while IDEM and the Vision-Language Backbone are frozen, and Stage 2 unfreezes the entire model for end-to-end optimization. In the three-stage variant, Stage 1 also trains only SEM and the Action Expert, Stage 2 additionally unfreezes IDEM while keeping the Vision-Language Backbone frozen, and Stage 3 unfreezes the entire model for end-to-end optimization. This ablation examines whether more gradual cross-module alignment improves long-horizon manipulation performance.

Fusion Strategy Ablation. To investigate the impact of different fusion strategies, we compare three ways of integrating the implicit depth features extracted by IDEM into the 2D vision-language representations. *Concat* directly concatenates the depth features with the 2D representations before the Action Expert. *Crossatten* uses the 2D representations as queries and the depth features as keys and values for cross-attention fusion. *SEM* first aligns the depth features to the hidden space of the 2D representations and then injects them through FiLM-style feature-wise modulation. This ablation examines how different fusion mechanisms affect the use of implicit depth cues for action prediction.

E Implementation Details and Reproducibility

Unless otherwise specified, Evo-Depth is trained with the three-stage progressive alignment strategy described in Section 3. In Stage 1, only the SEM and Action Expert are optimized, while the vision-language backbone and IDEM remain frozen. In Stage 2, IDEM is unfrozen and jointly optimized with the SEM and Action Expert, while the vision-language backbone remains frozen. In Stage 3, all modules are jointly optimized end-to-end. For sequential training, Stage 2 is initialized from the final checkpoint of Stage 1, and Stage 3 is initialized from the final checkpoint of Stage 2.

Table 4 lists a representative set of training hyperparameters for the Meta-World setting. The remaining simulation benchmarks follow the same overall training recipe unless otherwise specified, with benchmark-dependent dataset configurations and stage lengths. Across all stages, we use AdamW with a linear warmup followed by cosine learning-rate decay.

F Compute Resources

Unless otherwise specified, training for both simulation and real-world settings was conducted on NVIDIA A100 GPUs. As a representative example, Meta-World training used 8 GPUs under the three-stage training pipeline described above. The remaining training runs follow the same overall hardware setting, with benchmark-dependent variation in dataset scale and training length.

For real-robot deployment, inference efficiency is measured on an NVIDIA RTX 4090D platform, as reported in the main paper.

Table 4: **Representative Training Hyperparameters on Meta-World.**

Setting	Value
Vision-language backbone	InternVL3-1B
Action head	Flow matching
Input image size	448
Data augmentation	Enabled
Batch size	16
Optimizer	AdamW
Learning rate	1×10^{-5}
Learning-rate schedule	Linear warmup + cosine decay
Warmup steps	1,000
Weight decay	1×10^{-3}
Gradient clipping norm	1.0
Action horizon	50
Action dimension	24
State dimension	24
Action head layers	8
Dropout	0.2
Data-loading workers	4
Stage 1 steps	5,000
Stage 2 steps	10,000
Stage 3 steps	120,000
Stage 1 trainable modules	SEM + Action Expert
Stage 2 trainable modules	IDEM + SEM + Action Expert
Stage 3 trainable modules	VLM + IDEM + SEM + Action Expert

Table 5: **External assets and licenses.**

Asset	License / terms
InternVL3-1B	Apache-2.0
Depth Anything 3 (DA3-BASE)	Apache-2.0
Meta-World	MIT
VLA-Arena	Apache-2.0
LIBERO	MIT
LIBERO-Plus	MIT

G Assets and Licenses

We build on several publicly available models and benchmarks. We cite the corresponding original papers in the main text and use these assets under their stated licenses or benchmark terms. The main external assets used in this work are summarized in Table 5.

H Limitations

Our current real-world evaluation focuses on representative tabletop manipulation tasks. While these tasks cover object grasping, placement, and stacking scenarios with different spatial demands, future work can further broaden the evaluation to a wider range of manipulation tasks and scene configurations.

In addition, this study focuses on fixed-base manipulation rather than broader embodied settings such as mobile manipulation or whole-body interaction. We view this as a scope choice consistent with the goal of studying lightweight depth-enhanced spatial perception for manipulation, and extending the framework to more general embodied platforms is an interesting direction for future work.

I Broader Impacts

This work may contribute to more efficient and practical robotic manipulation by improving spatially grounded policy learning under lightweight RGB-only settings. In the long term, such systems may benefit application scenarios such as laboratory automation, industrial assistance, and other structured manipulation environments where reliable and efficient robot operation is important.

At the same time, if such systems are deployed without sufficient safeguards, errors in perception or action prediction may lead to failed grasps or object damage. We therefore believe that real-world deployment should still be accompanied by appropriate safety constraints and human oversight.