

An Efficient Likelihood Ratio Test for Online Changepoint Detection in the Presence of Autocorrelation

Yuntang Fan, Paul Fearnhead, Idris A. Eckley, Gaetano Romano
School of Mathematical Sciences, Lancaster University

July 20, 2026

Abstract

Changepoint detection methods have seen considerable development in recent years, with online algorithms capable of identifying structural changes in streaming data in near real time. However, the majority of existing methods are designed under the assumption of IID observations, rendering them susceptible to either more false positives or longer detection delays when applied to data exhibiting temporal dependence, a common feature of many real-world data streams. In this article, we extend the generalised likelihood-ratio (GLR) statistic to autoregressive processes of order p , and adapt the `focus` algorithm to develop a computationally efficient online change detector. The resulting `AR(p)-focus` algorithm achieves an average computational cost of $\mathcal{O}(\log n)$ per iteration, making it suitable for high-frequency data streams. Through simulation studies, the proposed approach is seen achieving greater detection power than IID-based tests when the underlying data exhibit temporal correlation. We further illustrate the practical utility of `AR(p)-focus` through an application to a real-world telecommunications dataset.

Keywords: Autoregressive Processes; Online Changepoint Detection; Real-time Analysis; Streaming Data; Telecommunications

1 Introduction

Detecting structural changes in time-series data - commonly known as changepoint detection - is a fundamental statistical problem that arises in applications across informatics and cyber-security (Tartakovsky et al. 2005; Jeske et al. 2018; Chen 2019), machine learning (Guan et al. 2025), engineering (Henry et al. 2010; Pouliezios and Stavrakakis 2013; Zalisky et al. 2025), bioinformatics (Willenbrock and Fridlyand 2005; Liehrmann et al. 2023), finance (Andreou and Ghysels 2002), and climate records (Beaulieu and Killick 2018). A changepoint marks an abrupt shift in the underlying data-generating property, such as a change in mean, variance, or slope. While classical offline changepoint methods assume full access to the entire dataset, many modern applications require decisions to be made as data arrive, seeking to detect a change as soon as possible. Several online changepoint detection algorithms have been developed to identify simple changes in streaming data. For univariate data, these include Bayesian approaches (Adams and MacKay 2007; Fearnhead and Liu 2007; Lai and Xing 2010), and frequentist methods based on recursively applying likelihood ratio or similar tests (Lai 1995a; Kirch and Weber 2018; Aue and Kirch 2024).

Many real-world data streams exhibit serial dependence, often well modelled by auto-regressive (AR) processes of order p . Few examples include applications related to telemetry and Internet of Things (IoT), where systems frequently display autocorrelation and slowly-varying trends (Austin et al. 2024; Yang et al. 2024). Additionally, in astronomical observations, background rates vary systematically across timescales, demanding careful modelling (Crupi et al. 2023). Stock prices or returns in financial time series often show autocorrelation at short lags (Tsay 2005). In environmental data, air-quality indices or river flow measurements, frequently follow AR-like dynamics due to slowly changing meteorological or hydrological conditions (Hasnain et al. 2022; Hipel and McLeod 1994).

In addition to serial dependence, modern monitoring problems often involve large-scale or high-frequency data streams, where both statistical efficiency and computational scalability are essential.

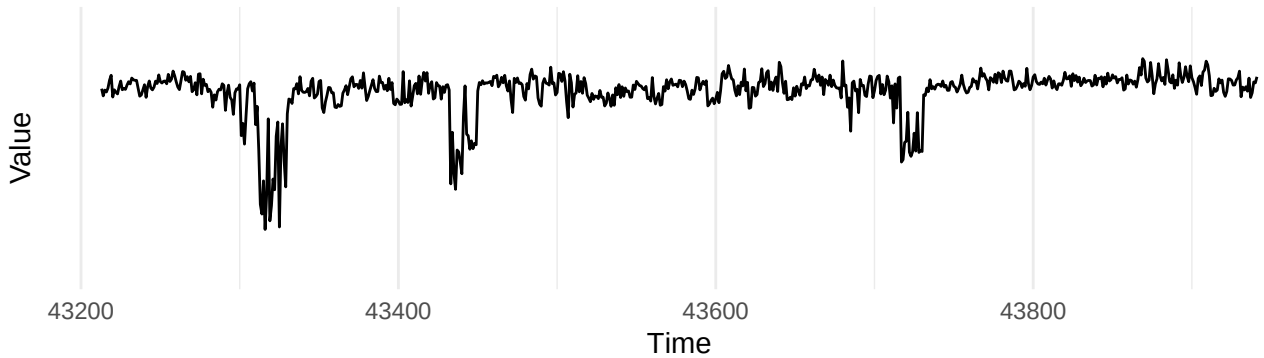


Figure 1: A subset of one time series from our network telemetry application.

In these settings, changes and anomalies must often be identified as quickly as possible, so that timely corrective actions or policy changes can be implemented.

In particular, our work is motivated by a network monitoring application in which performance metrics are collected continuously from telecommunication network devices at high frequency. Under normal operating conditions these measurements exhibit strong temporal dependence. However faults, congestion events, or configuration changes can induce unexpected abrupt structural changes in the observed process (see, for example, Figure 1, where three sudden drops occur around times 43,320, 43,440 and 43,720). Effective monitoring therefore requires methods that can account for serial dependence while simultaneously providing fast online detection.

For temporally correlated observations, Basseville and Nikiforov (1995) developed likelihood-based sequential detection procedures for mean and variance changes in AR processes. Lai (1995b) developed a general likelihood-based framework for sequential detection of mean and variance changes under dependent observations, which includes autoregressive time-series models as special cases. Chu et al. (1996) proposed sequential monitoring procedures for detecting structural changes under dependent observations, explicitly allowing autoregressive error processes such as AR(p). Gombay (2008) explicitly studied sequential detection of mean and variance changes in autoregressive AR(p) time series. Although these methods are likelihood-based and statistically optimal, their direct online implementation can be computationally demanding for long data streams, motivating the development of computationally efficient online algorithms that preserve exact like-

likelihood ratio evaluation.

The recent **focus** algorithm, introduced in Romano et al. (2023b), implements a fast and exact solution to the (generalised) likelihood-ratio test from Siegmund and Venkatraman (1995). The most important contribution of the **focus** algorithm was to reduce the computational complexity of $\mathcal{O}(n)$ per-iteration of a direct calculation to an average of $\mathcal{O}(\log n)$ without any approximations, allowing for an implementation of the GLR test capable of dealing with a real-time data stream. The **focus** algorithm has been adapted to different models from the exponential family (Ward et al. 2024, 2025), non-parametric models (Romano et al. 2023a), and finally to multivariate observations (Pishchagina et al., 2026).

However, the **focus** algorithm and its extensions all assume an independent and identically distributed (IID) process. While it is possible to run the **focus** algorithm directly on data exhibiting strong temporal dependence, this would result in a loss of detection power. In this article, we address this limitation by deriving a new formulation of the GLR test tailored to autoregressive processes of order p . Specifically, the contribution of this work is twofold. We first derive the Generalised Likelihood Ratio (GLR) statistic for an $\text{AR}(p)$ process and adapt the computational technique of the **focus** algorithm to achieve efficient computation suitable for high-frequency data streams, that we call **AR(p)-focus**. We then present empirical evaluations that (i) show the gains in detection power compared to IID tests on data exhibiting temporal correlation and (ii) demonstrate the practical utility of **AR(p)-focus** on a real-data application drawn from a telecommunications setting. The theoretical properties of the likelihood-ratio test are not discussed here, as these rest on well-established foundations provided by Yu et al. (2023), Lorden (1971), and Lai and Xing (2010).

The remainder of this article is organised as follows. In Section 2, we introduce the **focus** algorithm in the IID setting. Section 3 describes the extension to the $\text{AR}(p)$ case. In Section 4, we present an empirical simulation study illustrating performances of the proposed approach. Finally in Section 5 we discuss an application to monitoring performances of network devices. Links to

2 Online change-in-mean with IID noise

We begin by introducing the canonical model for detecting a change in mean. The observed data stream $\{x_t\}_{t=1,\dots}$ are realisations of a process

$$X_t = \mu^{(t)} + \epsilon_t,$$

where $\{\epsilon_t\}_{t=1,2,\dots}$ are IID Gaussian random variables with mean zero and known variance. We will assume throughout that the variance of the noise is known and, without loss of generality, we standardise the data so that the ϵ_t have unit variance. The mean parameter at time t , $\mu^{(t)}$, is assumed to undergo a single change at an unknown time τ , such that $\mu^{(t)} = \mu_0$ for $t \leq \tau$ and $\mu^{(t)} = \mu_1$ for $t > \tau$, where μ_0 and μ_1 denote the pre-change and post-change means, respectively. To simplify exposition, we will initially assume the pre-change mean μ_0 is known, and without loss of generality set $\mu_0 = 0$. The method can be extended to μ_0 being unknown, but we delay describing this extension to Section 3.1.

At time n we wish to detect whether there has been a change prior to n . Conditional on a putative changepoint time, $\tau < n$, and post-change mean, μ_1 , the log-likelihood ratio test statistic (which, henceforth, we will call the likelihood-ratio statistic) for a change at τ to mean μ_1 is (see e.g. Romano et al., 2023b)

$$LR_{\tau,n}(\mu_1) = \sum_{i=\tau+1}^n \mu_1(2x_i - \mu_1). \quad (2.1)$$

The corresponding test-statistic for a change prior to n involves maximising this over τ , and we would detect a change if

$$LR_n = \max_{\tau=0,\dots,n-1} \max_{\mu_1} LR_{\tau,n}(\mu_1) > \lambda_n,$$

for some chosen threshold λ_n which may depend on n . Often λ_n is a constant chosen based on

some required behaviour if there is no change, such as the expected detection delay (Lorden 1971), e.g. the expected time to detect a change if there is none. Alternatively, we can let λ_n increase with n and choose it so that we control the probability of ever detecting a change if there is none (Aue and Kirch, 2024).

As presented, calculating the test statistic, LR_n , at time n involves a computational cost that increases with n due to the maximisation over $\tau = 0, \dots, n-1$. In many online applications such a linearly increasing computational cost is impracticable. We can reduce this cost by restricting our maximisation to a small grid of possible τ values at each iteration (Eiauer and Hackl 1978; Chu et al. 1995) but this introduces an approximation. Instead, Romano et al. (2023b) showed that it is possible to calculate LR_n in an online setting with a computational cost that only increases logarithmically with n on average, which they called the **focus** algorithm.

The Gaussian change-in-mean **focus** begins by solving the recursion of Page (1954, 1955) for a known pre-change mean, $\mu_0 = 0$. If we define $LR_n(\mu_1) = \max_{\tau \leq n} LR_{\tau,n}(\mu_1)$, the likelihood ratio statistic conditional only on the post-change mean, then for $n = 2, 3, \dots$

$$LR_n(\mu_1) = \max\{0, LR_{n-1}(\mu_1)\} + \mu_1(2x_n - \mu_1). \quad (2.2)$$

The idea of **focus** is to solve this recursion jointly for all μ_1 . That is, at any time n we solve for $LR_n(\mu_1)$, a function of μ_1 . This function is piecewise quadratic, and at each iteration the algorithm maps a piecewise quadratic and a new data point, to an updated piecewise quadratic, e.g. $LR_{n-1}(\mu_1), y_n \rightarrow LR_n(\mu_1)$. This is achieved with a cost that is on average $O(1)$ per iteration. Then to calculate LR_n we just maximise this piecewise quadratic over μ_1 . In practice, the piecewise quadratic can be written as the maximum of a set of quadratics, each one corresponding to one $LR_{\tau,n}(\mu_1)$. Thus, we can find its maximum by maximising each quadratic individually and then finding the maximum of these maxima. Now, at iteration n we would need to store and check n separate curves, but in reality not all curves contribute to the final cost as for all $\mu \in \mathbb{R}$, the set

of $LR_{\tau,n}(\mu_1) = LR_n(\mu_1)$ at time n is bounded in expectation by $\log n$. Hence it is possible to drop (or prune) those functions that do not contribute (and never will) to $LR_n(\mu_1)$, and therefore the per-iteration cost of the **focus** algorithm in calculating LR_n increases like $\log n$.

For our use of the **focus** algorithm below it is helpful to briefly mention some features of the algorithm. At each iteration, n , the list of quadratics increases by one, as we add a quadratic that corresponds to the likelihood ratio test statistic given a change at time $n - 1$. The algorithm then prunes quadratics that correspond to the possible change-point times that can never be optimal in the future regardless of the future data. The key to the computational efficiency of **focus** is that we can prune quadratics in the order of how recent their corresponding change-point is, such that once we do not prune a quadratic we know that all remaining quadratics would also not be pruned. This means that on average the number of quadratics we need to check for pruning is $O(1)$.

If we wish to estimate where a detected change is, we can use the estimator

$$\hat{\tau} = \arg \max_{\tau} \left\{ \max_{\mu_1} LR_{\tau,n}(\mu_1) \right\}.$$

The estimator $\hat{\tau}$ corresponds to the change-point time associated with the quadratic stored by **focus** that has the largest maximum value, and is trivial to obtain.

3 focus in the presence of auto-correlation

In many applications where we wish to detect a change in mean, it is inappropriate to assume that the noise is independent across time. We will show how the **focus** algorithm can be extended to the case where the noise is modelled as an $AR(p)$ process, leading to an algorithm that we call **AR(p)-focus**.

Our model for the data is now

$$X_t = \mu^{(t)} + Z_t, \tag{3.1}$$

where as above $\mu^{(t)} = \mu_0$ for $t \leq \tau$ and $\mu^{(t)} = \mu_1$ for $t > \tau$, but now we model Z_t as an $AR(p)$ process. That is

$$Z_t = \rho_1 Z_{t-1} + \rho_2 Z_{t-2} + \cdots + \rho_p Z_{t-p} + \epsilon_t,$$

with, ϵ_t being IID Gaussian random variables with mean 0. We initially assume μ_0 is known as are $p, \rho_1, \dots, \rho_p$ and the variance of the ϵ_t . To simplify notation, we standardise the data so $\mu_0 = 0$ and each ϵ_t has unit variance. The case where μ_0 is unknown is covered in the next section. We then discuss how to estimate the parameters of the $AR(p)$ process and how to implement **AR(p)-focus** in a way that accounts for estimation error in Section 3.2.

Assume we have data $x_{-p+1}, \dots, x_1, x_2, \dots$ that are realisations of (3.1), and at any time $n \geq 1$ wish to detect if a change has happened at time $\tau \geq 0$. It is helpful to work with a whitened version of the data, so for $t = 1, 2, \dots$, define

$$y_t = x_t - \sum_{i=1}^p \rho_i x_{t-i}.$$

It is simple to show that for $t \leq \tau$, $y_t = \epsilon_t$, $y_{\tau+1} = \mu_1 + \epsilon_{\tau+1}$ and for $t > \tau + 1$,

$$y_t = \left(1 - \sum_{i=1}^{p \wedge (t-\tau-1)} \rho_i \right) \mu_1 + \epsilon_t,$$

where $p \wedge (t - \tau - 1)$ is the minimum of p and $t - \tau - 1$. If we define $v_1 = 1$, $v_j = 1 - \sum_{i=1}^{j-1} \rho_i$ for $j = 2, \dots, p$, and $v_j = 1 - \sum_{i=1}^p \rho_i$ for $j > p$, then this can be simplified to, if $t = \tau + i$,

$$y_t = v_i \mu_1 + \epsilon_t, \text{ for } i = 1, 2, \dots$$

As in Section 2, to detect a change prior to time n based on data $x_{-p+1}, \dots, x_n$ we will use the likelihood-ratio statistic. If we condition on a changepoint time $\tau \in \{0, \dots, n-1\}$ and post-change

mean μ_1 then the likelihood-ratio statistic is

$$LR_{\tau,n}(\mu_1) = \sum_{t=\tau+1}^n v_{t-\tau}\mu_1(2y_t - v_{t-\tau}\mu_1). \quad (3.2)$$

This is equivalent to (2.1) applied to data $y_1, \dots, y_n$ but allowing for the varying mean of y_t after the change at τ .

For $t > \tau + p$, the post-change mean is constant, and thus we can directly apply the idea of **focus** to give us an efficient approach to calculate the likelihood-ratio statistic. We now derive such an algorithm, which is more complex than the standard FOCuS algorithm as we need to separately treat the case of change within p time-steps of the current time and one which is older. To do this it is helpful to define the contribution to the likelihood-ratio statistic of a change at different lags from the current time.

Define the contribution of data y_t to the likelihood-ratio statistic for a change at $\tau = t - k$, for $k = 1, \dots, p$ as

$$C_{k,t}(\mu_1) = v_k\mu_1(2y_t - v_k\mu_1),$$

and the contribution to the likelihood-ratio statistic for a change at $\tau < t - p$ as

$$C_t(\mu_1) = v_{p+1}\mu_1(2y_t - v_{p+1}\mu_1).$$

We now define the likelihood-ratio test statistic for a change within p time-steps of the current time. If we fix a change at time τ and consider the likelihood-ratio statistic given data $y_1, \dots, y_t$ for $t \in \{\tau + 1, \dots, \tau + p\}$, then this can be shown to be

$$S_{t,\tau}(\mu_1) := \sum_{i=1}^{t-\tau} C_{i,\tau+i}(\mu_1).$$

Finally, we need to also deal with changes that have occurred further in the past. The following proposition does so and gives a recursion for calculating $LR_n(\mu_1)$, the likelihood-ratio statistic

conditional on μ_1 but where we have maximised over τ .

Proposition 1. *For $n \geq p + 1$,*

$$LR_n(\mu_1) = \max \left\{ \max_{j=1, \dots, p} \{S_{n, n-j}(\mu_1)\} \ , \ Q_n(\mu_1) \right\}, \quad (3.3)$$

where $Q_n(\mu_1)$ satisfies the recursion

$$Q_{p+1}(\mu_1) = S_{p,0}(\mu_1) + C_{p+1}(\mu_1),$$

and for $n = p + 2, \dots$,

$$Q_n(\mu_1) = \max \{S_{n-1, n-p-1}(\mu_1), Q_{n-1}(\mu_1)\} + C_n(\mu_1). \quad (3.4)$$

For $n \leq p$, $LR_n(\mu_1) = \max_{i=1, \dots, n} S_{n, n-i}(\mu_1)$.

The idea of **AR(p)-focus** is that we can use the **focus** algorithm to solve for $Q_n(\mu_1)$. To calculate the likelihood-ratio statistic at time n we then maximise $Q_n(\mu_1)$ and also maximise each of the $S_{n, n-j}(\mu_1)$ functions that appear in (3.3), and take the maximum of these maxima. As for the IID case we can also obtain the estimated change-point location as the time corresponding to the quadratic, whether it is one of the quadratics that defines $Q_n(\mu_1)$, or is one of the $S_{n, n-j}(\mu_1)$ s, that gives this maximum.

3.1 Unknown pre-change mean

We can extend our $AR(p)$ approach to deal with the pre-change mean being unknown. How we do this follows closely the approach for the IID case (see Romano et al., 2023b). The likelihood-ratio test statistic for a change at τ , from pre-change mean μ_0 to post-change mean μ_1 , can be written

as

$$LR_{\tau,n}^*(\mu_0, \mu_1) = 2 \left(\ell_{\tau,n}(\mu_0, \mu_1) - \max_{\mu} \ell_{\tau,n}(\mu, \mu) \right), \quad (3.5)$$

where

$$\ell_{\tau,n}(\mu_0, \mu_1) = -\frac{1}{2} \sum_{t=1}^{\tau} (y_t - v_{p+1}\mu_0)^2 - \frac{1}{2} \sum_{t=\tau+1}^n (y_t - v_{t-\tau}(\mu_1 - \mu_0) - v_{p+1}\mu_0)^2,$$

is, up to an additive constant, the log-likelihood for a model with pre-change mean μ_0 and post-change mean μ_1 with a change at $\tau < n$. Here $y_t = x_t - \sum_{i=1}^p \rho_i x_{t-i}$, $v_1 = 1$ and $v_j = 1 - \sum_{i=1}^{(j-1) \wedge p} \rho_j$ as in the previous section.

Let $\mathcal{T}_n$ be the set of τ values such that if for some μ_0 and μ_1 , $\ell_{\tau',n}(\mu_0, \mu_1) = \max_{\tau} \ell_{\tau,n}(\mu_0, \mu_1)$, then $\tau \in \mathcal{T}_n$. Then we can calculate the maximum of (3.5) using

$$\max_{\tau, \mu_0, \mu_1} LR_{\tau,n}^*(\mu_0, \mu_1) = 2 \left(\max_{\tau \in \mathcal{T}_n} \left\{ \max_{\mu_0, \mu_1} \ell_{\tau,n}(\mu_0, \mu_1) \right\} - \max_{\mu} \ell_{\tau,n}(\mu, \mu) \right).$$

This expression uses the fact that $\max_{\mu} \ell_{\tau,n}(\mu, \mu)$ is the same for all τ .

We will define the set $\mathcal{T}_n$ to always include changes within p of the current time n , and use the following result to keep only a subset of changes prior to $n - p$.

Proposition 2. *At time n , consider two changepoint locations τ and τ' with $n - p > \tau' > \tau > 0$.*

Let $h = \tau' - \tau$. There exists constant $b_{\tau,\tau'}$, that depends on the data $y_{\tau+1:\tau'+p}$, such that

$$\ell_{\tau,n}(\mu_0, \mu_1) - \ell_{\tau',n}(\mu_0, \mu_1) > 0,$$

if and only if $\mu_1 > \mu_0$ and $\mu_1 < b_{\tau,\tau'} - \mu_0$; or $\mu_1 < \mu_0$ and $\mu_1 > b_{\tau,\tau'} - \mu_0$.

The proof is given in Appendix B.

If we fix μ_0 then the candidate τ values for which the log-likelihood for some μ_1 is largest can be obtained by finding the interval, if any, where the log-likelihood for a change at τ is greater than the log-likelihood at τ' for all $\tau' \neq \tau$. This interval will be defined in terms of the intersection of the intervals where the log-likelihood at τ is greater than each of the log-likelihoods at τ' . If we

consider a positive change, say, then the log-likelihood at τ will be greatest for μ_1 that satisfy

$$\mu_1 - \mu_0 > \max \left\{ 0, \max_{\tau' < \tau} b_{\tau', \tau} - 2\mu_0 \right\} \text{ and } \mu_1 - \mu_0 < \min_{\tau' > \tau} b_{\tau, \tau'} - 2\mu_0.$$

Thus, τ is a candidate for this value of μ_0 if and only if

$$\max \left\{ 0, \max_{\tau' < \tau} b_{\tau', \tau} - 2\mu_0 \right\} < \min_{\tau' > \tau} b_{\tau, \tau'} - 2\mu_0 \Rightarrow \max \left\{ 2\mu_0, \max_{\tau' < \tau} b_{\tau', \tau} \right\} < \min_{\tau' > \tau} b_{\tau, \tau'}$$

It is immediate that τ is a candidate for some μ_0 value if and only if

$$\max_{\tau' < \tau} b_{\tau', \tau} < \min_{\tau' > \tau} b_{\tau, \tau'}.$$

This condition corresponds to the pruning condition for the pre-change mean known case in the limit as $\mu_0 \rightarrow -\infty$, and moreover can be implemented efficiently as described in Romano et al. (2023b). Specifically, the pseudo-code for implementing this can be found in Appendix C. In practice, the maximisation steps are implemented by storing and updating coefficients of each $LR_{\tau, n}^*(\mu_0, \mu_1)$, the complete details can be found in Appendix D.

3.2 Estimating Parameters and Calculating the Detection Threshold

The proposed method requires knowledge of the noise variance, the AR parameters, and choice of the detection threshold λ_n . In most real-world applications, the AR structure is not known *a priori*. As is common in the online change-point setting (Chu et al., 1996; Kirch and Weber, 2018), we estimate the AR parameters and noise variance from a probationary period with no change, that is, a sequence of observations drawn from historical data, or a short initial segment of the data stream during which no detection is performed. In the case of this article, in simulation studies and application, for a fixed AR order we estimate the autocorrelation parameters and noise variance from the training set using the Yule–Walker equations. If we also estimate the AR order

we fit $\text{AR}(p)$ models for $p = 1, \dots, p_{\max}$, for some suitably chosen maximum order $p_{\max}$, and then estimate p using AIC.

Whilst it is possible to derive closed-form expressions for the detection threshold, they tend to be conservative in practice. Instead, we suggest using the common practice of adopting a Monte Carlo calibration procedure (Romano et al., 2023b; Chen et al., 2022; Pishchagina et al., 2026). There are various statistical criteria that can be used to define the detection threshold. For our empirical studies, we control the false positive rate at a pre-specified level α , for a fixed run length N . Though, the Monte Carlo approach we adopt can also be used for other criteria, for example see Chen et al. (2022) for an equivalent approach for setting a threshold to have a required average run length.

We will describe our procedure for the case where the $\text{AR}(p)$ model is unknown and we are using a probationary period of length N_0 to estimate them. We first estimate the $\text{AR}(p)$ model using the probationary data. We call a model with constant mean and with this choice of $\text{AR}(p)$ model the null model in the following. We then implement the following steps B times: (i) Simulate an independent datasets of the length $N + N_0$ under the null model; (ii) Taking the first N_0 data-points as a probationary period, we estimate the $\text{AR}(p)$ model parameters using the data from the probationary period; (iii) We run **AR(p)-FOCuS** (or another sequential algorithms) on the last N data-points, using the estimated $\text{AR}(p)$ parameters, and record the maximum of the trace of the test statistic. We then set the threshold λ as the upper α -quantile of the resulting empirical distribution of maximum statistics across the B replicates.

Importantly, this procedure accounts for the uncertainty in the estimates of the AR model – in that each time when we run **AR(p)-FOCuS** say, we run it with estimated parameters based on simulated probationary data of the correct length. If we know the AR model we can omit step (ii) and use the true parameter values in step (iii).

4 Simulation Study

In this section, we aim to evaluate performances of **AR(p)-focus**. We compare three methodologies: (i) **focus**, which applies the IID algorithm described in Section 2 directly to the raw data, ignoring any autocorrelation in the noise; (ii) **focus_prewhiten**, which pre-whitens the data using either true or estimated AR parameters and then applies **focus** to the residual; and (iii) **AR(p)-focus**, our proposed approach, incorporating either known or estimated AR parameters into the detection statistic. In all cases we use the same methods for estimating unknown parameters and setting the detection threshold, described in Section 3.2. We present results for using the unknown pre-change mean version of all algorithms, with results for the known pre-change in Appendix E.1.

Unless stated otherwise, all experiments use the following default configuration: data length $n = 10000$, true changepoint at observation 5000 and change of size $\delta = 5$. In all scenarios the noise is generated from AR(p) processes with the following specifications: AR(1) with coefficient $\rho_1 \in \{0.2, 0.5, 0.8, 0.95\}$; AR(2) with coefficients $(0.7, 0.2)$; and AR(3) with coefficients $(0.7, 0.3, -0.1)$.

The threshold was set to achieve false positive rate of 5% for a sequence of length $n = 10000$. As a measure for detection power, we will present results in terms of detection delay, e.g. the difference from the stopping time (first time where each statistics passes the threshold) and true changepoint. Across the study, each set of results uses 100 replications, with separate datasets used both for threshold calibration, parameter tuning (where present) and finally for evaluating detection performance.

4.1 Performance under Known AR parameters

We begin by examining the idealised case in which the AR parameters are assumed known, so that all three methods operate without any estimation error. This setting allows us to isolate the effect of autocorrelation itself on detection performance, independent of any uncertainty introduced by parameter estimation.

Figure 2 shows the empirical distribution of detection delay for each method and scenario (each plot reports the proportion of detection within a certain time delay). When autocorrelation is weak, all three methods perform comparably. As the strength of autocorrelation increases, however, the differences become more pronounced: **AR(p)-focus** increasingly outperforms both **focus** and **focus_prewhiten**, since the latter two methods fail to account for the dependence structure of the noise. This pattern holds across all AR(1), AR(2), and AR(3) processes, confirming that explicitly modelling the autocorrelation structure yields meaningful gains in detection efficiency when the noise is strongly correlated.

To see the benefit of using **AR(p)-focus** over a method that directly calculates the generalised LR statistic without pruning, we show in Figure 3 the average number of quadratics stored by **AR(p)-focus** for data simulated with no change under different AR(1) models. We see that the average number of quadratics stored at time t , and hence the average computational cost per iteration, is close to $\log t$, and varies little across different choices of the AR parameters.

4.2 Performance under AR Parameter Estimation

We now estimate the AR(p) parameters of the process. In this section parameters that are not fixed are estimated from a dedicated, separate training sequence, which we refer to as the probation period. To compare performances with the optimal setting, we add the **AR(p)-focus** method where all parameters and order are assumed (denoted by “oracle”), which corresponds to having an infinite length probation period.

4.2.1 Effects of Probation Period

Again, to remove nuisance parameters, we begin first by evaluating how probation period size affect the detection delay, assuming that the order p of the AR(p) process is known and estimating the coefficients alone. We vary the length of the probation period to assess how the amount of training data affects detection performance.

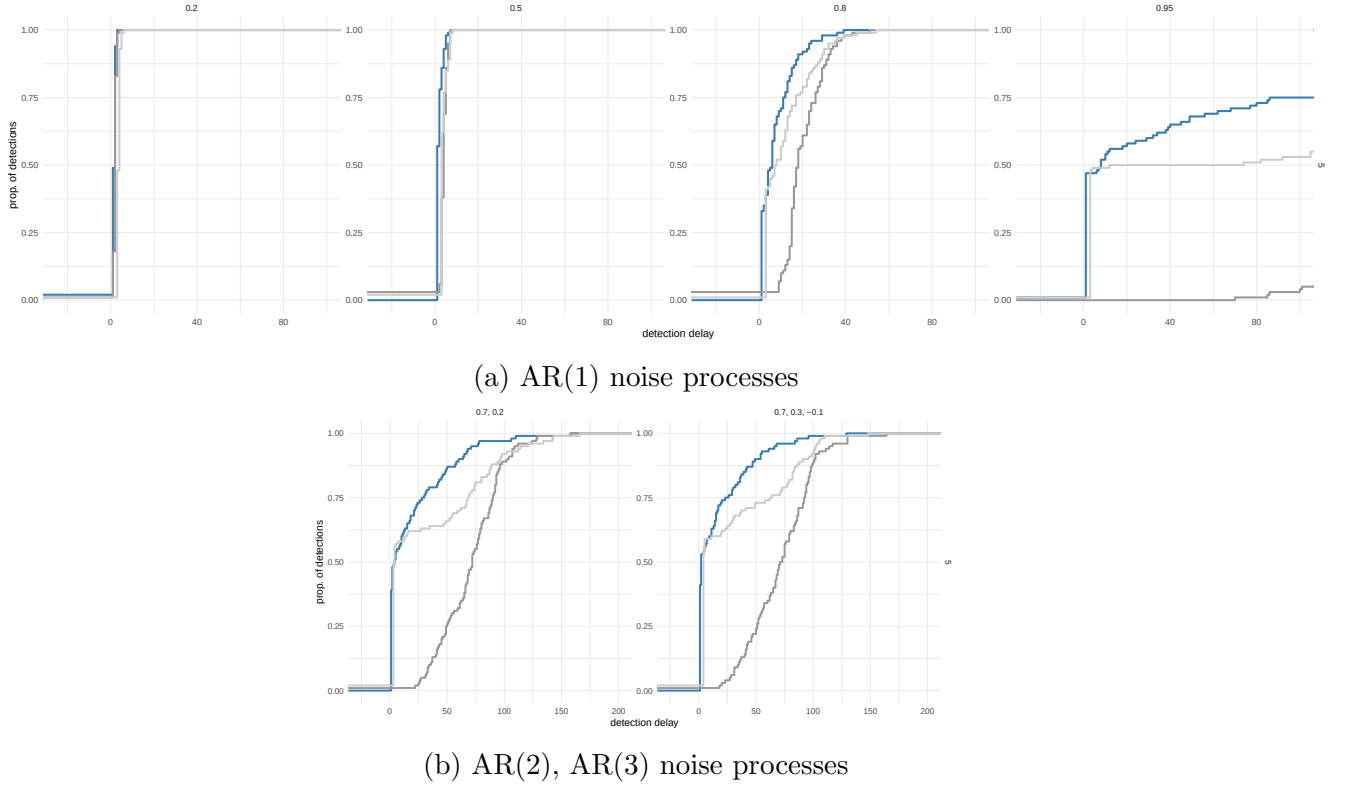


Figure 2: Oracle setting: empirical distribution of detection delay across different noise processes. Each column corresponds to a different AR(1) autocorrelation coefficient. Blue: **AR(p)-focus**; light gray: **focus_prewhiten**; gray: **focus**.

Figure 4 displays the detection delay distributions across a range of probation period sizes, for both weakly and strongly autocorrelated noise. Several patterns emerge clearly. First, detection is substantially easier when the underlying autocorrelation is weak, regardless of the method used, as in the previous section. Second, when the probation period is short and autocorrelation is strong, the performance of **AR(p)-focus** degrades noticeably, falling below that of the simpler **focus** method: the additional parameters introduced by the AR model cannot be estimated reliably from limited data. However, as the probation period grows, **AR(p)-focus** progressively recovers and eventually surpasses both **focus** and **focus_prewhiten**, converging towards its oracle performance. These results highlight a fundamental trade-off: the benefits of modelling the autocorrelation structure are only realised once the probation period is sufficiently long to support accurate parameter estimation.


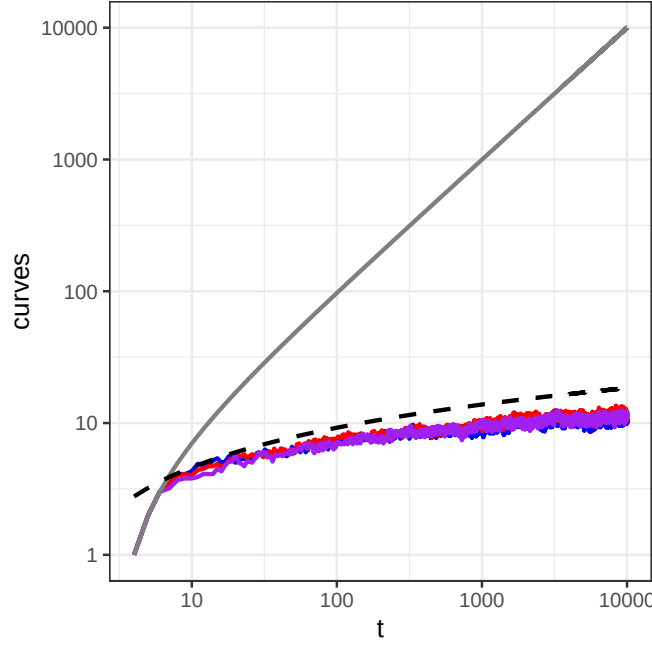


Figure 3: Oracle setting: number of curves stored at each time point by the brute-force method and $\text{AR}(p)\text{-FOCuS}$. Purple: $\text{AR}(1)$ with 0.95; red: $\text{AR}(1)$ with 0.5; blue: $\text{AR}(1)$ with 0.25; gray: brute force method; black dashed: $2 \log t$. Log-scale on both axes.


4.2.2 Robustness to AR Order Misspecification and Unknown Order

The experiments in Section 4.2.1 assumed that the AR order p is known. In practice, however, the order must also be determined from the data. We examine this in two stages: first assessing robustness to order misspecification, and then considering a fully data-driven procedure in which both the order and the AR parameters are estimated from the probation period.

To assess robustness, for each scenario, for a probation period size of 4000, the AR order used when running the algorithm is fixed and varied over $\{1, 2, 3, 5\}$, covering cases of both under- and over-specification. Figure 5 summarises the results. When the assumed order is at least as large as the true order, both $\text{AR}(p)\text{-focus}$ and `focus_prewhiten` incur only a modest loss of power: the additional parameters estimated are unnecessary but do not substantially distort inference. Conversely, when the assumed order is smaller than the true order, performance deteriorates more sharply, as the fitted model fails to capture the full autocorrelation structure of the noise, suggesting that, when in doubt, it is preferable to over-specify the order rather than under-specify the order.

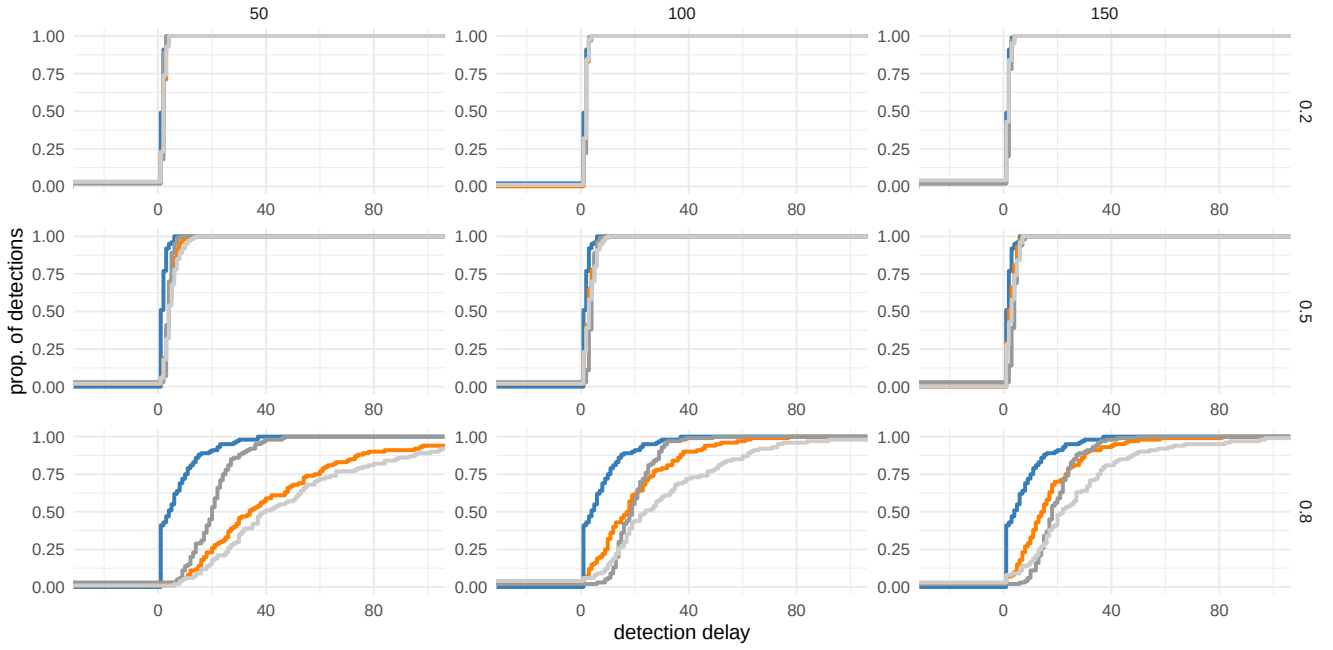

(a) AR(1) noise processes

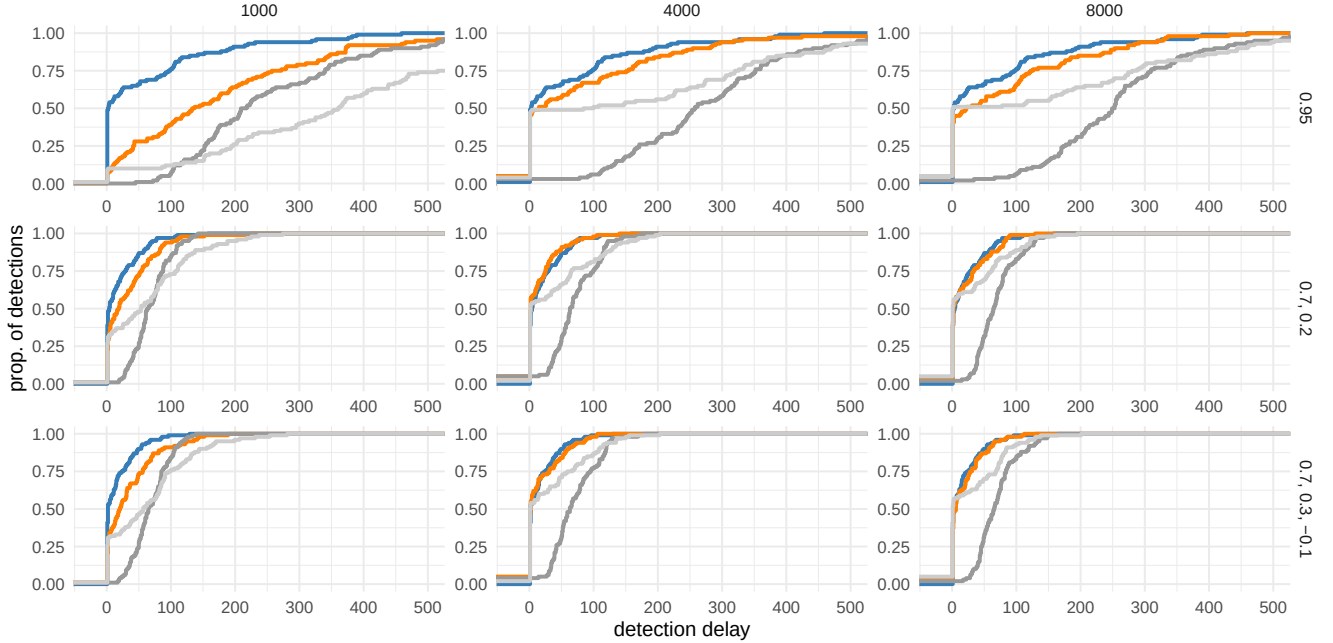

(b) AR(1), AR(2), and AR(3) noise processes

Figure 4: Effect of probation period length on detection delay across different noise processes. Each column corresponds to a different training size; each row to a different AR process. Blue: $\text{AR}(p)\text{-focus oracle}$; orange: $\text{AR}(p)\text{-focus}$; gray: focus ; light gray: focus_prewhiten .

An additional illustration of how detection performance varies with the strength of the AR(1) parameter for different assumed maximum orders is provided in Appendix E.2, where we restrict

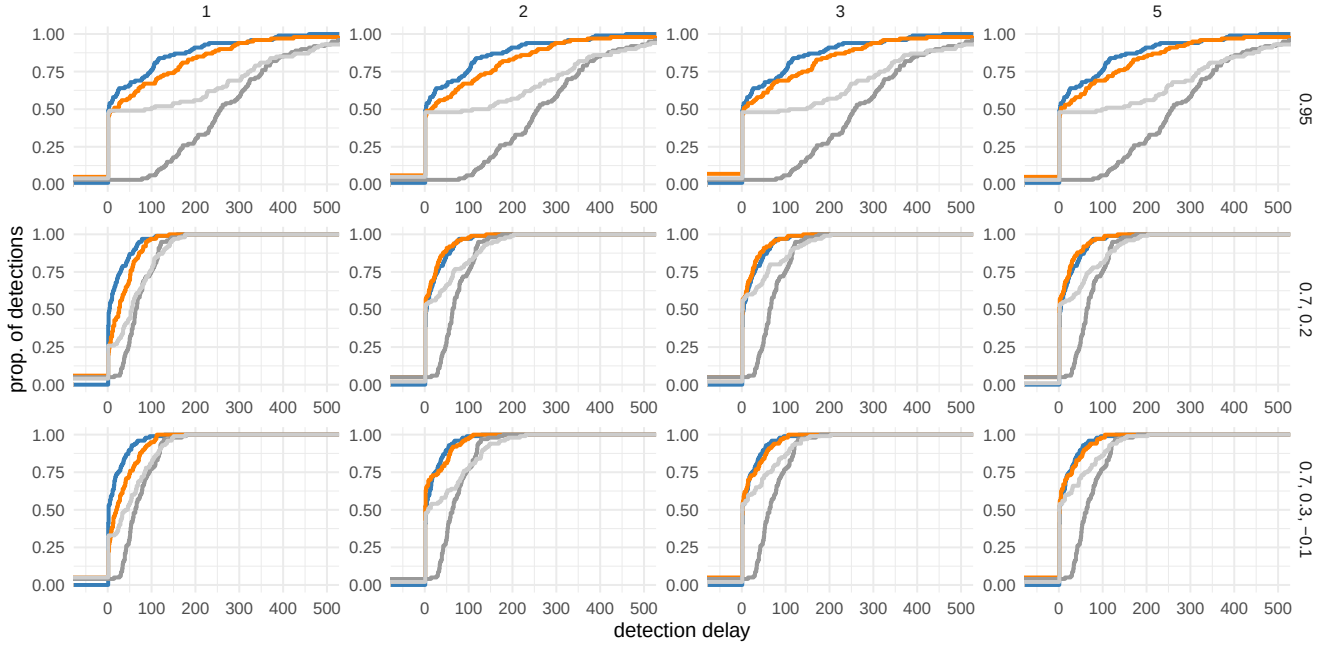


Figure 5: Robustness to AR order misspecification. Each row corresponds to a different true AR process (labelled by autocorrelation); each column to a different assumed order p used by the algorithm. Blue: **AR(p)-focus** oracle; orange: **AR(p)-focus**; gray: **focus**; light gray: **focus_prewhiten**.

attention to the AR(1) case for clarity.

We now finally combine order selection with parameter estimation by applying the AIC-based model selection procedure as mentioned in Section 3.2. Figure 6 repeats the experiments of Figure 4b under this more realistic setting. The curves with known true order are different across training sizes as estimation of AR parameters are possibly different even if orders are the same. Interestingly, the results are strikingly similar to the setting where the true order was assumed known. This indicates that AIC-based order selection reliably identifies the correct order from the probation data, and that the overall performance of **AR(p)-focus** is not meaningfully degraded by the additional uncertainty in order estimation, at least for the probation sizes considered here.

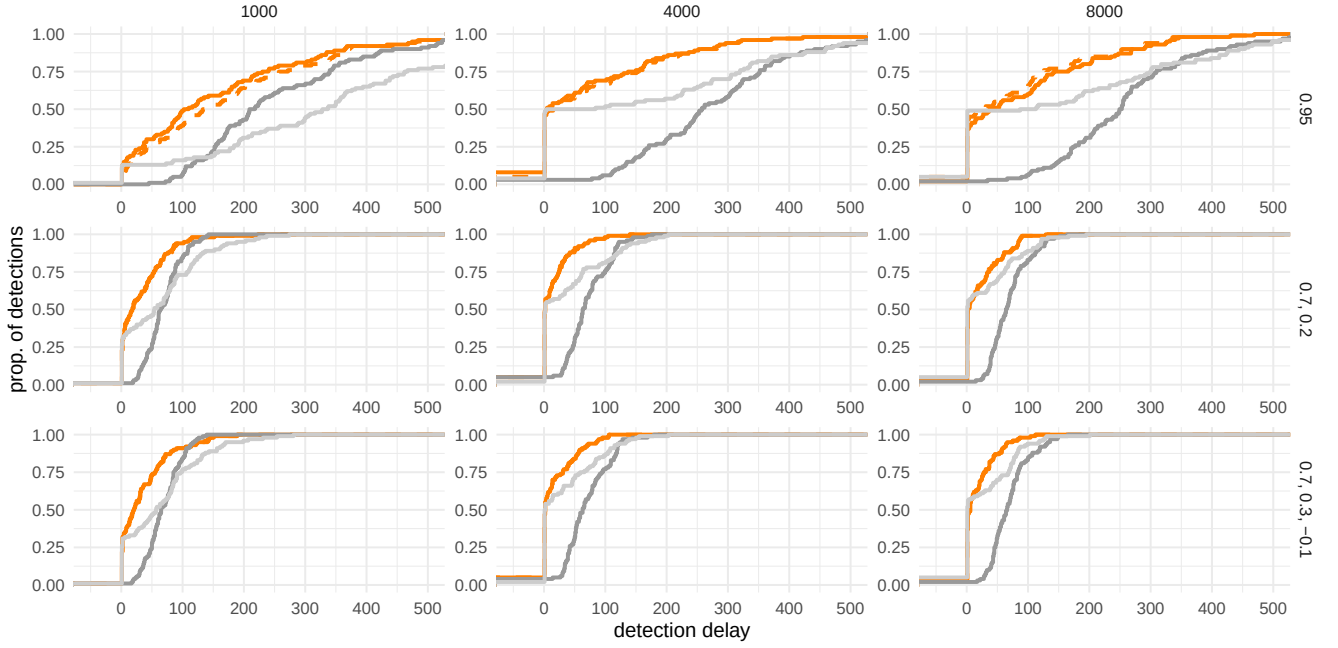


Figure 6: Performance of $\text{AR}(p)\text{-focus}$ when the AR order is unknown and selected by AIC. Each row corresponds to a different AR process (labelled by autocorrelation); each column to a different probation period length. Orange dashed: $\text{AR}(p)\text{-focus}$ (known p); orange: $\text{AR}(p)\text{-focus}$; gray: focus ; light gray: focus_prewhiten .

5 Accounting for Temporal Dependence in Real-Time Monitoring of Network Traffic Data

To further illustrate the performance of $\text{AR}(p)\text{-focus}$ we consider an application related to network traffic data provided by an industry partner with the aim of monitoring the performance of network devices. For testing and development purposes, three high-frequency datasets were collected, each one consisting of approximately 800,000 observations (we display in Figure 1 a portion of the first dataset). To evaluate how an approach modelling for temporal dependence would behave on such data, we compare the same three approaches of the simulation study: (i) the proposed $\text{AR}(p)\text{-focus}$ method, (ii) the focus method assuming IID noise, and (iii) the focus_prewhiten approach. Since the data contain multiple changepoints and collective anomalies (sometimes referred as epidemic changes), we use a simple sequential detection scheme: we process new data points and compute

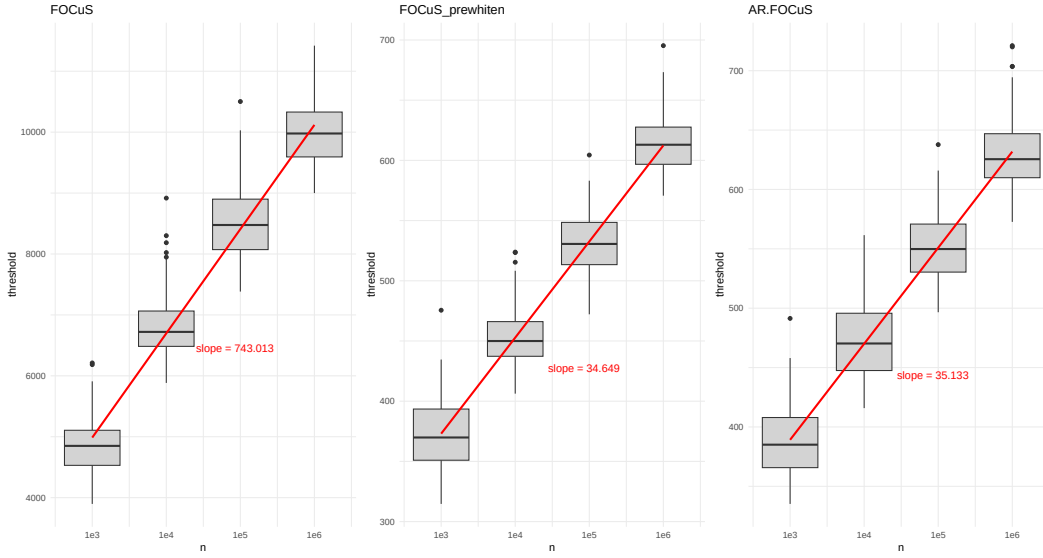


Figure 7: Calibrated thresholds as a function of stream length n for **focus** (IID), **focus** (IID) on pre-whitened data, and **AR(p)-focus**, estimated via Monte Carlo simulation. The red line indicates the fitted linear trend on the $\log(n)$ scale, with the estimated slope as a label.

the statistics sequentially one observation at a time, and upon crossing the threshold, we record the change point and restart detection immediately.

For each dataset, we estimate AR parameters using a probation period of 1000 observations, selecting the AR model order via the AIC, as in Section 4.2. Thresholds are then tuned using the Monte Carlo procedure described in Section 3.2. Figure 7 illustrates how the distribution of the maximum LR statistic under the null varies as a function of the stream length, n , across the three methods of this study. We denote how the statistics produced by the IID **focus** method are substantially inflated relative to those of the methods correcting for autocorrelation. To maintain a target false positive rate, the detector must adopt an artificially higher threshold than those accounting for correlation. By contrast, the thresholds for **focus_prewhitened**, and **AR(p)-focus** are lower and not significantly different. For the rest of this section, all methods are calibrated to achieve a false positive rate of 0.01 over one million iterations under the null, as false detections are deemed costly as they require human intervention.

As we are interested in comparing performances of an IID detector with one that accounts for temporal correlation, we employ a comparative framework that avoids relying on ground truth

knowledge of true changes. Specifically, we compare how quickly each method detects changes commonly identified all competing approaches.

Let $T_{i,j}$ denote the stopping time of the i th method over the j -th re-initialisation, defined as:

$$T_{i,j} = \inf \left\{ t \geq T_{i,j-1} : \max_{\substack{\tau \in \{T_{i,j-1}+1, \dots, t\}, \\ \mu_0, \mu_1}} \text{LR}_{\tau,t}^{*,T_{i,j-1}}(\mu_0, \mu_1) > \lambda^{(i)} \right\}, \quad (5.1)$$

where $\text{LR}_{\tau,t}^{*,T_{i,j-1}}$ is the likelihood ratio statistic computed at time t based on data after $T_{i,j-1}$ with changepoint at $\tau \in [T_{i,j-1}, t]$, μ_0 and μ_1 are the pre- and post-change parameters, and $\lambda^{(i)}$ is the detection threshold for the i th method. The corresponding estimated changepoint is:

$$\hat{\tau}_{i,j} = \arg \max_{\substack{\tau \in \{T_{i,j-1}+1, \dots, T_{i,j}\}, \\ \mu_0, \mu_1}} \text{LR}_{\tau,T_{i,j}}^{*,T_{i,j-1}}(\mu_0, \mu_1). \quad (5.2)$$

Two methods are considered to detect the same change if their estimated changepoints lie within a tolerance of $\delta = 10$ observations, e.g. for methods i and k , and respective changes $\hat{\tau}_{i,j}$, $\hat{\tau}_{k,\ell}$, if $|\hat{\tau}_{i,j} - \hat{\tau}_{k,\ell}| \leq \delta$. For each pair of methods detecting an agreed change, we define the true changepoint as $\hat{\tau}_j^* = \min(\hat{\tau}_{i,j}, \hat{\tau}_{k,\ell})$, and compute the detection delay for method i as $T_{i,j} - \hat{\tau}_j^*$. An example of a subset of data together with the output of different methods and their estimated change-points is shown in Figure 8.

We report two metrics: (1) the total number of estimated changepoints identified by each method, in Table 1 (a), and (2) the pairwise average detection delay across all commonly detected changes, in Table 1 (b)–(c). This allows us to assess both detection sensitivity, and how quickly each method detects mutually agreed-upon changes.

We see that IID **focus** tends to detect far fewer changes, and on the commonly detected ones, it shows significantly slower detection delays on average. The reasons behind this disparity appear clear when we note that the IID detector consistently misses the second change in short, low magnitude collective anomalies. For example see Figure 8: we notice how, despite having

correctly identified the beginning of a collective anomaly, the detector built on top of the IID **focus** misses all subsequent changes, with the statistics passing the change only after two further collective anomalies. As we highlighted in the simulation study, to control for the unaccounted temporal dependence there is an inherent loss of power, and this is mostly seen on hard-to-detect changes. Compared to the pre-whitened detector, which accounts for temporal dependence, while **focus_prewhitened** improves detection of those smaller intensity collective anomalies, our proposed **AR(p)-focus** still detects a greater number of changepoints overall, whilst achieving comparable or lower average detection delays across all three datasets on commonly detected changes, yielding an improvement in sensitivity.

Dataset	focus	focus (prewhiten)	AR(p)-focus
1	889	3100	4030
2	813	2672	2697
3	1340	2519	2890

(a)

Dataset	focus	AR(p)-focus
1	29.29	1.90
2	5.82	1.44
3	41.97	6.41

(b) **focus** vs **AR(p)-focus**.

Dataset	focus (prewhiten)	AR(p)-focus
1	3.59	1.75
2	2.56	2.59
3	9.83	6.30

(c) **focus** (prewhiten) vs **AR(p)-focus**.

Table 1: Comparison of **focus** and **AR(p)-focus** across the three datasets. (a) Total number of estimated changepoints detected by each method. (b)–(c) Average detection delay for commonly detected changepoints across methods.

6 Discussion

We have extended the **focus** algorithm for online Gaussian change-in-mean detection, originally developed under the assumption of IID noise, to the setting of **AR(p)** noise, proposing **AR(p)-focus** as a computationally efficient solution. Both simulation studies and real data applications confirm that explicitly modelling the autocorrelation structure yields meaningful reductions in detection

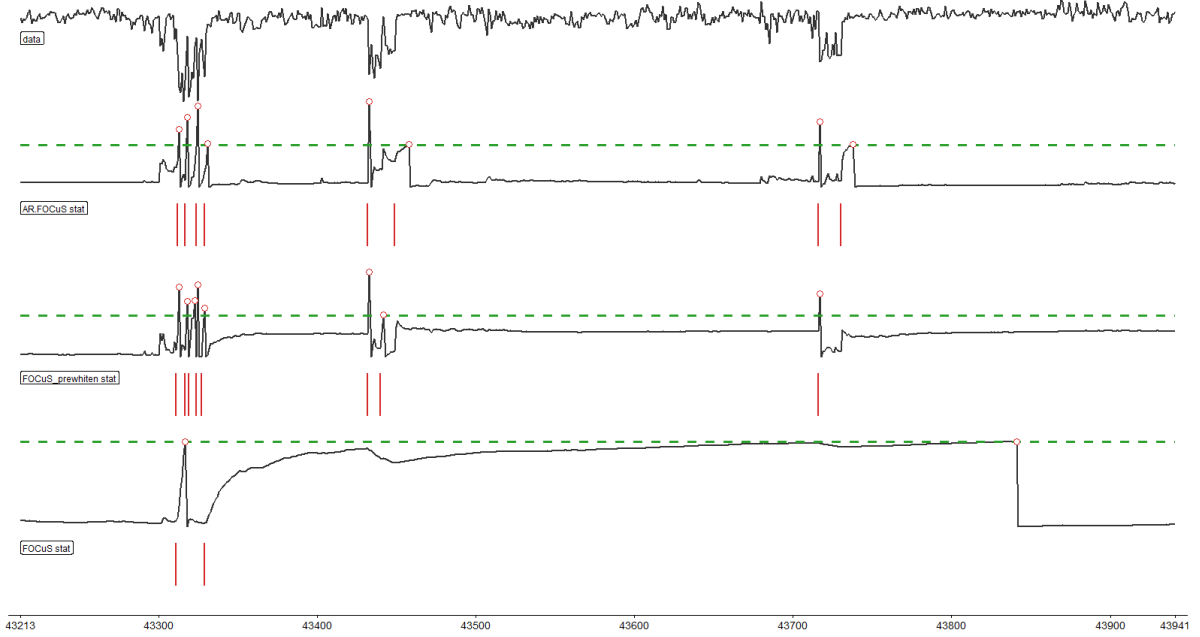


Figure 8: (Top) a subset of one of the analysed time series, with corresponding traces for both $AR(p)$ -detector (middle top), the IID detector on pre-whitened data (middle bottom) and the regular IID detector (bottom). On each trace, the green dotted line represents threshold. The red dot indicates the stopping time: for each stopping time, the estimated change is illustrated by a red segment.

delay relative to methods that ignore it or apply pre-whitening as a post-hoc correction, provided that sufficiently accurate estimates of the $AR(p)$ parameters are available. In practice these must be estimated from a probation period, which may appear a limitation: however, the settings in which $AR(p)$ -focus is most naturally applied are precisely those involving high-frequency data, where a sufficient probation record is easily available. As demonstrated in the real data application of Section 5, where less than 0.2% of the available data was used for probation, this translates directly into faster and more reliable detections.

The current framework is restricted to univariate time series, and extending it directly to the multivariate setting is non-trivial. A natural direction for future work is to build on **md-focus** from Pishchagina et al. (2026), which carries the **focus** framework to the multivariate case under IID noise, and to incorporate the $AR(p)$ modelling developed here into that richer setting. More broadly, relaxing the parametric $AR(p)$ assumption to accommodate longer-range dependence,

or extending to non-stationary or seasonal signal structures would further widen the practical applicability of the approach, as for instance achieved by the approach Romano et al. (2022) in the offline case.

Section 4.2 Replication Code: The $\text{AR}(p)$ -focus method and simulation study described in the article is available in a pure R implementation at:

https://github.com/Yuntang2023/AR_FOCuS-simulation-code.git.

R and Python Packages: A full implementation in C++ of $\text{AR}(p)$ -focus will be available in the near future in CRAN package `focus` (R interface) and on PyPI package `focus-py` (Python interface).

References

- Adams, R. P. and MacKay, D. J. C. (2007). Bayesian online changepoint detection.
- Andreou, E. and Ghysels, E. (2002). Detecting multiple breaks in financial market volatility dynamics. *Journal of Applied Econometrics*, 17(5):579–600.
- Aue, A. and Kirch, C. (2024). The state of cumulative sum sequential changepoint testing 70 years after page. *Biometrika*, 111(2):367–391.
- Austin, E., Eckley, I. A., and Bardwell, L. (2024). Detection of emergent anomalous structure in functional data. *Technometrics*, 66(4):614–624.
- Basseville, M. and Nikiforov, I. V. (1995). Detection of abrupt changes: theory and applications. *Journal of the Royal Statistical Society-Series A Statistics in Society*, 158(1):185.
- Beaulieu, C. and Killick, R. (2018). Distinguishing trends and shifts from memory in climate data. *Journal of Climate*, 31(23):9519–9543.

- Chen, H. (2019). Sequential change-point detection based on nearest neighbors. *The Annals of Statistics*, 47(3):1381–1407.
- Chen, Y., Wang, T., and Samworth, R. J. (2022). High-dimensional, multiscale online changepoint detection. *Journal of the Royal Statistical Society Series B: Statistical Methodology*, 84(1):234–266.
- Chu, C.-S. J., Hornik, K., and Kaun, C.-M. (1995). MOSUM tests for parameter constancy. *Biometrika*, 82(3):603–617.
- Chu, C.-S. J., Stinchcombe, M., and White, H. (1996). Monitoring structural change. *Econometrica: Journal of the Econometric Society*, pages 1045–1065.
- Crupi, R., Dilillo, G., Bissaldi, E., Ward, K., Fiore, F., and Vacchi, A. (2023). Searching for long faint astronomical high energy transients: a data driven approach. *Experimental Astronomy*, 56(2):421–476.
- Eiauer, P. and Hackl, P. (1978). The use of MOSUMS for quality control. *Technometrics*, 20(4):431–436.
- Fearnhead, P. and Liu, Z. (2007). On-line inference for multiple changepoint problems. *Journal of the Royal Statistical Society Series B: Statistical Methodology*, 69(4):589–605.
- Gombay, E. (2008). Change detection in autoregressive time series. *Journal of Multivariate Analysis*, 99(3):451–464.
- Guan, H., Bates, D., and Zhou, L. (2025). Keeping medical ai healthy and trustworthy: A review of detection and correction methods for system degradation. *IEEE Transactions on Biomedical Engineering*.
- Hasnain, A., Sheng, Y., Hashmi, M. Z., Bhatti, U. A., Hussain, A., Hameed, M., Marjan, S., Bazai, S. U., Hossain, M. A., Sahabuddin, M., et al. (2022). Time series analysis and forecasting

- of air pollutants based on prophet forecasting model in Jiangsu province, China. *Frontiers in Environmental Science*, 10:945628.
- Henry, D., Simani, S., and Patton, R. J. (2010). Fault detection and diagnosis for aeronautic and aerospace missions. In *Fault tolerant flight control: A benchmark challenge*, pages 91–128. Springer.
- Hipel, K. W. and McLeod, A. I. (1994). *Time series modelling of water resources and environmental systems*, volume 45. Elsevier.
- Jeske, D. R., Stevens, N. T., Tartakovsky, A. G., and Wilson, J. D. (2018). Statistical methods for network surveillance. *Applied Stochastic Models in Business and Industry*, 34(4):425–445.
- Kirch, C. and Weber, S. (2018). Modified sequential change point procedures based on estimating functions. *Electronic Journal of Statistics*, 12:1579–1613.
- Lai, T. L. (1995a). Sequential changepoint detection in quality control and dynamical systems. *Journal of the Royal Statistical Society: Series B (Methodological)*, 57(4):613–644.
- Lai, T. L. (1995b). Sequential changepoint detection in quality control and dynamical systems. *Journal of the Royal Statistical Society: Series B (Methodological)*, 57(4):613–644.
- Lai, T. L. and Xing, H. (2010). Sequential change-point detection when the pre-and post-change parameters are unknown. *Sequential Analysis*, 29(2):162–175.
- Liehrmann, A., Delannoy, E., Launay-Avon, A., Gilbault, E., Loudet, O., Castandet, B., and Rigai, G. (2023). Diffsegr: an rna-seq data driven method for differential expression analysis using changepoint detection. *NAR Genomics and Bioinformatics*, 5(4):lqad098.
- Lorden, G. (1971). Procedures for reacting to a change in distribution. *The Annals of Mathematical Statistics*, pages 1897–1908.
- Page, E. S. (1954). Continuous inspection schemes. *Biometrika*, 41(1/2):100–115.

- Page, E. S. (1955). A test for a change in a parameter occurring at an unknown point. *Biometrika*, 42(3/4):523–527.
- Pishchagina, L., Romano, G., Fearnhead, P., Runge, V., and Rigaiil, G. (2026). Online multivariate changepoint detection: Leveraging links with computational geometry. *Journal of the Royal Statistical Society Series B: Statistical Methodology*, 88(1):171–194.
- Pouliezos, A. and Stavrakakis, G. S. (2013). *Real time fault monitoring of industrial processes*, volume 12. Springer Science & Business Media.
- Romano, G., Eckley, I. A., and Fearnhead, P. (2023a). A log-linear nonparametric online changepoint detection algorithm based on functional pruning. *IEEE Transactions on Signal Processing*, 72:594–606.
- Romano, G., Eckley, I. A., Fearnhead, P., and Rigaiil, G. (2023b). Fast online changepoint detection via functional pruning CUSUM statistics. *Journal of Machine Learning Research*, 24(81):1–36.
- Romano, G., Rigaiil, G., Runge, V., and Fearnhead, P. (2022). Detecting abrupt changes in the presence of local fluctuations and autocorrelated noise. *Journal of the American Statistical Association*, 117(540):2147–2162.
- Siegmund, D. and Venkatraman, E. S. (1995). Using the generalized likelihood ratio statistic for sequential detection of a change-point. *The Annals of Statistics*, 23(1):255–271.
- Tartakovsky, A. G., Rozovskii, B. L., and Shah, K. (2005). A nonparametric multichart cusum test for rapid intrusion detection. In *Proceedings of Joint Statistical Meetings*, volume 7, page 11.
- Tsay, R. S. (2005). *Analysis of financial time series*. John Wiley & Sons.
- Ward, K., Dilillo, G., Eckley, I., and Fearnhead, P. (2025). Poisson-focus: An efficient online method for detecting count bursts with application to gamma ray burst detection. *Journal of the American Statistical Association*, 120(549):7–19.

- Ward, K., Romano, G., Eckley, I., and Fearnhead, P. (2024). A constant-per-iteration likelihood ratio test for online changepoint detection for exponential family models. *Statistics and Computing*, 34(3):99.
- Willenbrock, H. and Fridlyand, J. (2005). A comparison study: applying segmentation to array cgh data for downstream analyses. *Bioinformatics*, 21(22):4084–4091.
- Yang, Z., Eckley, I. A., and Fearnhead, P. (2024). A communication-efficient, online changepoint detection method for monitoring distributed sensor networks. *Statistics and Computing*, 34(3):115.
- Yu, Y., Padilla, O. H. M., Wang, D., and Rinaldo, A. (2023). A note on online change point detection. *Sequential Analysis*, 42(4):438–471.
- Zaliskyi, M., Ostroumov, I., Kuzmenko, N., and Ivannikova, V. (2025). Algorithms of reliability data processing for navigation systems. In *2025 Integrated Communications, Navigation and Surveillance Conference (ICNS)*, pages 1–9. IEEE.

SUPPLEMENTARY MATERIAL

A Proof of Proposition 1

We use notation $S_{t,\tau}(\mu_1)$, $C_{k,t}(\mu_1)$, $C_t(\mu_1)$ defined in Section 3. Given that $LR_n(\mu_1)$ is the likelihood-ratio statistic conditional on μ_1 but where we have maximised over τ , then we can write it as

$$LR_n(\mu_1) = \max \{ LR_{0,n}(\mu_1), LR_{1,n}(\mu_1), \dots, LR_{n-1,n}(\mu_1) \}.$$

For $n \leq p$, $LR_{\tau,n}(\mu_1)$ is equal to the corresponding $S_{n,\tau}(\mu_1)$ function.

For $n \geq (p+1)$, we define $Q_n(\mu_1)$ as the likelihood-ratio statistic conditional on μ_1 where we have maximised over a collection $n - \tau > p$:

$$Q_n(\mu_1) = \max \{ LR_{0,n}(\mu_1), LR_{1,n}(\mu_1), \dots, LR_{n-p-1,n}(\mu_1) \}, \quad (\text{A.1})$$

so that

$$LR_n(\mu_1) = \max \left\{ \max_{i=1,\dots,p} \{S_{n,n-i}(\mu_1)\} \ , \ Q_n(\mu_1) \right\}.$$

For $n \geq p+2$, we know $LR_{n-i,n}(\mu_1) = LR_{n-i,n-1}(\mu_1) + C_n(\mu_1)$ for $i > p$. So, by definition of $Q_n(\mu_1)$ in A.1, we get

$$\begin{aligned} Q_n(\mu_1) &= \max_{i=(p+1),\dots,n} \{LR_{n-i,n-1}(\mu_1)\} + C_n(\mu_1) \\ &= \max \left\{ LR_{(n-p-1),n-1}(\mu_1) \ , \ \max_{i=(p+1),\dots,(n-1)} \{LR_{(n-1)-i,n-1}(\mu_1)\} \right\} + C_n(\mu_1) \\ &= \max \left\{ S_{n-1,n-p-1}(\mu_1) \ , \ Q_{n-1}(\mu_1) \right\} + C_n(\mu_1). \end{aligned}$$

For $n = p+1$, in this case $Q_{p+1}(\mu_1) = LR_{0,p+1}(\mu_1)$, and by definition $LR_{0,p+1}(\mu_1) = S_{p,0}(\mu_1) + C_{p+1}(\mu_1)$, which gives the initial condition for $Q_n(\mu_1)$.

B Proof of Proposition 2

The log-likelihoods $\ell_{\tau,n}(\mu_0, \mu_1)$ and $\ell_{\tau',n}(\mu_0, \mu_1)$ only differ in terms of the contribution from observations at times $t = \tau + 1, \dots, \tau' + p$, and this gives

$$2[\ell_{\tau,n}(\mu_0, \mu_1) - \ell_{\tau',n}(\mu_0, \mu_1)] = - \sum_{t=\tau+1}^{\tau'+p} (y_t - v_{t-\tau}(\mu_1 - \mu_0) - v_{p+1}\mu_0)^2 + \sum_{t=\tau+1}^{\tau'} (y_t - v_{p+1}\mu_0)^2 + \sum_{t=\tau'+1}^{\tau'+p} (y_t - v_{t-\tau'}(\mu_1 - \mu_0) - v_{p+1}\mu_0)^2.$$

Writing $\Delta = \mu_1 - \mu_0$ and $\mu = v_{p+1}\mu_0$ and rearranging gives

$$\begin{aligned} & 2[\ell_{\tau,n}(\mu_0, \mu_1) - \ell_{\tau',n}(\mu_0, \mu_1)] \\ &= \sum_{t=\tau+1}^{\tau'+p} \{2v_{t-\tau}\Delta(y_t - \mu) - v_{t-\tau}^2\Delta^2\} - \sum_{t=\tau'+1}^{\tau'+p} \{2\Delta v_{t-\tau'}(y_t - \mu) - v_{t-\tau'}^2\Delta^2\} \\ &= 2\Delta \left(\sum_{t=\tau+1}^{\tau'+p} v_{t-\tau}(y_t - \mu) - \sum_{t=\tau'+1}^{\tau'+p} v_{t-\tau'}(y_t - \mu) \right) - \Delta^2 \left(\sum_{t=\tau+1}^{\tau'+p} v_{t-\tau}^2 - \sum_{t=\tau'+1}^{\tau'+p} v_{t-\tau'}^2 \right). \end{aligned}$$

Now let, $h = \tau' - \tau$. Note that

$$2 \left(\sum_{t=\tau+1}^{\tau'} v_{t-\tau} + \sum_{t=\tau'+1}^{\tau'+p} (v_{t-\tau} - v_{t-\tau'}) \right) = 2 \left(\sum_{i=1}^{h+p} v_i - \sum_{i=1}^p v_i \right) = 2hv_{p+1},$$

and similarly

$$\sum_{t=\tau+1}^{\tau'} v_{t-\tau}^2 - \sum_{t=\tau'+1}^{\tau'+p} v_{t-\tau'}^2 = \sum_{i=1}^{h+p} v_i^2 - \sum_{i=1}^p v_i^2 = hv_{p+1}^2.$$

Define

$$B_{\tau,\tau'} = 2 \left(\sum_{t=\tau+1}^{\tau'+p} v_{t-\tau}y_t - \sum_{t=\tau'+1}^{\tau'+p} v_{t-\tau'}y_t \right),$$

then, using $h = v_{p+1}\mu_0$

$$2[\ell_{\tau,n}(\mu_0, \mu_1) - \ell_{\tau',n}(\mu_0, \mu_1)] = -\Delta^2 hv_{p+1}^2 + \Delta(B_{\tau,\tau'} - 2hv_{p+1}^2\mu_0).$$

The roots of the quadratic in Δ on the right-hand side are $\Delta = 0$ and

$$\Delta = (B_{\tau,\tau'} - 2hv_{p+1}^2\mu_0)/(hv_{p+1}^2) = \frac{B_{\tau,\tau'}}{hv_{p+1}^2} - 2\mu_0.$$

Thus, as the co-efficient of Δ^2 is negative, this quadratic is positive for Δ between these two roots. This gives the required set of (μ_0, μ_1) values in the proposition with $b_{\tau,\tau'} = B_{\tau,\tau'}/C_h$. For example, for positive change $\Delta > 0$ and using $\Delta = \mu_1 - \mu_0$, the range of μ_1 values for which the loglikelihood for a change at τ is greater than a later change at τ' is $\mu_1 > \mu_0$ and

$$\mu_1 - \mu_0 < \frac{B_{\tau,\tau'}}{hv_{p+1}^2} - 2\mu_0 \Rightarrow \mu_1 < \frac{B_{\tau,\tau'}}{hv_{p+1}^2} - \mu_0. \quad (\text{B.1})$$

C Pseudo-code for AR(p)-focus with unknown pre-change mean

Algorithm 1: AR(p)-focus (one iteration)

Data: $y_{n-p:n}$; $Q_{n-1}(\mu_0, \mu_1)$ the cost function from the previous iteration.

Input: Detection threshold, $\lambda > 0$, $\mu_0 = 0$

- 1 Calculate $LR_{n-p-1,n-1}(\mu_0, \mu_1)$ /* See (D.2) in Appendix D */
 - 2 $Q_n(\mu_0, \mu_1) \leftarrow \max \left\{ LR_{n-p-1,n-1}(\mu_0, \mu_1), Q_{n-1}(\mu_0, \mu_1) \right\} + C_{p+1,n}(\mu_0, \mu_1)$; /* Algorithm 2 */
 - 3 $\mathcal{Q}_n^{(1)} \leftarrow \max_{\mu_0, \mu_1} Q_n(\mu_0, \mu_1)$;
 - 4 $\mathcal{Q}_n^{(2)} \leftarrow \max_{\mu_0, \mu_1, 1 \leq i \leq p} LR_{n-i,n}(\mu_0, \mu_1)$; /* See (D.2) in Appendix D */
 - 5 $\mathcal{Q}_n \leftarrow \max\{\mathcal{Q}_n^{(1)}, \mathcal{Q}_n^{(2)}\}$;
 - 6 **if** $\mathcal{Q}_n \geq \lambda$ **then**
 - 7 | **return** n as a stopping point
 - 8 **end**
 - 9 **return** $Q_n(\mu_0, \mu_1)$ for the next iteration .
-

A description of AR(p)-focus with unknown pre-change mean is given in Algorithm 1. The algorithm consists of two main steps: (i) we solve the recursion in Proposition 1 to obtain the function $Q_n(\mu_0, \mu_1)$ from $Q_{n-1}(\mu_0, \mu_1)$, and (ii) we maximise the function $Q_n(\mu_0, \mu_1)$ and $LR_{n-i,n}(\mu_0, \mu_1)$ for

Algorithm 2: Algorithm for $\max \left\{ LR_{n-p-1,n-1}(\mu_0, \mu_1), Q_{n-1}(\mu_0, \mu_1) \right\} + C_{p+1,n}(\mu_0, \mu_1)$ for $\mu_1 > \mu_0$

Data: $Q_n(\mu_0, \mu_1) = Q$ an ordered set of tuples $\{q_i = (\tau_i, \mathbf{Coef}_i, l_i) \mid i = 1, \dots, k\}$, y_n

```

1 Initialize Coefk+1 ; /* See (D.2) in Appendix D */
2  $q_{k+1} \leftarrow (\tau_{k+1} = n - p - 1, \mathbf{Coef}_{k+1}, l_{k+1} = \infty)$  ;
3  $i \leftarrow k$  ;
4 while  $\text{Inter}(LR_{\tau_{k+1},n}(0, \mu_1), LR_{\tau_i,n}(0, \mu_1)) \leq l_i$  and  $i \geq 1$  do
5   |  $i \leftarrow i - 1$  ;
6 end
7  $l_{k+1} \leftarrow \text{Inter}(LR_{\tau_{k+1},n}(0, \mu_1), LR_{\tau_i,n}(0, \mu_1))$  ;
8 if  $i \neq k$  then
9   |  $Q \leftarrow Q \setminus \{q_{i+1}, \dots, q_k\}$  ;
10 end
11 Update Coefj for  $j = 1, \dots, i, k+1$  to account for  $y_n$  ; /* See (D.3) in Appendix D */
12 return  $\{q_1, \dots, q_i, q_{k+1}\}$ .

```

$1 \leq i \leq p$, then choose max value among them; we explain these two briefly as follows. Step 2, is the maximisation step, which trivially evaluates the Likelihood ratio test from either Equation 3.2 or 3.5 for each candidate quadratic stored in Q_n , and picks the maximum overall. Step 1 is where the pruning is performed, and for a positive change $\mu_1 > \mu_0$ this is detailed in Algorithm 2.

In Algorithm 2 we store each q_i an un-pruned change-point, τ_i , the coefficients of the quadratic in μ_0 and μ_1 for the test-statistic for a change at τ_i , and a value l_i . These sets are stored in the order such that smaller i correspond to earlier changes, and the value l_i indicates that a change at τ_i has higher likelihood than a change at τ_{i-1} for $\mu_1 > \mu_0$.

We define $\text{Inter}(LR_{\tau',n}(0, \mu_1), LR_{\tau,n}(0, \mu_1))$ to be the non-zero value of μ_1 for which

$$LR_{\tau',n}(0, \mu_1) - LR_{\tau,n}(0, \mu_1) = 0.$$

If $\tau' > \tau$ then this is calculating the value $B_{\tau,\tau'}/(h\nu_{p+1}^2)$, where $h = \tau' - \tau$, that appears in (B.1). This value shows, relative to μ_0 , the values below which the older change-point at τ has greater likelihood than the newer change at τ' . Thus if we calculate $c = \text{Inter}(LR_{\tau_{k+1},n}(0, \mu_1), LR_{\tau_i,n}(0, \mu_1))$

then we have that a change at τ_{k+1} has higher likelihood than a change at τ_i for $\mu_1 > c - \mu_0$, but l_i is defined so that a change at τ_{i-1} has higher likelihood than a change at τ_i for $\mu_1 < l_i - \mu_0$. Thus if $c < l_i$ then there are no values of μ_1 for which the change at τ_i has higher likelihood than both the other two change locations, and it can be pruned. We repeat this check for pruning until a change-point cannot be removed.

If we consider a negative change size where $\mu_1 < \mu_0$, then the initial condition $l_{k+1} = \infty$ in line 2 is changed to $l_{k+1} = -\infty$ and the pruning criterion in line 5 is changed to

$$\text{Inter}\left(LR_{k+1,n}(\mu_1), LR_{i,n}(\mu_1)\right) \geq l_i.$$

D Coefficients Update for the AR(p)-focus Statistic

The log-likelihood ratio statistics is the twice difference between log-likelihood under alternative and null, which we define as $Cost_{\tau,n}(\mu_0, \mu_1)$ and $Cost_{\tau,n}(\mu_0, \mu_0)$ respectively. We define $y_t = x_t - \rho_1 x_{t-1} - \rho_2 x_{t-2} - \dots - \rho_p x_{t-p}$, $M_n = \sum_{t=1}^n y_t$.

Then for changepoint τ at current time point n ,

$$LR_{\tau,n}^*(\mu_0, \mu_1) = 2 \left(Cost_{\tau,n}(\mu_0, \mu_1) - Cost_{\tau,n}(\mu_0, \mu_0) \right), \quad (\text{D.1})$$

where

$$Cost_{\tau,n}(\mu_0, \mu_0) = -\frac{n}{2} v_{p+1}^2 \mu_0^2 + v_{p+1} M_n \mu_0 - \frac{1}{2} \sum_{t=1}^n y_t^2.$$

There are two cases of $Cost_{\tau,n}(\mu_0, \mu_1)$. One is for $n \leq \tau + p$,

$$Cost_{\tau,n}(\mu_0, \mu_1) = -\frac{1}{2} \left(\sum_{t=1}^{\tau} (y_t - v_{p+1} \mu_0)^2 + \sum_{t=\tau+1}^n (y_t - v_{t-\tau} \mu_1 + u_{t-\tau} \mu_0)^2 \right),$$

the other one is for $n > \tau + p$,

$$\begin{aligned} Cost_{\tau,n}(\mu_0, \mu_1) = & -\frac{1}{2} \left(\sum_{t=1}^{\tau} (y_t - v_{p+1}\mu_0)^2 \right. \\ & \left. + \sum_{t=\tau+1}^{\tau+p} (y_t - v_{t-\tau}\mu_1 + u_{t-\tau}\mu_0)^2 + \sum_{t=\tau+p+1}^n (y_t - v_{p+1}\mu_1)^2 \right) \end{aligned}$$

The function $Cost_{\tau,n}(\mu_0, \mu_1)$ is a quadratic in μ_0 and μ_1 and can be written as $A_{\tau,n}\mu_0^2 + B_{\tau,n}\mu_1^2 + C_{\tau,n}\mu_0\mu_1 + D_{\tau,n}\mu_0 + E_{\tau,n}\mu_1 + F_{\tau,n}$ for some constants $A_{\tau,n}, \dots, F_{\tau,n}$. Using the notation v_i , defined in Section 3, the coefficients for case $n \leq \tau + p$ can be calculated as:

$$\begin{aligned} A_{\tau,n} &= -\frac{1}{2} \left[\tau v_{p+1}^2 + \sum_{i=1}^{n-\tau} u_i^2 \right] \\ B_{\tau,n} &= -\frac{1}{2} \sum_{i=1}^{n-\tau} v_i^2 \\ C_{\tau,n} &= \sum_{i=1}^{n-\tau} u_i v_i \\ D_{\tau,n} &= -\frac{1}{2} \left[-2v_{p+1}M_\tau + 2 \sum_{t=\tau+1}^n y_t u_{t-\tau} \right] \\ E_{\tau,n} &= -\frac{1}{2} \left[-2 \sum_{t=\tau+1}^n y_t v_{t-\tau} \right] \\ F_{\tau,n} &= -\frac{1}{2} \sum_{t=1}^n y_t^2 \end{aligned} \tag{D.2}$$

If $n > \tau + p$, we found contributions adding on $Cost_{\tau,\tau+p}(\mu_0, \mu_1)$ depend on y_n or M_n , the coefficients

can be updated by changing n , y_n or M_n , which is

$$\begin{aligned}
A_{\tau,n} &= A_{\tau,\tau+p} \\
B_{\tau,n} &= B_{\tau,\tau+p} - \frac{1}{2}(n - \tau - p)v_{p+1}^2 \\
C_{\tau,n} &= C_{\tau,\tau+p} \\
D_{\tau,n} &= D_{\tau,\tau+p} \\
E_{\tau,n} &= E_{\tau,\tau+p} + v_{p+1}(M_n - M_{\tau+p}) \\
F_{\tau,n} &= F_{\tau,\tau+p} - \frac{1}{2} \sum_{t=\tau+p+1}^n y_t^2
\end{aligned} \tag{D.3}$$


E Additional Simulation Results

E.1 Performance under the Known Pre-Change Mean


We complement the main simulation results by reporting performance in the known pre-change mean case, which serves as a further oracle benchmark. Figures 9 display the detection delay distributions for AR(1) and higher-order AR noise respectively, mirroring the structure of Figure 2 in the main body, but now including both the known and unknown pre-change mean variants of each algorithm. All other simulation parameters take the same default values described in the main body.

As expected, algorithms with a known pre-change mean uniformly outperform their unknown-mean counterparts if training sets are sufficiently large, since they do not incur any estimation error for μ_0 . The relative ordering among methods otherwise mirrors the patterns described in Section 4.1: differences are modest under weak autocorrelation and become more pronounced as the autocorrelation increases.

We also examine how the relationship between the known and unknown pre-change mean cases evolves as the probation period length varies. Figure 13 compares **AR(p)-focus** with its known-

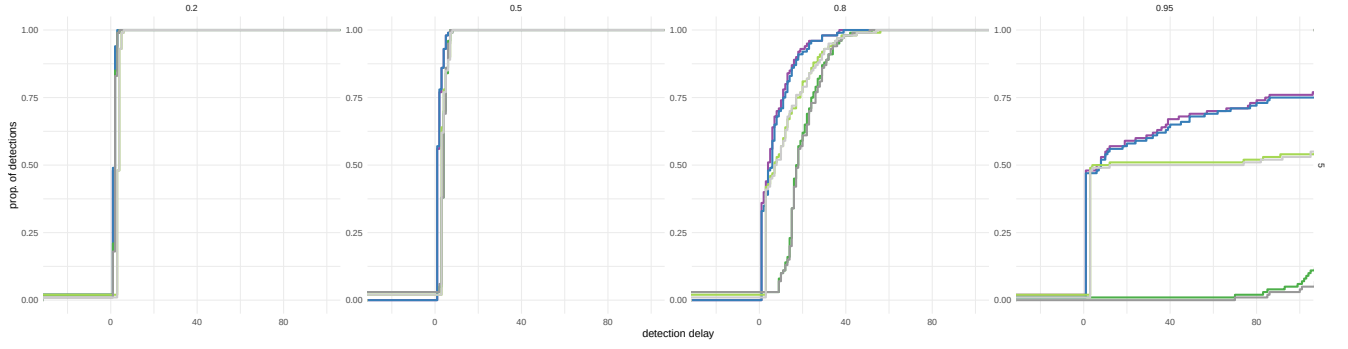

(a) AR(1) noise processes

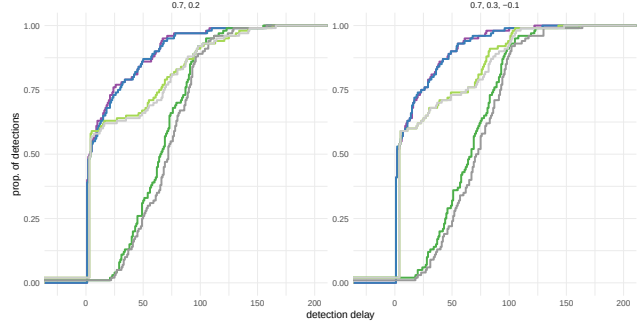


(b) AR(2) and AR(3) noise processes


Figure 9: Oracle setting: empirical distribution of detection delay across different noise processes, comparing known and unknown pre-change mean variants. Data length $n = 10,000$, true change-point at 5,000, pre-change mean $\mu_0 = 50$, change magnitude $\delta = 5$. Each column corresponds to a different AR process. Purple: **AR(p)-focus** (known mean, oracle); blue: **AR(p)-focus** (unknown mean, oracle); green: **focus** (known mean, oracle); light green: **focus_prewhiten** (known mean, oracle); gray: **focus** (unknown mean, oracle); light gray: **focus_prewhiten** (unknown mean, oracle).

mean counterpart across a range of training sizes and AR(1) autocorrelation coefficients. When the size of training observations are shorter than true change 5000, the unknown-mean algorithm is much better than known-mean performance as unknown-mean algorithm estimate the μ_0 from pre-change observations. However, if the probation period is sufficiently long, the known-mean algorithm closely approaches and exceeds the unknown-mean benchmark.

To make a direct and fair comparison between the known and unknown pre-change mean cases, we set the training size equal to the true changepoint location, so that both algorithms have access to the same amount of pre-change data. Figure 14 shows results for a fixed data length of $n = 10,000$ as the training size and true changepoint are varied jointly. The known-mean variant dominates

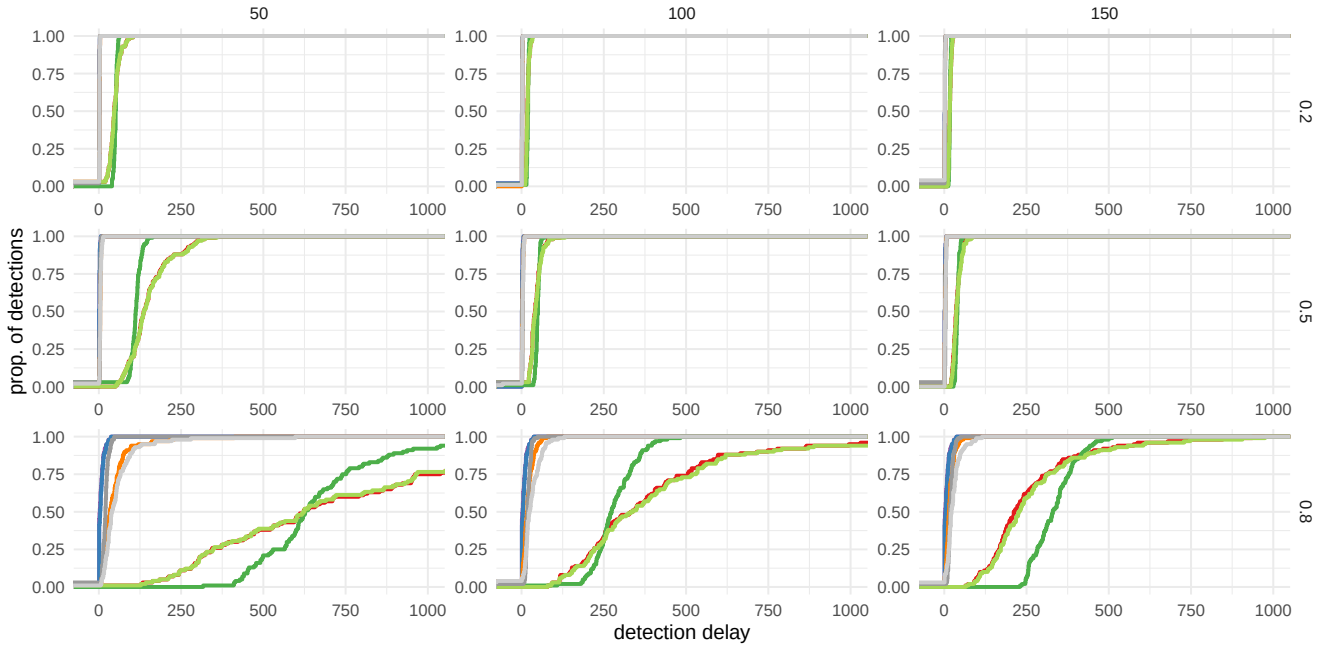

(a) AR(1) noise processes

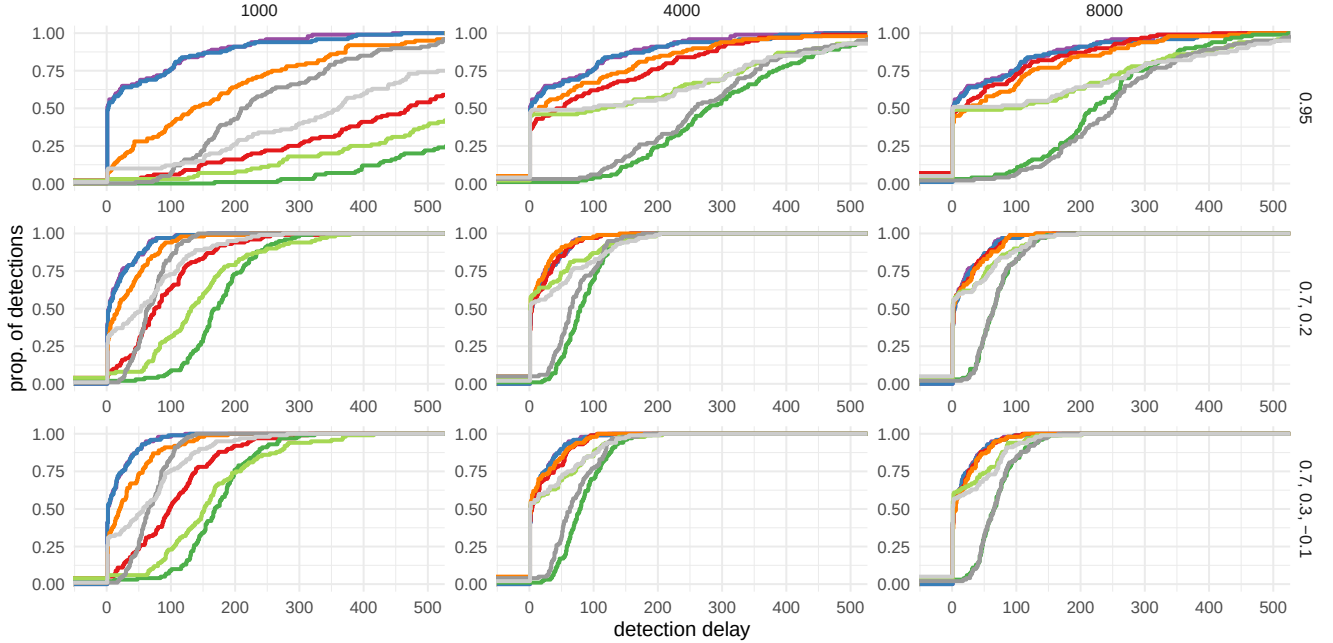

(b) AR(1), AR(2), and AR(3) noise processes

Figure 10: Effect of probation period length on detection delay across different noise processes. Each column corresponds to a different training size; each row to a different AR process. Purple: AR(p)-focus (known mean, oracle), blue: AR(p)-focus (unknown mean, oracle); red: AR(p)-focus (known mean); orange: AR(p)-focus (unknown mean); gray: focus; light gray: focus_prewhit.

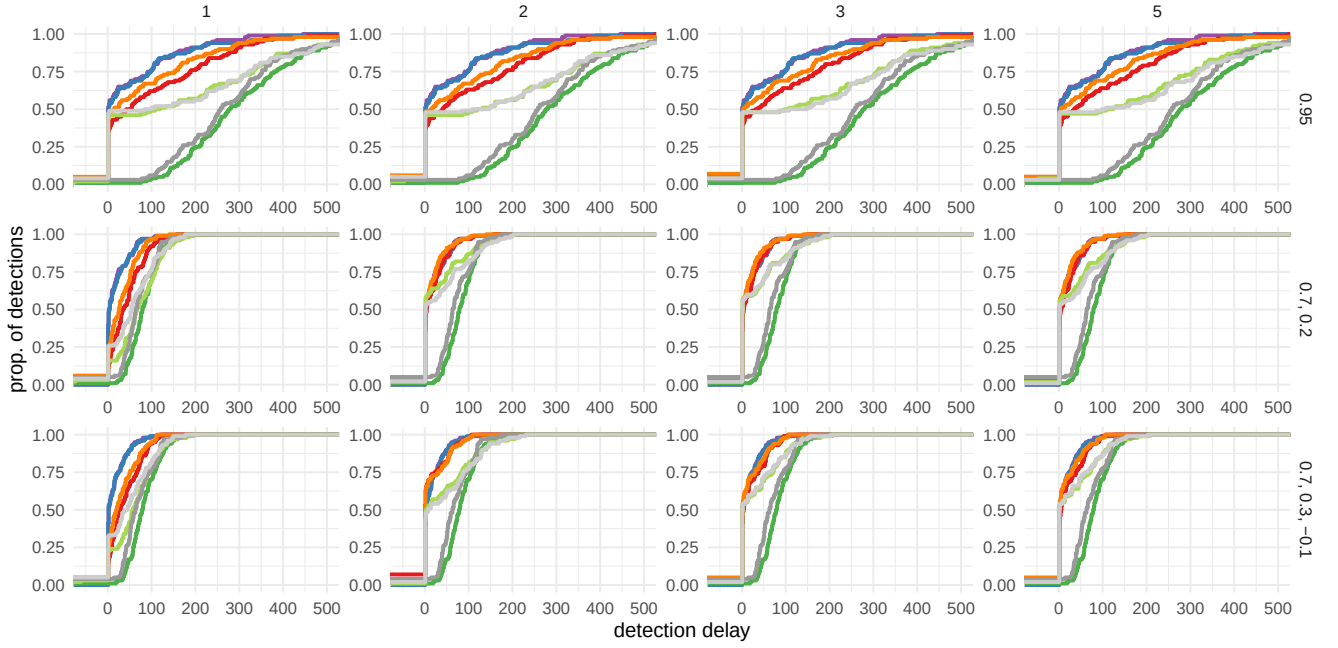


Figure 11: Robustness to AR order misspecification. Each row corresponds to a different true AR process (labelled by autocorrelation); each column to a different assumed order p used by the algorithm. Purple: **AR(p)-focus** (known mean, oracle), blue: **AR(p)-focus** (unknown mean, oracle); red: **AR(p)-focus** (known mean); orange: **AR(p)-focus** (unknown mean); gray: **focus**; light gray: **focus_prewhiten**.

when the training sample is large, but its advantage erodes and reverse when the probation period is not very large, since the training set leads to poor estimation of the AR parameters regardless of whether the mean is known.

E.2 Effect of Maximum Assumed Order in the AR(1) Setting

To complement the misspecification analysis in Section 4.2.2, we provide here a more detailed illustration restricted to the AR(1) case. This allows us to examine, in isolation, how the choice of maximum assumed order interacts with the strength of the AR(1) autocorrelation parameter.

Figure 15 shows that assuming a maximum order larger than the true order carries little cost: since AIC will tend to select the correct (lower) order, or at worst fit a slightly over-parameterised model, the performance of **AR(p)-focus** remains close to its oracle benchmark. By contrast, assuming a maximum order smaller than the true order forces the algorithm to work with a misspecified

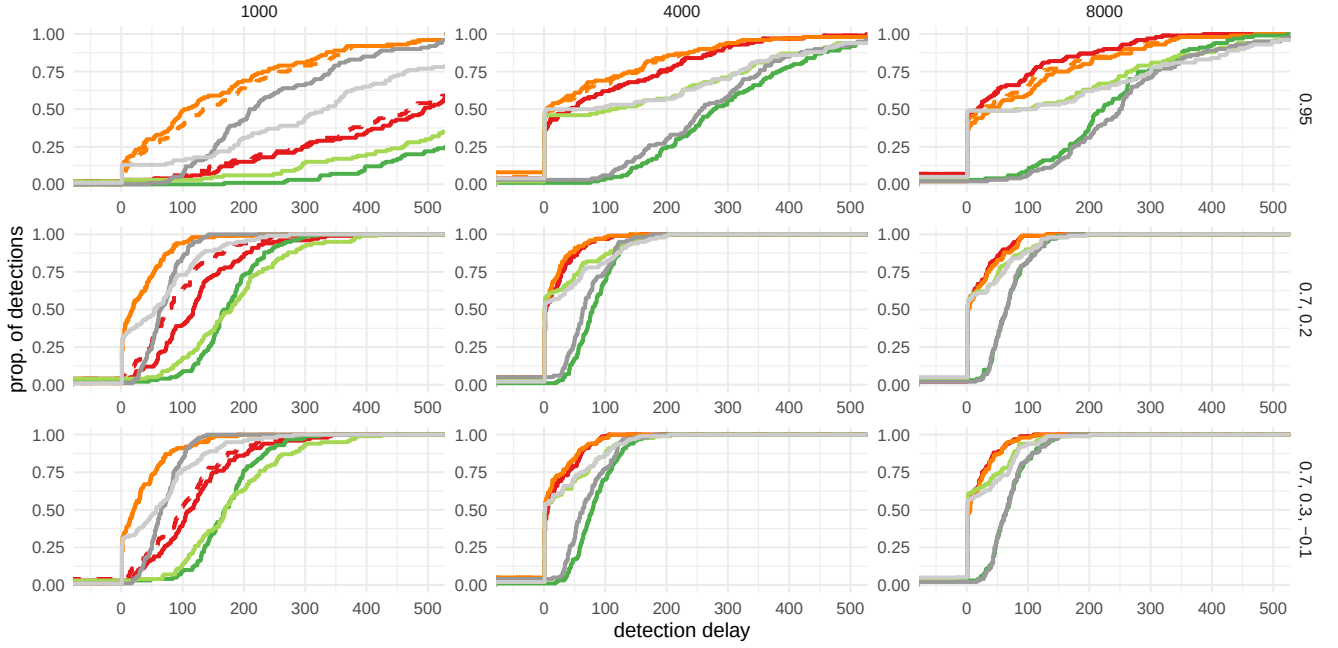


Figure 12: Performance of $\text{AR}(p)\text{-focus}$ when the AR order is unknown and selected by AIC. Each row corresponds to a different AR process (labelled by autocorrelation); each column to a different probation period length. Red dashed: $\text{AR}(p)\text{-focus}$ (known mean, p); red: $\text{AR}(p)\text{-focus}$ (known mean); orange dashed: $\text{AR}(p)\text{-focus}$ (known p); orange: $\text{AR}(p)\text{-focus}$; gray: focus ; light gray: focus_prewhiten .

model that cannot account for all the relevant autocorrelation, resulting in a more substantial loss of power. This is consistent with the broader robustness results reported in Figure 5.

E.3 Power Loss from Misspecification Error

The previous sections have focused on the gains from correctly modelling autocorrelation. Here we assess the consequences of imposing an AR model when the noise is in fact IID. This quantifies the penalty paid for model misspecification in the opposite direction, and is relevant whenever a practitioner applies $\text{AR}(p)\text{-focus}$ with a non-zero fixed AR parameter to data that does not actually exhibit autocorrelation.

To this end, we simulate data with IID noise and apply $\text{AR}(p)\text{-focus}$ with assumed $\text{AR}(1)$ coefficients $\rho_1 \in \{0, 0.1, 0.3, 0.5, 0.7, 0.9\}$, for change magnitudes $\delta \in \{0.5, 1, 3, 5\}$. The assumed value $\rho_1 = 0$ corresponds to no misspecification and serves as the baseline.

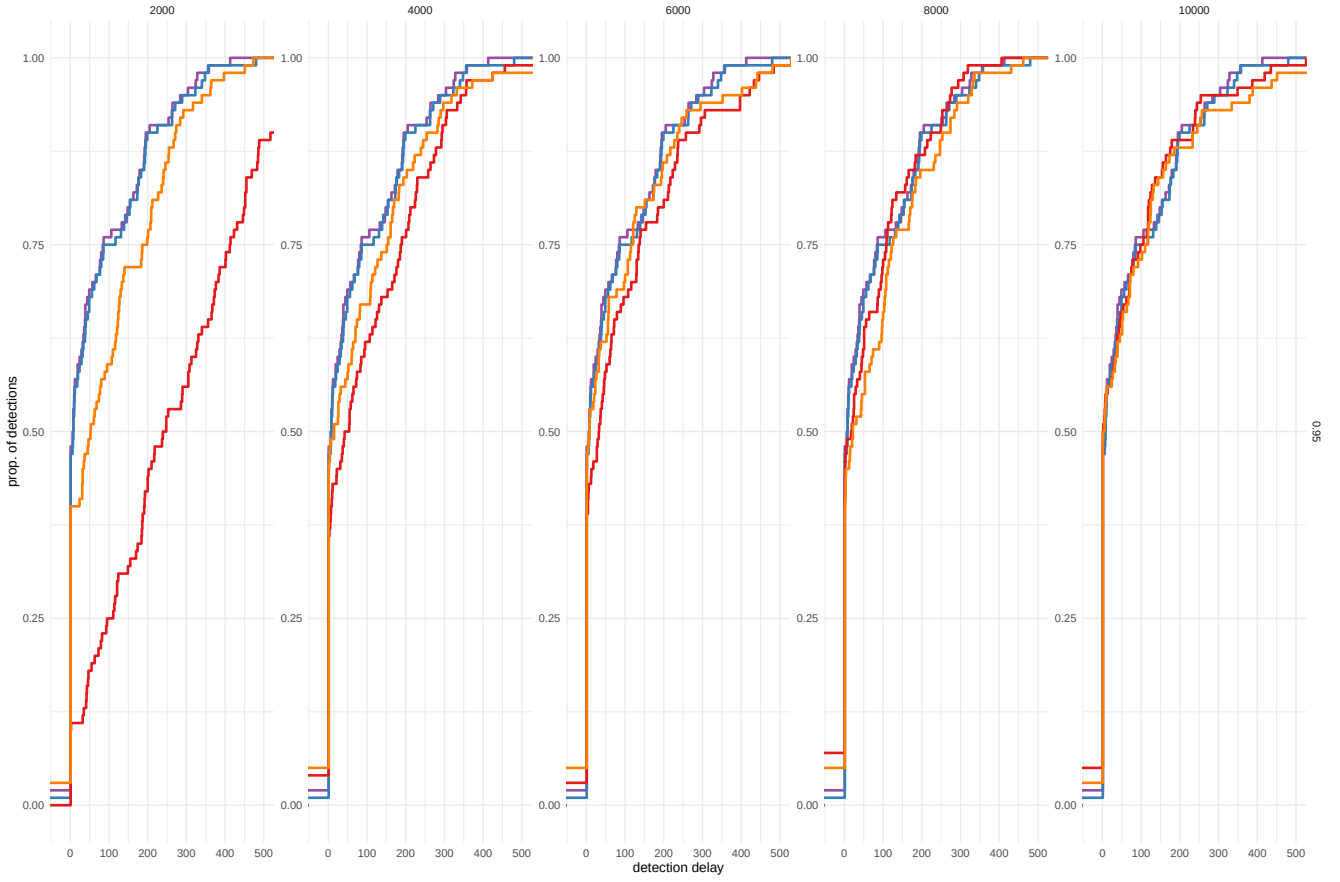


Figure 13: Effect of probation period length on detection delay: comparison between known and unknown pre-change mean variants of $\text{AR}(p)\text{-focus}$ for $\text{AR}(1)$ noise. Each column corresponds to a different probation period length. True changepoint at 5,000, change magnitude $\delta = 5$, data length $n = 10,000$. Purple: $\text{AR}(p)\text{-focus}$ oracle (known mean); blue: $\text{AR}(p)\text{-focus}$ oracle (unknown mean); red: $\text{AR}(p)\text{-focus}$ (known mean); orange: $\text{AR}(p)\text{-focus}$ (unknown mean).

Figure 16 shows that detection power decreases monotonically as the assumed AR parameter increases. The loss is most severe for small change magnitudes: at $\delta = 0.5$, the detection rate falls to near zero even for moderate values of ρ_1 . For larger change magnitudes the method is considerably more robust; at $\delta = 5$, power remains high even when ρ_1 is assumed to be as large as 0.9. These results underscore the importance of accurate AR parameter estimation when the change signal is weak: erroneous assumptions about the autocorrelation structure can render the detector ineffective, while the same misspecification is largely inconsequential when the signal is strong.

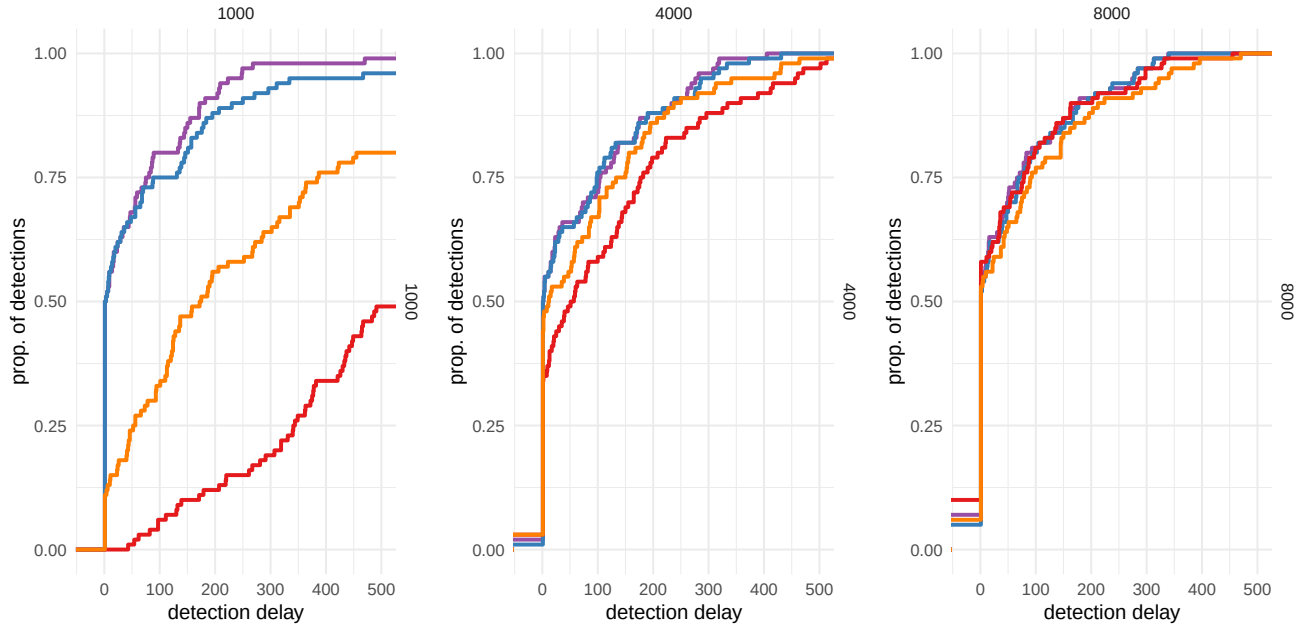


Figure 14: Comparison between known and unknown pre-change mean variants of $\text{AR}(p)$ -focus when the training size equals the true changepoint. The top and right margins of each panel indicate the training size and true changepoint, respectively. Change magnitude $\delta = 5$, data length $n = 10,000$. Purple: $\text{AR}(p)$ -focus oracle (known mean); blue: $\text{AR}(p)$ -focus oracle (unknown mean); red: $\text{AR}(p)$ -focus (known mean); orange: $\text{AR}(p)$ -focus (unknown mean).

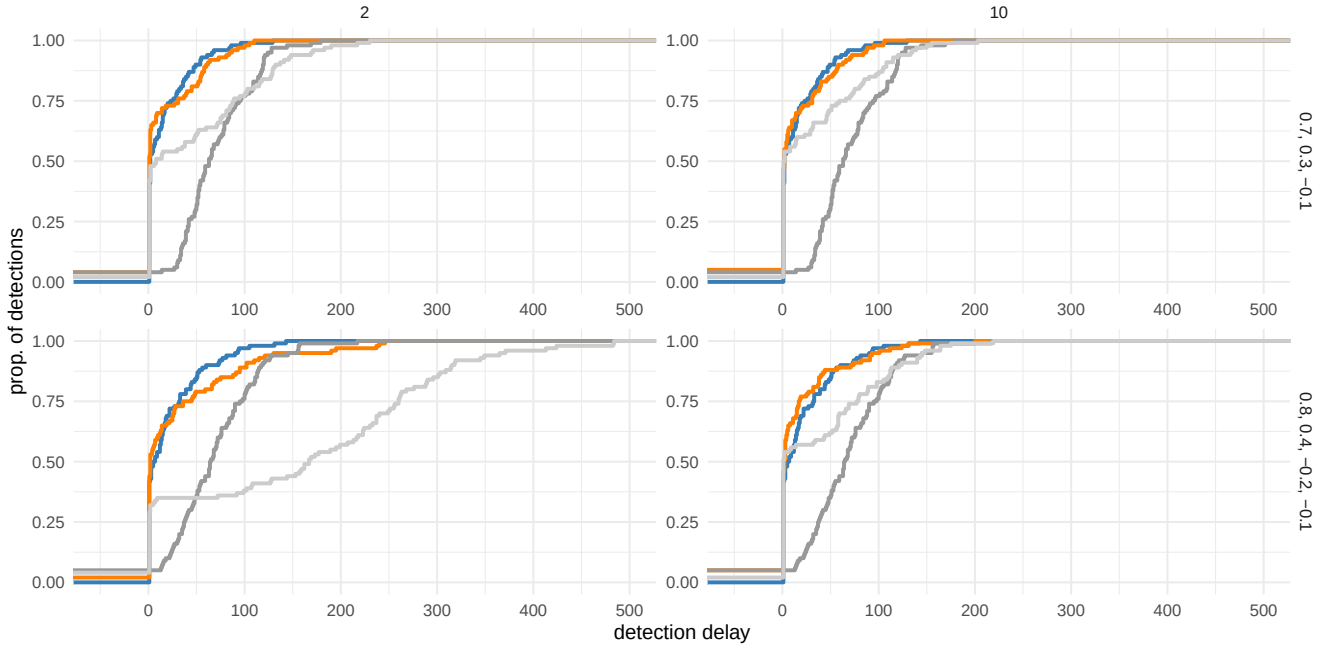


Figure 15: Effect of the maximum assumed AR order on detection performance in the $\text{AR}(1)$ setting. Each row corresponds to a different $\text{AR}(1)$ autocorrelation coefficient; each column to a different assumed maximum order. Blue: $\text{AR}(p)$ -focus oracle; orange: $\text{AR}(p)$ -focus; gray: focus; light gray: focus-prewhiten.

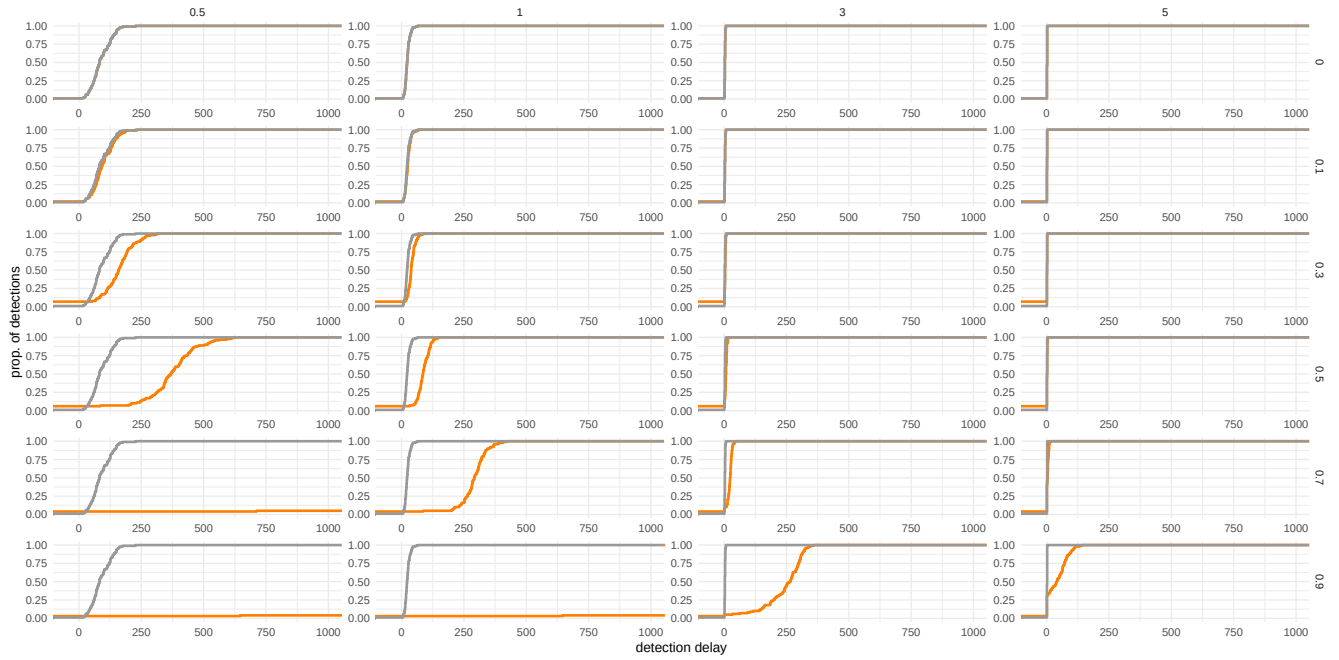


Figure 16: Power loss from misspecifying the AR parameter when the true noise is IID. Each column corresponds to a different change magnitude δ ; each row to a different assumed AR(1) coefficient ρ_1 . Orange: AR(p)-focus; gray: focus.