
Efficient Lookahead Encoding and Abstracted Width for Learning General Policies in Classical Planning

Michael Aichmüller
RWTH Aachen University
Aachen, Germany
michael.aichmueller@ml.rwth-aachen.de

Simon Ståhlberg
RWTH Aachen University
Aachen, Germany
simon.stahlberg@gmail.com

Martin Funkquist
Linköping University
Linköping, Sweden
martin.funkquist@liu.se

Hector Geffner
RWTH Aachen University
Aachen, Germany
hector.geffner@ml.rwth-aachen.de

Abstract

Generalized planning aims to learn policies that generalize across large collections of instances within a classical planning domain. Recent approaches using Graph Neural Networks (GNNs) have shown the ability to learn nearly perfect policies for several domains. This work improves on the recently published idea of Iterated Width (IW) policies. Therein, the policy broadens its successor scope through an IW-lookahead search that offers to “jump” over multiple transitions, simplifying the problem structure. Yet, each transition is evaluated individually leading to unscalable compute and expressivity limitations. Furthermore, while an IW(1) search is attractive due to scaling linearly with the number of atoms in a problem, it still becomes inefficient once thousands of objects are considered like in the International Planning Competition (IPC) 2023 benchmark. In this work, we address both limitations. Firstly, we introduce a vastly more efficient holistic encoding of the entire search tree. It jointly represents IW(1)-reachable states only by their relational differences to the current state, which enables Relational GNNs (R-GNNs) to score all transitions in a single forward pass. Secondly, we define Abstracted IW(1) to improve scaling through relational abstraction during novelty checks. Rather than testing fully instantiated atoms, it abstracts each atom by replacing all but one of its arguments with their types. The original atom is then novel if any of its abstracted forms is. This structural compression shifts the scaling of the novelty search to be linear in the number of objects, rather than atoms, still capturing meaningful subgoal structure. Our contributions are evaluated on the hyperscaling IPC 2023 benchmark and across a broad range of domains, including those that require features beyond the C_2 logic fragment. The results show that our policies achieve a new state-of-the-art performance, significantly surpassing prior work, including classical planners like LAMA.

1 Introduction

Generalized planning aims to learn policies that generalize across large collections of planning problems within the same domain, differing only in initial states, goals, and object counts [Srivastava et al., 2011, Hu and De Giacomo, 2011, Jiménez et al., 2019]. A general policy allows for solving diverse planning problems greedily, eliminating the need for search. Various approaches have been pursued to learn such policies from domain descriptions and training instances, ranging from symbolic to deep learning methods. While symbolic approaches offer transparency and potential correctness

guarantees, they often struggle with scalability [Kharon, 1999, Martín and Geffner, 2004, Fern et al., 2006, Srivastava et al., 2011, Boutilier et al., 2001, Sanner and Boutilier, 2009, Francès et al., 2021]. Conversely, deep learning approaches, though opaque, tend to scale more effectively [Toyer et al., 2020, Bajpai et al., 2018, Rivlin et al., 2020, Ståhlberg et al., 2023].

State-of-the-art generalized planning methods include supervised transformer-based approaches [Rossetti et al., 2024] and unsupervised reinforcement learning (RL) approaches using graph neural networks (GNNs), specifically relational GNNs. Both paradigms achieve impressive results on benchmarks, despite the known expressivity limitations of GNNs and transformers [Xu et al., 2019, Barceló et al., 2020, Grohe, 2021].

Recently, Aichmüller and Geffner [2025] introduced IW-policies, which use the Iterated-Width (IW) algorithm [Lipovetzky and Geffner, 2012] to perform lookahead searches at each state to augment successor choices. This enables “jumps” over multiple transitions, often simplifying the problem structure and reducing expressivity requirements. These are integrated by replacing 1-step transitions (s, s') with multi-step transitions $[s, s']$ identified by IW(1) from s [Aichmüller and Geffner, 2025]. However, the embeddings for each object o were inferred independently for states s and s' , interacting only within the value-function readout. While feasible for small instances, this approach faces key *computational and expressivity limitations* as size increases, because a given state might have many successors, of which each receives a separate and complete encoding of s' .

Our primary contributions address scaling and expressivity through two key innovations. First, we introduce a novel joint encoding approach for an entire tree of state transitions (s, s') , which avoids wastefully re-encoding shared state descriptions. We propose processing atoms from both s and each s' in an *aggregated* encoding within the R-GNN. By recreating the lookahead tree structure within the graph-encoding and representing successors merely by their atom differences to the current state, we compute all values in a single pass, reducing memory usage by over a magnitude.

Second, we propose Abstracted IW(1), a significantly relaxed variant of IW(1). For novelty testing, this variant abstracts state atoms by iteratively replacing all but one argument with their most specific type and tests the abstracted atoms instead. This shifts the worst-case complexity of the search from being linear in the number of atoms to the number of objects. Consequently, Abstracted IW(1) evaluates significantly faster while still capturing meaningful subgoals for task decomposition. Furthermore, this lookahead mitigates the expressivity limitations of models restricted to immediate successors; it simplifies the problem’s cost structure and removes the need for features the R-GNN inherently lacks the expressivity to derive.

These improvements are essential for scaling to large state spaces with numerous successors, a necessity highlighted by the massive instances in the IPC 2023 Learning Track (e.g., a 488-block Blocksworld). Scaling to this level requires both highly efficient IW lookahead and excellent model generalization. By achieving this, our approach outperforms prior work on the benchmark, including the strong LAMA baseline. Finally, the proposed lookahead drives substantial improvements in domains requiring expressivity beyond the standard C_2 logic fragment Drexler et al. [2024].

The paper is organized as follows. We begin with background on classical and generalized planning, and IW, including its use for state-space jumps. We then introduce R-GNNs, followed by the input encodings and the reinforcement learning training procedure. Finally, we present the experimental evaluation, discuss the results, and conclude. Related work is discussed throughout the paper.

2 Planning

Classical Planning. A classical planning instance is a pair $P = \langle D, I \rangle$, where $D = \langle \mathcal{T}, \mathcal{P}, \mathcal{A} \rangle$ is the domain and $I = \langle \mathcal{O}, s_0, g \rangle$ specifies the instance. The domain D consists of a set of types $\mathcal{T}$ organized in a hierarchy, along with a set of predicates $\mathcal{P}$ and actions $\mathcal{A}$. A predicate $P \in \mathcal{P}$ has an arity n and an associated tuple of types $(\tau_1, \dots, \tau_n) \in \mathcal{T}^n$, and an atom $P(x_1, \dots, x_n)$ is formed by applying P to a tuple of terms $(x_1, \dots, x_n)$ of matching types. If all terms are objects from $\mathcal{O}$, the atom is said to be ground. Actions in $\mathcal{A}$ are defined by a name and a typed list of arguments. Each action is associated with a precondition (a set of atoms required to be true) and an effect (sets of atoms to be added or deleted). We denote the set of actions applicable in a state s as $\mathcal{A}[s]$. The instance I defines the set of objects $\mathcal{O}$, where each object $o \in \mathcal{O}$ is assigned a type $\tau \in \mathcal{T}$, the initial

state s_0 , and the goal g , where states are sets of ground atoms. A state s is a goal state if $g \subseteq s$. A plan is a sequence of applicable actions that transforms s_0 into a goal state.

Generalized Planning. A generalized planning problem is a set $\mathcal{Q}$ of planning instances P drawn from the same domain, possibly with different object sets, initial states, and goals. Unlike classical planning, where a solution is typically an open-loop sequence of ground actions, a solution to a generalized problem is a closed-loop policy π that selects actions based on the current state and goals. This policy must work for every instance in $\mathcal{Q}$. Formally, π is correct for $\mathcal{Q}$ if for every $P \in \mathcal{Q}$ the trajectory obtained by repeatedly applying π from the initial state reaches a goal state. Generalized planning thus focuses on compact, reusable control policies that generalize across instances.

3 Iterated Width

Iterated Width (IW) is a search algorithm that prunes states based on their *novelty* [Lipovetzky and Geffner, 2012]. For a state s generated in the search, the novelty $w(s)$ is defined as the size of the smallest tuple of atoms true in s that is false in all previously generated states. If no such tuple exists, the novelty is infinite. $\text{IW}(k)$ is a standard Breadth-First Search (BFS) that prunes any state s with novelty $w(s) > k$. Since the number of atom tuples of size k is polynomial in the number of ground atoms, $\text{IW}(k)$ explores a polynomial number of states. Specifically, $\text{IW}(1)$ runs in time linear in the number of reachable atoms and preserves solvability for problems with width 1.

IW is particularly effective because atomic goals in many classical planning domains exhibit a small width, meaning goals can be reached via sequences of states with persistently low novelty, regardless of problem size. For example, in the Delivery domain, picking up n packages and delivering them requires exactly $2n$ $\text{IW}(1)$ jumps, regardless of grid size or package locations, as each subgoal is achievable within two jumps¹. Consequently, IW provides a guarantee that blind search methods, such as bounded-depth BFS, fundamentally lack.

In this work, we use $\text{IW}(1)$ as a local lookahead mechanism to define “jumps” in the state space. An $\text{IW}(1)$ -jump from s leads to a state s' that is reachable from s using $\text{IW}(1)$. This allows the learned policy to reason only over the endpoints of a subproblem that can be solved efficiently by a low-complexity search, focusing learning on high-level decisions. This approach has been explored previously by Aichmüller and Geffner [2025]. An important benefit of $\text{IW}(1)$ -jumps is that they often reduce the expressive requirements for learning the Q-value function. This is because $\text{IW}(1)$ can solve certain subproblems that would otherwise require more complex features to represent, thus facilitating the learning of a generalized policy.

Abstracted $\text{IW}(k)$ Each n -ary predicate $P(x_1, \dots, x_n)$ grounds $O(|\mathcal{O}|^n)$ many atoms. Thus, although $\text{IW}(1)$ is linear in the number of atoms, the number of atoms itself scales polynomially with the object count. This bottleneck materializes in very large instances and cannot be resolved through straightforward parallelization alone. To avoid this polynomial scaling, we relax width-1 novelty by modifying the novelty calculation itself.

For an n -ary ground atom $P(o_1, \dots, o_n)$ *Abstracted $\text{IW}(1)$* ($\text{AIW}(1)$) iterates over each position i to compress the information content of all but position i ’s object slots via a reduction function $r(o)$. The original atom is considered novel if any of its abstracted atoms $P(r(o_1), \dots, r(o_{i-1}), o_i, r(o_{i+1}), \dots, r(o_n))$ is novel. In this framework, regular $\text{IW}(1)$ corresponds to object identity $r(o) = o$, whereas $\text{AIW}(1)$ replaces objects by their type in the planning domain, i.e., $r(o) = \text{type}(o)$. In domains without a typing hierarchy, AIW treats every object as belonging to the same universal type.

With this modification, the novel atom count is bounded by $O(t^{m-1}|\mathcal{O}|)$, where t is the number of object types and m is the maximum predicate arity. Since both t and m depend only on the domain, the number of novel atoms scales linearly in the problem’s object count. However, goal atoms may require full object identities to be preserved to be safely detected in the lookahead. AIW therefore does not abstract an atom $P(o_1, \dots, o_n)$ if it is mentioned in the goal.

The idea of $\text{AIW}(1)$ extends naturally to a general width- k formulation. Let $\ell = (q_i)_{i \in I}$ be a canonically ordered atom-tuple of size $|I| \leq k$, and let $\mathcal{F}(q_i)$ denote the complete set of abstracted

¹Width-2 goals cannot always be decomposed into width-1 subgoals solvable by $\text{IW}(1)$ [Bonet and Geffner, 2024].

forms of atom q_i as described above. Then ℓ has *abstracted novelty at most k* if there exists a non-empty index set $J \subseteq I$ such that the abstracted tuple $(a_j)_{j \in J}$ with $a_j \in \mathcal{F}(q_j)$ has not been seen before in the search. Equivalently, $\text{AIW}(k)$ replaces the original subtuples of ℓ considered by standard $\text{IW}(k)$ novelty with all abstracted tuples induced by ℓ , and marks ℓ novel if any abstracted tuple is.

Although $\text{AIW}(k)$ loses the completeness guarantees of $\text{IW}(k)$ for problems of width k , it yields an efficiently scaling search that still induces meaningful subproblem structure. In this paper, we focus on $\text{AIW}(1)$, which allows us to overcome the branching hurdles of even the largest test instances in several IPC domains. Unless stated otherwise in the remainder, IW and AIW refer to $\text{IW}(1)$ and $\text{AIW}(1)$, respectively².

4 Relational Graph Neural Networks

While standard Graph Neural Networks (GNNs) operate on graphs, planning states are relational structures involving predicates of varying arities. Relational GNNs (R-GNNs) as used in Planning [Ståhlberg et al., 2022a] adapt standard message-passing GNNs to such structures by treating ground atoms as message sources that communicate information to the objects they involve. Indeed, by accommodating non-symmetric relations of arbitrary arity, R-GNNs generalize the standard homogeneous graph setting, where relations are typically represented as symmetric binary edges of a single type. Although such relations can be compiled away to obtain an equivalent GNN representation [Drexler et al., 2024], R-GNNs provide a higher-level abstraction that directly matches the relational state representations used in classical planning.

Concretely, each object $o \in \mathcal{O}$ has an embedding $f_i(o) \in \mathbb{R}^k$ at iteration i , initialized to $f_0(o) = \mathbf{0}$. An R-GNN takes as input a set of atoms, commonly a state s extended with the goal atoms, and produces final embeddings $f_L(o)$, where L is the number of R-GNN layers. These final embeddings are then used to define the value or Q-functions that implicitly encode the policies.

Let $\mathcal{R}$ be a set of ground atoms. Then the embeddings are updated by message aggregation and updates for a fixed number of iterations as:

$$f_{i+1}(o) = f_i(o) + \text{comb}_U(f_i(o), m_o),$$

where m_o is the aggregated message received by o from all atoms that mention it. Each ground atom $q = P(o_1, \dots, o_n) \in \mathcal{R}$ computes a set of position-wise messages $\{m_{q,o_j}\}_{j=1}^n$ by applying a predicate-specific function comb_P to the embeddings of the participating objects:

$$(m_{q,o_1}, \dots, m_{q,o_n}) = \text{comb}_P(f_i(o_1), \dots, f_i(o_n)).$$

In other words, comb_P maps the tuple of object embeddings for atom q to a tuple of message vectors, one per argument position. The aggregated message for object o collects all such position-wise messages over atoms that contain o :

$$m_o = \text{agg}(\{m_{q,o} : q \in \mathcal{R}, o \in q\}).$$

Here, it is important that $\text{agg}(\cdot)$ is a permutation-invariant function (e.g., maximization or summation).

We use the implementation provided by Ståhlberg and Geffner (2026), which uses maximization as the aggregation function and multi-layer perceptrons (MLPs) as the combination functions. Each MLP consists of two hidden layers with Mish activations [Misra, 2020].

Expressivity. The expressive power of GNNs is tightly linked to the Weisfeiler-Lehman (WL) test [Morris et al., 2019, Xu et al., 2019] and C_2 logic [Cai et al., 1992, Barceló et al., 2020, Grohe, 2021]. This expressivity can be increased by defining vertices as k -tuples, yielding k -GNNs that match the power of k -WL and C_k logic for $k > 2$. However, these more expressive architectures are data-hungry and difficult to train. While architectures with C_3 power appear sufficient for most planning benchmarks [Drexler et al., 2024], recent work suggests that theoretical expressiveness does not always translate to performance. For instance, Edge Transformers, which possess C_3 power [Bergen et al., 2021, Müller et al., 2024], often underperform in non- C_2 domains compared to more efficient architectures that do not aim to capture the full expressivity of C_3 [Ståhlberg et al., 2025].

²We also considered a capacity-limited variant (C-AIW) that restricts the retained states per depth, and a version that forces object abstraction to a universal type in Base-Abstracted IW (BAIW). Details and results on these variants are in the appendix.

5 Transition Encodings in R-GNNs

Precisely how states and transitions are encoded as inputs to R-GNNs affects the expressiveness of the resulting architecture. Ståhlberg et al. (2025) showed that the expressiveness of R-GNNs can go beyond C_2 simply by changing the input encoding, and successfully learn general policies for domains that require C_3 expressivity. However, these encodings are not practical for large states as all possible object pairs need to be part of the input. Alternative encodings and their impact on expressiveness have also been studied by Horčík and Sír (2024) and Horčík et al. (2025).

Formally, the R-GNN input consists of a set of ground atoms $\mathcal{R}$ that describe the current state, the goal, and optionally one or more successor states or actions. Different choices for $\mathcal{R}$ yield different encodings and different readout modalities. In our approach we adopt the current state s encoding from Ståhlberg et al. [2022b]. Let $\mathcal{O}$ be the set of objects in s , and let $\bar{o}$ denote a tuple of objects. The atoms representing s are given by:

$$\mathcal{R}^s = \{P(\bar{o}) \mid P(\bar{o}) \in s\} \cup \{P_{G,T}(\bar{o}) \mid P(\bar{o}) \in g \cap s\} \cup \{P_{G,F}(\bar{o}) \mid P(\bar{o}) \in g \setminus s\}.$$

Goal predicates $P_{G,T}$ and $P_{G,F}$ are included to distinguish goal atoms that are true in s from those that are false. This distinction is crucial, as R-GNNs may lack the expressiveness to infer these for predicates of arity greater than one [Francès et al., 2021, Chen et al., 2024, Drexler et al., 2024].

External Encoding. This encoding serves as a baseline, first used by Ståhlberg et al. [2023] and later adapted for IW-policies by Aichmüller and Geffner [2025]. It processes the current state s and the successor state s' separately, combining them only at the readout stage to produce Q-values. Specifically, the R-GNN generates embeddings for $\mathcal{R}^s$ and $\mathcal{R}^{s'}$ independently. Formally, let $f(o; \mathcal{R}^s)$ and $f(o; \mathcal{R}^{s'})$ be the embeddings of object o after the final iteration using $\mathcal{R}^s$ and $\mathcal{R}^{s'}$, respectively. The Q-value for a transition to s' is computed as:

$$Q(s, s') = \text{MLP}_1 \left(\sum_{o \in \mathcal{O}} \text{MLP}_2 \left(f(o; \mathcal{R}^s), f(o; \mathcal{R}^{s'}) \right) \right),$$

where MLP_1 and MLP_2 are multi-layer perceptrons. Crucially, since the R-GNN processes states independently, it cannot compute differences during message passing. The inner MLP combines the embeddings of each object from both states, marking their first interaction.

Aggregated-Actions (AA) Encoding. This second baseline, presented by Ståhlberg and Geffner (2026), represents successor states via ground actions. Consequently, this encoding applies only to learning flat policies that select primitive actions. Formally, for a current state s , the input is:

$$\mathcal{R}^A = \mathcal{R}^s \cup \{P_A(o_a, \bar{o}) \mid a \in \mathcal{A}[s], a = A(\bar{o})\},$$

where o_a is a new object representing ground action a . Here, A is the name of the action schema. The Q-value for ground action a is computed as:

$$Q(s, a) = \text{MLP} \left(f(o_a; \mathcal{R}^A), \sum_{o \in \mathcal{O}} f(o; \mathcal{R}^A) \right),$$

where $f(o_a; \mathcal{R}^A)$ is the final embedding of the action object o_a , and $f(o; \mathcal{R}^A)$ are the final embeddings of the original objects. Since the effects of ground action a are not explicitly represented, the R-GNN must infer them from the action name and arguments.

Aggregated-Delta (AD) Encoding. In our proposed encoding scheme of Aggregated-Delta, we move from representing each transition $s \rightarrow s'$ individually to instead representing the entire tree jointly. Let $\mathcal{T} = (V, E)$ represent an IW (or its variants) directed lookahead tree from root state s .

We represent the root state implicitly via the relation set $\mathcal{R}^s$ again. However, to compactly represent successors we introduce an explicit state object-node $o_{s'}$ for each $s' \in V \setminus \{s\}$ and encode only its added predicates $P^+(o_{s'}, \bar{o})$ for atoms in $s' \setminus s$ and deleted predicates $P^-(o_{s'}, \bar{o})$ for atoms in $s \setminus s'$. Crucially, the added and deleted predicates are anchored to their state object $o_{s'}$. This allows the R-GNN to compute embeddings for each state object $o_{s'}$ based on its differences from the root.

For each edge $(s', s'') \in E(\mathcal{T})$ a new atom $P_E(o_{s'}, o_{s''})$ representing the transition is added that allows the successors to exchange information directly, instead of only indirectly via the problem's object nodes. Another benefit of encoding the tree as a whole is the option to represent relative

search depth of successors in a structural way. To this end, we embed depth nodes o_d for each depth $d \leq d_{\max}(\mathcal{T})$ and imply an order through auxiliary atoms $P_D(o_d, o_{d'})$ whenever $d < d'$. Depth-information flows back into state-nodes via state-depth association atoms $P_{SD}(o_{s'}, o_d)$ for each successor s' at depth d . The complete set of atoms added to the input is then:

$$\begin{aligned}\mathcal{R}^{\mathcal{T}} &= \mathcal{R}^s \cup \mathcal{R}_E^{\mathcal{T}} \cup \mathcal{R}_D^{\mathcal{T}} \cup \bigcup_{s' \in V(\mathcal{T}) \setminus \{s\}} \mathcal{R}_{\Delta s'}^{\mathcal{T}}, \text{ where} \\ \mathcal{R}_E^{\mathcal{T}} &= \{P_E(o_{s'}, o_{s''}) \mid (s', s'') \in E(\mathcal{T})\}, \\ \mathcal{R}_D^{\mathcal{T}} &= \{P_D(o_d, o_{d'}) \mid d < d'\} \cup \{P_{SD}(o_{s'}, o_d) \mid s' \in V(\mathcal{T}) \text{ at depth } d\}, \\ \mathcal{R}_{\Delta s'}^{\mathcal{T}} &= \{P^+(o_{s'}, \bar{o}) \mid P(\bar{o}) \in s' \setminus s\} \cup \{P^-(o_{s'}, \bar{o}) \mid P(\bar{o}) \in s \setminus s'\} \\ &\quad \cup \{P_G^+(o_{s'}, \bar{o}) \mid P(\bar{o}) \in g \cap (s' \setminus s)\} \cup \{P_G^-(o_{s'}, \bar{o}) \mid P(\bar{o}) \in g \cap (s \setminus s')\}.\end{aligned}$$

Finally, the Q-value to state $s' \in V(\mathcal{T})$ is computed similarly as in AA:

$$Q(s, s') = \text{MLP}\left(f(o_{s'}; \mathcal{R}^{\mathcal{T}}), \sum_{o \in \mathcal{O}} f(o; \mathcal{R}^{\mathcal{T}})\right).$$

Including both the state object embedding $f(o_{s'}; \mathcal{R}^{\mathcal{T}})$ and the aggregated original object embeddings $\sum_{o \in \mathcal{O}} f(o; \mathcal{R}^{\mathcal{T}})$ is vital to provide context about s when evaluating the jump to s' . Although using only the first term is possible, representing both states with a single embedding proves difficult in practice. During readout, we compute Q-values for all states $s' \in V(\mathcal{T})$ in a single batch.

AD improves resource usage in two ways. First, root-state embedding reuse reduces the number of required embeddings and the associated memory footprint by a factor of $|V(\mathcal{T})|$. Second, representing states through atom changes avoids message and gradient creation proportional to the number of atoms. As a result, IW-policy models that previously exceeded 24GB of VRAM become trainable with at most 4GB.

Between External and AD encodings, two meaningful interpolations are possible. The first, *internal*, still encodes each transition $s \rightarrow s'$ separately, but represents the transition in a single graph over shared object nodes. It uses the full state description $\mathcal{R}_{\mathcal{P}}^s$ for s and a duplicated predicate set $\mathcal{R}_{\mathcal{P}}^{s'}$ for s' . The second, *internal-delta*, also encodes each transition separately, but represents s' by delta predicates $\mathcal{R}_{\Delta s'}^s$ without an explicit $o_{s'}$ state-node, while s remains encoded through $\mathcal{R}^s$. Neither interpolation matches AD performance, since both lack tree-level communication between successor nodes. Still, both serve as ablations for the benefits of compact internalized inputs. Detailed results are provided in the appendix.

6 Learning Generalized Policies

The R-GNN is trained using deep Q-learning [Mnih et al., 2015], following the approach of Ståhlberg and Geffner (2026), which uses a lifted variant of hindsight relabeling. The objective is to learn a Q-value function $Q(s, s')$ that estimates the expected cumulative reward of performing a transition from state s to successor state s' . In this paper, the reward is always defined as -1 . Thus, the Q-value approximately represents the negative expected number of transitions to reach the goal from state s .

Additionally, AD encodings introduced depth information of successors as inductive bias which we enforce via an auxiliary loss. Such is beneficial whenever the distance of IW-jumps is crucial in an environment. For example, in the Spanner domain, the agent can only move forward and collect items on location, meaning bypassed items cannot be retrieved later. If the agent jumps to pick up the farthest spanner, it often guarantees a dead-end state. This loss ensures that distance information is properly learned, helping the agent acquire a strategy that avoids failure. Since absolute label classification or value regression cannot generalize to values unseen during training, we enforce depth order by adapting the ranking loss of Burges et al. [2005] over (o_k, o_l) pairs with $k < l$. To this end, a small probe matrix W_θ computes a score $z_d = W_\theta f(o_d)$ from each final depth-node embedding. Then, letting $w_{k,l} = 1/(l - k)$ and $Z = \sum_{k < l \leq d_{\max}} w_{k,l}$ each such depth-node pair is compared in a rank-loss $\mathcal{L}_{d\text{-rank}} = \frac{1}{Z} \sum_{k < l \leq d_{\max}} w_{k,l} \log(1 + \exp(z_k - z_l))$ where $d_{\max}$ is the maximum realized depth in that sample’s IW tree. This enforces deeper nodes to receive larger scores relative to shallower ones in a generalizing manner. Stochastic gradient descent updates the R-GNN parameters to minimize the aggregated loss over sampled mini-batches.

Domain	AIW-AD	IW-AD	AIW-Ext	IW-Ext	Flat-AA	LAMA*	Distinctor*	GOOSE*
blocksworld (90)	90 (100)	65 (72)	78 (87)	59 (66)	76 (84)	57 (63)	88 (98)	75 (83)
easy (30)	30 (100)	30 (100)	30 (100)	30 (100)	30 (100)	30 (100)	n/a	n/a
medium (30)	30 (100)	30 (100)	30 (100)	29 (97)	30 (100)	24 (80)	n/a	n/a
hard (30)	30 (100)	5 (17)	18 (60)	0 (0)	16 (53)	3 (10)	n/a	n/a
miconic (90)	90 (100)	90 (100)	72 (80)	72 (80)	84 (93)	90 (100)	90 (100)	90 (100)
easy (30)	30 (100)	30 (100)	30 (100)	30 (100)	30 (100)	30 (100)	n/a	n/a
medium (30)	30 (100)	30 (100)	30 (100)	30 (100)	30 (100)	30 (100)	n/a	n/a
hard (30)	30 (100)	30 (100)	12 (40)	12 (40)	24 (80)	30 (100)	n/a	n/a
spanner (90)	90 (100)	61 (68)	32 (36)	55 (61)	90 (100)	30 (33)	90 (100)	73 (81)
easy (30)	30 (100)	30 (100)	30 (100)	27 (90)	30 (100)	30 (100)	n/a	n/a
medium (30)	30 (100)	30 (100)	2 (7)	27 (90)	30 (100)	0 (0)	n/a	n/a
hard (30)	30 (100)	1 (3)	0 (0)	1 (3)	30 (100)	0 (0)	n/a	n/a
satellite (90)	88 (98)	55 (61)	61 (68)	56 (62)	51 (57)	90 (100)	48 (53)	53 (59)
easy (30)	30 (100)	30 (100)	30 (100)	30 (100)	30 (100)	30 (100)	n/a	n/a
medium (30)	30 (100)	25 (83)	30 (100)	26 (87)	21 (70)	30 (100)	n/a	n/a
hard (30)	28 (93)	0 (0)	1 (3)	0 (0)	0 (0)	30 (100)	n/a	n/a
transport (90)	86 (96)	74 (82)	55 (61)	66 (73)	74 (82)	72 (80)	50 (56)	29 (32)
easy (30)	30 (100)	30 (100)	29 (97)	30 (100)	29 (97)	30 (100)	n/a	n/a
medium (30)	29 (97)	30 (100)	19 (63)	30 (100)	25 (83)	30 (100)	n/a	n/a
hard (30)	27 (90)	14 (47)	7 (23)	6 (20)	20 (67)	12 (40)	n/a	n/a
ferry (90)	80 (89)	76 (84)	71 (79)	67 (74)	62 (69)	74 (82)	83 (92)	76 (84)
easy (30)	30 (100)	30 (100)	30 (100)	30 (100)	29 (97)	30 (100)	n/a	n/a
medium (30)	30 (100)	30 (100)	30 (100)	30 (100)	29 (97)	30 (100)	n/a	n/a
hard (30)	20 (67)	16 (53)	11 (37)	7 (23)	4 (13)	14 (47)	n/a	n/a
rovers (90)	67 (74)	62 (69)	24 (27)	36 (40)	27 (30)	78 (87)	42 (47)	37 (41)
easy (30)	30 (100)	30 (100)	24 (80)	30 (100)	27 (90)	30 (100)	n/a	n/a
medium (30)	24 (80)	25 (83)	0 (0)	6 (20)	0 (0)	30 (100)	n/a	n/a
hard (30)	13 (43)	7 (23)	0 (0)	0 (0)	0 (0)	18 (60)	n/a	n/a
childsnack (90)	64 (71)	33 (37)	47 (52)	37 (41)	41 (46)	36 (40)	64 (71)	29 (32)
easy (30)	30 (100)	28 (93)	30 (100)	30 (100)	27 (90)	30 (100)	n/a	n/a
medium (30)	30 (100)	5 (17)	17 (57)	7 (23)	12 (40)	5 (17)	n/a	n/a
hard (30)	4 (13)	0 (0)	0 (0)	0 (0)	2 (7)	1 (3)	n/a	n/a
sokoban (90)	13 (14)	13 (14)	17 (19)	15 (17)	14 (16)	44 (49)	32 (36)	38 (42)
easy (30)	13 (43)	13 (43)	17 (57)	15 (50)	14 (47)	30 (100)	n/a	n/a
medium (30)	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)	14 (47)	n/a	n/a
hard (30)	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)	n/a	n/a
floortile (90)	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)	15 (17)	2 (2)	2 (2)
easy (30)	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)	15 (50)	n/a	n/a
medium (30)	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)	n/a	n/a
hard (30)	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)	n/a	n/a
Total (900)	668 (74)	529 (59)	457 (51)	463 (51)	519 (58)	586 (65)	589 (65)	502 (56)

Table 1: IPC 2023 benchmark coverage results for AIW with AD encoding (highlighted in bold) against ablations and baselines. Methods marked * perform exponential search at test time. Numbers in parentheses are percentages of row totals.

During training, exploration is encouraged using a Boltzmann policy, where the probability of selecting a successor state s' from state s is given by $P(s' | s) \propto \exp(Q(s, s')/\tau)$, where τ is the temperature parameter that controls the exploration-exploitation trade-off.

7 Experiments

We detail the experimental benchmarks, training and testing setup, and discuss the results.

Domains and Data. Before diving into the specifics, it is important to contextualize these benchmarks, as our evaluation differs from standard practices in deep learning and RL. First, our objective is strictly binary goal-reaching from an initial state in a goal-conditioned RL setting with extremely sparse rewards; unlike typical RL setups, there is no accumulated reward signal or partial degree of success. Second, we focus on zero-shot structural generalization: models are trained on small instances and tested on significantly larger ones, often featuring more than 10–20 times the number of objects seen during training and an exponentially larger state space. For example, in the Blocksworld domain, training is performed on instances with up to 20 blocks and testing on instances with up to 488 blocks. In contrast, standard ML benchmarks typically evaluate on test distributions of similar scale to the training set. Finally, to rigorously test the robustness of the learned representations, we evaluate using strictly greedy, deterministic policies. While we use a limited lookahead search, the agent must commit to its “jumps” without the safety net of backtracking or multiple stochastic rollouts

common in other RL approaches. This ensures we are measuring the true generalization capacity of the learned policy itself, rather than the compensatory power of an extensive search algorithm.

We evaluate our approach on two benchmark sets: hard-to-learn domains from Drexler et al. [2024] that require more than C_2 logic expressivity, and the IPC Learning Track 2023 [Taitler et al., 2024]. This means that both training and testing has been carried out in instances that are much larger than those used in previous works on general policy learning. Detailed domain descriptions and an overview of the train, validation and test sets are available in the appendix, where we also provide a visualization of the immense scaling factors present in the IPC benchmark.

Training. Our implementation is based on PyTorch and extends the codebase of Ståhlberg and Geffner [2026]. The architecture remains unchanged; methods differ only in their input encoding and hyperparameters. We set the embedding size to 32 and used smooth maximum aggregation. The learning rate decayed linearly from 10^{-3} to 10^{-5} over 300 episodes. Similarly, the Boltzmann temperature decayed linearly from 1.0 to 0.1 over 1000 episodes. The discount factor was set to 0.999. Each episode consisted of 32 optimization steps with a batch size of 32. The replay buffer size was 100 for IW-policies and 1000 for flat-policies. We generated 4 trajectories per episode, each capped at 20 IW jumps or 200 action steps. We trained 5 seeds per method and domain on a cluster with an Intel Xeon Platinum 8352M CPU, 20 GB RAM, and an NVIDIA A10/L40S GPU capped at 24GB, with a time limit of 12 hours. Model selection was based on validation coverage; in case of ties, we prioritized the shortest total solution length, followed by the lowest total TD-error, and finally random selection. We test the best 5 checkpoints among all runs and report the best outcome.

Testing. We evaluate policies on the test set using a greedy strategy over Q-value functions. We consider two types of goal-conditioned policies: flat policies that select primitive actions, and IW-policies that select IW-jumps as described in the background. At each step, the policy selects the successor state $s^* = \arg \max_{s' \in \mathcal{S}} Q(s, s')$ that maximizes the Q-value among all valid successors $\mathcal{S}$. To ensure progress and avoid infinite loops, we maintain a history of visited states within the current episode and exclude any transition to a previously visited state from the candidate successors. The evaluation continues until the goal condition is satisfied ($g \subseteq s$), or until a resource limit is exhausted. We enforce a limit of 1,000 choices and a timeout of 15 and 60 minutes per instance for flat- and IW-policies, respectively. We test the following methods:

- (a) *AIW-AD*: Our full proposed method of combining AIW with AD encoding.
- (b) *IW-AD*: IW-policies [Aichmüller and Geffner, 2025] using our proposed AD encoding. This method compares the unidimensional improvement made by more efficient encodings.
- (c) *AIW Ext*: AIW-policies using the baseline’s External encoding. This method compares the unidimensional improvement made by the relaxed IW-lookahead variant.
- (d) *IW Ext*: IW-policies using External encodings, the direct baseline.
- (e) *Flat AA*: This baseline uses the AA encoding [Ståhlberg and Geffner, 2026] (see Section 5) and relies entirely on the greedy selection of primitive actions that to not result in a cycle.
- (f) *LAMA* – The classical planner LAMA [Richter and Westphal, 2008] which uses a best-first search to first find a plan and then improves it using iterated weighted A^* search. LAMA was given 1 hour and 90 GB of memory per instance.
- (g) *Distincter*: Distincter Bai et al. [2025] uses Greedy Best-First Search (GBFS) with GNNs that provides both heuristic guidance and approximate symmetry detection. To prioritize speed, the GNNs rely on a shallow 3–4 layer architecture; however, this restricted expressivity risks falsely identifying distinct states or actions as symmetric.
- (h) *GOOSE*: WL-GOOSE Chen et al. [2024] diverges from deep learning approaches by using the WL algorithm alongside classical machine learning models to learn search heuristics from scratch. Rather than relying on GNNs, it colors a graph (specifically, the ILG) and uses the resulting color counts to define its heuristic. This strikes a good balance between computational efficiency and heuristic quality, resulting in competitive performance when used with GBFS.

We also tested BAIW, C-AIW, and Flat policies using AD encoding in the appendix. We note that all (A)IW and flat policy methods – baseline or not – are trained via the described learning method in this paper, including the usage of lifted HER [Ståhlberg and Geffner, 2026]. Technically, extending

the IW(1) policies of Aichmüller and Geffner [2025] with lifted HER is also first presented in this paper, yet we consider this straightforward. The results for Distincter and WL-GOOSE – trained with supervised learning – are taken directly from their original papers, which used a timeout of 30 minutes and 8 GB of memory.

Results Table 1 reports coverage on the IPC 2023 benchmark. In summary, AIW-AD yields the strongest overall coverage among all methods and improves substantially over every baseline. It also surpasses the classical planning baseline LAMA by a wide margin. To our knowledge, the only previous method to exceed LAMA on this benchmark is Bai et al. [2025], and only by a small margin. Here, the gain over LAMA is obtained *without resorting to an exponential search*: AIW runs in time linear in the number of objects and is invoked only a bounded number of times in sequence.

The main remaining failure cases are *Sokoban* and *Floortile*. Sokoban is PSPACE-complete [Culberson, 1997], making it difficult to learn a Q-function that generalizes well enough to replace search. This difficulty is reflected in the results, where only search-based methods solve a non-trivial subset of its instances. Floortile poses a different challenge: under our Q-learning setup with Hindsight Experience Replay (HER), the domain provides a weak training signal. Success requires precise action sequences to avoid dead ends, but failed trajectories are rarely relabeled into useful supervision for learning such sequences. However, no evaluated method performs convincingly on either domain.

Outside these puzzle domains, performance is consistently strong. In nearly all other domains, AIW-AD solves all easy and medium instances, and most hard instances, with the main remaining gaps concentrated in Rovers and Childsnack. Childsnack exposes a scaling regime that is prohibitive for methods that choose discriminatively from an explicitly enumerated set of options. On the hardest instances, the branching factor reaches tens of millions of applicable actions. Mere action enumeration requires up to 10 minutes, despite highly optimized software and latest hardware, rendering decision-making from fully enumerated options unlikely to scale under reasonable budgets. C-AIW solves six additional hard instances and raises coverage in this domain to 70/90, the best result to date, to the best of our knowledge. Yet, further progress on Childsnack will likely require models that opt to generate decisions compositionally rather than select them from an enumerated set.

These results show that abstracted width-based lookaheads improve scalability, while also preserving a useful subgoal structure that learned models can exploit. Previous work showed that IW lookaheads can simplify the cost structure and lower the expressive requirements for learned policies [Aichmüller and Geffner, 2025]. Our results show that this effect persists at scale and also under abstracted width-1 lookaheads, despite more aggressive pruning. This is most evident in Satellite and Rovers, two domains known to require features beyond the C_2 logic fragment [Drexler et al., 2024, Ståhlberg et al., 2022a]. Satellite is fully solved by AIW-AD. On Rovers, some hard instances remain unresolved, but the gains over previous learned approaches are substantial. Moreover, performance improves steadily as the local scope is expanded from primitive successors to BAIW, C-AIW, and finally AIW successors, underscoring the value of principled lookaheads.

The same pattern carries over to a list of domains not included in the IPC 2023 benchmark (see Table 2, appendix), especially containing Grid and Logistics, which also lie beyond C_2 logic. There, more aggressive abstraction failed: BAIW reaches only 48% test coverage in Logistics due to pruning too aggressively. However, it still achieves full coverage on Grid. By contrast, AIW-AD attains full coverage on both domains again. Together, these results show that AIW-AD is not only effective on the IPC 2023 benchmark, but also on a vast set of structurally diverse domains.

8 Conclusions

We introduced two main contributions. First, we proposed Aggregated-Delta (AD) encodings for R-GNNs, which represent transitions through state differences and combine all lookahead successors into a single relational graph. This enables IW-based successors to be evaluated in one forward pass, greatly reducing memory and runtime costs and removing the main scalability bottleneck of previous IW-policy formulations. Second, we introduced Abstracted IW (AIW), a stricter IW variant that reduces the novelty-based search space by modifying novelty calculation itself.

Together, these contributions yield a new state of the art in generalized planning. On the IPC 2023 benchmark, AIW combined with AD significantly outperforms all previous baselines, including the strong baseline LAMA. The key point is not only that the learned policy improves, but also that AD

makes larger lookaheads practical, especially with AIW, whose novelty search scales with object counts rather than atom counts. At the same time, the results show that the stronger abstractions used by AIW still preserve meaningful subgoals that learned models can exploit. The gains on Satellite, Rovers, Grid, and Logistics – domains that require beyond- C_2 expressiveness – suggest that AIW reduces the expressive burden on the architecture in two ways. First, AIW induces a simpler cost structure by replacing sequences of primitive decisions with jump endpoints. Second, because intermediate states inside such jumps are handled by the lookahead rather than by the network, the learned policy can avoid distinctions that would otherwise require features beyond C_2 . Together, these effects show that efficient width-based lookahead enable general policies to scale not only by reducing search cost, but also by reducing what the learned architecture must represent.

Acknowledgments and Disclosure of Funding

We thank Jonas Gösgens and Niklas Jansen for their helpful discussions and insights during the development of this work. The research has been supported by the Alexander von Humboldt Foundation with funds from the Federal Ministry for Education and Research, Germany. This project has received funding from the European Research Council (ERC) under the European Union’s Horizon 2020 research and innovations programme (Grant agreement No. 885107). This project was also funded by the German Federal Ministry of Education and Research (BMBF) and the Ministry of Culture and Science of the German State of North Rhine-Westphalia (MKW) under the Excellence Strategy of the Federal Government and the Länder.

References

- Michael Aichmüller and Hector Geffner. Sketch decompositions for classical planning via deep reinforcement learning. In *Proceedings of the 34th International Joint Conference on Artificial Intelligence (IJCAI 2025)*, pages 8438–8446, 2025.
- Yingbin Bai, Sylvie Thiébaux, and Felipe Trevizan. Learning efficiency meets symmetry breaking. *Proceedings of the International Conference on Automated Planning and Scheduling (ICAPS 2025)*, 35(1):154–159, 2025.
- Aniket Nick Bajpai, Sankalp Garg, et al. Transfer of deep reactive policies for mdp planning. In *Proceedings of the 32nd Annual Conference on Neural Information Processing Systems (NeurIPS 2018)*, pages 10965–10975, 2018.
- Pablo Barceló, Egor Kostylev, Mikaël Monet, Jorge Pérez, Juan Reutter, and Juan-Pablo Silva. The logical expressiveness of graph neural networks. In *Proceedings of the 8th International Conference on Learning Representations (ICLR 2020)*, 2020.
- Leon Bergen, Timothy J. O’Donnell, and Dzmitry Bahdanau. Systematic generalization with edge transformers. In *Proceedings of the 35th Annual Conference on Neural Information Processing Systems (NeurIPS 2021)*, pages 1390–1402, 2021.
- Blai Bonet and Hector Geffner. General policies, subgoal structure, and planning width. *Journal of Artificial Intelligence Research*, 80:475–516, 2024.
- Craig Boutilier, Raymond Reiter, and Bob Price. Symbolic dynamic programming for first-order MDPs. In *Proceedings of the 17th International Joint Conference on Artificial Intelligence (IJCAI 2001)*, pages 690–700, 2001.
- Chris Burges, Tal Shaked, Erin Renshaw, Ari Lazier, Matt Deeds, Nicole Hamilton, and Greg Hullender. Learning to rank using gradient descent. In *Proceedings of the 22nd International Conference on Machine Learning (ICML 2005)*, pages 89–96, 2005.
- Jin-Yi Cai, Martin Fürer, and Neil Immerman. An optimal lower bound on the number of variables for graph identification. *Combinatorica*, 12(4):389–410, 1992.
- Dillon Z. Chen, Felipe W. Trevizan, and Sylvie Thiébaux. Return to tradition: Learning reliable heuristics with classical machine learning. In *Proceedings of the 34th International Conference on Automated Planning and Scheduling (ICAPS 2024)*, pages 68–76, 2024.
- Joseph C. Culberson. Sokoban is PSPACE-complete. Technical Report TR 97-02, Department of Computing Science, The University of Alberta, Edmonton, Alberta, Canada, 1997.
- Dominik Drexler, Simon Ståhlberg, Blai Bonet, and Hector Geffner. Symmetries and expressive requirements for learning general policies. In *Proceedings of the 21st International Conference on Principles of Knowledge Representation and Reasoning (KR 2024)*, 2024.
- Alan Fern, SungWook Yoon, and Robert Givan. Approximate policy iteration with a policy language bias: Solving relational markov decision processes. *Journal of Artificial Intelligence Research*, 25: 75–118, 2006.

- Guillem Francès, Blai Bonet, and Hector Geffner. Learning general planning policies from small examples without supervision. In *Proceedings of the 35th AAAI Conference on Artificial Intelligence (AAAI 2021)*, pages 11801–11808, 2021.
- Martin Grohe. The logic of graph neural networks. In *Proc. LICS*, pages 1–17, 2021.
- Rostislav Horčík and Gustav Sír. Expressiveness of graph neural networks in planning domains. In *Proceedings of the 34th International Conference on Automated Planning and Scheduling (ICAPS 2024)*, 2024.
- Rostislav Horčík, Gustav Sír, Vítězslav Simek, and Tomáš Pevný. State encodings for gnn-based lifted planners. In *Proceedings of the 39th AAAI Conference on Artificial Intelligence (AAAI 2025)*, pages 26525–26533, 2025.
- Yuxiao Hu and Giuseppe De Giacomo. Generalized planning: Synthesizing plans that work for multiple environments. In *Proceedings of the 22nd International Joint Conference on Artificial Intelligence (IJCAI 2011)*, pages 918–923, 2011.
- Sergio Jiménez, Javier Segovia-Aguas, and Anders Jonsson. A review of generalized planning. *The Knowledge Engineering Review*, 34:e5, 2019.
- Roni Khardon. Learning action strategies for planning domains. *Artificial Intelligence*, 113:125–148, 1999.
- Nir Lipovetzky and Hector Geffner. Width and serialization of classical planning problems. In *Proceedings of the 20th European Conference on Artificial Intelligence (ECAI 2012)*, pages 540–545, 2012.
- Mario Martín and Hector Geffner. Learning generalized policies from planning examples using concept languages. *Applied Intelligence*, 20(1):9–19, 2004.
- Diganta Misra. Mish: A self regularized non-monotonic activation function. In *Proceedings of the 31st British Machine Vision Conference (BMVC 2020)*. BMVA Press, 2020.
- Volodymyr Mnih, Koray Kavukcuoglu, David Silver, Andrei A. Rusu, Joel Veness, Marc G. Belle-mare, Alex Graves, Martin A. Riedmiller, Andreas Kirkeby Fidjeland, Georg Ostrovski, Stig Petersen, Charlie Beattie, Amir Sadik, Ioannis Antonoglou, Helen King, Dharshan Kumaran, Daan Wierstra, Shane Legg, and Demis Hassabis. Human-level control through deep reinforcement learning. *Nature*, 518:529–533, 2015.
- Christopher Morris, Martin Ritzert, Matthias Fey, William L Hamilton, Jan Eric Lenssen, Gaurav Rattan, and Martin Grohe. Weisfeiler and leman go neural: Higher-order graph neural networks. In *Proceedings of the 33rd AAAI Conference on Artificial Intelligence (AAAI 2019)*, pages 4602–4609, 2019.
- Luis Müller, Daniel Kusuma, Blai Bonet, and Christopher Morris. Towards principled graph transformers. In *Proceedings of the 38th Annual Conference on Neural Information Processing Systems (NeurIPS 2024)*, 2024.
- Silvia Richter and Matthias Westphal. The LAMA planner — Using landmark counting in heuristic search. IPC 2008 short papers, <http://ipc.informatik.uni-freiburg.de/Planners>, 2008.
- Or Rivlin, Tamir Hazan, and Erez Karpas. Generalized planning with deep reinforcement learning. In *ICAPS 2020 Workshop on Bridging the Gap Between AI Planning and Reinforcement Learning (PRL)*, pages 16–24, 2020.
- Nicholas Rossetti, Massimiliano Tummolo, Alfonso Emilio Gerevini, Luca Putelli, Ivan Serina, Mattia Chiari, and Matteo Olivato. Learning general policies for planning through GPT models. In *Proceedings of the 34th International Conference on Automated Planning and Scheduling (ICAPS 2024)*, pages 500–508, 2024.
- Scott Sanner and Craig Boutilier. Practical solution techniques for first-order MDPs. *Artificial Intelligence*, 173(5-6):748–788, 2009.

- Siddharth Srivastava, Neil Immerman, and Shlomo Zilberstein. A new representation and associated algorithms for generalized planning. *Artificial Intelligence*, 175(2):393–401, 2011.
- Simon Ståhlberg and Hector Geffner. First-order representation languages for goal-conditioned rl. In *Proceedings of the 40th AAAI Conference on Artificial Intelligence (AAAI 2026)*, 2026.
- Simon Ståhlberg, Blai Bonet, and Hector Geffner. Learning general optimal policies with graph neural networks: Expressive power, transparency, and limits. In *Proceedings of the 32nd International Conference on Automated Planning and Scheduling (ICAPS 2022)*, pages 629–637, 2022a.
- Simon Ståhlberg, Blai Bonet, and Hector Geffner. Learning generalized policies without supervision using GNNs. In *Proceedings of the 19th International Conference on Principles of Knowledge Representation and Reasoning (KR 2022)*, pages 474–483, 2022b.
- Simon Ståhlberg, Blai Bonet, and Hector Geffner. Learning general policies with policy gradient methods. In *Proceedings of the 20th International Conference on Principles of Knowledge Representation and Reasoning (KR 2023)*, 2023.
- Simon Ståhlberg, Blai Bonet, and Hector Geffner. Learning more expressive general policies for classical planning domains. In *Proceedings of the 39th AAAI Conference on Artificial Intelligence (AAAI 2025)*, pages 26697–26706, 2025.
- Ayal Taitler, Ron Alford, Joan Espasa, Gregor Behnke, Daniel Fišer, Michael Gimelfarb, Florian Pommerening, Scott Sanner, Enrico Scala, Dominik Schreiber, Javier Segovia-Aguas, and Jendrik Seipp. The 2023 International Planning Competition. *AI Magazine*, 45(2):280–296, 2024.
- Sam Toyer, Sylvie Thiébaux, Felipe Trevizan, and Lexing Xie. ASNets: Deep learning for generalised planning. *Journal of Artificial Intelligence Research*, 68:1–68, 2020.
- Keyulu Xu, Weihua Hu, Jure Leskovec, and Stefanie Jegelka. How powerful are graph neural networks? In *Proceedings of the 7th International Conference on Learning Representations (ICLR 2019)*, 2019.

Domain	AIW-AD	IW-AD	AIW-Ext	IW-Ext	Flat AA	LAMA
depots (86)	86 (100)	86 (100)	83 (97)	81 (94)	76 (88)	85 (99)
delivery (80)	80 (100)	80 (100)	80 (100)	80 (100)	25 (31)	79 (99)
driverlog (123)	120 (98)	123 (100)	116 (94)	123 (100)	122 (99)	123 (100)
goldminer (359)	359 (100)	359 (100)	133 (37)	69 (19)	132 (37)	222 (62)
grippers (312)	312 (100)	312 (100)	312 (100)	312 (100)	312 (100)	312 (100)
freecell (117)	117 (100)	117 (100)	117 (100)	117 (100)	117 (100)	117 (100)
visitall (100)	100 (100)	100 (100)	100 (100)	100 (100)	97 (97)	100 (100)
reward (99)	99 (100)	99 (100)	99 (100)	99 (100)	97 (98)	99 (100)
grid* (100)	100 (100)	99 (99)	100 (100)	96 (96)	27 (27)	100 (100)
logistics* (100)	97 (97)	98 (98)	0 (0)	7 (7)	25 (25)	100 (100)
satellite* (100)	100 (100)	100 (100)	26 (26)	29 (29)	73 (73)	100 (100)
Total (1576)	1570 (100)	1573 (100)	1166 (74)	1113 (71)	1103 (70)	1437 (91)

Table 2: Benchmark coverage results for AIW-AD against its baselines and unidimensional improvement variants. Domains marked * are known to require logic beyond C_2 expressiveness. Numbers in parentheses are percentages of row totals.

A Benchmark Results

We complement in table 2 the reporting of test outcomes on our benchmark for methods described in the experimental section. We can clearly read two observations off the table: (1) AD encodings enhance the R-GNN’s expressivity, and (2) width-based lookaheads simplify problem structures.

AIW-AD achieves full coverage across all domains, particularly even for those requiring logic beyond C_2 . The same holds only for IW-AD showing that AD input encodings directly enhance the model’s expressivity. We can observe these facts hold for both IW and AIW in our benchmark distinctly, since its test-time scaling is more moderate and, thus, does not render IW(1) itself inefficient, unlike the IPC 2023 benchmark. On one domain, Goldminer, only AD encoded lookaheads are able to produce solutions for the entire set, again surpassing even LAMA. AA-encoded and AD-encoded (see table 4) flat policies are not able to achieve sufficient solve rates on many domains, reaffirming the observation made by Aichmüller and Geffner [2025] that (A)IW lookaheads simplify problem structure indeed and that this simplification is crucial for solving some domains.

B Base-Abstracted IW and Capacity-Limited Abstracted IW

As mentioned in section 3, we also considered two modifications of AIW. A fallback variant of AIW in Base-Abstracted IW, which is the backup abstraction whenever a domain exhibits no typing information, and a depth-capacity limiting form in C-AIW. The following will further contextualize the methods and then discuss their results on the ICP 2023 benchmark as found in table 3 alongside Flat AD.

Base-Abstracted IW (BAIW). Reducing every other object information in an atom $P(o_1, \dots, o_n)$ to the base *object*-type erases the object’s information. Alternatively, BAIW can be seen as a novelty check via iteratively testing each of the n position-derived unary atoms $P_i(o_i)$. As a lookahead BAIW is also generally effective, but can be too coarse when several semantically different object types occur in the same predicate. The Spanner domain provides a simple example for this. The first argument x of its predicate

$$\text{at}(x - \text{locatable}, 1 - \text{location})$$

applies both to the *man*-typed object bob and to spanner objects, since both are of a subtype of *locatable*. Under the base abstraction, an atom $\text{at}(\text{bob}, \text{loc})$ is tested through the abstracted atoms $\text{at}(\text{bob}, *)$ and $\text{at}(*, \text{loc})$, where $*$ denotes the object compressed to the base *object*-type. The first abstracted atom, $\text{at}(\text{bob}, *)$, is already seen in the root through $\text{at}(\text{bob}, \text{loc}0)$. The second abstracted atom, $\text{at}(*, \text{loc})$, can also already be seen in the root, because spanners occupy locations and generate atoms such as $\text{at}(\text{spanner1}, \text{loc})$. Consequently, moving bob to a

new location may fail to produce any novel atom. The AIW lookahead would be defunct, i.e., not provide any expansion of the root, if not for the primitive successors guaranteed by a prior IW(0) search, as the logic of IW(1) implies. A circumvention of this is to allow the primitive successors to be marked as novel themselves, to ensure BAIW continues novelty checks from these states, effectively combining IW(0) and BAIW(1) lookaheads in one go. This extension also provided meaningful results in preliminary experiments, but we did not evaluate it further.

AIW prevents this failure mode naturally by retaining the type of compressed objects. Then, $\text{at}(\text{bob}, \text{loc})$ is tested through the abstracted atoms $\text{at}(\text{bob}, \text{location})$ and $\text{at}(\text{man}, \text{loc})$. A location previously seen only through $\text{at}(\text{spanner1}, \text{loc})$ contributes $\text{at}(\text{locatable}, \text{loc})$, but not the more specific $\text{at}(\text{man}, \text{loc})$. Hence, $\text{at}(\text{man}, \text{loc})$ remains novel when bob first reaches that location. Retaining types in the abstraction thus preserves enough role information to prevent the lookahead from collapsing, while staying meaningful, but coarser than full IW(1).

Capacity-Limited-AIW (C-AIW). To further account for infeasibly large branching factors, we also tried coupling the search with a layer capacity limit C , so that at any depth d in the BFS we may at most retain C novel successors to expand at depth $d + 1$. Selection of the C candidates happens via a scoring heuristic $h(s')$ that counts the number of satisfied goals in s' and prefers those of higher score, breaking ties on a first-seen basis. We experimented with various values for C , finding $C = 1000$ to work well in experiments. Although Capacity-Limited AIW (C-AIW) further weakens completeness for width-1 goals, we gain an effective search limiter that reduces successor counts based on a fast and simple heuristic. In general, capacity limitation can lose crucial successors as shown in table 3 with Satellite, Rovers, and Transport, in which performance drops for 'hard' problems, i.e., the largest ones, where capacity limits actually start ejecting successors. In turn, capacity limits can improve the search when there are many equivalent continuation paths to the goal, e.g., due to action commutativity or argument permutations, as is common in Spanner and Childsnack. Its result of 70/90 solved instances on Childsnack is the highest reported rate on this domain to date.

C Model and Encoding Ablations

We ablate the main model, i.e., AIW lookaheads coupled with AD encoding, along several structural changes in either encoding, IW lookahead behaviour, or both:

- *No Depthnodes* – omitting depth nodes o_d and associated depth atoms $\mathcal{R}_D^s$ from the encoding, resulting in the relation set $\mathcal{R}^T \setminus \mathcal{R}_D^T$.
- *No Tree-Atoms* – omitting the encoding step for the parent relation atoms, resulting in the relation set $\mathcal{R}^T \setminus \mathcal{R}_E^T$.
- *No Depth/Tree-Atoms* – omitting both depth and tree atoms, resulting in the relation set $\mathcal{R}^T \setminus (\mathcal{R}_D^T \cup \mathcal{R}_E^T)$.
- *Reduced Goals* – Full AD relation set $\mathcal{R}^T$ encoded, yet AIW now also applies the abstracted novelty checks on atoms $P(o_1, \dots, o_n)$ that match an atom $P_g(o_1, \dots, o_n)$ in the goal.

Given that Tables 1 and 3 already cover several ablation directions, Table 5 isolates the remaining AD-encoding components. Most of these components were introduced to stabilize test-time behavior. During development, we often observed large variance in test outcomes, which decreased after the full encoding was introduced. The ablation results show no large aggregate performance drop for most removals. However, they indicate policy instabilities: some easy test instances remain unsolved, even when most hard instances are solved, as in Spanner when depth nodes are removed. Values also fluctuate between the ablation setups, resulting in better outcomes, although more components have been deactivated. The only consistently high-impact ablation is the abstraction of atoms that also occur in the goal. Removing this exception substantially reduces coverage on the harder instances of most domains.

Encoding Ablations. As mentioned in Section 5, we consider two interpolating encodings: Internal and Internal-Delta. External encodings represent each successor with its full relation set in a separate graph and process state transitions sequentially. At the other end, Aggregated-Delta (AD) represents successors only through their delta atoms and encodes all transitions jointly. Internal and Internal-Delta therefore isolate whether performance gains arise from merging current and successor states

Domain	AIW	BAIW	C-AIW	Flat AD	Flat AA
blocksworld (90)	90 (100)	89 (99)	90 (100)	76 (84)	76 (84)
easy (30)	30 (100)	30 (100)	30 (100)	30 (100)	30 (100)
medium (30)	30 (100)	30 (100)	30 (100)	30 (100)	30 (100)
hard (30)	30 (100)	29 (97)	30 (100)	16 (53)	16 (53)
miconic (90)	90 (100)	90 (100)	90 (100)	84 (93)	84 (93)
easy (30)	30 (100)	30 (100)	30 (100)	30 (100)	30 (100)
medium (30)	30 (100)	30 (100)	30 (100)	30 (100)	30 (100)
hard (30)	30 (100)	30 (100)	30 (100)	24 (80)	24 (80)
spanner (90)	90 (100)	90 (100)	90 (100)	73 (81)	90 (100)
easy (30)	30 (100)	30 (100)	30 (100)	30 (100)	30 (100)
medium (30)	30 (100)	30 (100)	30 (100)	30 (100)	30 (100)
hard (30)	30 (100)	30 (100)	30 (100)	13 (43)	30 (100)
satellite (90)	88 (98)	87 (97)	63 (70)	55 (61)	51 (57)
easy (30)	30 (100)	30 (100)	30 (100)	30 (100)	30 (100)
medium (30)	30 (100)	30 (100)	30 (100)	22 (73)	21 (70)
hard (30)	28 (93)	27 (90)	3 (10)	3 (10)	0 (0)
transport (90)	86 (96)	87 (97)	73 (81)	74 (82)	74 (82)
easy (30)	30 (100)	30 (100)	30 (100)	30 (100)	29 (97)
medium (30)	29 (97)	30 (100)	30 (100)	25 (83)	25 (83)
hard (30)	27 (90)	27 (90)	13 (43)	19 (63)	20 (67)
ferry (90)	80 (89)	80 (89)	80 (89)	64 (71)	62 (69)
easy (30)	30 (100)	30 (100)	30 (100)	30 (100)	29 (97)
medium (30)	30 (100)	30 (100)	30 (100)	30 (100)	29 (97)
hard (30)	20 (67)	20 (67)	20 (67)	4 (13)	4 (13)
rovers (90)	67 (74)	59 (66)	51 (57)	43 (48)	27 (30)
easy (30)	30 (100)	30 (100)	30 (100)	30 (100)	27 (90)
medium (30)	24 (80)	17 (57)	19 (63)	13 (43)	0 (0)
hard (30)	13 (43)	12 (40)	2 (7)	0 (0)	0 (0)
childsnack (90)	64 (71)	66 (73)	70 (78)	59 (66)	41 (46)
easy (30)	30 (100)	30 (100)	30 (100)	30 (100)	27 (90)
medium (30)	30 (100)	30 (100)	30 (100)	29 (97)	12 (40)
hard (30)	4 (13)	6 (20)	10 (33)	0 (0)	2 (7)
sokoban (90)	13 (14)	11 (12)	12 (13)	14 (16)	14 (16)
easy (30)	13 (43)	11 (37)	12 (40)	14 (47)	14 (47)
medium (30)	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)
hard (30)	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)
floortile (90)	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)
easy (30)	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)
medium (30)	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)
hard (30)	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)
Total (900)	668 (74)	659 (73)	619 (69)	542 (60)	519 (58)

Table 3: IPC 2023 benchmark coverage results for AIW with AD encoding compared to BAIW, C-AIW, and Flat AD policies, as well as the baseline Flat AA (repeated from table 1. Numbers in parentheses are percentages of row totals.

into a single graph, from representing successors through state differences, or from combining both mechanisms.

Tables 6 and 7 show that merging current and successor states into a single graph is not sufficient on its own. Internal encodings are consistently worse than External encodings, both in coverage and resource usage. This is likely due to the duplicated relation set, which effectively doubles the number of predicate-specific modules relative to External encodings and increases the number of messages aggregated by the R-GNN. Internal-Delta recovers much of the lost performance while substantially reducing memory usage, showing that explicit state differences are important for exploiting the structure exposed by IW lookaheads. This effect is particularly clear on the extended benchmark: External and Internal encodings fail on several domains where Internal-Delta achieves high coverage, including domains that require logic beyond C_2 . In particular, Logistics is solved substantially more often, Satellite becomes almost fully solvable, and Goldminer is solved well only by Internal-Delta and AD. Nevertheless, Internal-Delta still remains below AD, and only AD achieves full coverage on the extended benchmark. These results indicate that both components are needed: compact delta-based successor representations and the joint encoding of the full transition set.

Domain	AIW	BAIW	C-AIW	Flat AD
depots (86)	86 (100)	86 (100)	86 (100)	8 (9)
delivery (80)	80 (100)	80 (100)	80 (100)	63 (79)
driverlog (123)	120 (98)	122 (99)	123 (100)	120 (98)
goldminer (359)	359 (100)	359 (100)	359 (100)	155 (43)
grippers (312)	312 (100)	312 (100)	312 (100)	312 (100)
freecell (117)	117 (100)	117 (100)	117 (100)	117 (100)
visitall (100)	100 (100)	100 (100)	100 (100)	92 (92)
reward (99)	99 (100)	99 (100)	99 (100)	95 (96)
grid* (100)	100 (100)	100 (100)	100 (100)	24 (24)
logistics* (100)	97 (97)	48 (48)	93 (93)	70 (70)
satellite* (100)	100 (100)	100 (100)	100 (100)	54 (54)
Total (1576)	1570 (100)	1523 (97)	1569 (100)	1110 (70)

Table 4: Benchmark coverage results for AIW compared to its variants BAIW, C-AIW, and Flat policy, all using AD encodings. Domains marked * are known to require logic beyond C_2 expressiveness. Numbers in parentheses are percentages of row totals.

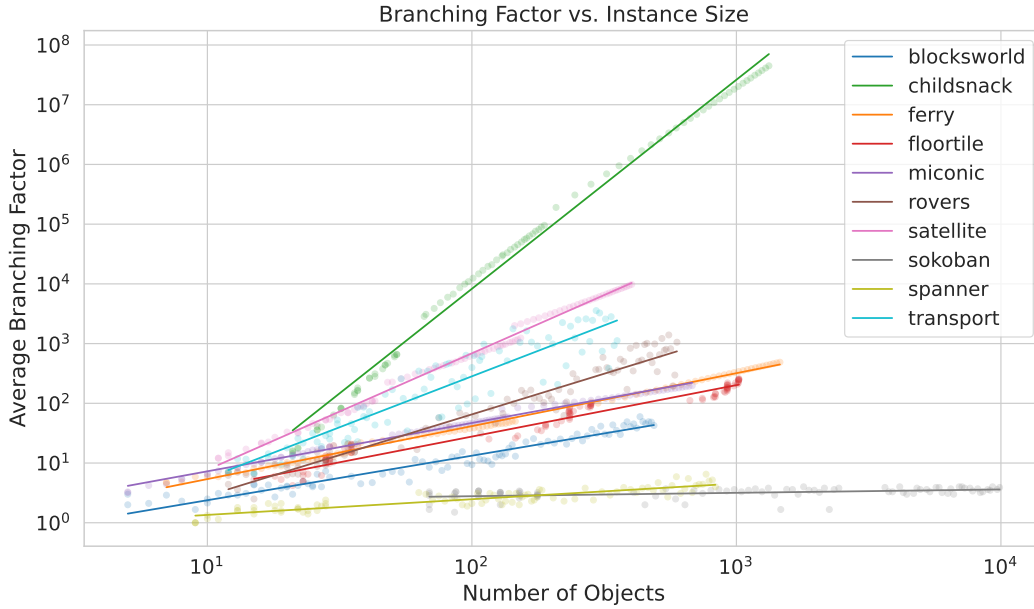


Figure 1: Log-log plot of the branching factor for each IPC benchmark domain as a function of the number of objects.

D IPC 2023 Benchmark Data Scaling Behavior

One way to analyze problem difficulty is to examine how the branching factor scales with instance size. Since the size of the search tree grows exponentially in the branching factor, instances with larger branching factors are generally harder for search-based approaches. We estimate the average branching factor of an instance by running a random walk of length 10 from the initial state, recording the number of applicable actions in each visited state, and averaging these counts. Figure 1 shows the resulting scaling behavior for the IPC domains on a log-log scale. The plot highlights the particular difficulty of Childsnack, whose branching factor grows much faster than in the other domains and reaches values several orders of magnitude larger. Concretely, in Childsnack’s hard category, instances #1, #10, #20, and #30 exhibit 0.25, 3.7, 17, and 47 million applicable actions in the initial state, respectively, which scale from requiring 1 second up to 10 minutes simply to generate. This, despite highly optimized software and latest hardware.

Domain	AIW	No Depthnodes	No Tree-Atoms	No Depthnodes No Tree-Atoms	Reduced Goals
blocksworld (90)	90 (100)	90 (100)	84 (93)	84 (93)	78 (87)
easy (30)	30 (100)	30 (100)	30 (100)	28 (93)	30 (100)
medium (30)	30 (100)	30 (100)	30 (100)	29 (97)	30 (100)
hard (30)	30 (100)	30 (100)	24 (80)	27 (90)	18 (60)
micronic (90)	90 (100)	90 (100)	90 (100)	90 (100)	90 (100)
easy (30)	30 (100)	30 (100)	30 (100)	30 (100)	30 (100)
medium (30)	30 (100)	30 (100)	30 (100)	30 (100)	30 (100)
hard (30)	30 (100)	30 (100)	30 (100)	30 (100)	30 (100)
spanner (90)	90 (100)	86 (96)	81 (90)	87 (97)	90 (100)
easy (30)	30 (100)	27 (90)	30 (100)	30 (100)	30 (100)
medium (30)	30 (100)	30 (100)	30 (100)	30 (100)	30 (100)
hard (30)	30 (100)	29 (97)	21 (70)	27 (90)	30 (100)
satellite (90)	88 (98)	88 (98)	84 (93)	85 (94)	64 (71)
easy (30)	30 (100)	30 (100)	30 (100)	30 (100)	30 (100)
medium (30)	30 (100)	30 (100)	30 (100)	29 (97)	28 (93)
hard (30)	28 (93)	28 (93)	24 (80)	26 (87)	6 (20)
transport (90)	86 (96)	83 (92)	82 (91)	86 (96)	63 (70)
easy (30)	30 (100)	30 (100)	30 (100)	30 (100)	30 (100)
medium (30)	29 (97)	28 (93)	27 (90)	29 (97)	26 (87)
hard (30)	27 (90)	25 (83)	25 (83)	27 (90)	7 (23)
ferry (90)	80 (89)	80 (89)	80 (89)	80 (89)	69 (77)
easy (30)	30 (100)	30 (100)	30 (100)	30 (100)	30 (100)
medium (30)	30 (100)	30 (100)	30 (100)	30 (100)	30 (100)
hard (30)	20 (67)	20 (67)	20 (67)	20 (67)	9 (30)
rovers (90)	67 (74)	57 (63)	43 (48)	56 (62)	36 (40)
easy (30)	30 (100)	30 (100)	30 (100)	30 (100)	29 (97)
medium (30)	24 (80)	20 (67)	9 (30)	19 (63)	7 (23)
hard (30)	13 (43)	7 (23)	4 (13)	7 (23)	0 (0)
childsnaek (90)	64 (71)	66 (73)	62 (69)	66 (73)	65 (72)
easy (30)	30 (100)	30 (100)	30 (100)	30 (100)	30 (100)
medium (30)	30 (100)	30 (100)	30 (100)	30 (100)	30 (100)
hard (30)	4 (13)	6 (20)	2 (7)	6 (20)	5 (17)
sokoban (90)	13 (14)	13 (14)	14 (16)	11 (12)	11 (12)
easy (30)	13 (43)	13 (43)	14 (47)	11 (37)	11 (37)
medium (30)	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)
hard (30)	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)
floortile (90)	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)
easy (30)	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)
medium (30)	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)
hard (30)	0 (0)	0 (0)	0 (0)	0 (0)	0 (0)
<i>Total (900)</i>	668 (74)	653 (73)	620 (69)	645 (72)	566 (63)

Table 5: IPC 2023 benchmark ablation coverage results for AIW with AD encoding. Numbers in parentheses are percentages of row totals.

Of course, branching factors alone do not explain all of a domain’s difficulty. For example, the branching factor in Sokoban remains nearly constant with instance size, although the domain remains challenging for search due to complex long-term consequences of individual action choices.

E Domain Descriptions

This appendix section complements the main text with supplementary content cataloguing every benchmark domain and summarizing the instance statistics highlighted in Table 8.

Blocksworld In Blocksworld, the goal is to stack blocks on top of each other to form specific configurations. The actions involve picking up and putting down blocks, where blocks can only be picked up if they have no other blocks on top of them.

Childsnaek In this domain, the task is to serve snacks to children. Some children are gluten allergic and need to be served gluten-free bread. One general policy is to always serve gluten-free bread to gluten allergic children first, then serve the rest to those that are left. Actions include making sandwiches and serving them to children.

Domain	AD	ID	Int	Ext
blocksworld (90)	90 (100)	75 (83)	76 (84)	78 (87)
easy (30)	30 (100)	30 (100)	30 (100)	30 (100)
medium (30)	30 (100)	30 (100)	30 (100)	30 (100)
hard (30)	30 (100)	15 (50)	16 (53)	18 (60)
miconic (90)	90 (100)	72 (80)	69 (77)	72 (80)
easy (30)	30 (100)	30 (100)	30 (100)	30 (100)
medium (30)	30 (100)	30 (100)	30 (100)	30 (100)
hard (30)	30 (100)	12 (40)	9 (30)	12 (40)
spanner (90)	90 (100)	30 (33)	32 (36)	32 (36)
easy (30)	30 (100)	30 (100)	30 (100)	30 (100)
medium (30)	30 (100)	0 (0)	2 (7)	2 (7)
hard (30)	30 (100)	0 (0)	0 (0)	0 (0)
satellite (90)	88 (98)	64 (71)	48 (53)	61 (68)
easy (30)	30 (100)	30 (100)	30 (100)	30 (100)
medium (30)	30 (100)	30 (100)	16 (53)	30 (100)
hard (30)	28 (93)	4 (13)	2 (7)	1 (3)
transport (90)	86 (96)	64 (71)	45 (50)	55 (61)
easy (30)	30 (100)	30 (100)	30 (100)	29 (97)
medium (30)	29 (97)	28 (93)	14 (47)	19 (63)
hard (30)	27 (90)	6 (20)	1 (3)	7 (23)
ferry (90)	80 (89)	69 (77)	69 (77)	71 (79)
easy (30)	30 (100)	30 (100)	30 (100)	30 (100)
medium (30)	30 (100)	30 (100)	30 (100)	30 (100)
hard (30)	20 (67)	9 (30)	9 (30)	11 (37)
rovers (90)	67 (74)	29 (32)	27 (30)	24 (27)
easy (30)	30 (100)	29 (97)	27 (90)	24 (80)
medium (30)	24 (80)	0 (0)	0 (0)	0 (0)
hard (30)	13 (43)	0 (0)	0 (0)	0 (0)
childsnap (90)	64 (71)	32 (36)	38 (42)	47 (52)
easy (30)	30 (100)	20 (67)	30 (100)	30 (100)
medium (30)	30 (100)	12 (40)	8 (27)	17 (57)
hard (30)	4 (13)	0 (0)	0 (0)	0 (0)
sokoban (90)	13 (14)	12 (13)	7 (8)	17 (19)
easy (30)	13 (43)	12 (40)	7 (23)	17 (57)
medium (30)	0 (0)	0 (0)	0 (0)	0 (0)
hard (30)	0 (0)	0 (0)	0 (0)	0 (0)
floortile (90)	0 (0)	0 (0)	0 (0)	0 (0)
easy (30)	0 (0)	0 (0)	0 (0)	0 (0)
medium (30)	0 (0)	0 (0)	0 (0)	0 (0)
hard (30)	0 (0)	0 (0)	0 (0)	0 (0)
<i>Total (900)</i>	668 (74)	447 (50)	411 (46)	457 (51)

Table 6: IPC 2023 benchmark ablation coverage results for encodings External, Internal, Internal-Delta, and Aggregated-Delta paired with AIW lookaheads. Numbers in parentheses are percentages of row totals.

Delivery In Delivery, the objective is to deliver packages to their respective destinations using a single truck. The truck can only carry one package at a time, and the actions include loading and unloading packages, as well as driving the truck between locations.

Depots The task in Depots is to move crates onto pallets. The instances contain multiple trucks and hoists that can be used to move crates. The actions include loading and unloading crates onto and from pallets, as well as driving trucks and operating hoists.

Driverlog In Driverlog, the goal is to transport packages and trucks to different locations. In comparison to Delivery and Logistics, this domain also includes drivers that are required to drive the trucks. The actions include loading and unloading packages onto and from trucks, as well as driving trucks and walking drivers to different locations.

Freecell The Freecell domain is based on a card game similar to Solitaire, where the objective is to move all cards to the locations specified in the goal. Actions are to move cards between different cells.

Domain	AD	ID	Int	Ext
depots (86)	86 (100)	79 (92)	83 (97)	83 (97)
delivery (80)	80 (100)	80 (100)	75 (94)	80 (100)
driverlog (123)	120 (98)	122 (99)	116 (94)	116 (94)
goldminer (359)	359 (100)	317 (88)	50 (14)	133 (37)
grippers (312)	312 (100)	312 (100)	312 (100)	312 (100)
freecell (117)	117 (100)	117 (100)	117 (100)	117 (100)
visitall (100)	100 (100)	98 (98)	94 (94)	100 (100)
reward (99)	99 (100)	99 (100)	86 (87)	99 (100)
grid* (100)	100 (100)	91 (91)	90 (90)	100 (100)
logistics* (100)	97 (97)	69 (69)	7 (7)	0 (0)
satellite* (100)	100 (100)	87 (87)	19 (19)	26 (26)
<i>Total (1576)</i>	1570 (100)	1471 (93)	1049 (67)	1166 (74)

Table 7: Encoding ablation coverage results for encodings External, Internal, Internal-Delta, and Aggregated-Delta paired with AIW lookaheads on our extended benchmark set. Numbers in parentheses are percentages of row totals.

Domain	Train					Validation					Test				
	Objects			Atoms		Objects			Atoms		Objects			Atoms	
	#	Min	Max	Min	Max	#	Min	Max	Min	Max	#	Min	Max	Min	Max
delivery	165	6	70	31	447	30	88	129	567	844	80	153	634	1006	4321
depots	589	13	20	62	104	50	21	25	100	130	86	26	60	126	313
driverlog	108	7	15	27	83	48	16	18	71	104	123	19	50	91	291
freecell	787	29	48	124	213	40	31	51	131	225	117	40	56	174	242
goldminer	190	4	20	25	121	40	4	238	25	1609	359	18	361	109	2456
grippers	113	7	42	17	123	40	8	126	19	309	312	22	127	47	308
reward	155	4	144	26	1098	45	169	225	1293	1732	99	256	841	1968	6543
visitall	99	4	144	22	962	27	169	225	1133	1517	100	256	900	1730	6182
grid	128	11	76	48	459	47	108	206	684	1349	100	278	890	1792	6027
logistics	96	6	26	18	78	40	30	52	90	156	100	60	120	180	360
satellite	59	6	34	18	158	66	53	122	216	644	100	140	435	804	3425
blocksworld-ipc	69	2	20	6	45	30	21	29	45	64	90	5	488	13	1019
childsnack-ipc	68	7	41	20	135	30	41	52	135	174	90	21	1327	63	4563
ferry-ipc	69	3	25	9	65	30	26	35	68	92	90	7	1461	18	3898
floortile-ipc	67	5	40	17	238	30	37	45	215	267	90	15	1022	79	6884
miconic-ipc	69	3	21	10	148	30	22	30	164	271	90	5	681	19	21443
rovers-ipc	69	10	28	35	254	30	28	36	193	422	90	12	596	56	294553
satellite-ipc	69	5	32	15	133	30	34	43	139	196	90	11	402	37	2402
sokoban-ipc	69	54	128	134	517	30	128	177	475	793	90	69	9884	219	55872
spanner-ipc	59	6	22	22	88	30	22	28	88	114	90	9	833	31	3961
transport-ipc	69	6	34	20	258	30	34	45	140	382	90	12	354	47	7785

Table 8: Statistics of the benchmarks used in our experiments. For each benchmark, we report the number of instances, as well as the minimum and maximum number of objects and atoms.

Ferry The Ferry domain is about transporting cars with a ferry. The ferry can only hold a single car at the time, and the goal is to move all cars to their respective destinations. Actions include loading and unloading cars onto and from the ferry, as well as sailing between shores.

Floortile In Floortile, the objective is to paint floor tiles in a specific pattern using a robot. The robot can move around the grid of tiles and paint them in different colors, but can not move to a painted tile. The challenge is to ensure that the final configuration of painted tiles matches the desired pattern, without getting stuck.

Goldminer The goal of Goldminer is for a robot to reach a location that contains gold. The environment is grid based and contains items such as bombs and laser cannons. Actions include moving and using the items to clear a path to the gold.

Grid The task in Grid is to navigate a grid and put keys in specific positions. Some positions are locked and require a key to open. The actions include moving in the grid, picking up keys, and unlocking locked positions.

Grippers In Gripper, the objective is to move balls from one room to another using a robot with two grippers. The robot can carry up to two balls at a time, and the actions include moving between rooms, picking up balls, and dropping them off in the target room. Grippers is similar to Grippers, but instead of a single robot, there are multiple robots, and there can be more than two rooms.

Logistics In Logistics, the goal is to transport packages between different locations using trucks and airplanes. Trucks can only move within a city, while airplanes can fly between cities. The actions include loading and unloading packages onto and from vehicles, as well as driving trucks and flying airplanes to different locations.

Miconic Miconic is about transporting passengers in an elevator to their desired floors. The elevator can move up and down, and passengers can board and leave the elevator at different floors. The goal is to efficiently transport all passengers to their respective floors while minimizing the number of stops.

Reward The goal in Reward is to collect rewards that are placed in different cells. The environment is grid-based and contains obstacles that the agent can not pass. The actions include moving in the grid and collecting rewards.

Rovers Here rovers are tasked with exploring a planetary surface, collecting samples, and taking images. The rovers can move around the terrain, collect samples from specific locations, and take images of points of interest. Different rovers can traverse different types of terrain, which adds complexity to the planning task. The goal is to communicate data from different waypoints.

Satellite In Satellite, the goal is to capture images and point satellites in different directions. The actions include turning the satellites, taking images and calibrating instruments. The challenge is to manage the limited resources of the satellites while ensuring that all required images are captured.

Sokoban This domain is based on the classic puzzle game Sokoban, where the objective is to push boxes onto designated goal locations within a warehouse. The player can move in four directions and push boxes, but cannot pull them. The challenge lies in planning moves carefully to avoid getting boxes stuck in corners or against walls.

Spanner The task in Spanner is to tighten loose nuts using a wrench (spanner). The actions are to move, pickup spanners and tighten nuts. Whenever a wrench is used, it can not be used again. The difficulty is that the agent can only move in one direction, so if it missed to pick up a wrench that it later needs, it will not be able to solve the task.

Transport In Transport, the task is to drive packages to specific locations. Different vehicles have different capacities, so they can carry different number of packages. The actions include loading and unloading packages, as well as driving vehicles between locations.

Visitall Visitall is another grid based domain where the objective is to visit all the cells specified in the goal. The only action is to move between connected cells in the grid.

E.1 Domain statistics

Table 8 summarizes how each benchmark grows across the different splits. The non-IPC domains – Delivery, Depots, Driverlog, Freecell, Goldminer, Grippers, Reward, and Visitall – start with moderate

object/atom counts in training (≤ 70 objects, ≤ 1100 atoms) and scale to hundreds of objects and up to 6,543 atoms at test time (e.g., Reward and Visital).

The IPC-domain test splits explode in complexity. For example, Blocksworld grows from at most 20 in the train set to 488 objects in the test set, Miconic’s atom counts reach 21,443, Rovers tops 294,553 atoms, and Sokoban stretches to nearly 10^4 objects.