

REVEAL: Reference-Grounded Reasoning for Multimodal Manipulation Detection

Jun Zhou Bingwen Hu* Yaxiong Wang Zhedong Zheng Yongzhen Wang
Yuchen Zhang Ping Liu

Abstract

Multimodal manipulation detection aims to simultaneously identify forged image-text pairs and localize tampered regions, yet existing methods typically rely on memorizing isolated artifacts and struggle with imperceptible manipulation traces or domain shifts. Inspired by human comparative reasoning, we reformulate this task as a *reference-grounded verification* problem, where authenticity is assessed by comparing a query against retrieved authentic evidence. We propose **REVEAL (Reference-Enabled Verification for Evidence Analysis and Localization)**, a framework explicitly designed for this comparative paradigm. To support this paradigm, we construct a large-scale reference library comprising 170K authentic news image-text pairs featuring over 40K public figures. Technically, REVEAL employs a difference-aware fusion mechanism to capture fine-grained discrepancies between the query and retrieved evidence. Furthermore, we introduce a task-decoupled Mixture-of-Experts (MoE) architecture to jointly execute instance-level detection and fine-grained grounding, effectively mitigating optimization conflicts between these heterogeneous objectives. Extensive experiments demonstrate that REVEAL significantly outperforms state-of-the-art methods, and notably enables *training-free domain adaptation* by simply updating the reference library, offering a robust and practical solution for detecting evolving misinformation. Code is available at <https://anonymous.4open.science/r/REVEAL-Reference-A006>.

1 Introduction

The rapid progress of generative models has made fabricated media increasingly realistic, posing serious threats to information authenticity and public trust (Huang et al., 2024; Yan et al., 2025;

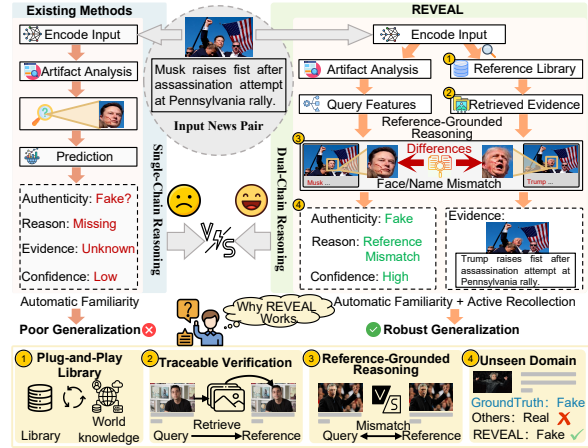


Figure 1: **Artifact-centric vs. Reference-grounded reasoning.** While existing methods rely on isolated, artifact-centric cues that often yield opaque and low-confidence predictions, REVEAL shifts to a reference-grounded paradigm. By mimicking active recollection via a plug-and-play memory, REVEAL explicitly contrasts the input against retrieved authentic evidence. This mechanism inherently exposes semantic inconsistencies (e.g., face/name mismatches), delivering highly interpretable decisions with traceable manipulation reasoning and robust generalization to unseen domains.

Zhang et al., 2025c). Among different misinformation formats, image-text news pairs are especially important due to their wide use on social platforms (Zeng et al., 2024; Rahman et al., 2025; Tonglet et al., 2024), where effective analysis demands multi-granularity reasoning to determine authenticity, identify manipulation types, and localize tampered regions across modalities (Shao et al., 2023, 2024).

However, two limitations are emerging for existing detectors. First, visual artifacts that once served as reliable cues, such as boundary inconsistencies or frequency anomalies, are becoming increasingly imperceptible as generative models improve (Corvi et al., 2023; Ricker et al., 2022). Second, detectors that memorize training-specific

* Corresponding author.

artifact patterns generalize poorly to unseen news sources or novel manipulation pipelines (Cozzolino et al., 2024a; Yan et al., 2024b). This raises a key question: when intrinsic artifacts are neither perceptible nor transferable, what other signal can be exploited? Inspired by human studies showing that deepfake judgments are influenced not only by cognitive tendencies such as truth bias, but also by prior knowledge when familiar figures or events are involved (Groh et al., 2022; Diel et al., 2024; Somoray et al., 2025), we introduce a comparison-based verification paradigm as a complementary reasoning pathway. For example, a manipulated news photograph showing Elon Musk raising his fist after an assassination attempt would be questioned not because of visual artifacts, but because the authentic event involved Donald Trump. To operationalize this verification pattern, Figure 1 distinguishes between two reasoning modes: *Automatic Familiarity*, which judges plausibility through internal artifact analysis, and *Active Recollection*, which validates the query against external authentic evidence. Most existing methods rely solely on the former (Cozzolino et al., 2024b; Yan et al., 2024b; Cui et al., 2025). By performing single-chain reasoning purely from learned artifact patterns, they often yield opaque decisions and exhibit brittle behavior under distribution shifts.

In contrast, REVEAL augments automatic familiarity with active recollection via an information retrieval paradigm. Here, an external memory serves as an authentic reference library, where recollection is driven by similarity-based retrieval, and verification proceeds through cross-reference reasoning. Given a query, our framework synthesizes internal artifact cues with retrieved references. By applying difference-aware reasoning across these signals, it effectively exposes visual, textual, and cross-modal inconsistencies. Consequently, REVEAL delivers authenticity predictions grounded in interpretable evidence, explicitly highlighting the retrieved references and detected mismatches. Crucially, this dual-chain architecture inherently resolves the generalization bottleneck. Because the reference library updates independently of the model parameters, REVEAL achieves training-free domain adaptation, seamlessly handling unseen news sources or novel manipulation pipelines.

To realize the above reference-grounded verification paradigm, two challenges must be addressed: constructing an informative authentic reference library and effectively integrating

retrieved evidence for multi-granularity detection. We therefore present **REVEAL** (Reference-Enabled Verification for Evidence Analysis and Localization), which retrieves authentic image-text evidence at inference time and verifies the query through cross-reference comparison. Built upon a reference library of 170K authentic news image-text pairs covering over 40K public figures, REVEAL employs difference-aware fusion and a task-decoupling Mixture-of-Experts architecture (Chen et al., 2023; Shazeer et al., 2017; Lepikhin et al., 2021) to support both global detection and fine-grained grounding.

In summary, our main contributions are as follows:

- We propose Reference-Grounded Verification, shifting the paradigm of multimodal forensics from isolated artifact memorization to retrieval-conditioned comparative reasoning.
- We construct a comprehensive reference library comprising 170K authentic news image-text pairs across over 40K public figures. This foundation preserves high-fidelity cross-modal correspondences, enabling scalable, evidence-driven verification.
- We develop a difference-aware fusion mechanism to capture fine-grained query-evidence discrepancies, alongside a task-decoupled Mixture-of-Experts (MoE) architecture that jointly handles global detection and fine-grained grounding.
- Extensive evaluations demonstrate that REVEAL consistently outperforms existing methods in both detection and localization. Crucially, our paradigm achieves training-free domain adaptation simply by updating the external reference library.

2 Related Work

2.1 Retrieval-Augmented Learning

Retrieval-augmented learning incorporates external evidence at inference time to reduce reliance on parametric knowledge. In NLP, methods improve factual grounding via self-reflective or corrective retrieval, e.g., Self-RAG (Asai et al., 2024) and CRAG (Yan et al., 2024a), while others refine when and how retrieved evidence is used, such as RankRAG (Yu et al., 2024b) and FLARE (Jiang

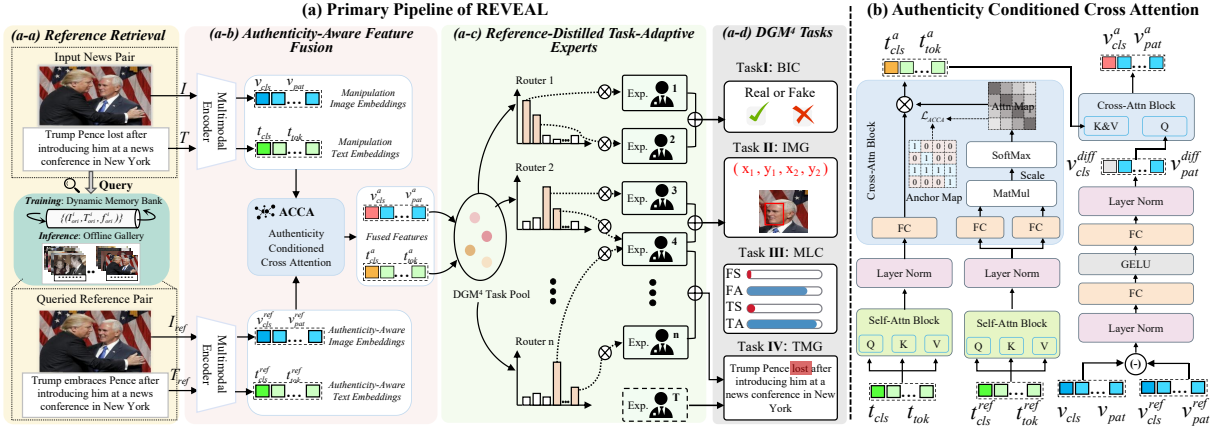


Figure 2: **Overview of the proposed REVEAL framework.** (a) **Primary Pipeline:** (a-a) *Reference Retrieval* obtains semantically related reference pairs from a dynamic memory bank during training or an offline retrieval gallery during inference; (a-b) *Authenticity-Aware Feature Fusion* employs the proposed ACCA module to fuse query and reference features, producing authenticity-conditioned representations; (a-c) *Reference-Distilled Task-Adaptive Experts* leverages a router-based Mixture-of-Experts architecture within the DGM⁴ task pool, where each expert specializes in different manipulation patterns; (a-d) *DGM⁴ Tasks* include four objectives: binary classification (BIC), image manipulation grounding (IMG), multi-label classification (MLC), and text manipulation grounding (TMG). (b) Detailed architecture of Authenticity Conditioned Cross Attention (ACCA), which computes cross-modal attention between query and reference to produce authenticity-aware representations.

et al., 2023). Multimodal extensions further ground visual reasoning with retrieved knowledge, e.g., MuRAG (Chen et al., 2022) for image–document reasoning and Wiki-LLaVA (Caffagni et al., 2024) for knowledge-grounded VQA, with recent work exploring retrieval over visual documents (Yu et al., 2024a) and knowledge-guided multimodal generation (Yang et al., 2024). However, these approaches use retrieval to *enrich generation*. In contrast, retrieval in our framework serves *verification*: retrieved references act as authentic anchors for exposing contradictions, inconsistencies, and manipulations, rather than augmenting output content.

2.2 Multimodal Manipulation Detection

Early manipulation detection focused on unimodal forgery, particularly face manipulation, leveraging spatial artifacts, frequency inconsistencies, and temporal coherence to identify deepfakes (Rossler et al., 2019; Li et al., 2020). As real-world misinformation increasingly involves coordinated cross-modal manipulation (Hu et al., 2023), recent work has shifted toward multimodal detection. HAMMER (Shao et al., 2023) performs joint detection and grounding via shallow cross-modal fusion with modality-specific decoders. Building on this, ASAP (Zhang et al., 2025b) introduces hierarchical cross-modal alignment to capture subtle manipulation traces, while UFAFormer (Liu et al., 2025a) incorporates frequency-aware analysis to

expose generation artifacts imperceptible in the spatial domain. More recently, IDseq (Liu et al., 2025b) adopts a decoupled sequential pipeline that first detects manipulation at the instance level and then grounds manipulated regions in each modality separately. Despite these advances, existing methods fundamentally operate in an *instance-isolated* manner: each sample is judged primarily from patterns learned during training, without access to authentic external references for comparative verification (Cozzolino et al., 2024a; Yan et al., 2024b).

3 Methodology

3.1 Problem Formulation

We formulate multimodal manipulation detection as reference-grounded verification. Let (I, T) denote a query image–text pair and $\mathcal{R} = \{(I_k, T_k)\}_{k=1}^N$ an authentic reference library. Instead of judging (I, T) in isolation, our detector conditions its prediction on retrieved evidence:

$$\mathcal{D}_\theta(I, T; \mathcal{R}) = \mathcal{D}_\theta(I, T \mid I_{\text{ref}}, T_{\text{ref}}), \quad (1)$$

where $(I_{\text{ref}}, T_{\text{ref}}) \in \mathcal{R}$ is the retrieved authentic reference. Thus, manipulation cues are modeled as query-reference inconsistencies rather than absolute artifacts within a single sample.

Figure 2 shows the overall architecture of **REVEAL**. Given a query image–text pair (I, T) , REVEAL first retrieves semantically relevant authen-

tic references ($I_{\text{ref}}, T_{\text{ref}}$) from a reference library, then compares the query with the retrieved evidence through an authenticity-aware fusion module, and finally feeds the fused discrepancy features into a Mixture-of-Experts predictor for authenticity verification and multimodal grounding. Through this pipeline, REVEAL detects manipulations by reasoning over query-reference inconsistencies rather than isolated artifact patterns.

3.2 Reference Retrieval

As shown in Figure 2(a-a), REVEAL retrieves semantically relevant authentic references from a dynamic memory bank during training and an offline gallery at inference. The reference gallery is plug-and-play: for domain-specific detection, it can be constructed from target news sources, while for general-purpose detection, we build a universal gallery containing 170K authentic image-text pairs covering over 40K public figures. This design enables training-free domain adaptation by updating the gallery without modifying model parameters.

During training, we maintain a memory bank of authentic pairs with cached visual embeddings. Crucially, to guarantee strict data isolation and prevent any potential data leakage, each sample in the training set is exclusively paired with its corresponding authentic reference from the training partition.

For each query image I_q , candidate references are retrieved by top- K cosine similarity:

$$\mathcal{K} = \text{TopK}_j \cos(\phi(I_q), \mathbf{f}_j), \quad (2)$$

where $\phi(\cdot)$ is the visual encoder and $\mathbf{f}_j$ denotes the cached embedding of the j -th reference. To improve retrieval quality, we impose a Visual Retrieval Contrastive loss $\mathcal{L}_{\text{VRC}}$ following InfoNCE (Oord et al., 2018), which encourages queries to be close to their authentic counterparts in the embedding space.

At inference time, the selected reference library is indexed as an offline retrieval gallery, and references are retrieved using FAISS (Johnson et al., 2019) for efficient approximate nearest-neighbor search over large-scale authentic evidence.

3.3 Authenticity-Aware Feature Fusion

The retrieved reference provides an authentic anchor for detecting query-reference discrepancies. As shown in Figure 2(a-b), we propose Authenticity Conditioned Cross Attention (ACCA) to com-

pare query and reference features and produce discrepancy-aware representations.

For textual comparison, query caption tokens attend to the retrieved reference caption, yielding a discrepancy-aware textual representation:

$$\mathbf{T}_{\text{diff}} = \text{CrossAttn}(\mathbf{T}_q, \mathbf{T}_{\text{ref}}, \mathbf{T}_{\text{ref}}), \quad (3)$$

where $\mathbf{T}_{\text{diff}} = [t_{\text{cls}}^a, t_{\text{tok}}^a]$, $\mathbf{T}_q = [t_{\text{cls}}, t_{\text{tok}}]$ and $\mathbf{T}_{\text{ref}} = [t_{\text{cls}}^{\text{ref}}, t_{\text{tok}}^{\text{ref}}]$. We further introduce Reference-Guided Attention Supervision (RGAS) to regularize this attention, encouraging authentic tokens to align with matched reference evidence while guiding manipulated tokens to search broader reference context. The RGAS loss is formulated as:

$$\mathcal{L}_{\text{RGAS}} = \frac{1}{|\mathcal{V}|} \sum_{(i,j) \in \mathcal{V}} \ell(A_{i,j}, G_{i,j}), \quad (4)$$

where $\mathcal{V}$ denotes valid non-padding positions.

For the visual modality, we retrieve the top-ranked authentic sample and use it as the reference anchor for discrepancy modeling. We model anchor-relative discrepancies by comparing the query image with the retrieved reference in the feature space. Specifically, the query and reference features are compared through element-wise subtraction and transformed into manipulation-aware visual representations. Finally, textual and visual discrepancy features are fused through cross-modal attention, enabling the model to jointly reason over semantic and visual evidence for detection and grounding.

3.4 Reference-Distilled Task-Adaptive Experts

As shown in Figure 2(a-c), we design a Reference-Distilled Task-Adaptive Experts architecture to address the multi-granularity demands of multimodal verification. Detection tasks rely on holistic semantic reasoning, while grounding tasks require fine-grained local alignment. We therefore adopt an MoE architecture with task-aware routing, where explicit task identifiers guide experts to specialize in task-specific feature patterns.

Expert Network Design. To address the heterogeneous demands of reference-grounded verification, we define a task pool $\mathcal{T} = \{\text{BIC}, \text{IMG}, \text{MLC}, \text{TMG}\}$, as illustrated in Figure 2. Recognizing that classification and grounding inherently require distinct feature granularities, we allocate a dedicated pool of N experts to each task $t \in \mathcal{T}$. This isolation enables

classification-oriented experts to extract holistic representations, while grounding-oriented experts isolate fine-grained spatial or token-level cues. Formally, each expert is instantiated as an independent feed-forward network:

$$\mathcal{E}_n^{(t)}(\mathbf{x}) = \text{FFN}_n^{(t)}(\mathbf{x}), \quad n \in \{1, \dots, N\}. \quad (5)$$

This task-decoupled design allows each expert pool to learn task-specific transformations and mitigates interference between global detection and fine-grained grounding objectives.

Task-Aware Routing. To address heterogeneous sub-task requirements, we adopt a task-aware MoE head whose routing is conditioned on both input features and task identity. For each task $t \in \mathcal{T}$, we use an independent expert pool $\{\mathcal{E}_n^{(t)}\}_{n=1}^N$ and a learnable task embedding $\mathbf{e}_t \in \mathbb{R}^{d/4}$. The MoE head is applied separately to each task with input $\mathbf{X}^{(t)} \in \mathbb{R}^{L_t \times d}$, where $L_t = 1$ for BIC, IMG, and MLC using $\mathbf{x}_{\text{cls}}$, and $L_t = L$ for TMG using $\mathbf{X}_{\text{tok}}$. The router mean-pools the input and concatenates it with the task embedding:

$$\mathbf{h}^{(t)} = \text{MeanPool}(\mathbf{X}^{(t)}) \oplus \mathbf{e}_t. \quad (6)$$

A lightweight gating network then produces the routing distribution over the N experts:

$$\mathbf{p}^{(t)} = \text{softmax}(\text{Gate}(\mathbf{h}^{(t)})). \quad (7)$$

We select the top- K experts according to $\mathbf{p}^{(t)}$ and re-normalize their weights:

$$\tilde{p}_n^{(t)} = \frac{p_n^{(t)}}{\sum_{j \in \mathcal{S}^{(t)}} p_j^{(t)}}, \quad n \in \mathcal{S}^{(t)}, \quad (8)$$

where $\mathcal{S}^{(t)} = \text{TopK}(\mathbf{p}^{(t)})$. The task output is obtained by aggregating the selected experts:

$$\mathbf{Y}^{(t)} = \sum_{n \in \mathcal{S}^{(t)}} \tilde{p}_n^{(t)} \mathcal{E}_n^{(t)}(\mathbf{X}^{(t)}). \quad (9)$$

For BIC, MLC, and IMG, the MoE operates on sentence-level features to produce global classification or box regression outputs, while for TMG, it is applied to token-level features to generate manipulation logits for each token. Thus, the router performs task-conditioned expert selection, and each task-specific expert pool learns features suited to its own reasoning granularity.

Reference-Enhanced Expert Distillation. Text Manipulation Grounding (TMG) is challenging

because manipulated tokens are sparse and can be weakened during multi-task optimization. To improve token-level sensitivity, we introduce a reference-enhanced teacher for TMG. Unlike the student head, the teacher directly takes the query-reference text pair $[\mathbf{T}_q; \mathbf{T}_{\text{ref}}]$ as input, preserving fine-grained discrepancy cues between the query and authentic evidence. The teacher’s predictions are then distilled to the MoE student through a temperature-scaled KL divergence loss:

$$\mathcal{L}_{\text{distill}} = \tau^2 D_{\text{KL}}(\sigma(\mathbf{z}_{\text{teacher}}/\tau) \parallel \sigma(\mathbf{z}_{\text{student}}/\tau)). \quad (10)$$

By providing soft supervision, this distillation mechanism forces the student to maintain acute sensitivity to subtle textual manipulations.

3.5 Objective Function

Following prior works (Shao et al., 2023, 2024), we define $\mathcal{L}_{\text{Task}}$ as the sum of four task losses:

$$\mathcal{L}_{\text{Task}} = \mathcal{L}_{\text{BIC}} + \mathcal{L}_{\text{MLC}} + \mathcal{L}_{\text{IMG}} + \mathcal{L}_{\text{TMG}}, \quad (11)$$

where classification objectives are optimized with cross-entropy losses, image grounding with L_1 and Generalized IoU losses (Rezatofighi et al., 2019), and text grounding with class-weighted cross-entropy.

To empower the framework with reference-grounded verification and high-recall optimization, we integrate our proposed contrastive, attention-guided, and distillation constraints. The overall optimization objective is formulated as:

$$\mathcal{L}_{\text{total}} = \mathcal{L}_{\text{Task}} + \alpha \mathcal{L}_{\text{VRC}} + \mathcal{L}_{\text{RGAS}} + \beta \mathcal{L}_{\text{distill}}, \quad (12)$$

where $\mathcal{L}_{\text{VRC}}$ denotes a unified contrastive term consisting of the visual retrieval contrastive loss, $\mathcal{L}_{\text{RGAS}}$ supervises the cross-modal attention patterns for verification, and $\mathcal{L}_{\text{distill}}$ transfers recall-centric knowledge from the teacher expert. α and β are trade-off hyperparameters to balance these objectives.

4 Experiments

Experimental Setup. For reference-grounded verification, we build an inference-time library from VisualNews (Liu et al., 2021), containing 170K authentic image-text pairs covering over 40K public figures.

Table 1: Performance comparison with state-of-the-art methods on DGM⁴ dataset (Shao et al., 2023). **Bold** indicates best performance, and underlined indicates second-best. $\uparrow/\downarrow$ indicates higher/lower is better, and Δ AVG denotes the average improvement compared to HAMMER.

Methods	Binary Cls			Multi-Label Cls			Image Grounding			Text Grounding			Δ AVG
	AUC $\uparrow$	EER $\downarrow$	ACC $\uparrow$	mAP $\uparrow$	CF1 $\uparrow$	OF1 $\uparrow$	IoU _m $\uparrow$	IoU ₅₀ $\uparrow$	IoU ₇₅ $\uparrow$	Precision $\uparrow$	Recall $\uparrow$	F1 $\uparrow$	
CLIP (Radford et al., 2021)	83.22	24.61	76.40	66.00	59.52	62.31	49.51	50.03	38.79	58.12	22.11	32.03	–
VILT (Kim et al., 2021)	85.16	22.88	78.38	72.37	66.14	66.00	59.32	65.18	48.10	66.48	49.88	57.00	–
HAMMER (Shao et al., 2023)	93.19	14.10	86.39	86.22	79.37	80.37	76.45	83.75	76.06	75.01	68.02	71.35	0.00
HAMMER++ (Shao et al., 2024)	93.33	14.06	86.66	86.41	79.73	80.71	76.46	83.77	76.03	73.05	72.14	72.59	+0.35
ViKi (Li et al., 2024)	93.51	13.87	86.67	86.58	81.07	80.10	76.51	83.95	75.77	77.79	66.06	72.44	+0.38
UFAFormer (Liu et al., 2025a)	93.81	13.60	86.80	87.85	80.31	81.48	78.33	85.39	79.20	73.35	70.73	72.02	+1.13
ASAP (Zhang et al., 2025b)	94.38	12.73	87.71	88.53	81.72	82.89	77.35	84.75	76.54	79.38	<u>73.86</u>	76.52	+2.40
IDseq (Liu et al., 2025b)	<u>94.55</u>	<u>11.40</u>	<u>88.94</u>	<u>90.01</u>	<u>83.00</u>	<u>84.90</u>	<u>83.33</u>	<u>89.39</u>	<u>86.19</u>	75.96	71.23	73.52	+3.96
REVEAL (Ours)	97.82	3.75	93.18	91.37	85.13	86.68	85.51	93.53	86.52	<u>79.31</u>	74.45	<u>75.34</u>	+6.92

Table 2: Comparison with state-of-the-art methods on the SAMM dataset using the original SAMM image reference gallery. **Bold** indicates best and underlined indicates second-best. $\uparrow/\downarrow$ indicates higher/lower is better, and Δ AVG denotes the average improvement compared to HAMMER.

Methods	Binary Cls			Multi-Label Cls			Image Grounding			Text Grounding			Δ AVG
	AUC $\uparrow$	EER $\downarrow$	ACC $\uparrow$	mAP $\uparrow$	CF1 $\uparrow$	OF1 $\uparrow$	IoU _m $\uparrow$	IoU ₅₀ $\uparrow$	IoU ₇₅ $\uparrow$	Precision $\uparrow$	Recall $\uparrow$	F1 $\uparrow$	
VILT (Kim et al., 2021)	96.10	11.02	88.83	96.03	90.21	89.84	65.38	71.91	54.49	77.42	69.78	73.40	–
HAMMER (Shao et al., 2023)	97.85	7.80	92.43	97.98	93.77	93.44	77.68	84.41	78.44	85.94	82.74	84.31	0.00
HAMMER++ (Shao et al., 2024)	97.60	7.99	92.26	97.72	93.70	93.34	77.66	84.12	78.62	85.86	82.89	84.35	-0.09
Qwen2.5VL-72b (Liu et al., 2024)	76.67	44.93	55.06	–	–	–	–	–	–	–	–	–	–
FKA-Owl (Liu et al., 2024)	98.09	7.19	92.60	2.53	13.97	13.84	66.40	73.54	54.82	19.16	49.71	27.66	-38.01
RamDG (Shen et al., 2025)	<u>98.79</u>	<u>5.42</u>	<u>94.66</u>	<u>98.86</u>	<u>95.52</u>	<u>95.33</u>	<u>80.90</u>	<u>87.56</u>	<u>82.00</u>	<u>86.16</u>	<u>83.54</u>	<u>84.83</u>	<u>+1.80</u>
REVEAL (Ours)	99.83	0.65	97.04	99.56	96.43	96.19	82.69	87.68	82.84	87.25	85.12	86.17	+3.25

4.1 Quantitative Results

We evaluate REVEAL from four perspectives: in-domain performance on DGM⁴ (Shao et al., 2023), robustness on SAMM (Shen et al., 2025), cross-domain generalization across news sources, and zero-shot cross-dataset transfer to MDSM.

(1) Superiority on DGM⁴ (Tab. 1). By using our comprehensive reference library, REVEAL achieves consistent improvements across all four task families, including binary classification, multi-label classification, image grounding, and text grounding. It obtains an average gain of +6.92% over HAMMER (Shao et al., 2023), with 97.82% AUC and 93.18% ACC for binary classification. Notably, REVEAL reduces EER from 14.10% to 3.75% compared with HAMMER, showing that reference-grounded comparison provides more reliable authenticity judgments than artifact-only detection. Compared with IDseq (Liu et al., 2025b), REVEAL achieves stronger overall performance, and it substantially outperforms ASAP (Zhang et al., 2025b) on binary classification and image grounding, demonstrating the advantage of retrieval-augmented verification beyond cross-modal alignment.

(2) Robustness on SAMM (Tab. 2). To further evaluate robustness beyond DGM⁴, we benchmark REVEAL on SAMM (Shen et al., 2025), which is constructed with different manipulation pipelines. REVEAL establishes a new state of the art across all metrics, achieving 99.83% AUC, 0.65% EER, and 97.04% ACC. Compared with the strongest baseline RamDG (Shen et al., 2025), REVEAL reduces EER from 5.42% to 0.65% and improves IoU_m by 1.79 points, indicating that authentic reference anchors remain effective under different manipulation distributions.

(3) Cross-Domain Generalization (Tab. 3). To evaluate domain robustness, we train models on a single news source and evaluate them across all four sources. To simulate a challenging, suboptimal retrieval scenario, we introduce a variant (Our-Top2) that intentionally excludes the top-1 retrieved reference. Despite this restriction, it consistently outperforms HAMMER (Shao et al., 2023), HAMMER++ (Shao et al., 2024), and ASAP (Zhang et al., 2025b), achieving average improvements of +10.2% in ACC and +15.8% in IoU_m over ASAP. Furthermore, when the full gallery is accessible (Our-Top1), performance improves even further.

Table 3: **Cross-domain generalization performance (%)**. By using our comprehensive reference library, models are trained on one news source (indicated by row blocks: BBC, Guardian, USA Today, or Washington Post) and evaluated on all four sources (columns). Gray cells denote in-domain evaluation where training and testing sources match; other cells represent cross-domain transfer scenarios. Best results per column are in **bold**.

Methods	Train \ Test	BBC				Guardian				USA Today				Wash. Post			
		ACC _{cls}	mAP	IoU _m	ACC _{tok}	ACC _{cls}	mAP	IoU _m	ACC _{tok}	ACC _{cls}	mAP	IoU _m	ACC _{tok}	ACC _{cls}	mAP	IoU _m	ACC _{tok}
HAMMER (Shao et al., 2023)	BBC	81.75	79.73	63.73	91.47	75.76	66.13	59.69	77.44	68.11	50.84	43.94	64.91	68.21	52.69	45.60	68.48
HAMMER++ (Shao et al., 2024)		81.96	79.92	63.77	90.84	75.80	66.59	60.43	77.13	67.65	50.33	43.01	64.16	68.10	52.16	45.47	68.41
ASAP (Zhang et al., 2025b)		82.48	80.09	64.05	91.91	76.69	67.71	62.89	79.63	68.94	51.58	44.81	67.58	68.51	52.50	46.52	70.46
Our-Top2		85.28	80.72	70.30	92.27	83.26	70.69	69.83	84.90	79.53	59.65	63.10	80.72	81.45	59.67	65.15	82.61
Our-Top1		97.09	90.14	83.62	93.90	95.34	82.43	82.90	91.48	93.91	72.42	78.41	90.82	93.66	73.53	78.86	91.63
HAMMER (Shao et al., 2023)	Guardian	66.65	59.80	57.30	87.22	87.13	83.13	73.53	89.60	66.04	59.76	36.17	87.62	66.39	59.52	35.59	88.98
HAMMER++ (Shao et al., 2024)		65.34	59.68	56.19	87.53	86.82	83.29	73.33	89.74	65.99	62.23	36.42	87.16	66.54	61.49	35.40	88.85
ASAP (Zhang et al., 2025b)		68.65	66.23	59.22	88.84	88.36	86.23	77.86	91.06	69.45	65.17	40.82	87.73	69.06	65.47	41.01	89.66
Our-Top2		81.21	64.04	70.90	89.39	86.93	81.26	72.43	92.67	80.72	73.75	81.63	82.18	84.12	66.74	64.06	90.04
Our-Top1		95.07	77.78	79.69	91.76	97.70	90.38	83.15	93.41	95.92	85.58	80.72	91.79	95.18	74.4	81.27	91.75
HAMMER (Shao et al., 2023)	USA Today	70.17	52.64	45.54	82.69	74.39	59.63	50.94	83.02	76.66	70.32	49.73	90.9	75.77	65.33	48.38	89.95
HAMMER++ (Shao et al., 2024)		70.25	52.36	47.07	82.29	74.84	59.17	52.07	82.22	76.80	71.27	50.72	91.15	75.85	66.30	50.30	90.11
ASAP (Zhang et al., 2025b)		74.02	56.25	50.95	81.44	79.91	63.58	57.68	82.82	86.10	75.63	56.02	92.64	83.95	70.67	54.97	91.00
Our-Top2		80.96	63.24	65.15	87.30	82.22	66.55	69.20	86.80	84.42	79.14	68.14	92.16	85.32	75.10	67.43	92.13
Our-Top1		94.35	75.62	79.29	91.35	94.97	78.46	83.84	91.31	97.25	87.41	82.5	93.13	96.93	84.17	81.59	93.59
HAMMER (Shao et al., 2023)	Wash. Post	70.58	53.72	44.61	83.10	74.10	58.8	50.27	83.36	74.80	66.84	47.22	89.71	75.74	65.71	48.99	89.84
HAMMER++ (Shao et al., 2024)		70.93	53.02	44.66	82.23	75.03	59.82	50.52	83.50	75.49	68.08	47.45	89.01	75.85	67.50	48.52	89.89
ASAP (Zhang et al., 2025b)		71.86	57.28	49.75	82.77	80.71	63.60	56.29	84.04	77.58	71.59	53.00	89.25	78.57	73.10	54.10	91.91
Our-Top2		82.24	61.16	61.70	87.06	82.54	65.34	65.28	86.43	80.85	72.94	61.07	90.88	81.73	75.37	63.35	91.33
Our-Top1		95.89	76.46	78.60	91.55	95.63	79.05	81.70	90.73	96.98	84.16	80.68	91.38	97.53	86.37	79.58	92.88

Table 4: **Cross-dataset generalization on MDSM (%)**. Models are trained on the Guardian domain of DGM⁴ and evaluated using our comprehensive reference library. **Bold** indicates best and underlined indicates second-best.

Methods	Guardian			BBC			NYT			USA Today			Wash. Post			AVG		
	ACC	mAP	mIoU	ACC	mAP	mIoU	ACC	mAP	mIoU	ACC	mAP	mIoU	ACC	mAP	mIoU	ACC	mAP	mIoU
HAMMER (Shao et al., 2023)	73.51	44.06	60.78	51.53	38.44	63.21	65.33	25.23	38.94	59.17	31.78	28.14	67.81	33.89	27.48	63.47	34.68	43.71
HAMMER++ (Shao et al., 2024)	73.57	<u>45.86</u>	60.74	50.72	39.12	<u>63.97</u>	65.21	25.09	38.22	59.84	33.73	28.71	67.62	35.30	28.40	63.39	35.82	44.01
FKA-Owl (Liu et al., 2024)	69.18	19.46	15.01	<u>57.94</u>	22.94	11.37	61.29	18.03	12.27	58.95	30.68	16.74	62.30	35.15	18.01	61.93	25.25	14.68
RamDG (Shen et al., 2025)	72.49	43.84	60.69	55.27	<u>41.25</u>	63.50	65.55	25.78	40.28	66.82	34.33	28.23	66.15	36.17	27.72	65.26	<u>36.27</u>	44.08
ASAP (Zhang et al., 2025b)	<u>73.63</u>	44.91	61.25	51.55	38.97	63.74	<u>66.13</u>	26.29	39.67	59.89	33.47	29.87	67.71	35.44	29.61	63.78	35.82	44.83
AMD (Zhang et al., 2025a)	69.89	33.67	73.17	52.68	18.39	62.11	64.62	<u>29.89</u>	41.57	73.28	<u>37.04</u>	<u>50.89</u>	73.24	<u>39.61</u>	<u>50.94</u>	<u>66.74</u>	31.72	<u>55.74</u>
REVEAL (Ours)	78.52	50.28	<u>65.31</u>	72.69	55.22	76.66	70.22	31.56	<u>40.56</u>	<u>66.62</u>	51.46	63.95	<u>70.51</u>	51.92	67.08	71.71	48.09	62.71

Crucially, this gain is achieved simply by updating the retrieval index without any parameter tuning, confirming that our plug-and-play memory effectively enables training-free domain adaptation.

(4) Zero-Shot Cross-Dataset Transfer (Tab. 4). We further test generalization under a harder setting by training models only on the Guardian split of DGM⁴ and evaluating them on MDSM without fine-tuning. REVEAL achieves the best average results with 71.71% ACC, 48.09% mAP, and 62.71% mIoU, surpassing the next-best baseline by +4.97%, +11.82%, and +6.97%, respectively. This demonstrates that reference-grounded verification generalizes across different news sources, manipulation pipelines, and annotation protocols.

4.2 Ablation Study

We conduct comprehensive ablation experiments to dissect the contribution of each component in REVEAL. The baseline is a standard BEiT-3 model that relies solely on internal artifact memorization.

To validate our reference-grounded paradigm, we systematically integrate the two parallel branches of our Authenticity Conditioned Cross Attention (ACCA) module. We first activate the Visual Reference Stream, which processes retrieved I_{ref} via the visual discrepancy modeling branch. Subsequently, we enable the Text Reference Stream, which leverages the textual consistency verification branch to align query texts with retrieved T_{ref} . Finally, we orchestrate these reference-enhanced features via the Task-Aware MoE. Table 5 summarizes the progressive improvements.

Visual Reference Stream (I_{ref}). Activating the visual reference stream introduces authentic image anchors to the visual discrepancy modeling branch of ACCA. This integration yields substantial gains across all metrics, with AUC improving from 90.07% to 95.78% (+5.71%) and Image Grounding (IoU_m) increasing from 79.21% to 84.14% (+4.93%). These results validate that the

Table 5: Ablation study of different components on the DGM⁴ dataset using our comprehensive reference library. I_{ref} : Visual Reference Stream; T_{ref} : Text Reference Stream; T_{moe} : Reference-Distilled Task-Adaptive Experts. Baseline denotes the model without any retrieval augmentation.

Variants	Binary Cls			Multi-Label Cls			Image Grounding			Text Grounding		
	AUC $\uparrow$	EER $\downarrow$	ACC $\uparrow$	mAP $\uparrow$	CF1 $\uparrow$	OF1 $\uparrow$	IoU _m $\uparrow$	IoU ₅₀ $\uparrow$	IoU ₇₅ $\uparrow$	Precision $\uparrow$	Recall $\uparrow$	F1 $\uparrow$
Baseline	90.07	15.84	84.78	83.23	78.69	78.84	79.21	86.93	74.72	71.70	66.02	68.74
w/ I_{ref}	95.78	5.15	91.75	89.59	82.44	83.22	84.14	92.30	80.82	74.96	64.13	69.12
w/ $I_{\text{ref}}+T_{\text{ref}}$	96.66	4.31	92.91	89.95	83.54	84.14	84.21	92.39	81.40	82.84	68.83	75.15
w/ $I_{\text{ref}}+T_{\text{ref}}+T_{\text{moe}}$	97.82	3.75	93.18	91.37	85.13	86.68	85.51	93.53	86.52	79.31	74.45	75.34

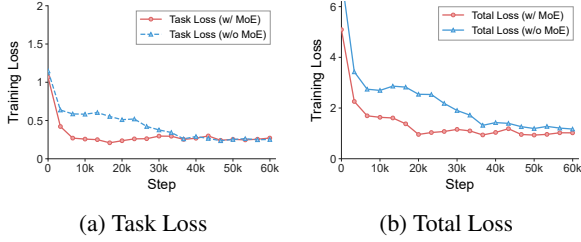


Figure 3: Training dynamics on the DGM⁴ dataset. The curves (Task Loss and Total Loss) demonstrate that incorporating the proposed MoE detection head leads to faster convergence compared to the baseline.

ACCA module effectively transforms the detection paradigm. By computing feature-level residuals against the retrieved I_{ref} , the model shifts from searching for absolute artifacts to measuring relative inconsistencies, thereby significantly enhancing localization precision.

Text Reference Stream (T_{ref}). Complementing the visual pathway, the text reference stream integrates authentic captions through the textual consistency verification branch of ACCA. This transforms the model into a complete dual-stream framework, resulting in a pronounced improvement in text-related metrics (Text Grounding F1: +6.03%). The performance surge is attributed to the semantic anchoring mechanism within ACCA. By employing cross-attention to contrast query texts against verified logic in T_{ref} , the model becomes capable of exposing subtle semantic contradictions that purely statistical language models fail to detect.

Impact of Task-Aware MoE (T_{moe}). The MoE architecture with teacher expert distillation provides additional performance gains across all metrics. As discussed in Section 3.4, global classification and local grounding tasks impose different optimization pressures on shared representations. The MoE design addresses this by routing features to specialized experts, allowing each task to lever-

age tailored feature transformations while still benefiting from shared low-level representations. The consistent improvements across both classification and grounding metrics confirm that this architecture successfully mitigates task interference.

Figure 3 compares the training dynamics of REVEAL with and without the task-decoupling MoE detection head. The MoE-equipped model shows faster optimization in the early training stage and consistently reaches a lower total loss throughout training. For the task loss, both variants eventually converge to comparable values, while the MoE variant descends more rapidly and remains more stable after convergence. These trends suggest that task-adaptive expert routing facilitates optimization under heterogeneous objectives, allowing global classification and fine-grained grounding tasks to share representations more effectively while reducing optimization interference.

5 Conclusion

We present REVEAL, a retrieval augmented framework that reformulates multimodal manipulation detection as reference-grounded verification. By retrieving authentic references and modeling query-reference discrepancies, REVEAL shifts from isolated artifact memorization to comparative reasoning. Extensive experiments demonstrate state-of-the-art performance across detection and grounding tasks. Notably, our paradigm enables training-free domain adaptation by simply updating the reference library, achieving strong cross-domain transferability without parameter updates. The reference-grounded paradigm offers a complementary perspective to artifact-based detection, more closely aligning with human fact-checking processes while providing interpretable evidence for detection decisions.

Ethics Statement

All datasets utilized in this study are derived from publicly available sources and legitimate news media. We strictly ensure that the collected data exclusively features public figures in public spheres, thereby avoiding any privacy infringement of private individuals. Furthermore, we explicitly declare that all data and the proposed models are restricted to non-commercial, scientific research purposes aimed at combating multimodal misinformation.

Limitations

Like other retrieval-augmented methods, its performance hinges on the coverage and quality of the reference library. For rare or out-of-distribution entities, retrieved neighbors may be uninformative, degrading the reference-grounded paradigm under retrieval failures. Although the reference gallery can be constructed offline, our implementation builds the gallery at a speed of 697 images per second; when the gallery is large or needs to be frequently updated, this additional preprocessing step still introduces certain computational overhead. Moreover, due to space limitations in the main text, we moved several supplementary experiments and analyses to the appendix, which may slightly affect the overall reading experience.

References

- Akari Asai, Zeqiu Wu, Yizhong Wang, Avirup Sil, and Hannaneh Hajishirzi. 2024. Self-rag: Learning to retrieve, generate, and critique through self-reflection. In *International Conference on Learning Representations*.
- Davide Caffagni, Federico Cocchi, Nicholas Moratelli, Sara Sarto, Marcella Cornia, Lorenzo Baraldi, and Rita Cucchiara. 2024. Wiki-llava: Hierarchical retrieval-augmented generation for multimodal llms. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 1818–1826.
- Tianlong Chen, Xuxi Chen, Xianzhi Du, Abdullah Rashwan, Fan Yang, Huizhong Chen, Zhangyang Wang, and Yeqing Li. 2023. Adamv-moe: Adaptive multi-task vision mixture-of-experts. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 17346–17357.
- Wenhu Chen, Hexiang Hu, Xi Chen, Pat Verga, and William Cohen. 2022. Murag: Multimodal retrieval-augmented generator for open question answering over images and text. In *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*, pages 5558–5570.
- Riccardo Corvi, Davide Cozzolino, Giada Zingarini, Giovanni Poggi, Koki Nagano, and Luisa Verdoliva. 2023. On the detection of synthetic images generated by diffusion models. In *ICASSP 2023-2023 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 1–5. IEEE.
- Davide Cozzolino, Giovanni Poggi, Riccardo Corvi, Matthias Nießner, and Luisa Verdoliva. 2024a. Raising the bar of ai-generated image detection with clip. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR) Workshops*, pages 4356–4366.
- Davide Cozzolino, Giovanni Poggi, Riccardo Corvi, Matthias Nießner, and Luisa Verdoliva. 2024b. Raising the bar of ai-generated image detection with clip. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 4356–4366.
- Xinjie Cui, Yuezun Li, Ao Luo, Jiaran Zhou, and Junyu Dong. 2025. Forensics adapter: Adapting clip for generalizable face forgery detection. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pages 19207–19217.
- Alexander Diel, Tania Lalgi, Isabel Carolin Schröter, Karl F MacDorman, Martin Teufel, and Alexander Bäuerle. 2024. Human performance in detecting deepfakes: A systematic review and meta-analysis of 56 papers. *Computers in Human Behavior Reports*, 16:100538.
- Matthew Groh, Ziv Epstein, Chaz Firestone, and Rosalind Picard. 2022. Deepfake detection by human crowds, machines, and machine-informed crowds. *Proceedings of the National Academy of Sciences*, 119(1):e2110013119.
- Xuming Hu, Zhaochen Hong, Zhijiang Guo, Lijie Wen, and Philip Yu. 2023. Read it twice: Towards faithfully interpretable fact verification by revisiting evidence. In *Proceedings of the 46th International ACM SIGIR Conference on Research and Development in Information Retrieval*, pages 2319–2323.
- Runsheng Huang, Liam Dugan, Yue Yang, and Chris Callison-Burch. 2024. **MiRAGeNews: Multimodal realistic AI-generated news detection**. In *Findings of the Association for Computational Linguistics: EMNLP 2024*, pages 16436–16448, Miami, Florida, USA. Association for Computational Linguistics.
- Zhengbao Jiang, Frank F Xu, Luyu Gao, Zhiqing Sun, Qian Liu, Jane Dwivedi-Yu, Yiming Yang, Jamie Callan, and Graham Neubig. 2023. Active retrieval augmented generation. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 7969–7992.
- Jeff Johnson, Matthijs Douze, and Hervé Jégou. 2019. Billion-scale similarity search with gpus. *IEEE Transactions on Big Data*, 7(3):535–547.

- Wonjae Kim, Bokyung Son, and Ildoo Kim. 2021. Vilt: Vision-and-language transformer without convolution or region supervision. In *International conference on machine learning*, pages 5583–5594. PMLR.
- Dmitry Lepikhin, HyoukJoong Lee, Yuanzhong Xu, Dehao Chen, Orhan Firat, Yanping Huang, Maxim Krikun, Noam Shazeer, and Zhifeng Chen. 2021. Gshard: Scaling giant models with conditional computation and automatic sharding. In *International Conference on Learning Representations*.
- Lingzhi Li, Jianmin Bao, Ting Zhang, Hao Yang, Dong Chen, Fang Wen, and Baining Guo. 2020. Face x-ray for more general face forgery detection. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 5001–5010.
- Qilei Li, Mingliang Gao, Guisheng Zhang, Wenzhe Zhai, Jinyong Chen, and Gwanggil Jeon. 2024. Towards multimodal disinformation detection by vision-language knowledge interaction. *Information Fusion*, 102:102037.
- Fuxiao Liu, Yinghan Wang, Tianlu Wang, and Vicente Ordonez. 2021. Visual news: Benchmark and challenges in news image captioning. In *Proceedings of the 2021 conference on empirical methods in natural language processing*, pages 6761–6771.
- Huan Liu, Zichang Tan, Qiang Chen, Yunchao Wei, Yao Zhao, and Jingdong Wang. 2025a. Unified frequency-assisted transformer framework for detecting and grounding multi-modal manipulation. *International Journal of Computer Vision*, 133(3):1392–1409.
- Runxin Liu, Tian Xie, Jiaming Li, Lingyun Yu, and Hongtao Xie. 2025b. Idseq: Decoupled and sequentially detecting and grounding multi-modal media manipulation. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 39, pages 496–504.
- Xuannan Liu, Peipei Li, Huaibo Huang, Zekun Li, Xing Cui, Jiahao Liang, Lixiong Qin, Weihong Deng, and Zhaofeng He. 2024. Fka-owl: Advancing multimodal fake news detection through knowledge-augmented lvlms. In *Proceedings of the 32nd ACM International Conference on Multimedia*, pages 10154–10163.
- Aaron van den Oord, Yazhe Li, and Oriol Vinyals. 2018. Representation learning with contrastive predictive coding. *arXiv preprint arXiv:1807.03748*.
- Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, and 1 others. 2021. Learning transferable visual models from natural language supervision. In *International conference on machine learning*, pages 8748–8763. PmLR.
- Md Mahbubur Rahman, Shufeng Hao, Chongyang Shi, An Lao, and Jinyan Liu. 2025. Exploring hyperbolic hierarchical structure for multimodal rumor detection. In *Findings of the Association for Computational Linguistics: EMNLP 2025*, pages 115–134, Suzhou, China. Association for Computational Linguistics.
- Hamid Rezaatofghi, Nathan Tsoi, JunYoung Gwak, Amir Sadeghian, Ian Reid, and Silvio Savarese. 2019. Generalized intersection over union: A metric and a loss for bounding box regression. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 658–666.
- Jonas Ricker, Simon Damm, Thorsten Holz, and Asja Fischer. 2022. Towards the detection of diffusion model deepfakes. *arXiv preprint arXiv:2210.14571*.
- Andreas Rossler, Davide Cozzolino, Luisa Verdoliva, Christian Riess, Justus Thies, and Matthias Nießner. 2019. Faceforensics++: Learning to detect manipulated facial images. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 1–11.
- Rui Shao, Tianxing Wu, and Ziwei Liu. 2023. Detecting and grounding multi-modal media manipulation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 6904–6913.
- Rui Shao, Tianxing Wu, Jianlong Wu, Liqiang Nie, and Ziwei Liu. 2024. Detecting and grounding multimodal media manipulation and beyond. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 46(8):5556–5574.
- Noam Shazeer, Azalia Mirhoseini, Krzysztof Maziarz, Andy Davis, Quoc Le, Geoffrey Hinton, and Jeff Dean. 2017. Outrageously large neural networks: The sparsely-gated mixture-of-experts layer. In *International Conference on Learning Representations*.
- Jinjie Shen, Yaxiong Wang, Lechao Cheng, Nan Pu, and Zhun Zhong. 2025. Beyond artificial misalignment: Detecting and grounding semantic-coordinated multimodal manipulations. In *Proceedings of the 33rd ACM International Conference on Multimedia*, pages 11308–11317.
- Klaire Somoray, Dan J Miller, and Mary Holmes. 2025. Human performance in deepfake detection: a systematic review. *Human Behavior and Emerging Technologies*, 2025(1):1833228.
- Jonathan Tonglet, Marie-Francine Moens, and Iryna Gurevych. 2024. “image, tell me your story!” predicting the original meta-context of visual misinformation. In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, pages 7845–7864, Miami, Florida, USA. Association for Computational Linguistics.
- Shi-Qi Yan, Jia-Chen Gu, Yun Zhu, and Zhen-Hua Ling. 2024a. Corrective retrieval augmented generation. *arXiv preprint arXiv:2401.15884*.
- Zehong Yan, Peng Qi, Wynne Hsu, and Mong-Li Lee. 2025. TRUST-VL: An explainable news assistant for general multimodal misinformation detection. In

Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing, pages 5588–5604, Suzhou, China. Association for Computational Linguistics.

Zhiyuan Yan, Yuhao Luo, Siwei Lyu, Qingshan Liu, and Baoyuan Wu. 2024b. Transcending forgery specificity with latent space augmentation for generalizable deepfake detection. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 8984–8994.

Diji Yang, Jinmeng Rao, Kezhen Chen, Xiaoyuan Guo, Yawen Zhang, Jie Yang, and Yi Zhang. 2024. Im-rag: Multi-round retrieval-augmented generation through learning inner monologues. In *Proceedings of the 47th International ACM SIGIR Conference on Research and Development in Information Retrieval*, pages 730–740.

Shi Yu, Chaoyue Tang, Bokai Xu, Junbo Cui, Junhao Ran, Yukun Yan, Zhenghao Liu, Shuo Wang, Xu Han, Zhiyuan Liu, and 1 others. 2024a. Vis-rag: Vision-based retrieval-augmented generation on multi-modality documents. *arXiv preprint arXiv:2410.10594*.

Yue Yu, Wei Ping, Zihan Liu, Boxin Wang, Jiaxuan You, Chao Zhang, Mohammad Shoeybi, and Bryan Catanzaro. 2024b. Rankrag: Unifying context ranking with retrieval-augmented generation in llms. *Advances in Neural Information Processing Systems*, 37:121156–121184.

Fengzhu Zeng, Wenqian Li, Wei Gao, and Yan Pang. 2024. [Multimodal misinformation detection by learning from synthetic data with multimodal LLMs](#). In *Findings of the Association for Computational Linguistics: EMNLP 2024*, pages 10467–10484, Miami, Florida, USA. Association for Computational Linguistics.

Yuchen Zhang, Yaxiong Wang, Yujiao Wu, Lianwei Wu, Li Zhu, and Zhedong Zheng. 2025a. The coherence trap: When mllm-crafted narratives exploit manipulated visual contexts. *arXiv preprint arXiv:2505.17476*.

Zhenxing Zhang, Yaxiong Wang, Lechao Cheng, Zhun Zhong, Dan Guo, and Meng Wang. 2025b. Asap: Advancing semantic alignment promotes multi-modal manipulation detecting and grounding. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pages 4005–4014.

Zhihao Zhang, Yiran Zhang, Xiyue Zhou, Liting Huang, Imran Razzak, Preslav Nakov, and Usman Naseem. 2025c. [From generation to detection: A multimodal multi-task dataset for benchmarking health misinformation](#). In *Findings of the Association for Computational Linguistics: EMNLP 2025*, pages 24245–24260, Suzhou, China. Association for Computational Linguistics.