

DiscoForcing: A Unified Framework for Real-Time Audio-Driven Character Control with Diffusion Forcing

Kaiyang Ji^{1,2*} Bingsheng Qian^{1,2*} Binghuan Wu¹ Kangyi Chen¹ Ye Shi^{1,2} Jingya Wang^{1†}

Abstract

We study real-time audio-responsive character control as a deployment-faithful problem: strictly causal, bounded-latency streaming that must generate coherent full-body motion at interactive frame rates while the audio condition can change abruptly (tempo shifts, drops, or user edits). Prior music-to-motion systems are largely optimized for offline generation with global context, and degrade in streaming rollouts where conditioning history becomes stale or unreliable. We introduce DiscoForcing, a streaming audio-driven diffusion framework that combines a causal music encoder that captures rhythmic structure and phase dynamics with a diffusion-forcing sequence model trained under heterogeneous noise levels across the temporal horizon. Building on this, we design a hybrid temporal schedule and a history-guided streaming sampler to explicitly trade off responsiveness against long-horizon consistency under non-stationary audio. Implemented in an end-to-end real-time interactive system with on-line avatar playback and humanoid deployment workflows, DiscoForcing delivers more stable long-horizon rollouts and sharper audio-motion alignment than prior baselines under matched causality and latency constraints while maintaining real-time throughput. Project Page: <https://discoforcing.github.io/>

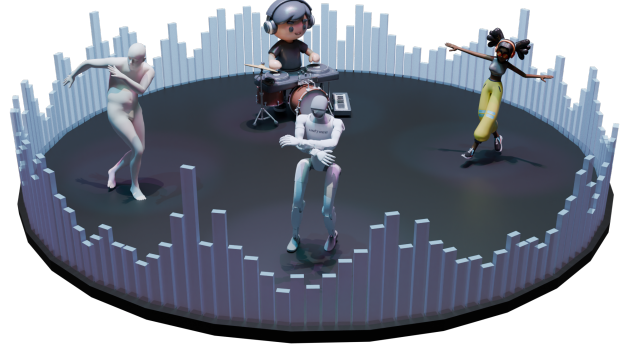


Figure 1. We introduce **DiscoForcing**, a real-time, audio-responsive character control system. Given online streaming audio inputs, DiscoForcing causally synthesizes continuous full-body motions in real time. The generated motion supports two deployment settings: (i) *avatar interactive control* for responsive animation and visualization, and (ii) *physics-based humanoid platform* by converting the predicted motion into executable humanoid joint commands.

that is simultaneously (i) *responsive* to newly arriving audio cues and user edits, (ii) *temporally coherent* over long rollouts, and (iii) *computationally feasible* at interactive frame rates under a strict per-frame budget. Beyond entertainment, this problem provides a concrete and deployment-faithful testbed for studying streaming generative policies under causality and latency constraints, which aligns with the broader goal of making generative sequence models usable in real interactive loops.

Despite rapid progress in music-to-motion generation, most prior methods are developed and validated in an offline regime. They commonly assume access to future audio context (Alexanderson et al., 2023; Li et al., 2021), rely on long temporal windows (Siyao et al., 2022), or perform non-causal inference that can revisit and refine past decisions (Li et al., 2024b). While these choices can improve offline metrics on fixed clips, they do not translate cleanly to streaming deployment. When executed online with zero lookahead, models often exhibit delayed reactions (Xiao et al., 2025), weakened beat synchronization (Tseng et al., 2023), and accumulating artifacts in long-horizon rollouts (Holden et al., 2017). Importantly, this mismatch is structural rather than incidental: streaming execution changes the learning and

1. Introduction

Real-time audio-responsive character control is a core capability for interactive embodied applications, spanning virtual reality avatars, animation-driven simulation, and physical humanoid deployment. In these settings, a system must convert a live music stream into continuous full-body motion

^{*}Equal contribution ¹ShanghaiTech University
²InstAdapt. Correspondence to: Jingya Wang
 <wangjingya@shanghaitech.edu.cn>.

Table 1. Comparative analysis of DiscoForcing versus existing audio-driven human motion synthesis approaches.

Method	online system	long-horizon	music transition	physical platform	user-interactive
Bailando (Siyao et al., 2022)		✓			
EDGE (Tseng et al., 2023)		✓	✓		
Lodge (Li et al., 2024b)		✓			
MEGADance (Yang et al., 2025a)			✓		
FlowerDance (Yang et al., 2025b)					✓
DiscoForcing	✓	✓	✓	✓	✓

inference problem because the model must act causally on incomplete evidence, commit to outputs without revision, and satisfy a hard real-time compute budget (Zhao et al., 2025).

Streaming audio-responsive control is challenging for three intertwined reasons. First, causality and bounded latency remove the anticipatory cues that offline systems exploit for beat alignment and phrase-level structure, making instantaneous synchronization substantially harder (Siyao et al., 2022; Barquero et al., 2024). Second, music streams are non-stationary: tempo shifts, drops, style switches, and user-driven edits can induce abrupt conditioning changes. Over-trusting motion history improves smoothness but slows reaction, whereas aggressively overriding history increases responsiveness but risks discontinuities and jitter (Fan et al., 2025; Huang et al., 2024). Third, long-horizon streaming amplifies error accumulation. Any small prediction error contaminates the future conditioning history, inducing a train–test distribution shift that is exacerbated when the audio condition itself evolves over time (Xiao et al., 2025; Holden et al., 2017).

A central limitation of the current literature is the lack of a **deployment-faithful end-to-end system** for audio-responsive character control. Most prior work is presented as an offline generation model evaluated on fixed clips, rather than a real-time interactive stack that users can directly experience. In practical use, however, the model must run online: it must process streaming audio, produce motion continuously in real time, and commit to outputs without retroactive revision (Dai et al., 2024). Without an integrated system that couples perception/encoding, streaming generation, and online execution, it remains unclear how existing models behave when placed in an actual interactive loop, and what design choices are necessary to deliver stable and responsive user-facing control.

In this work, we study real-time audio-responsive character control under explicit streaming constraints. We formulate the task as bounded-latency streaming motion generation: at each time step, the model receives a causal music representation extracted from the live audio stream and a finite motion history buffer, and then predicts the next short motion chunk

at interactive rate. This formulation mirrors practical interactive systems and enables principled, apples-to-apples evaluation under matched constraints.

Building on this formulation, we propose **DiscoForcing**, a streaming audio-driven diffusion framework that addresses the stability–responsiveness trade-off in non-stationary rollouts. DiscoForcing couples (i) a causal music encoder that extracts rhythmic structure and phase dynamics from a sliding audio window with (ii) a diffusion-forcing sequence model trained with heterogeneous noise across time, improving robustness to imperfect or stale autoregressive histories. During inference, we use a streaming sampler with hybrid temporal scheduling, where temporal guidance combines a stable history-based prediction with an audio-conditioned prediction that preserves recent context while discounting distant history, thereby reducing lock-in to stale autoregressive states and improving responsiveness to incoming audio.

To close the evaluation gap, we also build an end-to-end real-time online verification system that runs the full loop under strict causality and low-latency constraints. The system enables real-time, audio-driven full-body motion generation from streaming audio inputs and supports two deployment settings: (i) a user-facing avatar platform for responsive animation and interaction, and (ii) a physics-based humanoid pipeline that executes the generated motion as joint-level control commands. This setup enforces matched causality and latency budgets and supports both interactive demos and embodied execution.

Under streaming settings, DiscoForcing improves both offline metrics and online rollout behavior compared with strong autoregressive and diffusion baselines. In particular, it yields better responsiveness to abrupt music changes without sacrificing continuity, while maintaining real-time throughput under strict per-frame computation budgets. These results indicate that diffusion-forcing models, when paired with deployment-aware conditioning management and streaming evaluation, offer a practical path toward robust audio-responsive character control in interactive applications, as shown in Table 1.

Our contributions are threefold:

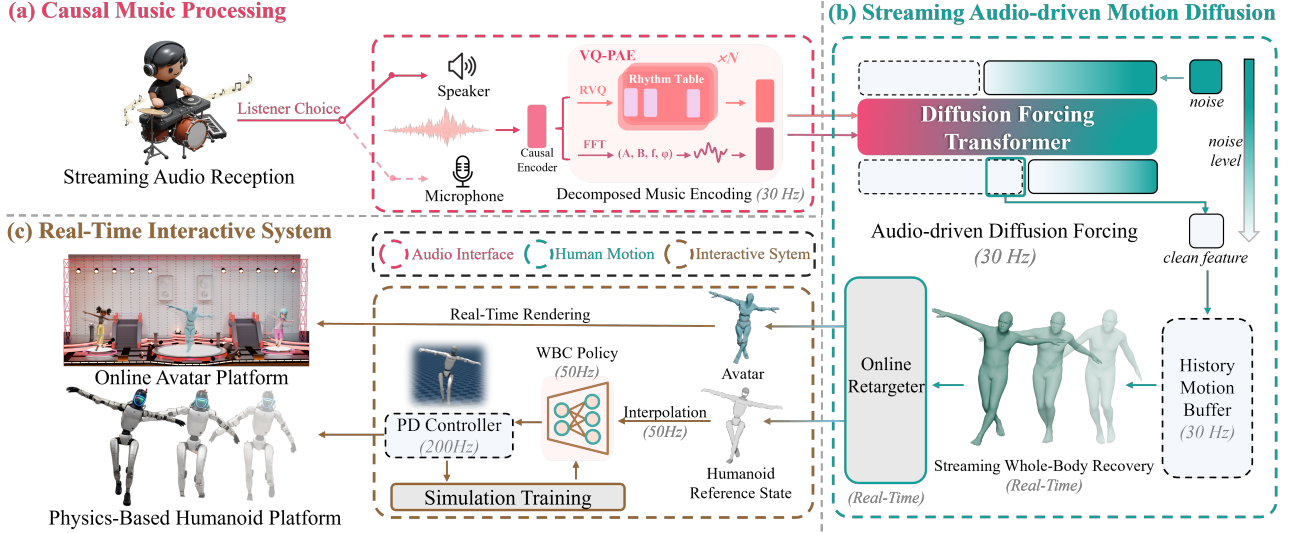


Figure 2. **System Pipeline.** DiscoForcing encodes live audio into a *causal* music feature (30 Hz) and generates continuous full-body motion via a diffusion-forcing transformer conditioned on the feature and a history buffer (30 Hz). The resulting motion is delivered to (i) an online avatar platform for retargeting and interactive Unity visualization, and (ii) a humanoid deployment stack that performs IK/interpolation and executes whole-body control with low-level PD tracking.

- We present **DiscoForcing**, to our knowledge, the first end-to-end real-time audio-responsive character control framework that integrates causal audio encoding with streaming dance generation.
- We propose a latent diffusion-forcing model with decomposed music conditioning on rhythmic and periodic features, and introduce a temporal-guided strategy to balance fast reaction with long-horizon stability.
- We build a reproducible communication-based interactive system that enables real-time user interaction for both online avatar playback and a physics-based humanoid platform, supporting practical demonstrations and cross-platform validation within a unified runtime.

2. Related Works

Audio-Driven Human Motion Synthesis. Human motion synthesis has rapidly advanced with deep generative models that support rich conditioning signals, from action labels (Guo et al., 2020; Petrovich et al., 2021), text descriptions (Tevet et al., 2023; Chen et al., 2023; Zhang et al., 2023; Jiang et al., 2023; Wang et al., 2025; Liu et al., 2025b) and various interactions (Ji et al., 2025; Tang et al., 2024; Deng et al., 2026) to audio. Audio-driven generation introduces a distinctive synchronization challenge: the model must align kinematic events to fine-grained rhythm while preserving coherent, natural full-body dynamics over long horizons. Early systems such as FACT (Li et al., 2021) and Bailando (Siyao et al., 2022) use autoregressive transformers, but often accumulate errors in long rollouts, degrading

beat timing and motion fidelity. Diffusion-based methods improve coverage of complex choreography and stylistic diversity (Alexanderson et al., 2023; Tseng et al., 2023; Li et al., 2023), with further advances in structure and controllability via coarse-to-fine sampling (Lodge (Li et al., 2024b)), bidirectional context (BADM (Zhang et al., 2024a)), and genre-aware experts (MEGADance (Yang et al., 2025a)). However, most approaches remain offline and non-causal, relying on future audio or full-track access for global consistency, which limits streaming use where the system must react causally to live audio and user edits under tight latency budgets.

Real-Time Interactive Character Control. Interactive character control is a core problem in animation and physics-based simulation, enabling users to steer virtual agents in a responsive and physically plausible way. Early approaches such as DeepPhase (Starke et al., 2022) and PFNN (Holden et al., 2017) rely on low-dimensional controls (e.g., heading direction, speed, simple style flags) to drive motion generation, yielding smooth locomotion but limited expressivity. Later methods like PADL (Juravsky et al., 2022) and AnySkill (Cui et al., 2024) use natural language as the control interface, formulating character control as language-conditioned motion generation. Building on this, CAMDM (Chen et al., 2024b), DART (Zhao et al., 2025) and FloodDiffusion (Cai et al., 2025) employ autoregressive diffusion models for text-driven motion synthesis, producing long-horizon motions with richer multimodality and temporal coherence. In parallel, CLoSD (Tevet et al., 2025) explicitly closes the loop between motion generation

and simulation to enforce physical feasibility, while recent work such as Diffuse-CLoC (Huang et al., 2025b) and UniPhys (Wu et al., 2025) jointly models state and action distributions to more tightly couple generative priors with control dynamics. However, audio-driven real-time interactive character control remains largely unexplored: music is highly non-stationary and diverse in rhythm and style, and existing systems rarely support a user-facing, real-time interaction and validation platform for evaluating control quality from the end-user’s perspective.

Diffusion Models for Sequence Modeling. Diffusion probabilistic models (Sohl-Dickstein et al., 2015; Ho et al., 2020) invert a progressive noising process and have become dominant in image generation (Dhariwal & Nichol, 2021; Saharia et al., 2022; Rombach et al., 2022), motivating adaptations to sequential domains. A common approach is full-sequence denoising, jointly refining all timesteps (Ho et al., 2022; Janner et al., 2022; Song et al., 2023; Gupta et al., 2024). While effective for fixed-length synthesis, such non-causal formulations are ill-suited to variable-length or low-latency streaming, where outputs must be emitted incrementally. Several works combine diffusion with autoregressive factorization for incremental generation (Rasul et al., 2021; Wu et al., 2023; Kim et al., 2024; Ruhe et al., 2024), but naive AR execution can reintroduce exposure bias and compounding errors through history. Diffusion Forcing (Chen et al., 2024a) addresses this by training with token-wise heterogeneous noise, improving robustness to imperfect histories. Follow-ups refine conditioning management: History-Guided Diffusion (Song et al., 2025) stabilizes coherence with corrupted history, Self Forcing (Huang et al., 2025a) reduces train-test mismatch via self-generated history, and Rolling Forcing (Liu et al., 2025a) targets real-time generation with rolling-window denoising. Nevertheless, most streaming diffusion systems assume static or slowly varying global conditions, and do not directly address interactive control with non-stationary signals such as streaming music, which requires balancing continuity and responsiveness.

3. Methods

As shown in Fig. 2, our method is organized around three tightly coupled components for deployment-faithful streaming control: (i) **Causal Music Processing** that converts live audio into synchronized, strictly causal conditioning features; (ii) a **Streaming Audio-driven Motion Diffusion** model that performs bounded-latency, autoregressive diffusion generation over motion tokens/frames while remaining robust to imperfect histories; and (iii) a **Real-time Interactive System** that connects audio ingestion, online sampling, and avatar/robot playback in a closed timing loop with explicit latency budgets.

3.1. Causal Music Processing

Decomposed Music Conditioning. To support strictly streaming control without lookahead, we introduce a causal music encoding pipeline that extracts a compact feature c_t from a fixed-length sliding audio buffer at each step t . This enables the motion generator to respond immediately to newly arriving musical cues and user edits. Concretely, we adopt a Vector-Quantized Periodic Autoencoder (VQ-PAE) (Starke et al., 2022; Li et al., 2024a) to factorize music conditioning into discrete rhythmic tokens and continuous phase-alignment dynamics, producing an embedding that is simultaneously beat-aware and temporally smooth—well-suited for low-latency, online motion synthesis. At streaming step t , our generator is conditioned on a causal music feature

$$c_t = [f_t^{\text{vq}}, f_t^{\text{pae}}], \quad (1)$$

which is extracted from a fixed-length sliding audio window. The feature combines (i) a discrete rhythmic code via residual vector quantization and (ii) a continuous periodic alignment feature parameterized in the frequency domain.

Discrete Rhythmic Encoding. Let w_t be the waveform segment in the sliding buffer at step t . We compute a shared causal latent using a dilated 1D convolutional encoder:

$$f^{\text{causal}} = \text{Conv1D}(w_t), \quad (2)$$

where the dilation schedule is chosen to capture multi-scale temporal patterns while preserving causality. Then we feed the shared latent into a residual vector quantizer (RVQ) (Van Den Oord et al., 2017; Lee et al., 2022):

$$f^{\text{vq}} = \text{RVQ}(\text{FFN}_{\text{vq}}(f^{\text{causal}})). \quad (3)$$

This branch captures discrete rhythmic patterns and high-level musical structure that are useful for motion triggering and style consistency.

Periodic Alignment Encoding. To obtain a smooth temporal alignment signal, we estimate frequency-domain parameters and predict the phase by a lightweight network using Fast Fourier Transformation (FFT) (Starke et al., 2022; Li et al., 2024a):

$$[\mathbf{A}, \mathbf{B}, \mathbf{F}] = \text{FFT}(f^{\text{causal}}), \quad \phi = \tan^{-1}(\text{FC}_{\text{phase}}(f^{\text{causal}})). \quad (4)$$

We reconstruct a periodic alignment feature in the time domain as:

$$f^{\text{pae}}(t) = \mathbf{A} \cdot \sin(2\pi(\mathbf{F} \cdot t - \phi)) + \mathbf{B}, \quad (5)$$

where t denotes time within the window. Intuitively, ϕ controls the alignment (phase), while $\mathbf{A}$ and $\mathbf{B}$ control amplitude and offset for smooth transitions.

3.2. Streaming Audio-driven Motion Diffusion

We formulate real-time, audio-responsive interactive character control as a *streaming* motion generation problem. At the current time step t , our goal is to model the conditional distribution over the next n motion frames, $\mathbf{m}_{t:t+n-1}$, given a historical motion buffer $\mathbf{m}_{t-h:t-1}$ and the synchronized music context $\mathbf{c}_t$.

Streaming Motion Representation. Prior dance generation methods (Tseng et al., 2023; Li et al., 2024b) often model motion in global, non-canonical coordinates. In autoregressive (AR) rollouts, global-frame error accumulation shifts the conditioning distribution, degrading long-horizon stability (e.g., drift and jitter). We thus adopt a *canonicalized incremental* representation that expresses dynamics in the root frame with velocity-like increments, yielding more stationary AR conditioning.

Many streaming generators (Tevet et al., 2025; Chen et al., 2024b) use the 263-D HumanML3D (Guo et al., 2022) feature, which recovers joint positions but not the joint rotations needed for real-time retargeting, requiring costly post-processing (Bogo et al., 2016). To remove this bottleneck, we follow (Xiao et al., 2025) and encode each frame as a 272-D vector:

$$\mathbf{m}_t = \{\dot{r}_t^x, \dot{r}_t^z, \dot{r}_t^a, \mathbf{j}_t^p, \mathbf{j}_t^v, \mathbf{j}_t^r\} \in \mathbb{R}^{272}, \quad (6)$$

where $\dot{r}_t^x, \dot{r}_t^z \in \mathbb{R}$ are root XZ-plane linear velocities, $\dot{r}_t^a \in \mathbb{R}^6$ is the 6D root angular velocity (Zhou et al., 2019), and $\mathbf{j}_t^p \in \mathbb{R}^{3K}$, $\mathbf{j}_t^v \in \mathbb{R}^{3K}$, $\mathbf{j}_t^r \in \mathbb{R}^{6K}$ are local joint positions, velocities, and rotations in the root frame. For SMPL (Loper et al., 2015), $K = 22$. This enables direct real-time reconstruction via forward kinematics, making AR streaming outputs immediately usable for low-latency retargeting without per-frame fitting.

Motion Primitive Learning. Given the strict low-latency requirements of streaming audio-driven motion generation, directly modeling high-dimensional raw motion dynamics is computationally prohibitive. To address this, we employ a motion Variational Autoencoder (VAE) (Kingma & Welling, 2014) to project the motion stream into a compact latent manifold, aligned with prior frameworks (Chen et al., 2023; Zhao et al., 2025). This strategy not only reduces the computational burden for the autoregressive backbone but also acts as an implicit low-pass filter, effectively removing high-frequency sensor jitter. Formally, let $\mathcal{T} = \{1, \dots, T\}$ denote the indices of the full motion sequence. The VAE consists of an encoder $\mathcal{E}$ and a decoder $\mathcal{D}$, which map the processed motion stream $\mathbf{m}_{\mathcal{T}} \in \mathbb{R}^{T \times 272}$ to a latent sequence $\mathbf{z}_{\mathcal{T}} \in \mathbb{R}^{T \times D_z}$ and back to an approximation $\hat{\mathbf{m}}_{\mathcal{T}}$, respectively:

$$\mathbf{z}_{\mathcal{T}} = \mathcal{E}(\mathbf{m}_{\mathcal{T}}), \quad \hat{\mathbf{m}}_{\mathcal{T}} = \mathcal{D}(\mathbf{z}_{\mathcal{T}}). \quad (7)$$

Our VAE is trained with an ℓ_2 reconstruction loss to preserve motion fidelity and a Kullback-Leibler (KL) divergence loss to regularize the latent space towards a standard Gaussian prior:

$$\mathcal{L}_{\text{VAE}} = \|\mathbf{m}_{\mathcal{T}} - \hat{\mathbf{m}}_{\mathcal{T}}\|_2^2 + \lambda D_{\text{KL}}(q(\mathbf{z}_{\mathcal{T}}|\mathbf{m}_{\mathcal{T}}) \parallel \mathcal{N}(\mathbf{0}, \mathbf{I})), \quad (8)$$

where λ is a weighting coefficient.

Latent Diffusion Forcing. To enable streaming generation with flexible temporal control, we adapt the diffusion forcing framework (Chen et al., 2024a) to our latent sequence modeling. We define a probability path specific to each temporal sequence index t that transitions from clean data $\mathbf{x}_t^0 \equiv \mathbf{z}_t \sim q_{\text{data}}$ to pure noise $\mathbf{x}_t^1 \sim \mathcal{N}(\mathbf{0}, \mathbf{I})$ over a diffusion horizon $k_t \in [0, 1]$:

$$p(\mathbf{x}_t^{k_t} | \mathbf{x}_t^0) = \mathcal{N}(\mathbf{x}_t^{k_t}; \alpha_{k_t} \mathbf{x}_t^0, \sigma_{k_t}^2 \mathbf{I}), \quad (9)$$

where α_{k_t} and σ_{k_t} are predefined noise schedules satisfying the boundary conditions: $\alpha_0 = 1, \sigma_0 = 0$ and $\alpha_1 = 0, \sigma_1 = 1$. This formulation allows each token at sequence position t to undergo denoising at an independent noise level determined by k_t . To reverse this process, based on the flow-based paradigm (Lipman et al., 2023; Li & He, 2025), we train a network $\mathbf{v}_{\theta}(\mathbf{x}_{\mathcal{T}}^{k_{\mathcal{T}}}, k_{\mathcal{T}}, \mathbf{c})$ to predict the conditional vector field $\mathbf{v}_{\mathcal{T}}$. Each component $\mathbf{v}_t$ of this field corresponds to the instantaneous velocity of the probability flow with respect to the diffusion time:

$$\mathbf{v}_t = \dot{\alpha}_{k_t} \mathbf{x}_t^0 + \dot{\sigma}_{k_t} \boldsymbol{\epsilon}_t, \quad (10)$$

where $\dot{\alpha}_{k_t}$ and $\dot{\sigma}_{k_t}$ denote the derivatives of the schedule coefficients with respect to k_t , and $\boldsymbol{\epsilon}_t \sim \mathcal{N}(\mathbf{0}, \mathbf{I})$. The training objective minimizes the flow matching loss, computed selectively on noised tokens:

$$\mathcal{L}_{\text{DF}} = \mathbb{E}_{k_{\mathcal{T}}, \mathbf{z}_{\mathcal{T}}, \boldsymbol{\epsilon}_{\mathcal{T}}} \left[\|\mathbf{v}_{\theta}(\mathbf{x}_{\mathcal{T}}^{k_{\mathcal{T}}}, k_{\mathcal{T}}, \mathbf{c}) - \mathbf{v}_{\mathcal{T}}\|_{\mathcal{K}}^2 \right], \quad (11)$$

where the norm $\|\cdot\|_{\mathcal{K}}$ (defined as $\|\mathbf{u}\|_{\mathcal{K}}^2 = \sum_{t:k_t>0} \|u_t\|^2$) serves as a masking mechanism. Since tokens with $k_t = 0$ remain in the clean state and do not require denoising, this mask ensures the model focuses exclusively on learning the active transport dynamics.

Hybrid Temporal Schedule. Distinct from vanilla Diffusion Forcing which relies solely on random noise schedules, we employ a hybrid strategy to bridge the gap between training and streaming inference, while also encouraging consistent denoising patterns. At each iteration, we stochastically sample a noise schedule type from a categorical distribution defined over three variants:

1) **Random Schedule:** $k_t^{\text{rand}} \sim \mathcal{U}(0, 1)$. This independent sampling ensures the model retains the flexibility to handle arbitrary noise states.

2) **Monotonic Schedule.** Motivated by (Zhang et al., 2024b; Liu et al., 2025a), we define a schedule based on a randomly sampled current time step $\tau \in [0, T]$ and a window size l :

$$k_t^{\text{mono}} = \text{clamp} \left(\frac{t - (\tau - l)}{l}, 0, 1 \right). \quad (12)$$

Under this schedule, frames before $\tau - l$ are clean ($k_t = 0$), frames after τ are pure noise ($k_t = 1$), and the intermediate window transitions linearly.

3) **Trapezoid Schedule.** Following (Chen et al., 2024a; Song et al., 2025), we further introduce a trapezoidal noise profile that assigns higher noise levels to tokens significantly preceding the current time step τ :

$$k_t^{\text{hist}} = \text{clamp} \left(\frac{(\tau - l_{\text{ctx}} - l) - t}{l_{\text{hist}}}, 0, 1 \right), \quad (13)$$

$$k_t^{\text{trap}} = \max(k_t^{\text{hist}}, k_t^{\text{mono}}).$$

Here, l_{ctx} denotes the length of the clean context window and $l_{\text{hist}} > 0$ determines the rate at which noise levels increase for the distant past.

Streaming Inference with Temporal Guidance. We perform bounded-latency streaming generation by maintaining a fixed-length FIFO denoising window of size l at the tail of the sequence (Kim et al., 2024), and apply hybrid noise schedule as temporal guidance to denoise all tokens in the window jointly (Alg. 1). Once the leftmost token in the window reaches the clean state, we emit it as the next streaming output token, then shift the buffer by one position and append a new token initialized as pure Gaussian noise, continuing the streaming process.

Inspired by (Ho & Salimans, 2021; Song et al., 2025), we employ temporal guidance to mitigate long-term motion drift. By corrupting the distant history with a trapezoid noise schedule, we implicitly filter out high-frequency priors that may contradict current control signals. The guided velocity is then computed as a weighted sum with scale ω :

$$\mathbf{v}_{\mathcal{T}}^{\text{guided}} = \mathbf{v}_{\theta}(\hat{\mathbf{x}}_{\mathcal{T}}^{k_{\mathcal{T}}^{\text{mono}}}, k_{\mathcal{T}}^{\text{mono}}, \emptyset) + \omega[\mathbf{v}_{\theta}(\hat{\mathbf{x}}_{\mathcal{T}}^{k_{\mathcal{T}}^{\text{trap}}}, k_{\mathcal{T}}^{\text{trap}}, \mathbf{c}) - \mathbf{v}_{\theta}(\hat{\mathbf{x}}_{\mathcal{T}}^{k_{\mathcal{T}}^{\text{mono}}}, k_{\mathcal{T}}^{\text{mono}}, \emptyset)]. \quad (14)$$

3.3. Real-Time Interactive System

To validate our streaming formulation beyond offline metrics, we build an end-to-end real-time interactive system that supports both virtual and physical deployment. As illustrated in Fig. 2, the system exposes two application frontends: (i) an **online avatar interaction platform** in Unity for

Algorithm 1 Streaming Inference with Temporal Guidance

Input: Audio stream $\mathbf{c}$, Model $\mathbf{v}_{\theta}$, Max length T , Window size l , Guidance scale ω , Schedule params $l_{\text{ctx}}, l_{\text{hist}}$.

Initialize: Latent buffer $\hat{\mathbf{x}} = \emptyset$, Global step $\tau \leftarrow 0$, Solver step $\delta \leftarrow 1/l$.

▷ ensures one denoising step per output token

while streaming **do**

$\tau \leftarrow \tau + 1$.

$\hat{\mathbf{x}} \leftarrow [\hat{\mathbf{x}}, \epsilon]$, where $\epsilon \sim \mathcal{N}(\mathbf{0}, \mathbf{I})$.

$\hat{\mathbf{x}} \leftarrow \hat{\mathbf{x}}[-T :]$.

▷ maintain the buffer

Define active window $\mathcal{W} \leftarrow \{\tau - l + 1, \dots, \tau\}$.

Define history indices $\mathcal{H} \leftarrow \{\text{indices before } \mathcal{W}\}$.

$k_t^{\text{mono}} \leftarrow \Phi_{\text{mono}}(t, \tau, l)$ for $t \in \mathcal{W}$.

$k_t^{\text{trap}} \leftarrow \Phi_{\text{trap}}(t, \tau, l, l_{\text{ctx}}, l_{\text{hist}})$ for all t .

▷ construct the schedule

$\hat{\mathbf{x}}_{\mathcal{H}}^{\text{trap}} \leftarrow \hat{\mathbf{x}}; \text{Sample } \epsilon' \sim \mathcal{N}(\mathbf{0}, \mathbf{I})$.

$\hat{\mathbf{x}}_{\mathcal{H}}^{\text{trap}} \leftarrow \alpha(k_{\mathcal{H}}^{\text{trap}}) \odot \hat{\mathbf{x}}_{\mathcal{H}} + \sigma(k_{\mathcal{H}}^{\text{trap}}) \odot \epsilon'_{\mathcal{H}}$.

▷ here $\odot$ denotes element-wise multiplication

$\mathbf{v}_{\text{cond}} \leftarrow \mathbf{v}_{\theta}(\hat{\mathbf{x}}_{\mathcal{W}}^{\text{trap}}, k_{\mathcal{W}}^{\text{trap}}, \mathbf{c})$.

$\mathbf{v}_{\text{hist}} \leftarrow \mathbf{v}_{\theta}(\hat{\mathbf{x}}_{\mathcal{H}}, k_{\mathcal{H}}^{\text{mono}}, \emptyset)$.

$\mathbf{v} \leftarrow \mathbf{v}_{\text{hist}} + \omega(\mathbf{v}_{\text{cond}} - \mathbf{v}_{\text{hist}})$.

▷ temporal guidance

$\hat{\mathbf{x}}_{\mathcal{W}} \leftarrow \hat{\mathbf{x}}_{\mathcal{W}} - \mathbf{v}_{\mathcal{W}} \cdot \delta$.

▷ denoise the window

Emit token $\hat{\mathbf{x}}_{\tau-l+1}$ as output $\hat{\mathbf{z}}$.

end while

user-facing animation interaction and (ii) a **physics-based humanoid deployment pipeline** targeting the Unitree G1 humanoid robot for embodied execution. The streaming generator communicates with both Unity and the G1 robot exclusively via ROS2.

Online Avatar Platform. We implement an interactive animation and visualization platform in Unity, where virtual characters are controlled using SMPL parameters (Loper et al., 2015). The streaming generator transmits real-time motion data to Unity through ROS2, enabling the characters to perform synchronized movements with the input music. This setup allows for live, user-facing evaluation of the generated motions under realistic streaming conditions.

Physics-Based Humanoid Platform. We further validate the streaming generator on a physical humanoid robot. SMPL-format motions produced by the streaming generator are first retargeted to the Unitree G1 using GMR (Araujo et al., 2025). The resulting reference trajectories are subsequently tracked by a whole-body control (WBC) policy trained on large-scale motion datasets in simulation (Liao et al., 2025; Mahmood et al., 2019; Punnakkal et al., 2021). To ensure temporal alignment, the retargeted motion sequences are interpolated to match the tracker’s 50Hz control frequency. All of these steps are performed in real time, enabling the robot to dynamically adapt its dance movements in response to continuously changing music.

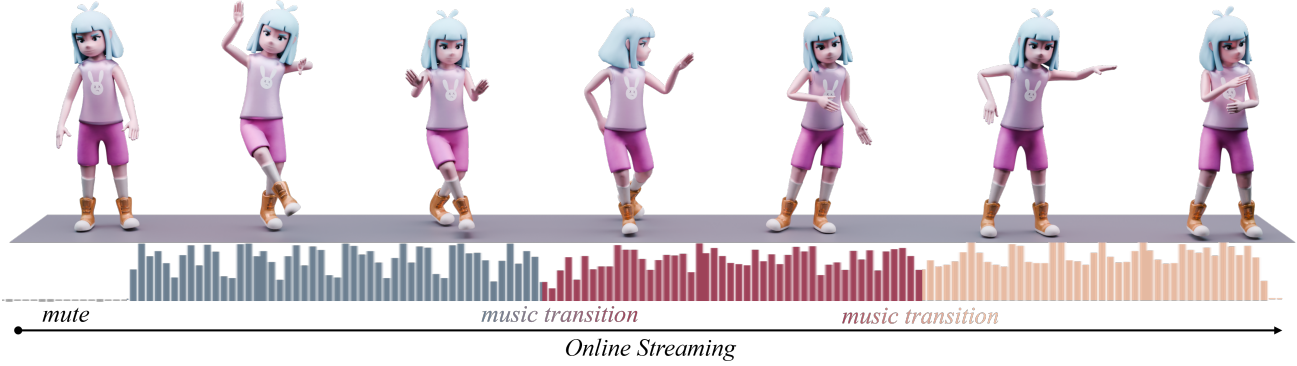


Figure 3. **Demonstration of Our Method.** In a strictly causal, bounded-latency online streaming rollout, DiscoForcing keeps the character stationary during silent segments (mute), and immediately generates beat-synchronized full-body dance once music resumes. As the input stream undergoes multiple music transitions, our model adapts in real time to the changing audio while maintaining long-horizon temporal coherence and smooth motion continuity.

Table 2. Quantitative comparison on FineDance (Li et al., 2023) dataset. GT stands for ground truth, A higher or lower value is better for $\uparrow$ or $\downarrow$, and $\rightarrow$ means the value closer to ground truth is better.

	FID _k ↓	FID _g ↓	FSR↓	Div _k →	Div _g →	BAS↑
GT	—	—	0.062	9.94	7.54	0.201
FACT	113.38	97.05	0.284	3.36	6.37	0.183
Bailando	82.81	28.17	0.188	7.74	6.25	0.202
EDGE	94.34	50.38	0.200	8.13	6.45	0.212
Lodge	50.00	35.52	0.028	5.67	4.96	0.226
MEGA	50.00	13.02	0.243	6.23	6.27	0.226
DiscoForcing	23.84	8.62	0.142	5.98	5.99	0.225

Table 3. Comparison on AIST++ (Li et al., 2021) dataset.

	FID _k ↓	FID _g ↓	Div _k →	Div _g →	BAS↑
Ground Truth	-	-	8.19	7.45	0.237
FACT	35.35	22.11	5.94	6.18	0.221
Bailando	28.16	9.62	7.83	6.34	0.233
EDGE	42.16	22.12	3.96	4.61	0.233
Lodge	37.09	18.79	5.58	4.85	0.242
MEGA	25.89	12.62	5.84	6.23	0.238
DiscoForcing	18.87	11.57	6.76	6.31	0.244

4. Experiments

4.1. Experimental Setup

Datasets. To validate our method, we utilize two public dance datasets that provide 3D dance motions synchronized with accompanying music: FineDance (Li et al., 2023) and AIST++ (Li et al., 2021). **FineDance** stands as the largest publicly available dataset to date, providing 7.7 hours of music-paired optical motion capture data at 30 FPS. **AIST++** serves as a widely used standard benchmark, providing 5.2

hours of motion sequences reconstructed from multi-view videos at 60 FPS. For both datasets, we strictly follow the official data split for fair comparison and cut all examples to 30 FPS.

Evaluation Metrics. Following established protocols (Yang et al., 2025a; Li et al., 2024b; Tseng et al., 2023), we evaluate: **1) Motion Quality** (realism and physical plausibility), **2) Motion Diversity** (variety and non-repetitiveness), and **3) Music–Dance Correlation** (rhythmic synchronization). For Motion Quality, we use Fréchet Inception Distance (FID) (Heusel et al., 2017) to measure distributional similarity between generated and real motions. Following (Li et al., 2021), we report **FID_k** and **FID_g** on kinetic and geometric features, capturing physical smoothness and choreographic quality. We also adopt **FSR** (Li et al., 2024b) to penalize foot-skating via consistency between center-of-mass acceleration and foot velocity. For Motion Diversity, we compute the average pairwise Euclidean distance of generated motion features and report **Div_k** and **Div_g** in the kinetic and geometric spaces (Siyao et al., 2022). For Music–Dance Correlation, we use Beat Alignment Score (**BAS**) (Li et al., 2021) to quantify alignment between kinematic motion beats and musical audio beats.

4.2. Music-to-Dance Evaluation

Baselines. We compare our method against several representative music-to-dance approaches: FACT (Li et al., 2021), an autoregressive cross-modal transformer; Bailando (Siyao et al., 2022), a VQ-VAE with actor–critic GPT framework; EDGE (Tseng et al., 2023), a diffusion transformer conditioned on Jukebox audio features; Lodge (Li et al., 2024b), a coarse-to-fine diffusion model with primitive generation and refinement; and MEGADance (Yang et al., 2025a), a Mixture-of-Experts Mamba–Transformer

Table 4. Ablation studies of music-to-dance generation on AIST++ (Li et al., 2021) dataset, where underlined denotes the design we choose.

Class	Settings	Motion Quality			Motion Diversity		BAS↑	Latency
		FID _k ↓	FID _g ↓	FSR↓	Div _k →	Div _g →		(ms / frame)
Ground Truth		–	–	0.007	8.19	7.45	0.237	–
Representation	151d	27.83	15.78	0.201	5.57	6.62	0.233	25.65
	263d	26.47	8.30	0.060	8.53	7.62	0.245	26.60
	<u>272d</u>	25.49	13.30	0.115	10.37	7.66	0.247	26.68
Music Encoder	Librosa	25.49	13.30	0.115	10.37	7.66	0.247	26.68
	<u>VQ-PAE</u>	23.23	12.28	0.097	6.50	6.68	0.238	26.73
Guidance	CFG	23.23	12.28	0.097	6.50	6.68	0.238	26.73
	<u>TG</u>	18.87	11.57	0.059	6.76	6.31	0.244	26.26
Time-steps	5	28.63	12.23	0.062	5.41	5.85	0.242	14.02
	<u>10</u>	18.87	11.57	0.059	6.76	6.31	0.244	26.26
	100	17.58	11.29	0.080	8.99	6.86	0.248	261.91
DiscoForcing		18.87	11.57	0.059	6.76	6.31	0.244	26.26

hybrid.

Comparisons. As summarized in Table 2 and Table 3, DiscoForcing achieves the best overall motion quality on FineDance, with substantially lower FID $_k$ and FID $_g$ than all baselines while keeping competitive BAS and diversity; on AIST++, DiscoForcing further improves kinetic FID $_k$ over strong diffusion and MoE baselines, indicating better rollout stability. Notably, methods optimized for offline/global-context generation may achieve strong alignment or specific sub-metrics, but DiscoForcing provides a more balanced trade-off between long-horizon coherence and responsiveness in a deployment-faithful setting.

4.3. Ablation Study

Motion Representation. As shown in Table 4, we compare our 272-dim representation with the 263-dim HumanML3D format and a 151-dim baseline. While 263-dim offers slight geometric gains, it lacks rotations and requires costly inverse kinematics, violating real-time constraints. Our 272-dim design best balances quality and deployability, improving fidelity and beat alignment over 151-dim while enabling low-latency forward-kinematics reconstruction.

Music Encoder. Hand-crafted Librosa (McFee et al., 2015) features yield marginally better beat alignment due to explicit onset cues, but our learned VQ-PAE substantially improves realism. This indicates rule-based descriptors capture low-level pulses, whereas VQ-PAE encodes richer stylistic and semantic cues for natural control.

Sampling Strategy. We ablate inference settings. Tempo-

ral Guidance (TG) outperforms Classifier-Free Guidance (CFG) by suppressing autoregressive drift and improving synchronization. For compute, 10 denoising steps are optimal: 100 steps brings diminishing gains while exceeding real-time limits, and 5 steps harms plausibility. We therefore adopt 10-step denoising to sustain stable 30 FPS throughput.

5. Conclusion

We present DiscoForcing, a novel streaming framework for audio-driven interactive character control that operates under strict causality and low-latency constraints. The core contribution is an autoregressive diffusion forcing generator that conditions on a short motion history and synchronized causal music features, enabling long-horizon, real-time motion synthesis without requiring future context or offline planning. We further describe a practical end-to-end system pipeline that supports both online avatar visualization and humanoid deployment via standard retargeting and tracking control. Experiments demonstrate that our approach improves motion quality and temporal consistency under streaming rollouts, while remaining responsive to time-varying audio conditions such as rhythm changes and abrupt transitions. We hope this work serves as a step toward deployment-faithful generative sequence modeling for interactive embodied applications, and we expect future work to explore stronger robustness under distribution shift, richer user control signals, stronger physical feasibility constraints, broader real-world testing, and tighter integration with downstream controllers for safer and more reliable deployment.

Acknowledgements

This work was supported by National Natural Science Foundation of China (62406195, 62303319), Shanghai Local College Capacity Building Program (23010503100), HPC Platform of ShanghaiTech University, Core Facility Platform of Computer Science and Communication of ShanghaiTech University, and MoE Key Laboratory of Intelligent Perception and Human-Machine Collaboration (ShanghaiTech University), and Shanghai Engineering Research Center of Intelligent Vision and Imaging.

References

- Alexanderson, S., Nagy, R., Beskow, J., and Henter, G. E. Listen, denoise, action! audio-driven motion synthesis with diffusion models. *ACM Transactions on Graphics (TOG)*, 42(4):1–20, 2023.
- Araujo, J. P., Ze, Y., Xu, P., Wu, J., and Liu, C. K. Retargeting matters: General motion retargeting for humanoid motion tracking. *arXiv preprint arXiv:2510.02252*, 2025.
- Barquero, G., Escalera, S., and Palmero, C. Seamless human motion composition with blended positional encodings. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 457–469, 2024.
- Bogo, F., Kanazawa, A., Lassner, C., Gehler, P., Romero, J., and Black, M. J. Keep it smpl: Automatic estimation of 3d human pose and shape from a single image. In *European conference on computer vision*, pp. 561–578. Springer, 2016.
- Cai, Y., Wu, Y., Li, K., Zhou, Y., Zheng, B., and Liu, H. Flooddiffusion: Tailored diffusion forcing for streaming motion generation. *arXiv preprint arXiv:2512.03520*, 2025.
- Chen, B., Martí Monsó, D., Du, Y., Simchowitz, M., Tedrake, R., and Sitzmann, V. Diffusion forcing: Next-token prediction meets full-sequence diffusion. *Advances in Neural Information Processing Systems*, 37:24081–24125, 2024a.
- Chen, R., Shi, M., Huang, S., Tan, P., Komura, T., and Chen, X. Taming diffusion probabilistic models for character control. In *ACM SIGGRAPH 2024 Conference Papers*, pp. 1–10, 2024b.
- Chen, X., Jiang, B., Liu, W., Huang, Z., Fu, B., Chen, T., and Yu, G. Executing your commands via motion diffusion in latent space. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 18000–18010, 2023.
- Cui, J., Liu, T., Liu, N., Yang, Y., Zhu, Y., and Huang, S. Anyskill: Learning open-vocabulary physical skill for interactive agents. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 852–862, 2024.
- Dai, W., Chen, L.-H., Wang, J., Liu, J., Dai, B., and Tang, Y. Motionlcm: Real-time controllable motion generation via latent consistency model. In *European Conference on Computer Vision*, pp. 390–408. Springer, 2024.
- Deng, Z., Shi, Y., Ji, K., Xu, L., Huang, S., and Wang, J. Human-object interaction via automatically designed VLM-guided motion policy. In *The Fourteenth International Conference on Learning Representations*, 2026.
- Dhariwal, P. and Nichol, A. Diffusion models beat gans on image synthesis. *Advances in neural information processing systems*, 34:8780–8794, 2021.
- Fan, C., Guan, J., Zhao, X., Xu, D., Lin, Y., Ye, T., Feng, P., and Pan, H. Align your rhythm: Generating highly aligned dance poses with gating-enhanced rhythm-aware feature representation. *arXiv preprint arXiv:2503.17340*, 2025.
- Guo, C., Zuo, X., Wang, S., Zou, S., Sun, Q., Deng, A., Gong, M., and Cheng, L. Action2motion: Conditioned generation of 3d human motions. In *Proceedings of the 28th ACM international conference on multimedia*, pp. 2021–2029, 2020.
- Guo, C., Zou, S., Zuo, X., Wang, S., Ji, W., Li, X., and Cheng, L. Generating diverse and natural 3d human motions from text. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 5152–5161, 2022.
- Gupta, A., Yu, L., Sohn, K., Gu, X., Hahn, M., Li, F.-F., Essa, I., Jiang, L., and Lezama, J. Photorealistic video generation with diffusion models. In *European Conference on Computer Vision*, pp. 393–411. Springer, 2024.
- Heusel, M., Ramsauer, H., Unterthiner, T., Nessler, B., and Hochreiter, S. Gans trained by a two time-scale update rule converge to a local nash equilibrium. *Advances in neural information processing systems*, 30, 2017.
- Ho, J. and Salimans, T. Classifier-free diffusion guidance. In *NeurIPS 2021 Workshop on Deep Generative Models and Downstream Applications*, 2021.
- Ho, J., Jain, A., and Abbeel, P. Denoising diffusion probabilistic models. *Advances in neural information processing systems*, 33:6840–6851, 2020.
- Ho, J., Salimans, T., Gritsenko, A., Chan, W., Norouzi, M., and Fleet, D. J. Video diffusion models. *Advances in neural information processing systems*, 35:8633–8646, 2022.

- Holden, D., Komura, T., and Saito, J. Phase-functioned neural networks for character control. *ACM Transactions on Graphics (TOG)*, 36(4):1–13, 2017.
- Huang, X., Li, Z., He, G., Zhou, M., and Shechtman, E. Self forcing: Bridging the train-test gap in autoregressive video diffusion. In *The Thirty-ninth Annual Conference on Neural Information Processing Systems*, 2025a.
- Huang, X., Truong, T., Zhang, Y., Yu, F., Sleiman, J. P., Hodgins, J., Sreenath, K., and Farshidian, F. Diffuse-cloc: Guided diffusion for physics-based character look-ahead control. *ACM Transactions on Graphics (TOG)*, 44(4): 1–12, 2025b.
- Huang, Z., Xu, X., Xu, C., Zhang, H., Zheng, C., Qin, J., and He, S. Beat-it: Beat-synchronized multi-condition 3d dance generation. In *European conference on computer vision*, pp. 273–290. Springer, 2024.
- Janner, M., Du, Y., Tenenbaum, J., and Levine, S. Planning with diffusion for flexible behavior synthesis. In *International Conference on Machine Learning*, pp. 9902–9915. PMLR, 2022.
- Ji, K., Shi, Y., Jin, Z., Chen, K., Xu, L., Ma, Y., Yu, J., and Wang, J. Towards immersive human-x interaction: A real-time framework for physically plausible motion synthesis. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp. 10173–10183, 2025.
- Jiang, B., Chen, X., Liu, W., Yu, J., Yu, G., and Chen, T. Motiongpt: Human motion as a foreign language. *Advances in Neural Information Processing Systems*, 36: 20067–20079, 2023.
- Juravsky, J., Guo, Y., Fidler, S., and Peng, X. B. Padl: Language-directed physics-based character control. In *SIGGRAPH Asia 2022 Conference Papers*, pp. 1–9, 2022.
- Kim, J., Kang, J., Choi, J., and Han, B. Fifo-diffusion: Generating infinite videos from text without training. *Advances in Neural Information Processing Systems*, 37: 89834–89868, 2024.
- Kingma, D. P. and Welling, M. Auto-encoding variational bayes. *stat*, 1050:1, 2014.
- Lee, D., Kim, C., Kim, S., Cho, M., and Han, W.-S. Autoregressive image generation using residual quantization. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 11523–11532, 2022.
- Li, P., Starke, S., Ye, Y., and Sorkine-Hornung, O. Walkthedog: Cross-morphology motion alignment via phase manifolds. In *ACM SIGGRAPH 2024 Conference Papers*, pp. 1–10, 2024a.
- Li, R., Yang, S., Ross, D. A., and Kanazawa, A. Ai choreographer: Music conditioned 3d dance generation with aist++. In *Proceedings of the IEEE/CVF international conference on computer vision*, pp. 13401–13412, 2021.
- Li, R., Zhao, J., Zhang, Y., Su, M., Ren, Z., Zhang, H., Tang, Y., and Li, X. Finedance: A fine-grained choreography dataset for 3d full body dance generation. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp. 10234–10243, 2023.
- Li, R., Zhang, Y., Zhang, Y., Zhang, H., Guo, J., Zhang, Y., Liu, Y., and Li, X. Lodge: A coarse to fine diffusion network for long dance generation guided by the characteristic dance primitives. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 1524–1534, 2024b.
- Li, T. and He, K. Back to basics: Let denoising generative models denoise. *arXiv preprint arXiv:2511.13720*, 2025.
- Liao, Q., Truong, T. E., Huang, X., Gao, Y., Tevet, G., Sreenath, K., and Liu, C. K. Beyondmimic: From motion tracking to versatile humanoid control via guided diffusion. *arXiv preprint arXiv:2508.08241*, 2025.
- Lipman, Y., Chen, R. T., Ben-Hamu, H., Nickel, M., and Le, M. Flow matching for generative modeling. In *The Eleventh International Conference on Learning Representations*, 2023.
- Liu, K., Hu, W., Xu, J., Shan, Y., and Lu, S. Rolling forcing: Autoregressive long video diffusion in real time. *arXiv preprint arXiv:2509.25161*, 2025a.
- Liu, Z., Ji, K., Yang, K., Yu, J., Shi, Y., and Wang, J. Commanding humanoid by free-form language: A large language action model with unified motion vocabulary. *arXiv preprint arXiv:2511.22963*, 2025b.
- Loper, M., Mahmood, N., Romero, J., Pons-Moll, G., and Black, M. J. Smpl: a skinned multi-person linear model. *ACM Transactions on Graphics (TOG)*, 34(6):1–16, 2015.
- Mahmood, N., Ghorbani, N., Troje, N. F., Pons-Moll, G., and Black, M. J. Amass: Archive of motion capture as surface shapes. In *Proceedings of the IEEE/CVF international conference on computer vision*, pp. 5442–5451, 2019.
- McFee, B., Raffel, C., Liang, D., Ellis, D. P., McVicar, M., Battenberg, E., and Nieto, O. librosa: Audio and music signal analysis in python. *SciPy*, 2015:18–24, 2015.
- Petrovich, M., Black, M. J., and Varol, G. Action-conditioned 3d human motion synthesis with transformer vae. In *Proceedings of the IEEE/CVF international conference on computer vision*, pp. 10985–10995, 2021.

- Punnakkal, A. R., Chandrasekaran, A., Athanasiou, N., Quiros-Ramirez, A., and Black, M. J. Babel: Bodies, action and behavior with english labels. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 722–731, 2021.
- Rasul, K., Seward, C., Schuster, I., and Vollgraf, R. Autoregressive denoising diffusion models for multivariate probabilistic time series forecasting. In *International conference on machine learning*, pp. 8857–8868. PMLR, 2021.
- Rombach, R., Blattmann, A., Lorenz, D., Esser, P., and Ommer, B. High-resolution image synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 10684–10695, 2022.
- Ruhe, D., Heek, J., Salimans, T., and Hoogeboom, E. Rolling diffusion models. In *Forty-first International Conference on Machine Learning*, 2024.
- Saharia, C., Chan, W., Saxena, S., Li, L., Whang, J., Denton, E. L., Ghasemipour, K., Gontijo Lopes, R., Karagol Ayan, B., Salimans, T., et al. Photorealistic text-to-image diffusion models with deep language understanding. *Advances in neural information processing systems*, 35: 36479–36494, 2022.
- Siyao, L., Yu, W., Gu, T., Lin, C., Wang, Q., Qian, C., Loy, C. C., and Liu, Z. Bailando: 3d dance generation by actor-critic gpt with choreographic memory. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 11050–11059, 2022.
- Sohl-Dickstein, J., Weiss, E., Maheswaranathan, N., and Ganguli, S. Deep unsupervised learning using nonequilibrium thermodynamics. In *International conference on machine learning*, pp. 2256–2265. pmlr, 2015.
- Song, J., Zhang, Q., Yin, H., Mardani, M., Liu, M.-Y., Kautz, J., Chen, Y., and Vahdat, A. Loss-guided diffusion models for plug-and-play controllable generation. In *International Conference on Machine Learning*, pp. 32483–32498. PMLR, 2023.
- Song, K., Chen, B., Simchowitz, M., Du, Y., Tedrake, R., and Sitzmann, V. History-guided video diffusion. In *Forty-second International Conference on Machine Learning*, 2025.
- Starke, S., Mason, I., and Komura, T. Deepphase: Periodic autoencoders for learning motion phase manifolds. *ACM Transactions on Graphics (ToG)*, 41(4):1–13, 2022.
- Tang, J., Wang, J., Ji, K., Xu, L., Yu, J., and Shi, Y. A unified diffusion framework for scene-aware human motion estimation from sparse signals. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 21251–21262, 2024.
- Tevet, G., Raab, S., Gordon, B., Shafir, Y., Cohen-or, D., and Bermano, A. H. Human motion diffusion model. In *The Eleventh International Conference on Learning Representations*, 2023.
- Tevet, G., Raab, S., Cohan, S., Reda, D., Luo, Z., Peng, X. B., Bermano, A. H., and van de Panne, M. Cload: Closing the loop between simulation and diffusion for multi-task character control. In *The Thirteenth International Conference on Learning Representations*, 2025.
- Tseng, J., Castellon, R., and Liu, K. Edge: Editable dance generation from music. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 448–458, 2023.
- Van Den Oord, A., Vinyals, O., et al. Neural discrete representation learning. *Advances in neural information processing systems*, 30, 2017.
- Wang, Y., Zheng, S., Cao, B., Wei, Q., Zeng, W., Jin, Q., and Lu, Z. Scaling large motion models with million-level human motions. In *Forty-second International Conference on Machine Learning*, 2025.
- Wu, T., Fan, Z., Liu, X., Zheng, H.-T., Gong, Y., Jiao, J., Li, J., Guo, J., Duan, N., Chen, W., et al. Ar-diffusion: Autoregressive diffusion model for text generation. *Advances in Neural Information Processing Systems*, 36:39957–39974, 2023.
- Wu, Y., Karunratanakul, K., Luo, Z., and Tang, S. Uni-phys: Unified planner and controller with diffusion for flexible physics-based character control. *arXiv preprint arXiv:2504.12540*, 2025.
- Xiao, L., Lu, S., Pi, H., Fan, K., Pan, L., Zhou, Y., Feng, Z., Zhou, X., Peng, S., and Wang, J. Motionstreamer: Streaming motion generation via diffusion-based autoregressive model in causal latent space. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp. 10086–10096, 2025.
- Yang, K., Tang, X., Peng, Z., Hu, Y., He, J., and Liu, H. MEGADance: Mixture-of-experts architecture for genre-aware 3d dance generation. In *The Thirty-ninth Annual Conference on Neural Information Processing Systems*, 2025a.
- Yang, K., Tang, X., Peng, Z., Zhang, X., Wang, P., He, J., and Liu, H. Flowerdance: Meanflow for efficient and refined 3d dance generation. *arXiv preprint arXiv:2511.21029*, 2025b.

- Zhang, C., Tang, Y., Zhang, N., Lin, R.-S., Han, M., Xiao, J., and Wang, S. Bidirectional autoregressive diffusion model for dance generation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 687–696, 2024a.
- Zhang, J., Zhang, Y., Cun, X., Zhang, Y., Zhao, H., Lu, H., Shen, X., and Shan, Y. Generating human motion from textual descriptions with discrete representations. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 14730–14740, 2023.
- Zhang, Z., Liu, R., Hanocka, R., and Aberman, K. Tedi: Temporally-entangled diffusion for long-term motion synthesis. In *ACM SIGGRAPH 2024 Conference Papers*, pp. 1–11, 2024b.
- Zhao, K., Li, G., and Tang, S. Dartcontrol: A diffusion-based autoregressive motion model for real-time text-driven motion control. In *The Thirteenth International Conference on Learning Representations*, 2025.
- Zhou, Y., Barnes, C., Lu, J., Yang, J., and Li, H. On the continuity of rotation representations in neural networks. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 5745–5753, 2019.