

# Fisher-R1: Training LLM Agents for Reliable Hypothesis Testing

Jiacheng Miao<sup>1,2,\*</sup>, Jin Mu<sup>3,\*</sup>, Guanhua Chen<sup>3,4</sup>, and James Zou<sup>1,5,6</sup>

<sup>1</sup>Department of Biomedical Data Science, Stanford University

<sup>2</sup>Department of Genetics, Stanford University

<sup>3</sup>Department of Biostatistics and Medical Informatics, University of Wisconsin–Madison

<sup>4</sup>Department of Statistics, University of Wisconsin–Madison

<sup>5</sup>Department of Electrical Engineering, Stanford University

<sup>6</sup>Department of Computer Science, Stanford University

\*These authors contributed equally to this work



## Abstract

Reliable hypothesis testing is the foundation of many empirical scientific claims. Large language model (LLM) agents are increasingly used to automate this process, as they can inspect datasets, generate code, and produce analyses end-to-end. However, we show that they frequently make subtle inferential errors that lead to incorrect conclusions despite correctly executed analyses. Existing benchmarks fail to capture this failure mode, as they rarely assess whether a reported p-value is statistically valid given the assumptions underlying the data. We address this gap by building **P-Bench**, a benchmark comprising 425 open-ended, realistic hypothesis-testing tasks spanning economics, biology, and medicine. Each task requires an agent to select a statistical method, compute a p-value, and draw a conclusion given only a scientific hypothesis and a dataset. We further introduce **Fisher-R1**, an open-weight LLM agent trained for rigorous hypothesis testing using synthetic tasks and reinforcement learning. On P-Bench, Fisher-R1-14B substantially improves over its backbone and **outperforms strong proprietary and open-source baselines, including GPT-5.4 and DeepSeek-V4-Pro**, achieving a 21% average relative improvement in single-trial success over DeepSeek-V4-Pro, with gains up to 26% on the most challenging tasks. Our results demonstrate that current LLM agents lack reliable statistical reasoning for hypothesis testing and that reinforcement learning on tasks with verified statistical reward substantially improves reliability.

## 1 Introduction

Many areas of empirical science follow a common workflow: a researcher begins with a scientific question and a dataset, translates the question into a testable hypothesis, selects an appropriate statistical test, computes a p-value, and then draws a conclusion [1]. This hypothesis-testing framework appears in high-stakes settings across disciplines, from medicine to economics. For example, in clinical trials, researchers test whether a new treatment is more effective than a placebo, while in economics, policymakers evaluate whether interventions such as minimum wage increases affect employment outcomes. The method must match the question and data; otherwise, a precise p-value can support the wrong scientific conclusion.

Large language model (LLM) coding agents can now execute much of the empirical workflow:

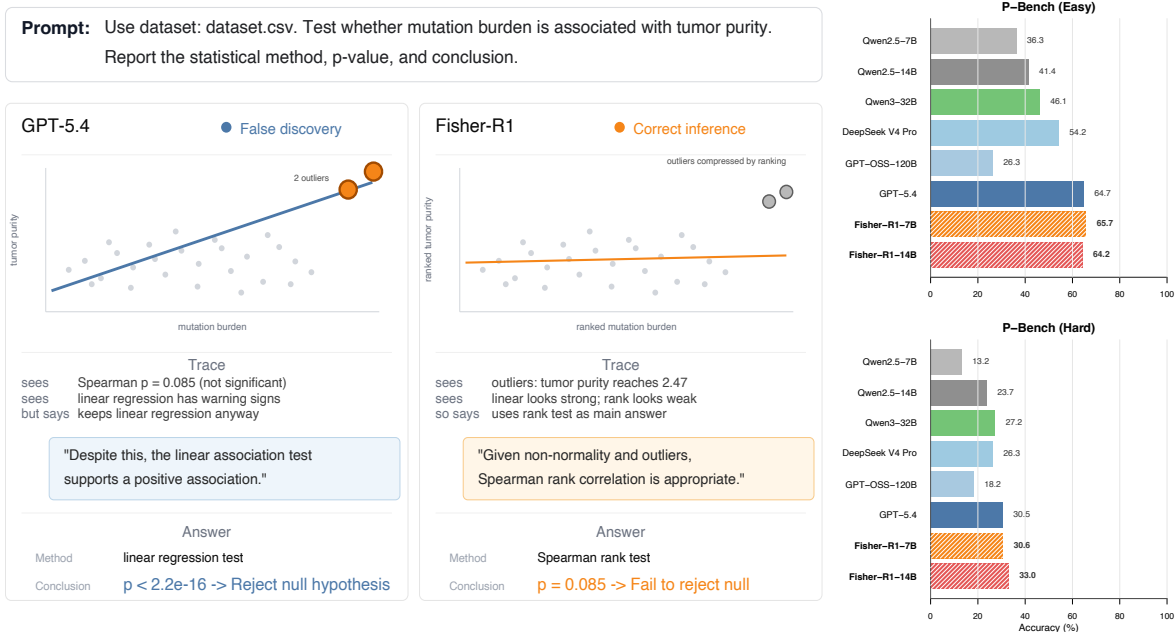


Figure 1: **Open-ended hypothesis testing with coding agents.** Left: GPT-5.4 identifies outliers but still applies linear regression, leading to a false discovery. Fisher-R1 instead uses a rank-based test and correctly fails to reject the null. Right: P-Bench accuracy on easy and hard splits.

inspecting datasets, generating code, running analyses, and drafting reports [2–4]. However, hypothesis testing is not merely code execution. Consider a cancer genomics task testing whether mutation burden is associated with tumor purity. The dataset contains a few high-leverage outliers: a linear analysis reports a highly significant association driven by these points, whereas a rank-based test does not. As shown in Figure 1, a frontier LLM agent recognizes these warning signs yet proceeds with linear regression, producing runnable code and a fluent but incorrect conclusion. In contrast, a Spearman test correctly fails to reject the null.

This example highlights how LLM agents can generate technically valid analyses while making flawed inferential choices that lead to false discoveries. Existing evaluations do not directly measure this ability. General data-analysis benchmarks [5–8] often reward a plausible answer or an executable workflow, but they rarely isolate the inferential method itself: which test was executed, whether the reported p-value is grounded in that execution, and whether the conclusion follows from the computed evidence. The gap is especially consequential for open-ended scientific discovery, where agents may search many datasets and hypotheses, and for private scientific and medical data, where reliable local or open-weight agents are needed.

Closing this evaluation gap requires verified statistical tasks: a scientific question, a dataset, an executable analysis, and a checked answer key for the method, p-value, and conclusion. Such tasks are scarce. Papers report selected results, public datasets require cleaning, and statistical methods are not packaged as machine-checkable targets.

To address this gap, we introduce **P-Bench (P-value Bench)**, a benchmark of 425 open-ended hypothesis-testing tasks built on real scientific data. Each task gives an agent a scientific question, a dataset, and a data description. The agent must choose a statistical method, execute the analysis, report a p-value, and draw a conclusion. Tasks are drawn from peer-reviewed economics and biology papers and from authoritative biostatistics teaching materials. Every answer key is

grounded in a logged execution of the canonical reference analysis and audited by domain experts. To make this construction tractable, we use an automated reproducibility pipeline that links each published claim to its dataset and analysis code. The pipeline is described in the appendix.

We further train **Fisher-R1**, an open-weight LLM agent for rigorous hypothesis testing. To enable training at scale, we design a synthetic task generator that produces realistic hypothesis-testing scenarios with verified answer keys. Fisher-R1 is trained on these tasks with supervised fine-tuning followed by reinforcement learning. On P-Bench, Fisher-R1-14B outperforms strong proprietary and open-source baselines, including GPT-5.4 and DeepSeek-V4-Pro.

To summarize, our contributions are:

- We introduce **P-Bench**, an expert-verified, executable benchmark of 425 open-ended hypothesis-testing tasks on real scientific data, evaluating LLM agents on p-value accuracy and conclusion correctness.
- We train **Fisher-R1**, an open-weight hypothesis-testing agent, using synthetic executable tasks and outcome-grounded reinforcement learning. Fisher-R1 substantially improves over its backbone and outperforms GPT-5.4 and DeepSeek-V4-Pro on P-Bench.

## 2 Problem Formulation

### 2.1 Settings

We consider open-ended hypothesis testing with LLM coding agents. Each task gives the agent a scientific question  $q$ , a dataset  $D$ , and a data description  $s$ , but not the statistical method. Given  $x = (q, D, s)$ , the agent must choose a method, execute the analysis, return a p-value  $\hat{p}$ , and a decision  $\hat{\delta}$ , where  $\hat{\delta}$  indicates whether to reject the null hypothesis at a pre-specified significance level.

Evaluation compares the agent output with a hidden answer key  $k^* = (p^*, \delta^*)$ . The agent interacts with an R environment through a multi-turn loop, reflecting the statistical software ecosystem used in many empirical analyses and providing a fixed execution backend for evaluation. At step  $t$ , the history is  $h_t = (x, a_1, o_1, \dots, a_{t-1}, o_{t-1})$ , where  $a_i$  is an agent action and  $o_i$  is the corresponding environment observation. An action may contain R code, an intermediate analysis decision, or the final answer. The environment executes code actions and returns observations such as data summaries, warnings, model outputs, diagnostics, test statistics, and p-values. The completed trajectory is

$$\tau \sim \pi_\theta(\cdot \mid x),$$

where  $\tau$  includes both the executed code trace and the final report. At evaluation time, we parse  $\tau$  to compare the reported p-value and the final decision with  $k^*$ .

### 2.2 Related works

**LLM agents for data analysis and statistical reasoning.** Recent work has evaluated LLM agents that write code, inspect data, execute programs, and iteratively revise their solutions, building on the ReAct paradigm of interleaved reasoning and tool use [9]. A substantial body of data-analysis benchmarks evaluates whether such agents can answer factoid queries about a dataset (e.g., “what is the mean of X?”) or build predictive models on tabular data through executable workflows [6, 7, 10–15]. These benchmarks score the executability of the workflow and the exact-match correctness of a final factoid or model accuracy, but they neither require nor verify that the

chosen statistical procedure is valid for the data at hand. A complementary line, exemplified by StatQA, asks whether LLMs can select an appropriate statistical procedure in a multiple-choice format, without executing the analysis with code [8]. P-Bench targets a regime that neither captures the full open-ended hypothesis-testing loop, method selection, executed analysis,  $p$ -value, nor the reject/fail-to-reject decision, and is evaluated against an answer key derived from the canonical reference analysis on real scientific data.

**Scientific claim verification and reproducibility.** Scientific claim verification has been studied as an evidence-retrieval and textual-entailment problem: SciFact asks models to verify scientific claims against evidence-containing abstracts and supply supporting rationales [16], with follow-on benchmarks scaling this to larger and multimodal corpora [17, 18]. This line evaluates whether claims are supported or refuted by the literature, but does not reconstruct the underlying statistical analysis. Large-scale replication efforts such as SCORE further show that re-running and checking empirical claims is important but costly, requiring substantial human effort to assess robustness and test replicability [19]. These efforts target manuscript-level verification of whether published numbers can be reproduced. In contrast, P-Bench evaluates the upstream act of inference itself: given the same data and question, does the agent select a method that yields a statistically valid  $p$ -value?

**Autonomous research agents.** A recent line of work pursues end-to-end autonomous scientific discovery, with LLM agents that propose hypotheses, generate code, run experiments, and draft manuscripts [20–22]. The reliability of such pipelines is, however, bounded by the statistical reasoning of the underlying agent at every stage. As our P-Bench experiments show, current LLM agents may make subtle inferential errors even on well-defined hypothesis-testing tasks, undermining the validity of any conclusion drawn downstream and casting doubt on whether fully autonomous end-to-end discovery is presently achievable. Fisher-R1 directly targets this bottleneck.

### 3 P-Bench

P-Bench is a benchmark of open-ended hypothesis-testing tasks built from real scientific data spanning economics, biology, and medicine. Each task is anchored to a statistical claim from a high-quality source, such as peer-reviewed top scientific journals and canonical course notes, so the answer key reflects a hypothesis test that domain experts have already computed and acted on.

#### 3.1 Task Formulation

A P-Bench task provides the agent with (Figure 2): (i) an analysis request describing a scientific question and the associated data, and (ii) a dataset in CSV format. The agent must explore the data, write and execute R code in a logged sandbox environment, and return a structured output consisting of a selected statistical method, a  $p$ -value, and a reject/fail-to-reject decision. Importantly, the task does not prescribe a statistical method. Instead, the agent must autonomously select an appropriate analysis strategy, and its output is evaluated against a hidden answer key comprising the  $p$ -value, and a decision derived from the canonical analysis.



Figure 2: A P-Bench task is composed of an analysis request, a CSV dataset, and a hidden answer key derived from the canonical reference analysis. The agent writes and executes R code inside a logged sandbox and returns a chosen statistical method,  $p$ -value, and reject/fail-to-reject decision, which are then compared against the answer key.

### 3.2 Dataset Construction and Verification

P-Bench is built from three high-quality source families: economics papers in top journals with datasets hosted on Harvard Dataverse [23], peer-reviewed biology papers with datasets hosted on cBioPortal[24–26], and authoritative teaching materials from Vanderbilt Biostatistics[27] with datasets distributed through R packages. Each task is derived from a real scientific analysis originally conducted by domain experts. To ensure diversity and balance, we first collected a broad pool of candidate tasks and randomly sampled from them to construct an evenly distributed benchmark. We also introduced controlled perturbations to the datasets to better reflect the noise, inconsistencies, and irregularities commonly encountered in real-world data analysis.

Starting from statistical claims extracted from the sources, we applied a three-stage pipeline: (1) reproduce the reference analysis on a clean machine and log the execution; (2) filter out analyses that could not be reproduced, and ground each remaining claim in the execution log; and (3) generate a self-contained executable task paired with a structured answer key in the P-Bench format. As a result, every released task is reproducible, traceable to an executed reference run, and self-contained.

P-Bench tasks and their answer keys are trustworthy by construction: keys are computed from canonical reference code (not transcribed from paper text), cross-validated against the published claim, and every task is audited by domain experts. (i) Reproducible execution. Every  $p$ -value, test statistic, and decision is read off a logged run of canonical reference code: a deposited replication script for economics, a methods-section re-implementation on the released tables for biology, or the published course-notes analysis for biostatistics. (ii) Expert review. Reviewers trained in statistics and biostatistics independently audit each finalized task, verifying that the analysis request, released data subset, and answer key all align with the source; tasks failing review are repaired or removed.

### 3.3 Composition

After verification, P-Bench contains **425** high-quality open-ended hypothesis-testing tasks, stratified into Easy (203) and Hard (222) splits using deterministic, metadata-only rules: a task is Hard if it belongs to a reference-method family that requires careful model specification and assumption checking (e.g., Cox regression, IV/2SLS, Tobit model) or it carries an adversarial data-quality perturbation. Several properties make P-Bench distinctive:

**Diverse and realistic methods.** P-Bench covers **17** hypothesis-testing method categories spanning commonly used tests ( $t$ -test,  $\chi^2$ , OLS coefficient test, Fisher exact test) and specialized methods routinely used in real published analyses (e.g., Cox proportional-hazards regression, IV / 2SLS estimators, mixed-effects models, log-rank tests, Mann–Whitney, Tobit model, probit model).

No single category exceeds 19%, so an agent cannot succeed by defaulting to a fixed recipe.

**Cross-domain coverage.** Tasks span economics, biology, and medicine, covering both randomized experiments and observational studies. Each setting has its own modeling assumptions and inferential targets, so an agent must transfer statistical reasoning across disciplines.

**Realistic statistical traps.** P-Bench contains adversarial data-quality and assumption-checking traps, including outliers, heteroskedasticity, and clustered observations, where naive methods yield confident-but-wrong results. These are textbook assumption violations that arise routinely in real-world data and that any trained statistician is expected to detect and handle.

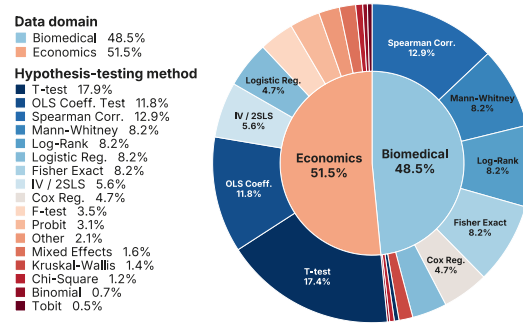


Figure 3: Task Composition of P-Bench

## 4 Fisher-R1 Training

### 4.1 Synthetic Data

We train on synthetic tasks with executable data-generating processes, known target analyses, and programmatically checkable answer keys. To generate each task, we use an LLM to write both the simulation code (which produces the dataset) and the accompanying analysis question. The simulation runs the canonical statistical method on its own simulated data, and the resulting  $p$ -value, decision, and method label form the answer key. This gives us a scalable, verified reward signal for RL, which is the bottleneck for training on real, published data. By construction, it also keeps P-Bench fully out of the training set, allowing us to test out-of-distribution generalization.

**Task taxonomy.** Each training task is generated by combining six independent factors: a statistical method ( $M$ ), a domain scenario ( $S_m$ ), a sample size ( $N$ ), an effect size ( $E$ ), a prompt style ( $P$ ), and a random seed ( $K$ ). Formally, the task taxonomy is the Cartesian grid

$$\underbrace{M}_{\text{method}} \times \underbrace{S_m}_{\text{scenario}} \times \underbrace{N}_{\text{sample size}} \times \underbrace{E}_{\text{effect size}} \times \underbrace{P}_{\text{prompt style}} \times \underbrace{K}_{\text{seed}}$$



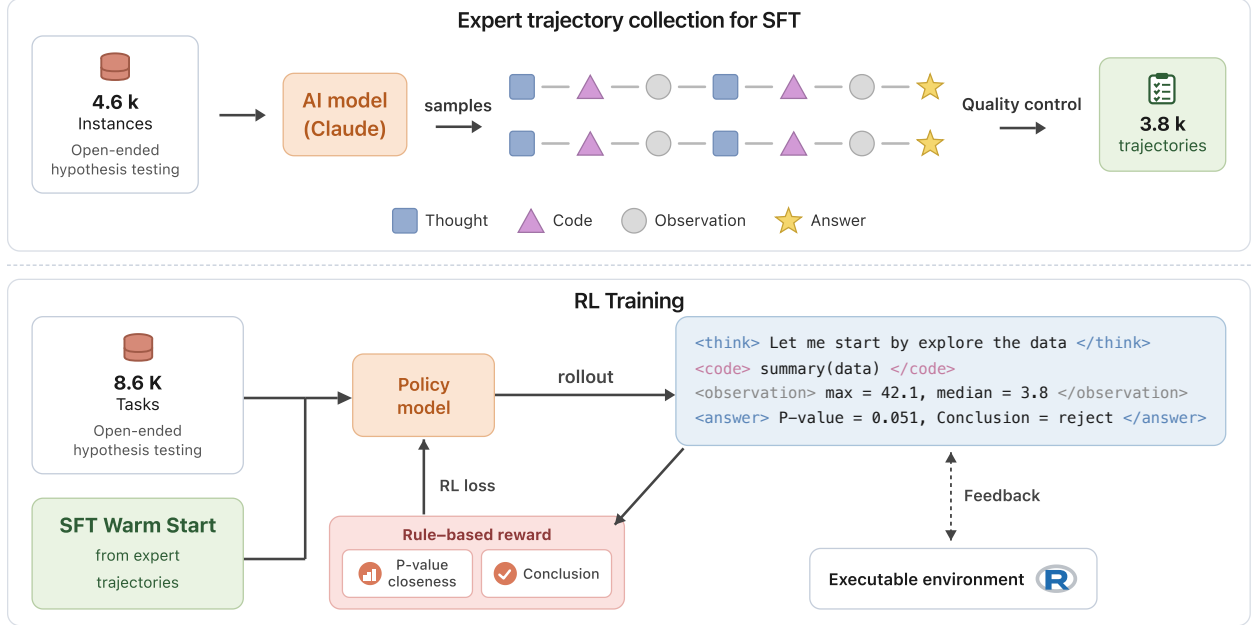


Figure 4: **Top:** Expert trajectories are collected for SFT. The model generates reasoning traces containing thoughts, code, observations, and final answers; quality control filters for high-quality trajectories. **Bottom:** The policy is initialized from the SFT model and optimized with RL. During rollout, it interacts with an executable environment to generate trajectories. Rule-based rewards score p-value accuracy and conclusion correctness.

Each method is paired with multiple domain scenarios that wrap a shared data-generating process in different realistic study descriptions. Effect size takes one of three regimes (null, borderline, medium); the borderline regime is auto-calibrated by simulation, so tasks fall in a genuinely ambiguous significance range. Prompt style controls whether the question states only the research question (non-hint) or additionally flags a methodologically relevant feature of the data, such as endogeneity or clustering (hint). Sample size and seeds are varied for coverage and reproducibility. Full per-axis level lists, the end-to-end generation pipeline, and example tasks are given in Appendix C.2.

On top of the clean grid, we add data-quality perturbations such as missing values and extreme or invalid observations. These test whether the agent notices and handles problematic data instead of applying an analysis mechanically. The full corpus contains 8,642 tasks with balanced coverage.

## 4.2 Supervised Fine-tuning

We warm-start the policy model with supervised fine-tuning on teacher-generated analysis trajectories. The teacher trajectories are generated by Claude-Sonnet-4.6 [28] on a randomly sampled subset of synthetic tasks, yielding 4,611 trajectories in total. For every task, the teacher follows a fixed five-step workflow: (i) basic exploratory data analysis (EDA) (data shape, column types, variable roles); (ii) detailed EDA (distributions, missingness, balance, correlations); (iii) assumption checking tailored to the candidate method (e.g., normality, proportional hazards, instrument strength, parallel trends); (iv) method selection and analysis; and (v) conclusion.

We then apply automatic quality control. A trajectory is retained only if it produces a valid multi-turn trace and a parseable conclusion. It must also match the ground-truth reject/fail-to-

reject decision. When a  $p$ -value is reported, it must agree with the answer key in significance at  $\alpha = 0.05$  and within one order of magnitude. We further remove teacher-only metadata and any answer-key leakage from training prompts and targets. After filtering, we keep  $3851/4611 \approx 83.5\%$  of trajectories for SFT.

Each trajectory is formatted in ReAct (CodeAct) style [9, 29], with the same `<think>`, `<code>`, `<observation>`, `<answer>` tags as the RL environment. Only assistant turns are optimized; user prompts and tool observations are provided as context. Let  $\mathcal{D}_{\text{SFT}} = \{(x_i, y_i)\}_{i=1}^n$  denote the filtered trajectory set, where  $x_i$  is the task prompt and  $y_i = (y_{i,1}, \dots, y_{i,T_i})$  is the teacher response sequence. We minimize the masked autoregressive negative log-likelihood

$$\mathcal{L}_{\text{SFT}}(\theta) = -\frac{1}{\sum_i \sum_t m_{i,t}} \sum_i \sum_{t=1}^{T_i} m_{i,t} \log \pi_\theta(y_{i,t} \mid x_i, y_{i,<t}),$$

where  $m_{i,t} = 1$  for assistant tokens and 0 for prompt and observation tokens.

### 4.3 Reinforcement Learning

**Algorithm.** Starting from the SFT-initialized policy  $\pi_\theta$ , we use the Decoupled Clip and Dynamic Sampling Policy Optimization (DAPO) algorithm [30]. For each prompt  $q$ , we sample a group of  $G$  multi-turn rollouts  $\{o_i\}_{i=1}^G \sim \pi_{\theta_{\text{old}}}(\cdot \mid q)$  and score each rollout with the Fisher reward  $R(o_i)$ . The group-relative advantage is

$$\hat{A}_i = \frac{R(o_i) - \mu_q}{\sigma_q + \epsilon}, \quad \mu_q = \frac{1}{G} \sum_{j=1}^G R(o_j), \quad \sigma_q^2 = \frac{1}{G} \sum_{j=1}^G (R(o_j) - \mu_q)^2.$$

For rollout  $o_i = (y_{i,1}, \dots, y_{i,T_i})$ , where  $T_i = |o_i|$  denotes the number of generated assistant tokens in rollout  $o_i$  that are included in the policy-gradient loss, the token-level importance ratio is

$$r_{i,t}(\theta) = \frac{\pi_\theta(y_{i,t} \mid h_{i,t})}{\pi_{\theta_{\text{old}}}(y_{i,t} \mid h_{i,t})},$$

where  $h_{i,t}$  denotes the full interaction history before token  $t$ , including the prompt, previous assistant tokens, and environment observations. We maximize the DAPO objective

$$J_{\text{DAPO}}(\theta) = \mathbb{E}_{q, \{o_i\}} \left[ \frac{1}{\sum_{i=1}^G T_i} \sum_{i=1}^G \sum_{t=1}^{T_i} \min(r_{i,t}(\theta) \hat{A}_i, \text{clip}(r_{i,t}(\theta), 1 - \epsilon_\ell, 1 + \epsilon_h) \hat{A}_i) \right],$$

where we use the asymmetric clipping range  $(\epsilon_\ell, \epsilon_h) = (0.20, 0.28)$ . The asymmetric range, with  $\epsilon_h > \epsilon_\ell$ , permits larger updates for tokens from positive-advantage rollouts while retaining the lower clip to control excessively large probability decreases. Following DAPO, we use *dynamic sampling*: groups satisfying  $\sigma_q^2 = 0$  are discarded and re-sampled. Thus, each policy update is computed from groups with non-degenerate relative advantages.

**Reward.** For each rollout  $o$ , we compute a scalar reward from two outcome-grounded components, gated by a hard format constraint:

$$R(o) = I_{\text{valid}}(o) (w_p r_p(o) + w_c r_c(o)), \quad w_p + w_c = 1.$$

We set  $w_p = 0.9$ ,  $w_c = 0.1$ . The conclusion reward is assigned a smaller weight because it primarily checks whether the reported decision is consistent with the reported  $p$ -value. Here



$I_{\text{valid}}(o) = 1$  only if the trajectory contains reasoning, executable code, and a parseable terminal `<answer>...</answer>` block; otherwise  $R(o) = 0$ . The  $p$ -value component compares the reported  $\hat{p}$  with the answer-key value  $p^*$  on a two-sided normal test-statistic scale:

$$z(p) = \Phi^{-1}(1 - p/2), \quad r_p(o) = \exp\left(-\frac{|\min\{z(\hat{p}), 5\} - \min\{z(p^*), 5\}|}{\sigma}\right), \quad \sigma = 1.$$

The map  $z(p) = \Phi^{-1}(1 - p/2)$  does *not* assume that the underlying data are Gaussian; it is a monotonic, distribution-free re-labeling of the  $p$ -value as the two-sided standard-normal  $z$ -score whose tail probability equals  $p$ , and applies regardless of which test (parametric or nonparametric) produced  $p$ . We score in  $z$ -space because raw  $p$ -values are heavily compressed near 0, where the most informative differences in evidence live. For example, the pair  $\{p = 0.5, p = 0.6\}$  and the pair  $\{p = 0.1, p = 10^{-10}\}$  both have  $|\Delta p| \approx 0.1$ , yet the first represents essentially no change in evidence while the second spans many orders of magnitude in statistical significance. The  $z$ -scale addresses this compression and is a widely used convention in statistical practice, such as meta-analysis. The conclusion component  $r_c \in \{0, 1\}$  checks whether the final reject/fail-to-reject decision agrees with the answer key at  $\alpha = 0.05$ . We do not include an explicit method-correctness term in the reward because multiple statistical procedures may be defensible for the same hypothesis-testing task. Instead, method choice is evaluated indirectly through the outcome-grounded reward: an inappropriate method will typically produce a  $p$ -value that deviates from the reference analysis, and therefore receive a lower  $z$ -space  $p$ -value closeness reward.

## 5 Experiment

### 5.1 Experimental Setting

**Models and Baselines** We include Qwen2.5-Coder-7B and 14B [31] as our backbone models to compare different baselines. We compare Fisher-R1 with strong proprietary models: GPT-5.4 [32]. We also include four outstanding open-source models: DeepSeek-V4-Pro [33], GPT-OSS-120B [34], Qwen3-Coder-30B [35] and Qwen3-32B [36], and DataMind [37] has been trained for data analysis.

**Evaluation metrics.** We evaluate each model on two splits of P-Bench: P-Easy and P-Hard. For each task, we sample three independent rollouts and report results under two correctness criteria. **Raw** measures whether the model reaches the correct hypothesis-testing conclusion at  $\alpha = 0.05$ , i.e., whether its final reject/fail-to-reject decision matches the ground-truth decision. Unparseable rollouts are counted as incorrect. **Strict** further requires the reported  $p$ -value to be numerically close to the ground-truth value in two-sided  $z$ -space:

$$\text{Strict} = \text{Raw} \wedge |z(\hat{p}) - z(p^*)| < 0.5, \quad z(p) = \Phi^{-1}(1 - p/2).$$

Thus, Raw evaluates conclusion-level correctness, while Strict evaluates whether the model reaches the correct conclusion with a sufficiently accurate reported  $p$ -value. For each model, we run three independent trials per task, pass@1 averages the per-trial success rate; pass@3 counts a task as solved if any of its three trials succeed. Because the canonical analyses come from peer-reviewed papers or authoritative course materials and are expert-audited, scoring is reproducible and expert-grounded.

Table 1: Main results on P-Bench. Raw denotes correct conclusion direction, while Strict additionally requires  $|\Delta z| < 0.5$ , where  $z$  is the two-sided  $z$ -score derived from the reported  $p$ -value. pass@1 is reported as mean $_{\pm\text{stdev}}$  over three independent runs.

| Model                     | P-Easy                |             |                       |             | P-Hard                |             |                       |             |
|---------------------------|-----------------------|-------------|-----------------------|-------------|-----------------------|-------------|-----------------------|-------------|
|                           | Raw                   |             | Strict                |             | Raw                   |             | Strict                |             |
|                           | pass@1                | pass@3      | pass@1                | pass@3      | pass@1                | pass@3      | pass@1                | pass@3      |
| <i>Proprietary Models</i> |                       |             |                       |             |                       |             |                       |             |
| GPT-5.4                   | <b>92.9</b> $\pm 1.0$ | 95.6        | 64.7 $\pm 3.3$        | 73.4        | 58.3 $\pm 0.9$        | 68.0        | 30.5 $\pm 1.6$        | 39.2        |
| <i>Open-source Models</i> |                       |             |                       |             |                       |             |                       |             |
| DeepSeek V4 Pro           | 70.9 $\pm 0.5$        | 93.1        | 54.2 $\pm 0.5$        | 71.9        | 46.8 $\pm 1.2$        | 69.7        | 26.3 $\pm 3.0$        | 42.5        |
| GPT-OSS-120B              | 48.1 $\pm 4.3$        | 86.2        | 26.3 $\pm 3.6$        | 55.2        | 37.4 $\pm 4.3$        | 71.2        | 18.2 $\pm 3.5$        | 38.7        |
| Qwen-3-Coder-30B          | 76.9 $\pm 2.2$        | 87.7        | 45.0 $\pm 1.1$        | 57.6        | 59.8 $\pm 0.9$        | 68.0        | 27.8 $\pm 1.8$        | 36.0        |
| Qwen-3-32B                | 82.8 $\pm 0.0$        | 90.6        | 46.1 $\pm 1.7$        | 56.2        | 58.4 $\pm 0.7$        | 71.6        | 27.2 $\pm 0.7$        | 38.7        |
| Qwen-2.5-Coder-7B         | 61.4 $\pm 8.5$        | 83.7        | 36.3 $\pm 5.5$        | 54.7        | 37.5 $\pm 2.8$        | 63.1        | 13.2 $\pm 0.5$        | 25.2        |
| DataMind-7B               | 60.3 $\pm 1.0$        | 84.2        | 31.5 $\pm 1.0$        | 49.8        | 44.4 $\pm 4.2$        | 66.7        | 19.1 $\pm 1.7$        | 32.0        |
| <b>Fisher-R1-7B</b>       | 87.0 $\pm 1.6$        | <b>96.6</b> | <b>65.7</b> $\pm 1.2$ | 74.9        | 63.4 $\pm 2.5$        | <b>82.4</b> | 30.6 $\pm 1.2$        | 44.1        |
| Qwen-2.5-Coder-14B        | 78.5 $\pm 1.2$        | 88.2        | 41.4 $\pm 2.5$        | 49.8        | 51.5 $\pm 4.3$        | 66.7        | 23.7 $\pm 1.6$        | 33.3        |
| DataMind-14B              | 69.0 $\pm 5.2$        | 88.2        | 39.6 $\pm 3.0$        | 53.7        | 48.2 $\pm 2.1$        | 67.1        | 22.1 $\pm 1.2$        | 33.8        |
| <b>Fisher-R1-14B</b>      | 87.4 $\pm 1.9$        | 94.1        | 64.2 $\pm 0.6$        | <b>75.9</b> | <b>65.8</b> $\pm 0.8$ | 81.1        | <b>33.0</b> $\pm 1.7$ | <b>45.5</b> |

## 5.2 Main Results

Fisher-R1 turns its Qwen-2.5-Coder backbones into the strongest open-source hypothesis-testing agents on P-Bench (Table 1). With the 7B backbone, Raw pass@1 rises from 61.4 to 87.0 on P-Easy and from 37.5 to 63.4 on P-Hard, while Strict pass@1 jumps from 36.3 to 65.7 (P-Easy) and 13.2 to 30.6 (P-Hard); the 14B variant achieves the best P-Hard Strict scores in the table (33.0 pass@1, 45.5 pass@3). Run-to-run standard deviations also drop sharply (e.g.,  $\pm 8.5 \rightarrow \pm 1.6$  on P-Easy Raw pass@1 for the 7B), so Fisher-R1 is not only more accurate but also more stable across rollouts.

Fisher-R1 also outperforms substantially larger open-source baselines. Despite using 7B/14B backbones, it beats DeepSeek V4 Pro, GPT-OSS-120B, Qwen-3-Coder-30B, and Qwen-3-32B on every Strict metric, indicating that for hypothesis testing, targeted training with a verified statistical reward is more effective than scaling the underlying coding model. Fisher-R1-14B further exceeds GPT-5.4 on three of four Strict metrics (P-Easy pass@3: 75.9 vs 73.4; P-Hard pass@1: 33.0 vs 30.5; P-Hard pass@3: 45.5 vs 39.2), trailing only narrowly on P-Easy Strict pass@1 (64.2 vs 64.7).

Across all baselines, Strict scores are far below Raw scores, especially on P-Hard. GPT-5.4, for example, scores 58.3 Raw but only 30.5 Strict on P-Hard pass@1: it reports the correct reject/fail-to-reject direction nearly twice as often as it produces a  $p$ -value close to the canonical analysis. This pattern is robust to the choice of Strict threshold: using a relaxed criterion of  $|\Delta z| < 1$  leads to the same qualitative conclusion (Table 5) as the main criterion of  $|\Delta z| < 0.5$ . Fisher-R1 shrinks this gap, suggesting that conclusion-only evaluation overstates agent reliability in open-ended hypothesis testing, and that explicitly rewarding  $p$ -value accuracy is what gets the model to ground its decision in the executed analysis.

### 5.3 Ablation Analysis

Table 2 shows that combining the SFT warm-start with DAPO is essential to reach Fisher-R1’s full performance: SFT+DAPO achieves the best score on every metric, substantially above either stage alone. DAPO applied directly to the backbone lifts single-run accuracy (e.g., P-Hard Strict pass@1 13.2 to 25.2), but plateaus well below SFT+DAPO. SFT alone improves pass@3 by broadening the solution distribution, but does not reliably improve pass@1.

Table 2: Ablation of SFT warm-start and DAPO training on P-Bench with the 7B backbone.

| Backbone          | P-Easy         |             |                       |        | P-Hard         |             |                |        |
|-------------------|----------------|-------------|-----------------------|--------|----------------|-------------|----------------|--------|
|                   | Raw            |             | Strict                |        | Raw            |             | Strict         |        |
|                   | pass@1         | pass@3      | pass@1                | pass@3 | pass@1         | pass@3      | pass@1         | pass@3 |
| Qwen-2.5-Coder-7B | 61.4 $\pm$ 8.5 | 83.7        | 36.3 $\pm$ 5.5        | 54.7   | 37.5 $\pm$ 2.8 | 63.1        | 13.2 $\pm$ 0.5 | 25.2   |
| +DAPO             | 81.6 $\pm$ 2.8 | 86.9        | 44.4 $\pm$ 0.9        | 48.2   | 52.3 $\pm$ 3.6 | 62.6        | 25.2 $\pm$ 0.8 | 30.3   |
| +SFT              | 51.6 $\pm$ 6.1 | 84.2        | 30.2 $\pm$ 4.6        | 59.6   | 33.5 $\pm$ 3.9 | 68.0        | 14.3 $\pm$ 1.1 | 30.2   |
| +DAPO             | 87.0 $\pm$ 1.6 | <b>96.6</b> | <b>65.7</b> $\pm$ 1.2 | 74.9   | 63.4 $\pm$ 2.5 | <b>82.4</b> | 30.6 $\pm$ 1.2 | 44.1   |

### 5.4 Generalization, not Memorization

To verify that gains on P-Bench reflect generalization rather than memorization, we quantify the distance between the evaluation set and the SFT and RL training corpus in semantic-embedding space. For each input, we extract the research question and study description, i.e., the user prompt, and embed it with OpenAI’s text-embedding-3-small [38]. We then compute, for each sample, the mean cosine similarity to its top-5 nearest neighbors in the training pool.

As shown in Fig. 5, train-to-train similarities form a tight high-similarity “memorization band” that reflects the templated structure of generated RL prompts, while eval-to-train similarities sit clearly below this band. The 425 P-Bench tasks, therefore, have no near-duplicate counterparts in the RL corpus, indicating that gains on P-Bench reflect generalization rather than retrieval of training prompts. The two distributions also differ by construction: training tasks are synthetic simulations, whereas P-Bench tasks are real-world hypothesis-testing tasks.

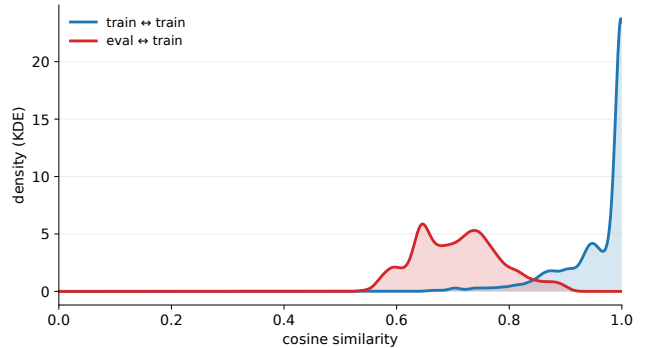


Figure 5: Similarity Analysis

## 6 Discussion

We introduced P-Bench, a benchmark of 425 real-world hypothesis-testing tasks with expert-audited answer keys, and Fisher-R1, an open-weight agent trained on synthetic statistical tasks via SFT and RL with verified-outcome rewards. Our results show that even current frontier models still lack reliable statistical reasoning for open-ended hypothesis testing. Fisher-R1-14B outperforms strong proprietary and open-source baselines, including GPT-5.4 and DeepSeek-V4-Pro.

P-Bench currently evaluates a single hypothesis test per task. Extending it to multi-test pipelines with multiple-comparison correction is a natural next step. Reliable statistical agents can improve scientific reproducibility by catching method-driven errors before they enter the literature. They could also lend false legitimacy to weak claims. We therefore release P-Bench and Fisher-R1 as evaluation and oversight tools, not as substitutes for human statistical review. Future work should further study how to make agents explicitly justify assumptions, quantify uncertainty over method choice, and recognize when no single hypothesis test is adequate for a scientific question.

## References

- [1] Ronald L. Wasserstein and Nicole A. Lazar. The asa statement on p-values: Context, process, and purpose. *The American Statistician*, 70(2):129–133, 2016. doi: 10.1080/00031305.2016.1154108. URL <https://doi.org/10.1080/00031305.2016.1154108>.
- [2] Wenqi Zhang, Yongliang Shen, Weiming Lu, and Yueting Zhuang. Data-copilot: Bridging billions of data and humans with autonomous workflow. *arXiv preprint arXiv:2306.07209*, 2023.
- [3] Shaolei Zhang, Ju Fan, Meihao Fan, Guoliang Li, and Xiaoyong Du. Deepanalyze: Agentic large language models for autonomous data science. *arXiv preprint arXiv:2510.16872*, 2025.
- [4] Sirui Hong, Yizhang Lin, Bang Liu, Bangbang Liu, Binhao Wu, Ceyao Zhang, Danyang Li, Jiaqi Chen, Jiayi Zhang, Jinlin Wang, et al. Data interpreter: An llm agent for data science. In *Findings of the Association for Computational Linguistics: ACL 2025*, pages 19796–19821, 2025.
- [5] Xueyu Hu, Ziyu Zhao, Shuang Wei, Ziwei Chai, Qianli Ma, Guoyin Wang, Xuwu Wang, Jing Su, Jingjing Xu, Ming Zhu, Yao Cheng, Jianbo Yuan, Jiwei Li, Kun Kuang, Yang Yang, Hongxia Yang, and Fei Wu. Infiagent-dabench: Evaluating agents on data analysis tasks, 2024. URL <https://arxiv.org/abs/2401.05507>.
- [6] Alex Egg, Martin Iglesias Goyanes, Friso Kingma, Andreu Mora, Leandro von Werra, and Thomas Wolf. Dabstep: Data agent benchmark for multi-step reasoning. *arXiv preprint arXiv:2506.23719*, 2025.
- [7] Yiming Huang, Jianwen Luo, Yan Yu, Yitong Zhang, Fangyu Lei, Yifan Wei, Shizhu He, Lifu Huang, Xiao Liu, Jun Zhao, and Kang Liu. DA-code: Agent data science code generation benchmark for large language models. In Yaser Al-Onaizan, Mohit Bansal, and Yun-Nung Chen, editors, *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, pages 13487–13521, Miami, Florida, USA, November 2024. Association for Computational Linguistics. doi: 10.18653/v1/2024.emnlp-main.748. URL <https://aclanthology.org/2024.emnlp-main.748/>.
- [8] Yizhang Zhu, Shiyin Du, Boyan Li, Yuyu Luo, and Nan Tang. Are large language models good statisticians? *Advances in Neural Information Processing Systems*, 37:62697–62731, 2024.
- [9] Shunyu Yao, Jeffrey Zhao, Dian Yu, Nan Du, Izhak Shafran, Karthik Narasimhan, and Yuan Cao. React: Synergizing reasoning and acting in language models. *arXiv preprint arXiv:2210.03629*, 2022.
- [10] Yuhang Lai, Chengxi Li, Yiming Wang, Tianyi Zhang, Ruiqi Zhong, Luke Zettlemoyer, Wentau Yih, Daniel Fried, Sida Wang, and Tao Yu. Ds-1000: A natural and reliable benchmark for

- data science code generation. In *International Conference on Machine Learning*, pages 18319–18345. PMLR, 2023.
- [11] Xueyu Hu, Ziyu Zhao, Shuang Wei, Ziwei Chai, Qianli Ma, Guoyin Wang, Xuwu Wang, Jing Su, Jingjing Xu, Ming Zhu, et al. Infiagent-dabench: Evaluating agents on data analysis tasks. *arXiv preprint arXiv:2401.05507*, 2024.
  - [12] Dan Zhang, Sining Zhoubian, Min Cai, Fengzu Li, Lekang Yang, Wei Wang, Tianjiao Dong, Ziniu Hu, Jie Tang, and Yisong Yue. Datascibench: An llm agent benchmark for data science. *arXiv preprint arXiv:2502.13897*, 2025.
  - [13] Jun Shern Chan, Neil Chowdhury, Oliver Jaffe, James Aung, Dane Sherburn, Evan Mays, Giulio Starace, Kevin Liu, Leon Maksin, Tejal Patwardhan, et al. Mle-bench: Evaluating machine learning agents on machine learning engineering. *arXiv preprint arXiv:2410.07095*, 2024.
  - [14] Jinyang Li, Nan Huo, Yan Gao, Jiayi Shi, Yingxiu Zhao, Ge Qu, Yurong Wu, Chenhao Ma, Jian-Guang Lou, and Reynold Cheng. Tapilot-crossing: Benchmarking and evolving llms towards interactive data analysis agents. *arXiv preprint arXiv:2403.05307*, 2024.
  - [15] Hanyu Li, Haoyu Liu, Tingyu Zhu, Tianyu Guo, Zeyu Zheng, Xiaotie Deng, and Michael I Jordan. Ida-bench: Evaluating llms on interactive guided data analysis. *arXiv preprint arXiv:2505.18223*, 2025.
  - [16] David Wadden, Shanchuan Lin, Kyle Lo, Lucy Lu Wang, Madeleine van Zuylen, Arman Cohan, and Hannaneh Hajishirzi. Fact or fiction: Verifying scientific claims. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 7534–7550, 2020.
  - [17] Sujit Kumar, Anshul Sharma, Siddharth Hemant Khincha, Gargi Shroff, Sanasam Ranbir Singh, and Rahul Mishra. Sciclaimehunt: A large dataset for evidence-based scientific claim verification. In *2025 International Joint Conference on Neural Networks (IJCNN)*, pages 1–10. IEEE, 2025.
  - [18] Yash Kumar Lal, Manikanta Bandham, Mohammad Saqib Hasan, Apoorva Kashi, Mahnaz Koupaee, and Niranjan Balasubramanian. Musciclaims: Multimodal scientific claim verification. In *Proceedings of the 14th International Joint Conference on Natural Language Processing and the 4th Conference of the Asia-Pacific Chapter of the Association for Computational Linguistics*, pages 3285–3307, 2025.
  - [19] Olivia Miske, Anna Lou Abatayo, Mason Daley, Mirka Dirzo, Nicholas Fox, Noah Haber, Krystal M Hahn, Melissa Kline Struhl, Brinna Mawhinney, Priya Silverstein, et al. Investigating the reproducibility of the social and behavioural sciences. *Nature*, 652(8108):126–134, 2026.
  - [20] Chris Lu, Cong Lu, Robert Tjarko Lange, Yutaro Yamada, Shengran Hu, Jakob Foerster, David Ha, and Jeff Clune. Towards end-to-end automation of ai research. *Nature*, 651(8107):914–919, 2026.
  - [21] Jiabin Tang, Lianghao Xia, Zhonghang Li, and Chao Huang. Ai-researcher: Autonomous scientific innovation. *arXiv preprint arXiv:2505.18705*, 2025.

- [22] Yutaro Yamada, Robert Tjarko Lange, Cong Lu, Shengran Hu, Chris Lu, Jakob Foerster, Jeff Clune, and David Ha. The ai scientist-v2: Workshop-level automated scientific discovery via agentic tree search. *arXiv preprint arXiv:2504.08066*, 2025.
- [23] Abdul Latif Jameel Poverty Action Lab (J-PAL). Development economics field experiments (dfeep). Harvard Dataverse, 2026. URL <https://dataverse.harvard.edu/dataverse/DFEEP>. Accessed: 2026-04-20.
- [24] Ethan Cerami, Jianjiong Gao, Ugur Dogrusoz, Benjamin E Gross, Selcuk Onur Sumer, Bülent Arman Aksoy, Anders Jacobsen, Caitlin J Byrne, Michael L Heuer, Erik Larsson, et al. The cbio cancer genomics portal: an open platform for exploring multidimensional cancer genomics data. *Cancer discovery*, 2(5):401–404, 2012.
- [25] Jianjiong Gao, Bülent Arman Aksoy, Ugur Dogrusoz, Gideon Dresdner, Benjamin Gross, S Onur Sumer, Yichao Sun, Anders Jacobsen, Rileen Sinha, Erik Larsson, et al. Integrative analysis of complex cancer genomics and clinical profiles using the cbiportal. *Science signaling*, 6(269):p11–p11, 2013.
- [26] Zifeng Wang, Benjamin Danek, and Jimeng Sun. Biodsa-1k: Benchmarking data science agents for biomedical research, 2025. URL <https://arxiv.org/abs/2505.16100>.
- [27] Frank E. Harrell. Vanderbilt biostatistics datasets (hbiostat.org). <https://hbiostat.org/data/>, 2024. Accessed 2026-04-20.
- [28] Anthropic. Introducing claude sonnet 4.6. <https://www.anthropic.com/news/claude-sonnet-4-6>, February 2026. Accessed: 2026-05-06.
- [29] Xingyao Wang, Yangyi Chen, Lifan Yuan, Yizhe Zhang, Yunzhu Li, Hao Peng, and Heng Ji. Executable code actions elicit better llm agents. In *Forty-first International Conference on Machine Learning*, 2024.
- [30] Qiying Yu, Zheng Zhang, Ruofei Zhu, Yufeng Yuan, Xiaochen Zuo, Yu Yue, Weinan Dai, Tiantian Fan, Gaohong Liu, Lingjun Liu, et al. Dapo: An open-source llm reinforcement learning system at scale. *arXiv preprint arXiv:2503.14476*, 2025.
- [31] Binyuan Hui, Jian Yang, Zeyu Cui, Jiayi Yang, Dayiheng Liu, Lei Zhang, Tianyu Liu, Jiajun Zhang, Bowen Yu, Keming Lu, Kai Dang, Yang Fan, Yichang Zhang, An Yang, Rui Men, Fei Huang, Bo Zheng, Yibo Miao, Shanghaoran Quan, Yunlong Feng, Xingzhang Ren, Xuancheng Ren, Jingren Zhou, and Junyang Lin. Qwen2.5-coder technical report, 2024. URL <https://arxiv.org/abs/2409.12186>.
- [32] OpenAI. Introducing gpt-5.4. <https://openai.com/index/introducing-gpt-5-4/>, March 2026. Accessed: 2026-05-06.
- [33] DeepSeek-AI. Deepseek-v4: Towards highly efficient million-token context intelligence. <https://huggingface.co/deepseek-ai/DeepSeek-V4-Pro>, April 2026. Model card and technical report for DeepSeek-V4-Pro. Accessed: 2026-05-06.
- [34] OpenAI. Introducing gpt-oss. <https://openai.com/index/introducing-gpt-oss/>, 2025. Accessed: 2026-05-07.
- [35] Qwen Team. Qwen3-coder-30b-a3b-instruct. <https://huggingface.co/Qwen/Qwen3-Coder-30B-A3B-Instruct>, 2025. Model card. Accessed: 2026-05-06.



- [36] An Yang, Anfeng Li, Baosong Yang, Beichen Zhang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Gao, Chengen Huang, Chenxu Lv, Chujie Zheng, Dayiheng Liu, Fan Zhou, Fei Huang, Feng Hu, Hao Ge, Haoran Wei, Huan Lin, Jialong Tang, Jian Yang, Jianhong Tu, Jianwei Zhang, Jianxin Yang, Jiayi Yang, Jing Zhou, Jingren Zhou, Junyang Lin, Kai Dang, Keqin Bao, Kexin Yang, Le Yu, Lianghao Deng, Mei Li, Mingfeng Xue, Mingze Li, Pei Zhang, Peng Wang, Qin Zhu, Rui Men, Ruize Gao, Shixuan Liu, Shuang Luo, Tianhao Li, Tianyi Tang, Wenbiao Yin, Xingzhang Ren, Xinyu Wang, Xinyu Zhang, Xuancheng Ren, Yang Fan, Yang Su, Yichang Zhang, Yinger Zhang, Yu Wan, Yuqiong Liu, Zekun Wang, Zeyu Cui, Zhenru Zhang, Zhipeng Zhou, and Zihan Qiu. Qwen3 technical report. *arXiv preprint arXiv:2505.09388*, 2025.
- [37] Shuofei Qiao, Yanqiu Zhao, Zhisong Qiu, Xiaobin Wang, Jintian Zhang, Zhao Bin, Ningyu Zhang, Yong Jiang, Pengjun Xie, Fei Huang, and Huajun Chen. Scaling generalist data-analytic agents, 2026. URL <https://arxiv.org/abs/2509.25084>.
- [38] OpenAI. text-embedding-3-small model. <https://developers.openai.com/api/docs/models/text-embedding-3-small>, 2026. Accessed: 2026-05-06.
- [39] Aman Madaan, Niket Tandon, Prakhar Gupta, Skyler Hallinan, Luyu Gao, Sarah Wiergraffe, Uri Alon, Nouha Dziri, Shrimai Prabhumoye, Yiming Yang, Shashank Gupta, Bodhisattwa Prasad Majumder, Katherine Hermann, Sean Welleck, Amir Yazdanbakhsh, and Peter Clark. Self-refine: Iterative refinement with self-feedback, 2023. URL <https://arxiv.org/abs/2303.17651>.
- [40] Noah Shinn, Federico Cassano, Ashwin Gopinath, Karthik Narasimhan, and Shunyu Yao. Reflexion: Language agents with verbal reinforcement learning. *Advances in neural information processing systems*, 36:8634–8652, 2023.
- [41] Guanzhi Wang, Yuqi Xie, Yunfan Jiang, Ajay Mandlekar, Chaowei Xiao, Yuke Zhu, Linxi Fan, and Anima Anandkumar. Voyager: An open-ended embodied agent with large language models. *arXiv preprint arXiv:2305.16291*, 2023.
- [42] John Yang, Carlos E Jimenez, Alexander Wettig, Kilian Lieret, Shunyu Yao, Karthik Narasimhan, and Ofir Press. Swe-agent: Agent-computer interfaces enable automated software engineering. *Advances in Neural Information Processing Systems*, 37:50528–50652, 2024.
- [43] John Schulman, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. Proximal policy optimization algorithms. *arXiv preprint arXiv:1707.06347*, 2017.
- [44] Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, et al. Training language models to follow instructions with human feedback. *Advances in neural information processing systems*, 35:27730–27744, 2022.
- [45] Rafael Rafailov, Archit Sharma, Eric Mitchell, Christopher D Manning, Stefano Ermon, and Chelsea Finn. Direct preference optimization: Your language model is secretly a reward model. *Advances in neural information processing systems*, 36:53728–53741, 2023.
- [46] Zhihong Shao, Peiyi Wang, Qihao Zhu, Runxin Xu, Junxiao Song, Xiao Bi, Haowei Zhang, Mingchuan Zhang, YK Li, Yang Wu, et al. Deepseekmath: Pushing the limits of mathematical reasoning in open language models. *arXiv preprint arXiv:2402.03300*, 2024.

- [47] Daya Guo, Dejian Yang, Haowei Zhang, Junxiao Song, Peiyi Wang, Qihao Zhu, Runxin Xu, Ruoyu Zhang, Shirong Ma, Xiao Bi, et al. Deepseek-r1: Incentivizing reasoning capability in llms via reinforcement learning. *arXiv preprint arXiv:2501.12948*, 2025.
- [48] Xuefeng Li, Haoyang Zou, and Pengfei Liu. Torl: Scaling tool-integrated rl. *arXiv preprint arXiv:2503.23383*, 2025.
- [49] Jiazhan Feng, Shijue Huang, Xingwei Qu, Ge Zhang, Yujia Qin, Baoquan Zhong, Chengquan Jiang, Jinxin Chi, and Wanjuan Zhong. Retool: Reinforcement learning for strategic tool use in llms. *arXiv preprint arXiv:2504.11536*, 2025.
- [50] Cheng Qian, Emre Can Acikgoz, Qi He, Hongru Wang, Xiusi Chen, Dilek Hakkani-Tür, Gokhan Tur, and Heng Ji. Toolrl: Reward is all tool learning needs. *arXiv preprint arXiv:2504.13958*, 2025.
- [51] Jeff Da, Clinton Wang, Xiang Deng, Yuntao Ma, Nikhil Barhate, and Sean Hendryx. Agent-rlvr: Training software engineering agents via guidance and environment rewards. *arXiv preprint arXiv:2506.11425*, 2025.
- [52] Madeline McKelway, Abhijit Banerjee, Erin Grela, Frank Schilbach, Miriam Sequeira, Garima Sharma, Girija Vaidyanathan, and Esther Duflo. Effects of cognitive behavioral therapy and cash transfers on older persons living alone in india: a randomized trial. *Annals of internal medicine*, 176(5):632–641, 2023.
- [53] Bastien Nguyen, Christopher Fong, Anisha Luthra, Shaleigh A Smith, Renzo G DiNatale, Subhiksha Nandakumar, Henry Walch, Walid K Chatila, Ramyasree Madupuri, Ritika Kundra, et al. Genomic characterization of metastatic patterns from prospective clinical sequencing of 25,000 patients. *Cell*, 185(3):563–575, 2022.
- [54] William A Knaus, Frank E Harrell, Joanne Lynn, Lee Goldman, Russell S Phillips, Alfred F Connors, Neal V Dawson, William J Fulkerson, Robert M Califf, Norman Desbiens, et al. The support prognostic model: Objective estimates of survival for seriously ill hospitalized adults. *Annals of internal medicine*, 122(3):191–203, 1995.
- [55] Yaowei Zheng, Richong Zhang, Junhao Zhang, Yanhan Ye, Zheyang Luo, Zhangchi Feng, and Yongqiang Ma. Llamafactory: Unified efficient fine-tuning of 100+ language models, 2024. URL <https://arxiv.org/abs/2403.13372>.
- [56] Guangming Sheng, Chi Zhang, Zilingfeng Ye, Xibin Wu, Wang Zhang, Ru Zhang, Yanghua Peng, Haibin Lin, and Chuan Wu. Hybridflow: A flexible and efficient rlhf framework. In *Proceedings of the Twentieth European Conference on Computer Systems*, pages 1279–1297, 2025.

## A Additional Related Works

**Agentic execution and reinforcement learning.** Beyond static prompting, recent LLM agents solve tasks through iterative interaction with external environments, using tool observations to revise plans, correct errors, and sustain long-horizon execution [39–42]. Reinforcement learning has become a central post-training approach for improving such reasoning and tool-use behaviors, evolving from preference-based alignment [43–45] to outcome-verifiable reasoning: DeepSeek-Math introduces GRPO for critic-free RL, DeepSeek-R1 scales RL to induce extended reasoning, and DAPO improves large-scale RL training with decoupled clipping and dynamic sampling [30, 46, 47]. A related line studies RL for tool-using agents that decide when and how to call external tools during multi-turn problem solving [48–51]. Whereas these systems reward correctness of a final answer in math, coding, or SQL, Fisher-R1’s reward must score *inferential validity*: a p-value compared on a z-score scale, plus consistency between the chosen method, the computed evidence, and the reported reject/fail-to-reject decision.

## B More details on P-bench

### B.1 Data curation pipeline.

Figure 6 summarizes how we convert scientific artifacts into verified hypothesis-testing tasks. Given a paper, released data, and available analysis code. It identifies statistical claims with inferential results and parses them into structured records, and links each claim to the corresponding executable analysis. Our system is built on Claude Code with Sonnet 4.5.

**Verification and filtering.** The agent reproduces the analysis in a clean execution environment and extracts p-values, test statistics, and conclusions from the execution logs rather than from paper text alone. Claims are kept only when the reported result can be matched to an executed computation with a consistent hypothesis-testing decision; ambiguous, failed, or inconsistent cases are discarded. The remaining claims are further checked by expert review and packaged as P-Bench tasks with hidden answer keys.

### B.2 P-bench Examples

We provide one representative task from each of the three source families. Each example shows the analysis request and the hidden answer key; the dataset itself is provided to the agent as a CSV file.

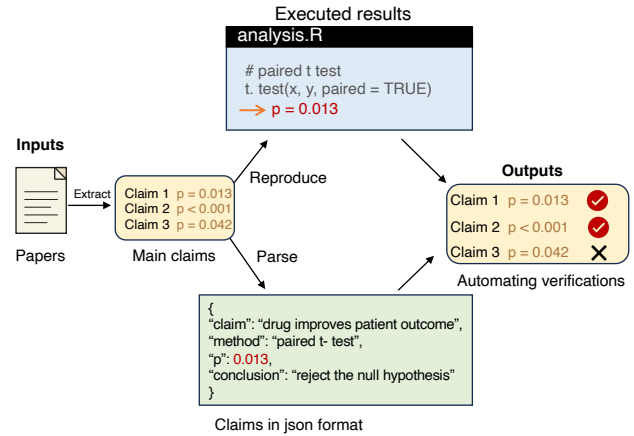


Figure 6: Data curation for P-bench

### B.3 Example from economics

Source: McKelway, Madeline, et al. "Effects of cognitive behavioral therapy and cash transfers on older persons living alone in India: a randomized trial." *Annals of internal medicine* 176.5 (2023): 632-641. [52]

A randomized controlled trial assigning elderly persons living alone to one of four arms (control, CBT only, cash only, both) with three measurement waves.

analysis\_request.txt

**Research question:** Does phone-based cognitive behavioral therapy without cash support reduce depression among elderly persons living alone in Tamil Nadu, India at 3 weeks after the intervention, relative to the control group?

**Hypothesis:**

$H_0$ : CBT does not affect depression at 3 weeks relative to the control group.

$H_1$ : CBT only reduces depression at 3 weeks relative to the control group.

**Study design:** Randomized controlled trial; individual-level randomization; three waves (baseline, 3 weeks, 3 months).

**Variable glossary:** GDS (Geriatric Depression Scale, integer 0–15) [OUTCOME]; itreat (treatment arm, 0–3) [TREATMENT]; T (time period, 0–2); elderly\_ID\_anon (individual id); plus covariates.

dataset.csv (first 3 rows, selected columns)

```
elderly_ID_anon, T, itreat, GDS, ADL, bl_female
211101, 2, 0, 8, 22, 1
143101, 2, 0, 8, 4, 1
232501, 2, 0, 9, 14, 1
...
```

answer\_key.json (hidden)

```
{
  "test_type": "mixed-effects linear regression",
  "treatment_variable": "1.T#1.itreat (CBT only x 3 weeks)",
  "treatment_coefficient": -0.0873,
  "treatment_p_value": 0.876,
  "significant_at_005": false,
  "conclusion": "Fail to reject H0",
  "n_observations": 3009,
  "n_groups": 1113
}
```

### B.4 Example from biology

Source: Nguyen et al., "Genomic characterization of metastatic patterns from prospective clinical sequencing of 25,000 patients." *Cell*, 2022 [53].

analysis\_request.txt

**Research question:** Is PTEN mutation status associated with metastatic disease among colorectal cancer patients in this tumor sequencing cohort, accounting for basic patient demographics?

**Hypothesis:**

$H_0$ : PTEN mutation status is not associated with metastatic disease among colorectal cancer patients.

$H_1$ : PTEN mutation status is associated with metastatic disease among colorectal cancer patients.

**Study design:** Observational tumor sequencing cohort; 2,396 primary tumor samples; metastatic status recorded at the patient level.

**Variable glossary:** is\_metastatic\_patient (binary) [OUTCOME]; pten\_mutated (binary) [TARGET]; sex\_numeric, age\_at\_sequencing (covariates).

dataset.csv (first 3 rows, selected columns)

```
sample_id, is_metastatic_patient, pten_mutated, sex_numeric, age_at_sequencing
P-0000520-T01-IM3, 1, 0, 1, 66.63
P-0000625-T01-IM3, 1, 0, 0, 69.77
P-0000674-T01-IM3, 1, 0, 0, 65.33
...
```

answer\_key.json (hidden)

```
{
  "test_type": "Logistic regression",
  "treatment_variable": "pten_mutated",
  "treatment_coefficient": -0.5059,
  "odds_ratio": 0.603,
  "treatment_p_value": 0.0146,
  "significant_at_005": true,
  "conclusion": "Reject H0",
  "n_observations": 2396
}
```

## B.5 Example from medicine

Source: Knaus et al., “The SUPPORT prognostic model. Objective estimates of survival for seriously ill hospitalized adults.” *Annals of Internal Medicine*, 1995, 122:191–203 [54] Prospective cohort of seriously ill hospitalized adults.

analysis\_request.txt

**Research question:** Among seriously ill hospitalized adults in the SUPPORT study, is in-hospital mortality associated with patient disease class, particularly the Coma category?

**Hypothesis:**

$H_0$ : Patients in the Coma disease class do not differ in in-hospital mortality from the reference disease class.

$H_1$ : Patients in the Coma disease class differ in in-hospital mortality from the reference disease class.

**Study design:** Prospective cohort; 9,105 observations; reference analysis uses  $N = 5,732$  after task-specific filtering and missing-data handling.

**Variable glossary:** hospdead (binary) [OUTCOME]; dzclass (categorical: ARF/MOSF w/Malignancy, ARF/MOSF w/Sepsis, COPD/CHF/Cirrhosis, Coma, Cancer) [TARGET]; age, num.co, meanbp, hrt, resp, crea, alb (covariates).

dataset.csv (first 3 rows, selected columns)

```
age, sex, hospdead, dzclass, num.co
62.85, male, 0, Cancer, 0
60.34, female, 1, COPD/CHF/Cirrhosis, 2
52.75, female, 0, COPD/CHF/Cirrhosis, 2
...
```

answer\_key.json (hidden)

```
{
  "test_type": "Logistic regression",
  "treatment_variable": "dzclass (Coma)",
  "treatment_coefficient": 0.9477,
  "treatment_p_value": 0.0001,
  "significant_at_005": true,
  "conclusion": "Reject H0",
  "n_observations": 5732
}
```

## C Fisher-R1 Training Details

### C.1 Why R rather than Python

We use R rather than Python because the canonical implementations of the statistical methods P-Bench covers — Cox proportional-hazards regression, mixed-effects models, instrumental-variable estimators, robust and rank-based tests — are most mature and standardized in R packages such as `survival`, `lme4`, `rms`, and `AER`, whose outputs are widely treated as canonical in biomedicine, biostatistics, and economics. Python’s statistical stack (`statsmodels`, `scipy.stats`, `lifelines`) is less complete on these methods and frequently differs in default settings (e.g., degrees-of-freedom corrections, link parameterizations, robust-variance estimators) that are standardized across R packages. Statisticians typically use R for these analyses, making it easier for domain experts to verify the agent’s executions against the reference analysis in a single software ecosystem.

### C.2 Synthetic Data Generations

This appendix gives the full implementation of the synthetic-task pipeline summarised in [S4.3](#).

#### C.2.1 End-to-end pipeline

For each cell of the Cartesian grid  $M \times S_m \times N \times E \times P \times K$  in the task taxonomy, we construct one task in five stages.

**Stage 1: simulation template.** For each statistical method  $M$ , we use an LLM to draft a parameterised simulation script. The script implements a canonical data-generating process for that method (e.g., a two-stage least-squares DGP for IV with an instrument, an endogenous treatment, an outcome, and covariates) and exposes the relevant parameters as variables (sample size, effect size, error variance, clustering, fixed effects, etc.). All templates were drafted by Claude Sonnet 4.6 and checked by the authors to fix syntax errors and standardise the parameter-slot naming. Templates are written once per method and reused across all tasks for that method.

**Stage 2: parameter instantiation.** Each cell of the grid specifies a sample size, an effect size, and a seed. We plug these into the simulation template to fix all parameter values.



**Stage 3: execution and answer key.** We execute the instantiated script. It writes a CSV dataset and runs the canonical statistical method on that dataset. The reported  $p$ -value, the reject/fail-to-reject decision at  $\alpha = 0.05$ , and the canonical method label are recorded in `answer_key.json`. Crucially, the answer key is the *output of the canonical method on the simulated data*, not the true generative parameter. This aligns the supervision target with what a correct analysis would actually produce.

**Stage 4: question rendering.** Each scenario provides two prompt templates: `analysis_nohint` states only the research question, while `analysis_hint` adds a one-sentence study-design summary (see Table 4). The chosen prompt style  $P$  selects which template is rendered, and the result is written to `analysis_request.txt`.

**Stage 5: task package.** Each task consists of four files: `study_description.txt`, `analysis_request.txt`, `dataset.csv`, and `answer_key.json`. The agent sees the first three. The answer key is hidden and used only for scoring.

### C.3 Per-axis level lists

Table 3: Levels for each axis of the synthetic-task Cartesian grid.

| Axis             | Levels                                                                                                                                                                                                                                             |
|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $M$ method       | 27 statistical methods spanning parametric, rank-based, regression, causal, hierarchical, and survival families                                                                                                                                    |
| $S_m$ scenario   | 5–7 domain scenarios per method. Each scenario specifies a column-renaming map, a study description, and <code>hint/non-hint</code> prompt templates.                                                                                              |
| $N$ sample size  | small, medium, large, xlarge. Exact values are method-specific; across methods, $N$ ranges from $\sim 30$ for paired and small two-sample tests, $\sim 200$ – $500$ for typical regressions, up to $\sim 4,800$ for hierarchical and panel models. |
| $E$ effect size  | null, borderline, medium.                                                                                                                                                                                                                          |
| $P$ prompt style | <code>hint</code> , <code>non-hint</code> . See 4 for examples.                                                                                                                                                                                    |
| $K$ seed         | $s_0, s_1, s_2$ . Three deterministic seeds per cell.                                                                                                                                                                                              |

Table 4: Examples of non-hint and hint prompts across method types. Both variants ask the same research question; the hint variant adds a one-sentence study-design summary that flags a methodologically relevant feature.

| Method        | non-hint                                                       | hint                                                                                            |
|---------------|----------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
| Mann–Whitney  | “Does API latency differ between server A and server B?”       | “... The latency distribution is heavily right-skewed.”                                         |
| Mixed-effects | “Does the new ad creative improve user click-through rate?”    | “... Each user is shown multiple ads over time, with users nested within demographic segments.” |
| Cox PH        | “Does the new battery formulation extend laptop battery life?” | “... Devices still in use at study end have right-censored lifetimes.”                          |

### C.3.1 Example

We give a single fully worked synthetic task to illustrate the pipeline end-to-end. The task uses the Mann–Whitney scenario `app_latency_two_servers`, with cell values  $N = \text{medium}$  ( $n = 200$ ),  $E = \text{medium}$ ,  $K = s_0$ , and prompt style  $P = \text{hint}$ . The four files generated by the pipeline are shown below.

`study_description.txt`

Paper: “P50 vs P95 App Request Latency: Two-Pool A/B Comparison”  
Study: Independent web requests were routed to one of two server pools.  
Variables: `request_id`, `server_pool` (0 = pool A, 1 = pool B) [GROUP], `request_latency_ms` (continuous, heavy right-tailed) [OUTCOME].  
Sample: 200 independent requests.

`analysis_request.txt`

Research question: Do the two server pools have different latency distributions?

Report test statistic,  $p$ -value, location shift with 95% CI, conclusion at  $\alpha = 0.05$ .

`dataset.csv` (first 6 of 200 rows)

```
request_id,server_pool,request_latency_ms
1,0,87.32
2,1,142.05
3,0,71.48
4,1,239.71
5,0,103.86
6,1,118.40
...
```

`answer_key.json` (hidden from agent)

```
{
  "task_id": "task_app_latency_two_servers_medium_medium_hint_s0",
  "method": "mann_whitney_test",
  "test_statistic": 4521.0,
  "p_value_correct": 0.0184,
  "location_shift": 12.4,
  "ci_95": [3.1, 24.7],
  "conclusion": "Reject H0",
  "n_observations": 200,
  "naive_method": "Welch's t-test",
  "p_value_naive": 0.0712
}
```

The agent sees only the first three files. The correct analysis is a Mann–Whitney test, which yields  $p \approx 0.018$  and rejects  $H_0$ . A naive Welch’s  $t$ -test would yield  $p \approx 0.07$  and reach the wrong conclusion.

### C.3.2 Data-quality perturbations

On top of the clean Cartesian grid, we add 60 perturbed task variants drawn from regression-method cells. The two perturbation types are: (i) `missing` — a fraction of values in the outcome or a covariate are set to NA, requiring the agent to choose how to handle missingness; (ii) `outlier` — a small number of rows are injected with extreme or invalid values (e.g., physiologically implausible

measurements), requiring the agent to detect and address them before fitting. The answer key for each perturbed variant is computed by running the canonical method on the perturbed data with the standard handling protocol for the issue (e.g., listwise deletion for missing, robust standard errors or trimming for outlier).

#### C.4 Training setup and detailed hyperparameters

We conduct SFT using LlamaFactory [55] and RL training using ver1 [56]. For SFT, we train for 3 epochs with a learning rate of  $1e-5$ , a cosine learning-rate scheduler, a warmup ratio of 0.1, a batch size of 16, and a cutoff length of 8192 tokens. For RL, we train for 1 epoch with a learning rate of  $1e-6$ , constant learning-rate warmup, and 20 warmup steps. The batch size is 16, the maximum prompt length is 2048 tokens, and the maximum response length is 4096 tokens. We use asymmetric clipping with  $\epsilon_{\text{low}} = 0.2$  and  $\epsilon_{\text{high}} = 0.28$ . During rollout generation, we use temperature 0.7, top- $p = 1.0$ , and a rollout group size of  $G = 8$ . At inference time, we use temperature 0.3, top- $p = 0.9$ , and a batch size of 10.

#### C.5 Computing Resources

All training and evaluation runs are conducted on a single node with NVIDIA H200 GPUs (141 GB HBM each). For the 14B model, the full RL training run completes in about 36 hours.

#### C.6 More Experiment Results

Table 5: Results on P-Bench under the relaxed strict threshold. Raw denotes correct conclusion direction, while Strict additionally requires  $|\Delta z| < 1.0$ , where  $z$  is the two-sided z-score derived from the reported  $p$ -value. pass@1 is reported as  $\text{mean}_{\pm\text{stddev}}$  over three independent runs.

| Model                     | P-Easy                |             |                       |             | P-Hard         |             |                |             |
|---------------------------|-----------------------|-------------|-----------------------|-------------|----------------|-------------|----------------|-------------|
|                           | Raw                   |             | Strict                |             | Raw            |             | Strict         |             |
|                           | pass@1                | pass@3      | pass@1                | pass@3      | pass@1         | pass@3      | pass@1         | pass@3      |
| <i>Proprietary Models</i> |                       |             |                       |             |                |             |                |             |
| GPT-5.4                   | <b>92.9</b> $\pm 1.0$ | 95.6        | <b>72.6</b> $\pm 2.5$ | 79.3        | 58.3 $\pm 0.9$ | 68.0        | 38.4 $\pm 0.7$ | 46.0        |
| <i>Open-source Models</i> |                       |             |                       |             |                |             |                |             |
| DeepSeek V4 Pro           | 70.9 $\pm 0.5$        | 93.1        | 59.1 $\pm 0.9$        | 78.8        | 46.8 $\pm 1.2$ | 69.7        | 32.2 $\pm 1.1$ | 49.3        |
| GPT-OSS-120B              | 48.1 $\pm 4.3$        | 86.2        | 31.2 $\pm 4.4$        | 64.5        | 37.4 $\pm 4.3$ | 71.2        | 23.6 $\pm 2.3$ | 49.1        |
| Qwen-3-Coder-30B          | 76.9 $\pm 2.2$        | 87.7        | 53.2 $\pm 1.7$        | 65.0        | 59.8 $\pm 0.9$ | 68.0        | 35.4 $\pm 1.0$ | 42.3        |
| Qwen-3-32B                | 82.8 $\pm 0.0$        | 90.6        | 55.2 $\pm 0.5$        | 66.0        | 58.4 $\pm 0.7$ | 71.6        | 34.2 $\pm 0.5$ | 46.4        |
| Qwen-2.5-Coder-7B         | 61.4 $\pm 8.5$        | 83.7        | 41.4 $\pm 6.5$        | 60.1        | 37.5 $\pm 2.8$ | 63.1        | 18.6 $\pm 0.7$ | 32.0        |
| DataMind-7B               | 60.3 $\pm 1.0$        | 84.2        | 38.6 $\pm 1.4$        | 57.1        | 44.4 $\pm 4.2$ | 66.7        | 25.2 $\pm 2.1$ | 40.5        |
| <b>Fisher-R1-7B</b>       | 87.0 $\pm 1.6$        | <b>96.6</b> | 71.8 $\pm 0.8$        | <b>80.8</b> | 63.4 $\pm 2.5$ | <b>82.4</b> | 40.1 $\pm 2.5$ | <b>56.8</b> |
| Qwen-2.5-Coder-14B        | 78.5 $\pm 1.2$        | 88.2        | 50.3 $\pm 1.3$        | 58.1        | 51.5 $\pm 4.3$ | 66.7        | 30.8 $\pm 2.1$ | 41.0        |
| DataMind-14B              | 69.0 $\pm 5.2$        | 88.2        | 47.8 $\pm 3.7$        | 64.0        | 48.2 $\pm 2.1$ | 67.1        | 29.0 $\pm 0.9$ | 42.3        |
| <b>Fisher-R1-14B</b>      | 87.4 $\pm 1.9$        | 94.1        | 70.6 $\pm 1.4$        | 79.8        | 65.8 $\pm 0.8$ | 81.1        | 42.0 $\pm 2.2$ | <b>56.8</b> |

## D Prompt

### Training Prompt

#### # System Prompt

You are a statistician working through a hypothesis-testing task in a multi-turn loop. The dataset is pre-loaded as 'data' (a data.frame). Do not load it yourself. On every turn, write exactly one of the following structures and then STOP:

1. An intermediate analysis turn:

<think>

your reasoning about the data, assumptions, and the next analysis step

</think>

<code>

one block of R code (use cat() or print() to display results)

</code>

2. A final answer turn (no code):

<think>

brief summary of what you learned

</think>

<answer>

1. Analysis summary: key EDA findings, assumption check results, method choice and rationale.

2. Results interpretation: effect estimate, direction, magnitude, p-value, confidence interval.

FINAL ANSWER:

- Treatment effect: [number]

- P-value: [number]

- 95% CI: [lower, upper]

- Conclusion: [Reject H0 / Fail to reject H0] at alpha = 0.05

</answer>

Rules:

- After each <code> block, the runtime will reply with <observation>...</observation> containing the R stdout. Read it before writing the next turn.

- Do NOT write more than one <code> block per turn. Do NOT write <observation> yourself.

- Do NOT print raw data values, unique values, or large vectors. Use dim(), colnames(), and class() to inspect data.

- If your code produces an error, read the message carefully and fix the root cause before retrying.

- Only emit <answer> on the very last turn, and only after you have verified the numerical results from <observation>.

#### # User Prompt

## Research Question

```
{analysis_request}
```

```
## Dataset
```

```
The dataset has been pre-loaded as data.
```

```

# =====
# Template: Welch's t-test (Two-Sample, Unequal Variances)
#
# DGP: Two groups with different means and possibly different variances.
#   Group 0: Y ~ Normal(mu0, sigma0)
#   Group 1: Y ~ Normal(mu1, sigma1)
#
# Key parameters to vary:
# - effect: null / nonnull
# - variance_ratio: equal / unequal
# - sample_size: small / large
# =====

set.seed({{SEED}})

.libPaths(c("~/R/Libs", .libPaths()))
library(jsonlite)

# --- Parameters ---

N      <- {{N}}                # total sample size
p_group <- {{P_GROUP}}          # proportion in group 1
mu0    <- {{MU0}}              # group 0 mean
mu1    <- {{MU1}}              # group 1 mean (= mu0 for null)
sigma0  <- {{SIGMA0}}           # group 0 SD
sigma1  <- {{SIGMA1}}           # group 1 SD (differs from sigma0 for unequal var)

# --- Generate data ---

group <- rbinom(N, 1, p_group)
outcome <- ifelse(group == 1,
                  rnorm(N, mu1, sigma1),
                  rnorm(N, mu0, sigma0))
outcome <- round(outcome, 2)

df <- data.frame(
  subject_id = 1:N,
  group      = group,
  outcome    = outcome
)

write.csv(df, "dataset.csv", row.names = FALSE)
cat("Dataset saved:", nrow(df), "rows\n")

# --- Analysis ---

tryCatch({

  g0 <- df$outcome[df$group == 0]
  g1 <- df$outcome[df$group == 1]

  # --- Correct analysis: Welch's t-test (unequal variances) ---
  wt      <- t.test(g1, g0, var.equal = FALSE, alternative = "two.sided")
  p_correct <- wt$p.value
  t_stat   <- wt$statistic
  mean_diff <- wt$estimate[1] - wt$estimate[2]
  ci       <- wt$conf.int
  conclusion <- ifelse(p_correct < 0.05, "Reject H0", "Fail to reject H0")

  # --- Naive analysis: pooled t-test (assumes equal variances) ---
  tt_pooled <- t.test(g1, g0, var.equal = TRUE)
  p_naive   <- tt_pooled$p.value

  # --- Answer key (ground truth = output of canonical method on simulated data) ---
  answer_key <- list(
    task_id      = "{{TASK_ID}}",
    method       = "welch_ttest",
    test_type    = "Welch's t-test (two-sided)",
    outcome_type = "continuous",
    true_effect_type = ifelse(mu0 == mu1, "null", "nonnull"),
    true_mean_diff = mu1 - mu0,
    test_statistic = round(as.numeric(t_stat), 4),
    p_value_correct = signif(as.numeric(p_correct), 6),
    ci_95         = c(round(ci[1], 4), round(ci[2], 4)),
    mean_difference = round(mean_diff, 4),
    conclusion     = conclusion,
    n_observations = nrow(df),
    group1_n      = length(g1),
    group0_n      = length(g0),
    group1_mean   = round(mean(g1), 4),
    group0_mean   = round(mean(g0), 4),
    group1_sd     = round(sd(g1), 4),
    group0_sd     = round(sd(g0), 4),
    p_value_naive = signif(as.numeric(p_naive), 6),
    naive_mistake = "Using pooled t-test assuming equal variances when variances differ",
    correct_method = "Welch's t-test (unequal variances)",
    common_mistakes = c(
      "Assuming equal variances without testing",
      "Using pooled t-test with unequal group variances",
      "Not reporting confidence interval for mean difference"
    )
  )

  writeLines(toJSON(answer_key, auto_unbox = TRUE, pretty = TRUE), "answer_key.json")
  cat("answer_key.json saved.\n")

}, error = function(e) {
  cat("ERROR:", conditionMessage(e), "\n")
  err_key <- list(task_id = "{{TASK_ID}}", error = conditionMessage(e))
  writeLines(toJSON(err_key, auto_unbox = TRUE, pretty = TRUE), "answer_key.json")
})

```

Figure 7: Full Welch's t-test simulation template.